


gateway lam0.1: secondary errors vs N (EM-consistent reference; floor-free companion of e_F')

Equal total budget per arm per seed: $B = N \times n_{\text{steps}} = 3.2768\text{e}+09$ walker-steps at every N ($h = 2.5\text{e}-05$, $T_N = B \cdot h / N$); 32 seeds per (N , method). Secondary read-outs reported by the plan (not the primary endpoints). $e_{F',\text{stat}} = \text{RMS over the eval bins of } \Gamma - \text{bin-averaged } F'_{\text{ref}}$, so that $e_{F'}^2 = e_{F',\text{stat}}^2 + \text{floor}^2$ exactly: the companion of $e_{F'}$ without its deterministic floor (mechanism cell: its own frozen thresholds, the plan's $e_{F'}$ tau endpoint, are drawn).

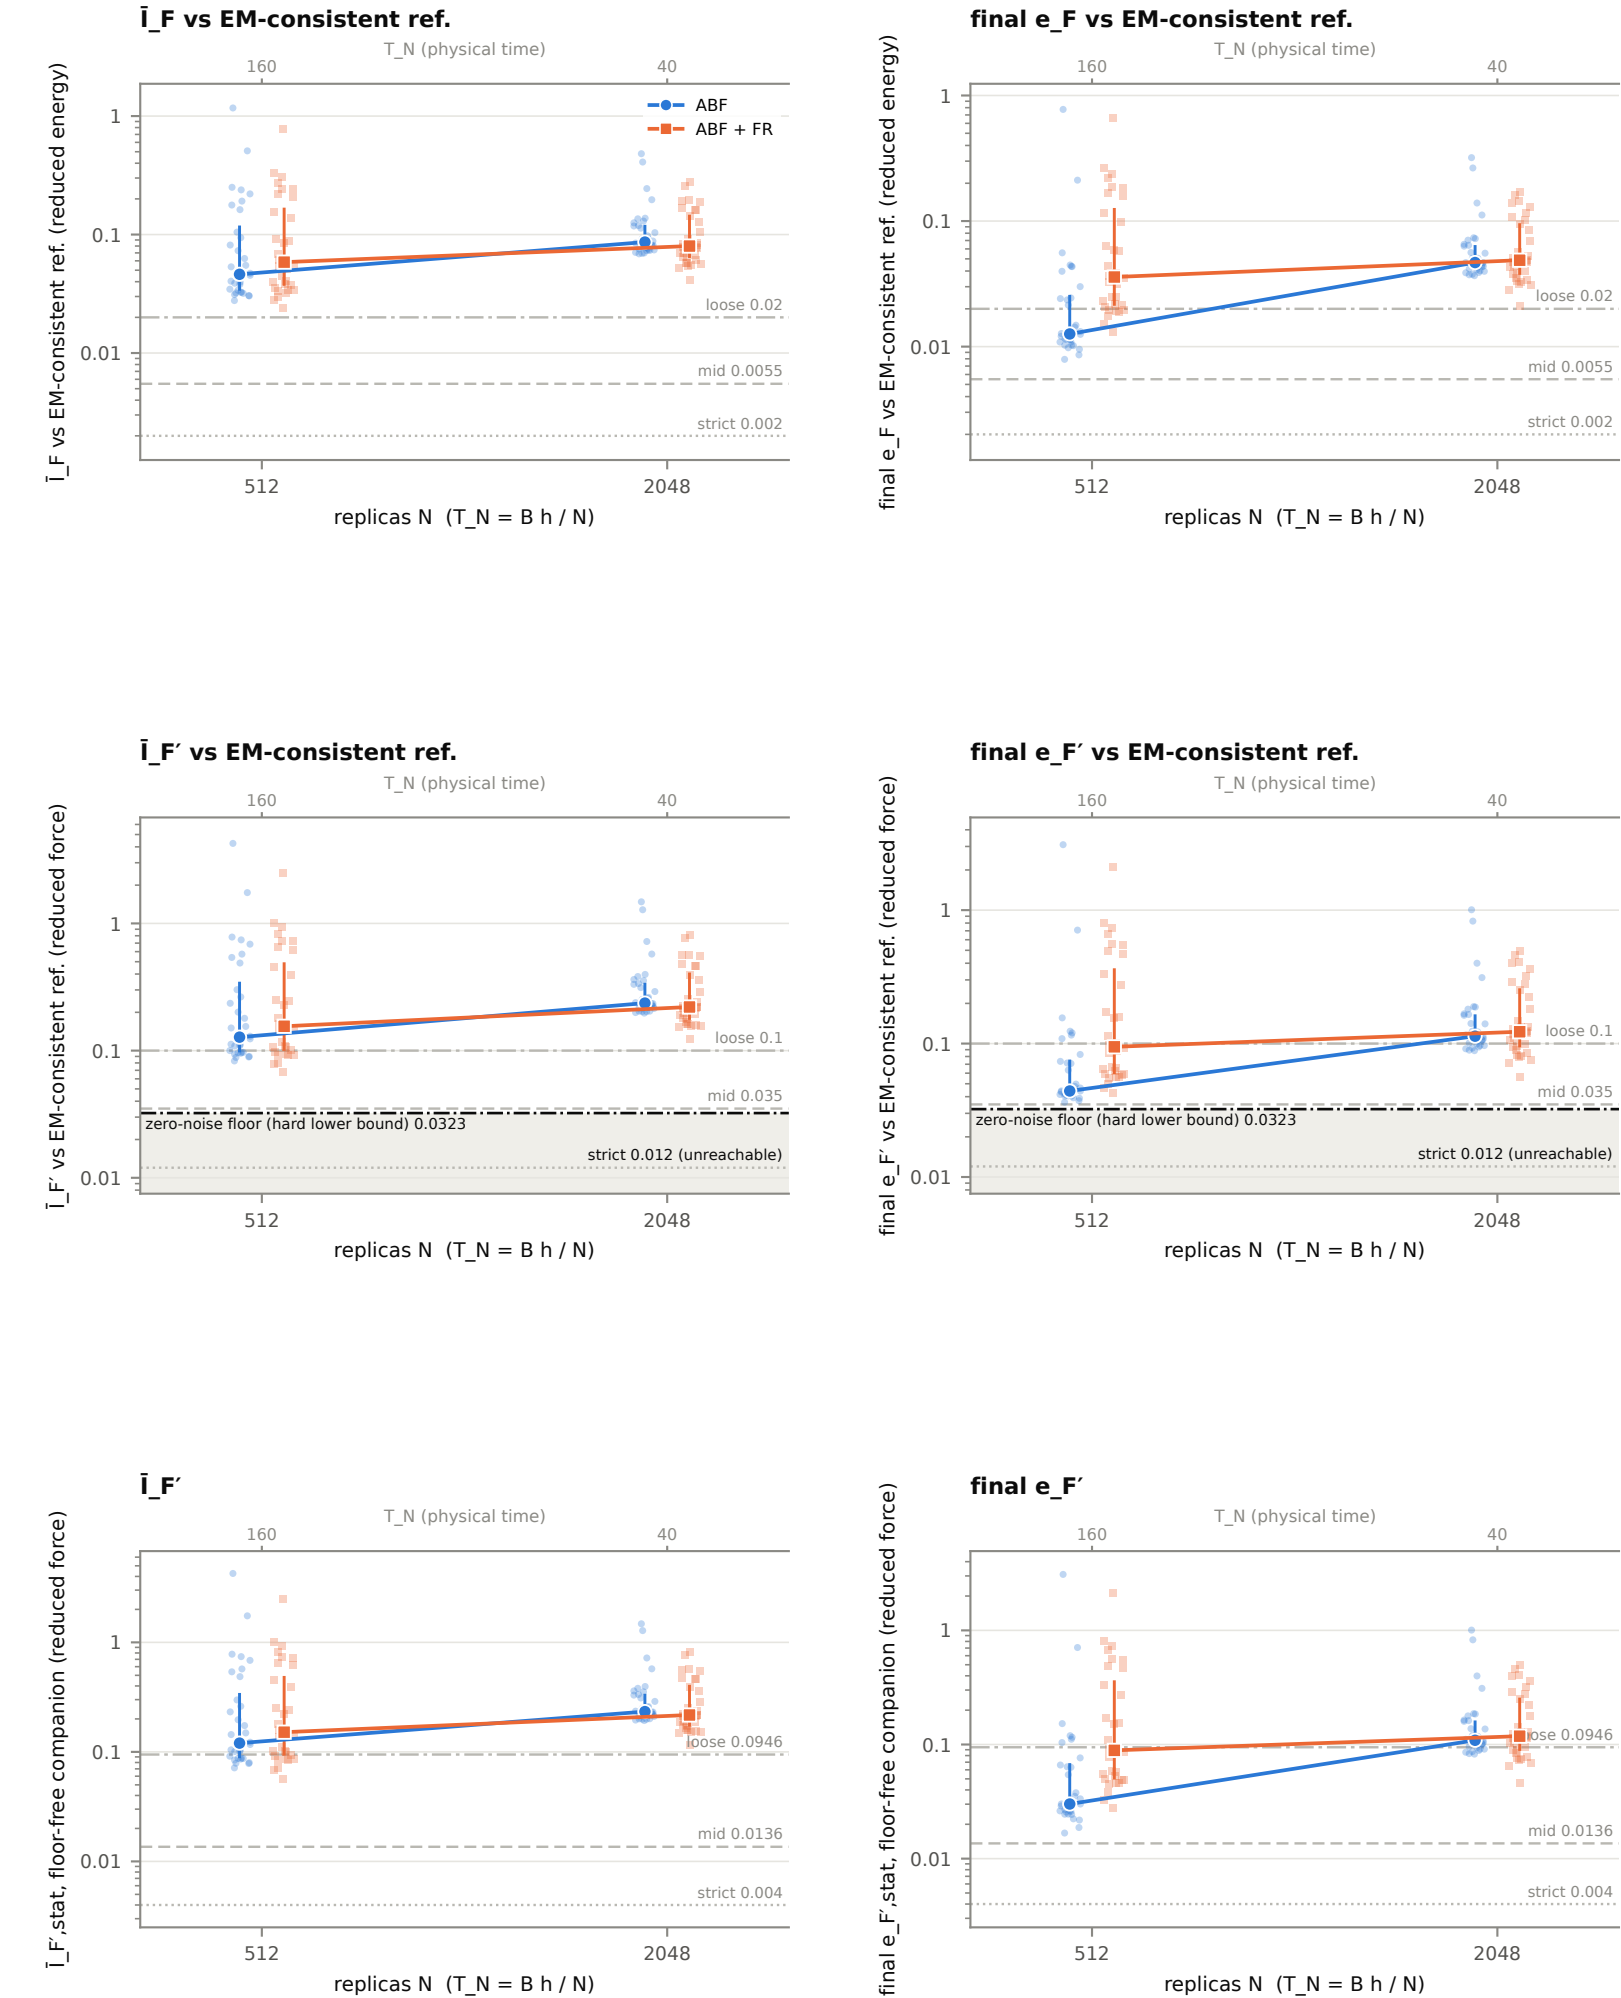

gateway lam0.1 · S2s_secondary_reference_abs_vs_N · status: all planned (N , seed, method) complete · FR is not defined at $N = 1$ (ABF only, by design).
Markers: seed median; whiskers: IQR over seeds; faint points: individual seeds. Grey lines: the frozen strict / mid / loose thresholds of $e(t)$ (shown for scale on the integrated errors as well).
Reference floors: $\text{lbar}_{F,\text{em}}$: EM bias of F vs analytic $7.9\text{e}-06$ lies below the axis; $\text{final}_{e_F,\text{em}}$: EM bias of F vs analytic $7.9\text{e}-06$ lies below the axis; $\text{lbar}_{Fp,\text{em}}$: every estimate lies above the zero-noise floor 0.03227 ($e^2 = \text{stat}^2 + \text{floor}^2$); thresholds below it are unreachable by construction; $\text{final}_{e_{Fp},\text{em}}$: every estimate lies above the zero-noise floor 0.03227 ($e^2 = \text{stat}^2 + \text{floor}^2$); thresholds below it are unreachable by construction.
Source results/mechanism/conditional_relaxation/lam0.1/analysis/summary.json (generated 2026-10-10T14:19:12Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.