


gateway lam0.1: best allocation at equal budget (secondary)

Equal total budget per arm per seed: $B = N \times n_steps = 3.2768e+09$ walker-steps at every N ($h = 2.5e-05$, $T_N = B \cdot h / N$); 32 seeds per (N , method). Best ABF N (all N) vs best FR N ($N \geq 2$) at equal B ; the bootstrap re-selects N in every resample.

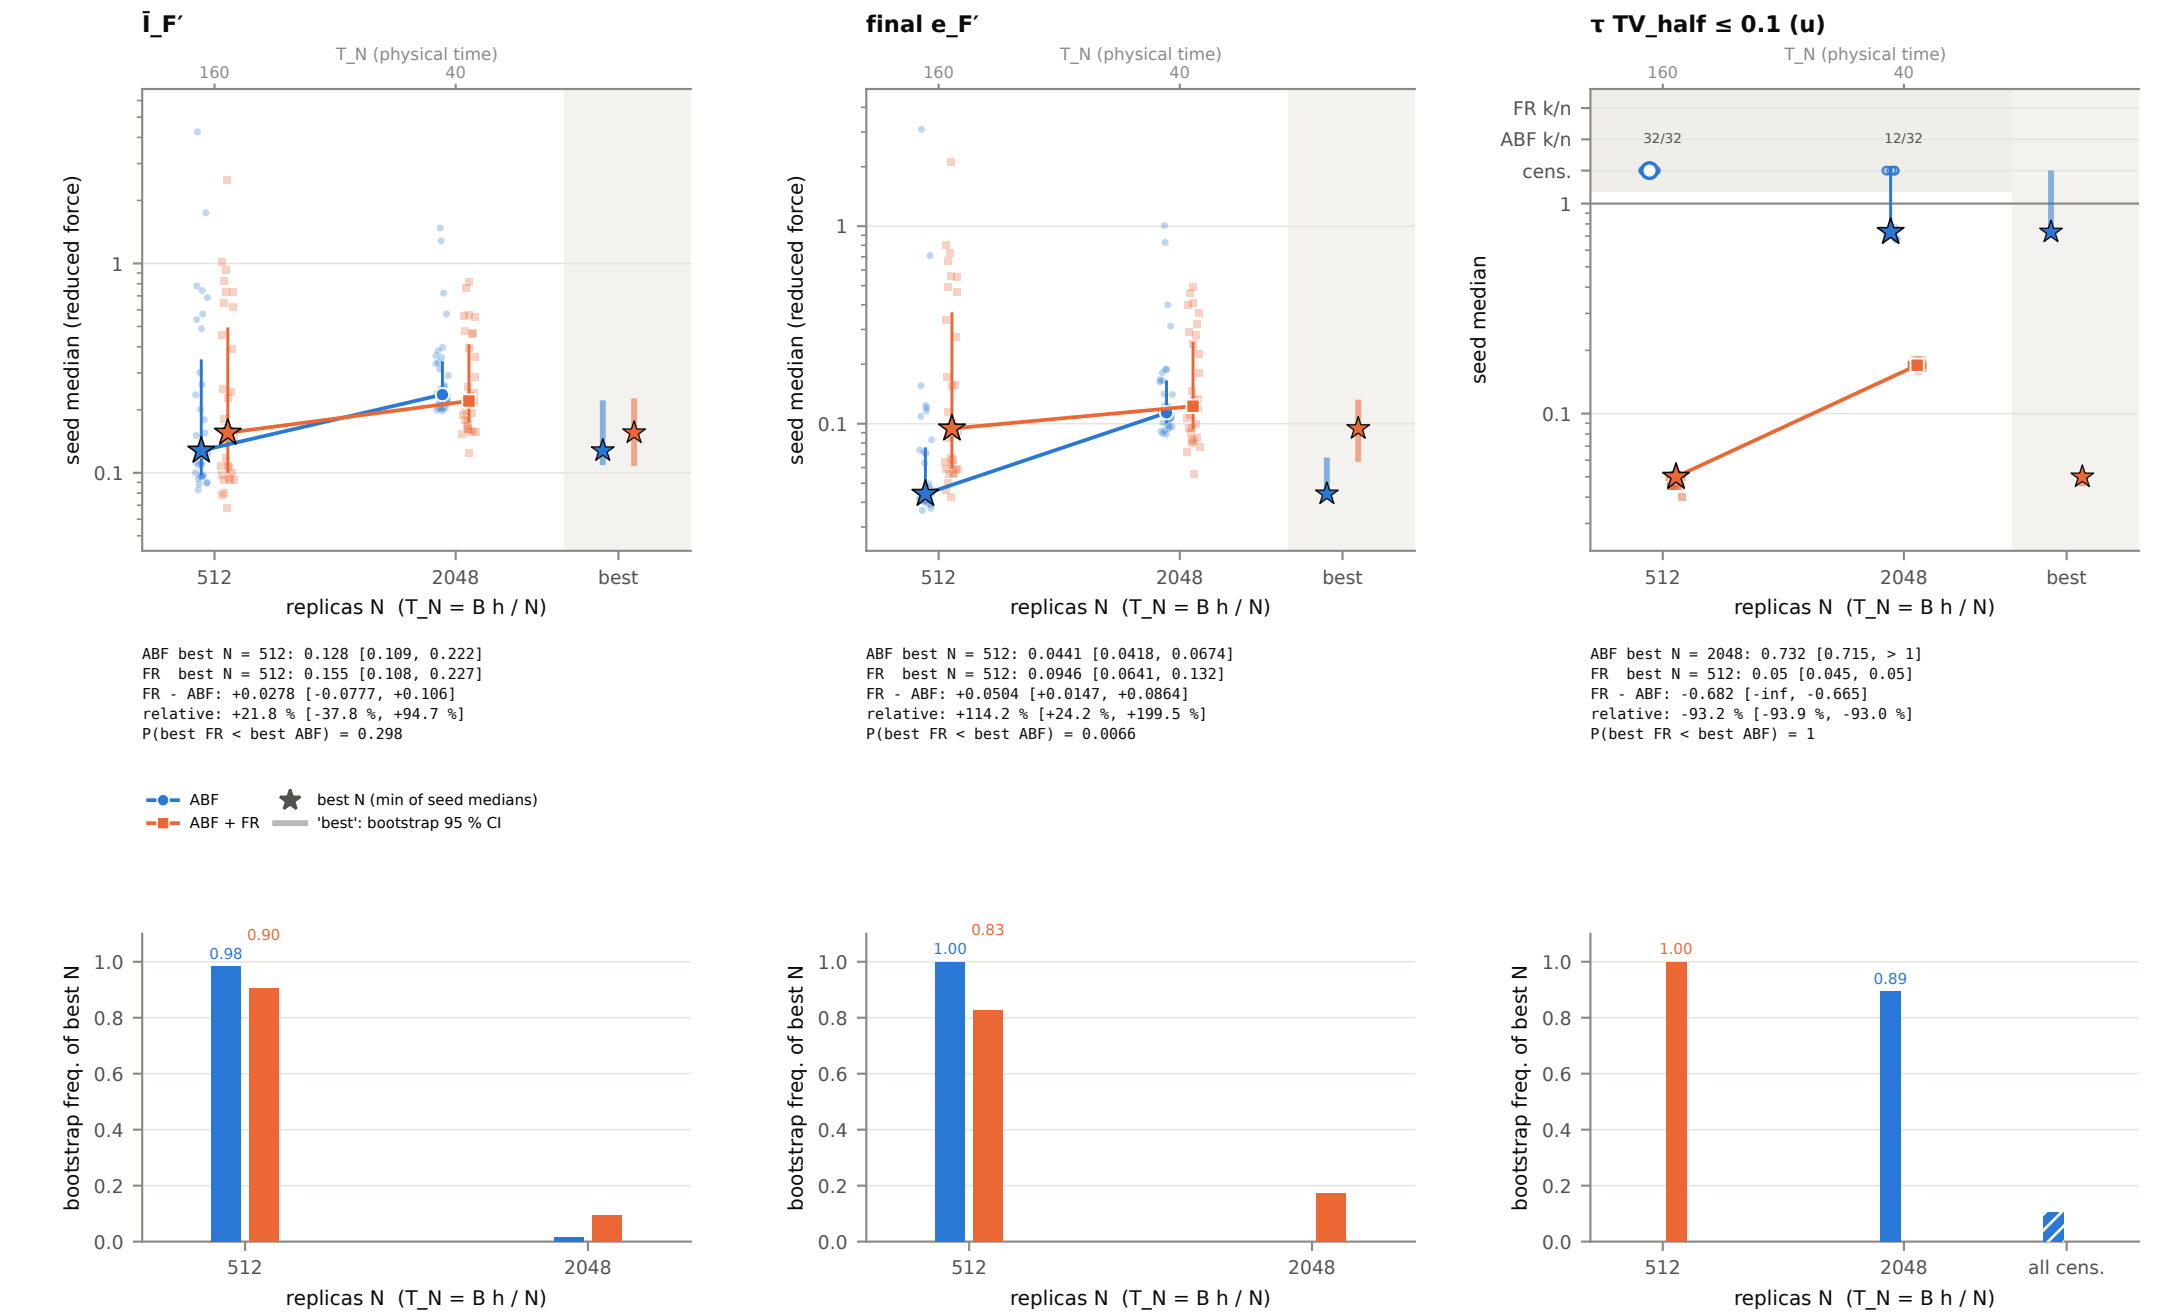

gateway lam0.1 · S8s_best_allocation_secondary · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design).
Bottom: fraction of bootstrap resamples in which each N is best (seeds resampled within each N, one draw shared by both methods; N tied at the minimum share the credit); 'all cens.' = every N censored in that resample (tau only). tau: common budget grid. A 'REDUCED ladder' line names planned N without data: the minimum is then over fewer N. Text: best values with bootstrap 95 % CIs, the CI of best FR - best ABF (absolute and relative) and the fraction of resamples in which the best FR beats the best ABF.
Source results/mechanism/conditional_relaxation/lam0.1/analysis/summary.json (generated 2026-10-10T14:19:12Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.