
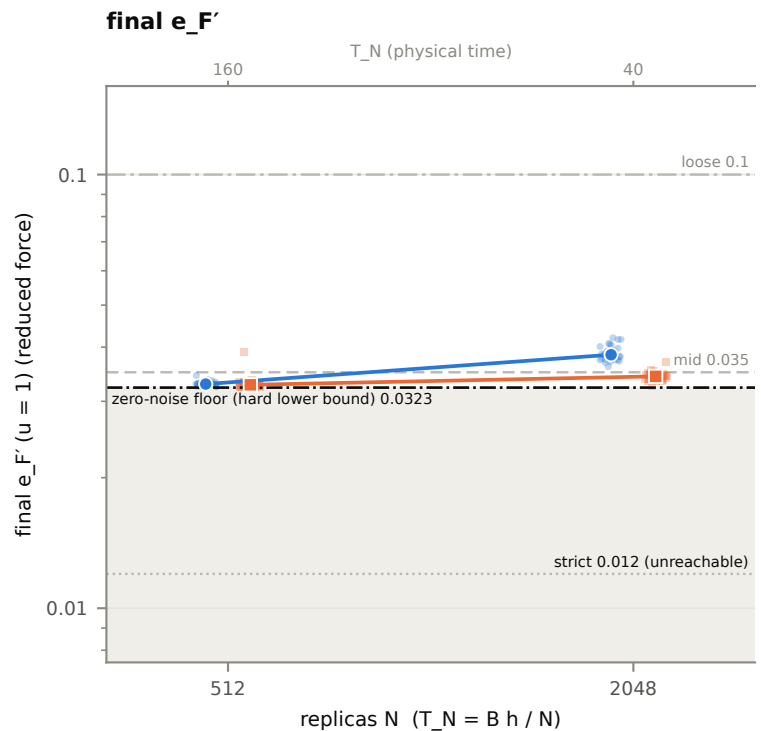


gateway lam0.5: absolute mean-force error vs N

Equal total budget per arm per seed: $B = N \times n_steps = 3.2768e+09$ walker-steps at every N ($h = 2.5e-05$, $T_N = B \cdot h / N$); 32 seeds per (N , method). ABF and ABF + FR: seed median, IQR and per-seed points.

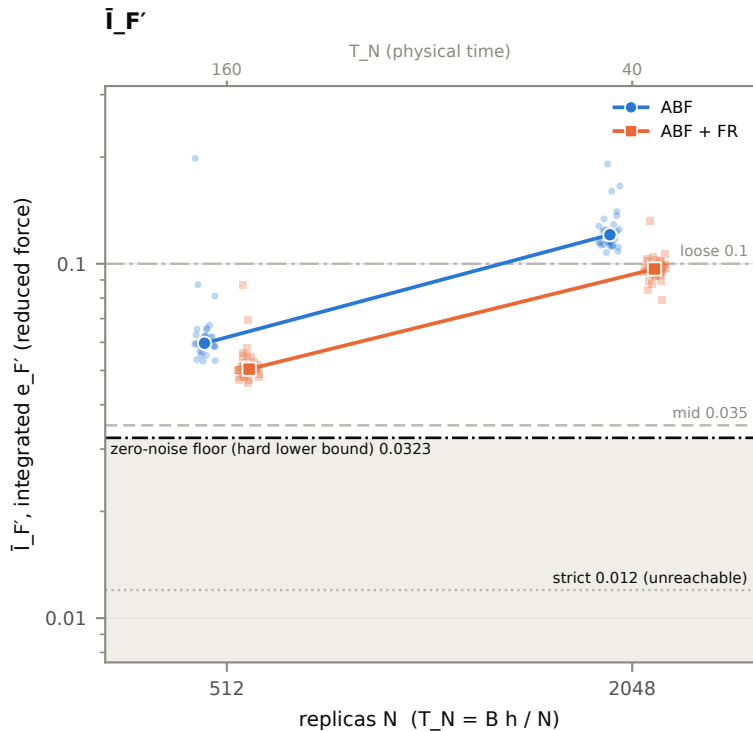

gateway lam0.5 · S2_mean_force_abs_vs_N · status: all planned (N , seed, method) complete · FR is not defined at $N = 1$ (ABF only, by design).
Markers: seed median; whiskers: IQR over seeds; faint points: individual seeds. Grey lines: the frozen strict / mid / loose thresholds of $e(t)$ (shown for scale on the integrated errors as well).
Reference floors: lbar_Fp: every estimate lies above the zero-noise floor 0.03227 ($e^2 = \text{stat}^2 + \text{floor}^2$); thresholds below it are unreachable by construction; final_e_Fp: every estimate lies above the zero-noise floor 0.03227 ($e^2 = \text{stat}^2 + \text{floor}^2$); thresholds below it are unreachable by construction.
Source results/mechanism/conditional_relaxation/lam0.5/analysis/summary.json (generated 2026-10-10T14:19:15Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.