


Entropic gateway · N = 1 · T_N = 81920 t.u.

n_steps = 3,276,800,000 · h = 2.5e-05 · B = N n_steps = 3.277e+09 walker-steps · complete seeds: ABF 32/32 (N = 1: ABF only, no FR arm)

Instantaneous marginal snapshots (seed-pooled), ABF vs ABF+FR

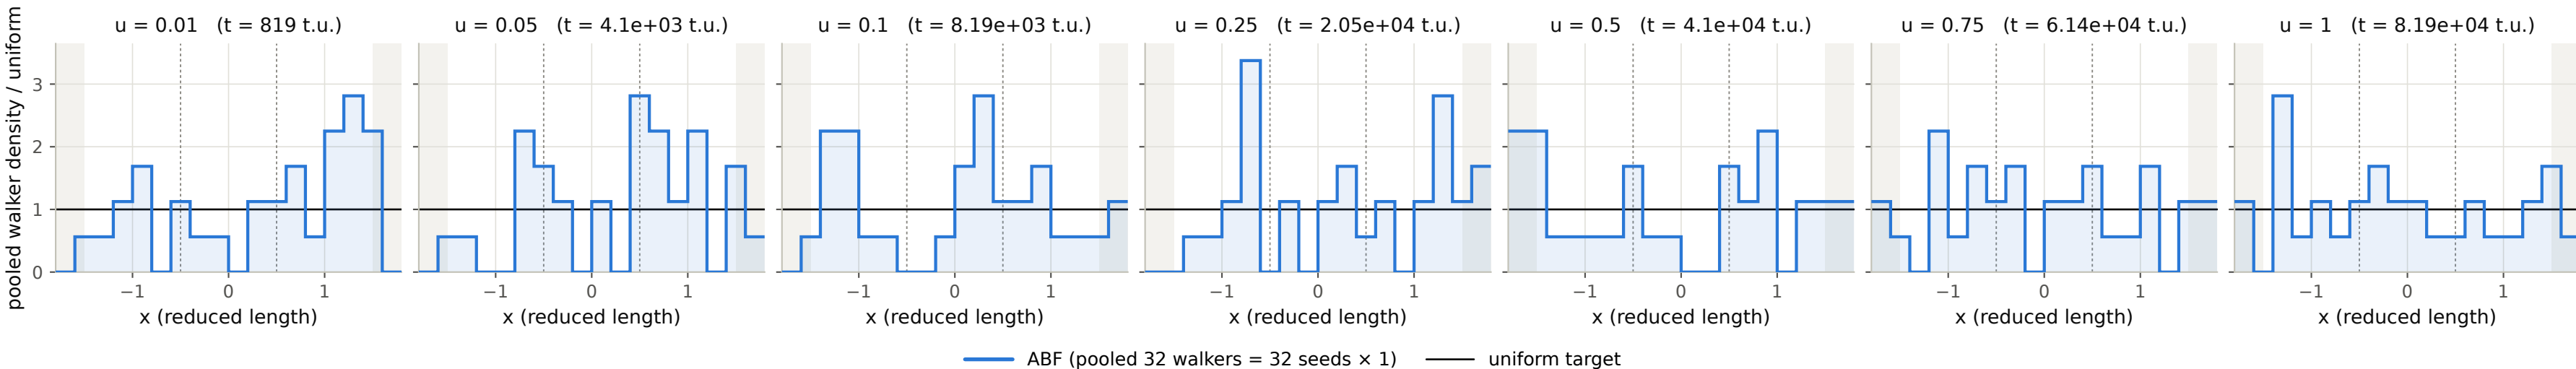

Seed-pooled instantaneous histograms of the walkers at the snapshot u (the saved state), on the 18 coarse bins of the TV metric; density relative to the uniform target (1 = uniform). Not a median: pooled counts.

Small N (N = 1, i.e. ≤ 4): each seed contributes only 1 walker to an instantaneous histogram, so instantaneous marginals are necessarily discrete (TV_inst floor E_N[TV] = 0.944).

Dashed guides: region boundaries x = ±0.5 (left well / gate / right well); shaded |x| > 1.5: outside the scored eval window.

eqb_plot_config/2 · config_gateway_production.json · 2026-10-10 09:46 UTC