
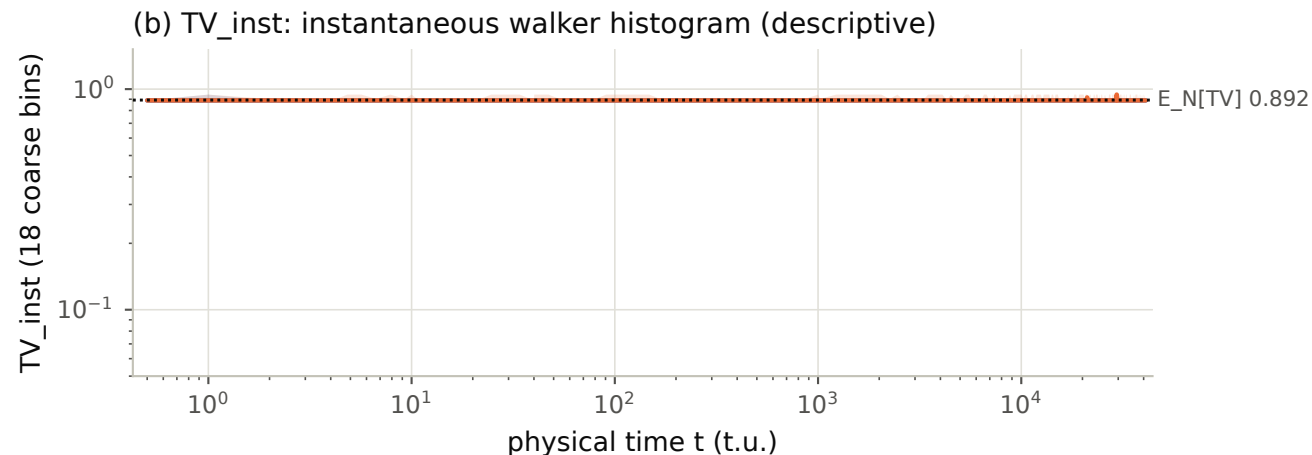


Entropic gateway · $N = 2$ · $T_N = 40960$ t.u.

$n_steps = 1,638,400,000$ · $h = 2.5e-05$ · $B = N n_steps = 3.277e+09$ walker-steps · complete seeds: ABF 32/32, ABF+FR 32/32

Marginal convergence: TV_half and TV_inst with the finite-N floor vs physical time

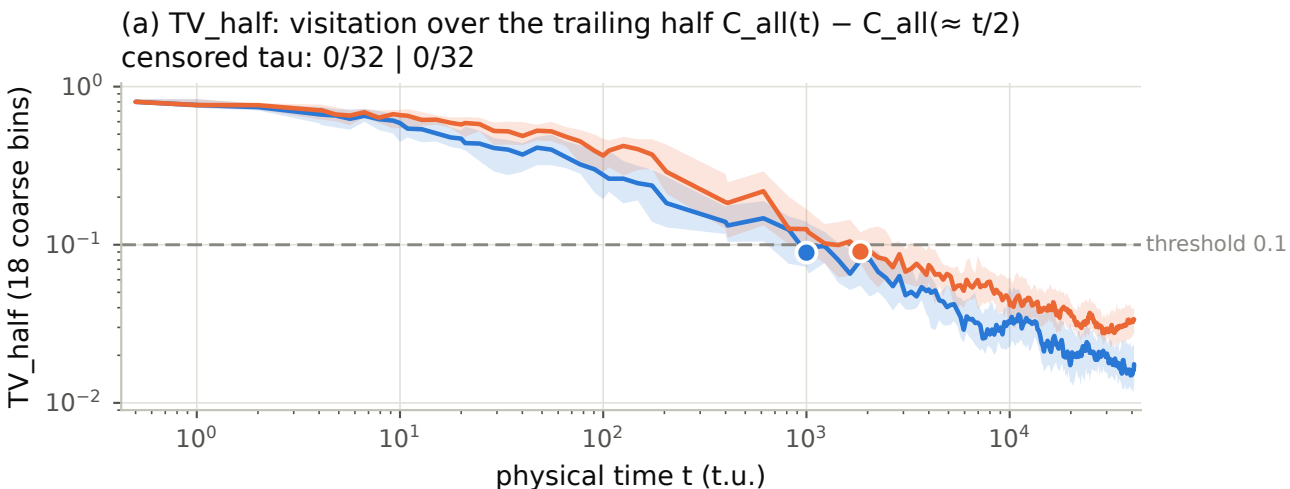

- ABF ($n = 32$)
- ABF+FR ($n = 32$)
- interquartile range
- ○ — TV_half threshold 0.1 (marker: persistent crossing of the median curve)
- finite-N floor $E_N[TV] = 0.8920$ (exact, multinomial(N , uniform))

Line = median across seeds; band = interquartile range (25th-75th percentile) across seeds. Metrics are the frozen SCIENTIFIC_PLAN section-4 quantities, unsmoothed.

TV_half uses the saved step nearest $t/2$ (or the run start) as the window's lower edge (eqb_metrics.tv_half); tau for the marginal is defined on TV_half. TV_inst is never used for tau: at small N it is dominated by discreteness (17/18 at $N = 1$).

Small N ($N = 2$, i.e. ≤ 4): each seed contributes only 2 walkers to an instantaneous histogram, so instantaneous marginals are necessarily discrete (TV_inst floor $E_N[TV] = 0.892$).

eqb_plot_config/2 · config_gateway_production.json · 2026-10-10 09:47 UTC