


Entropic gateway · $N = 2$ · $T_N = 40960$ t.u.


$n_steps = 1,638,400,000$ · $h = 2.5e-05$ · $B = N n_steps = 3.277e+09$ walker-steps · complete seeds: ABF 32/32, ABF+FR 32/32

Seed-averaged instantaneous CV density vs budget fraction u

(a) ABF (mean over 32 seeds of $hist_inst / N$)

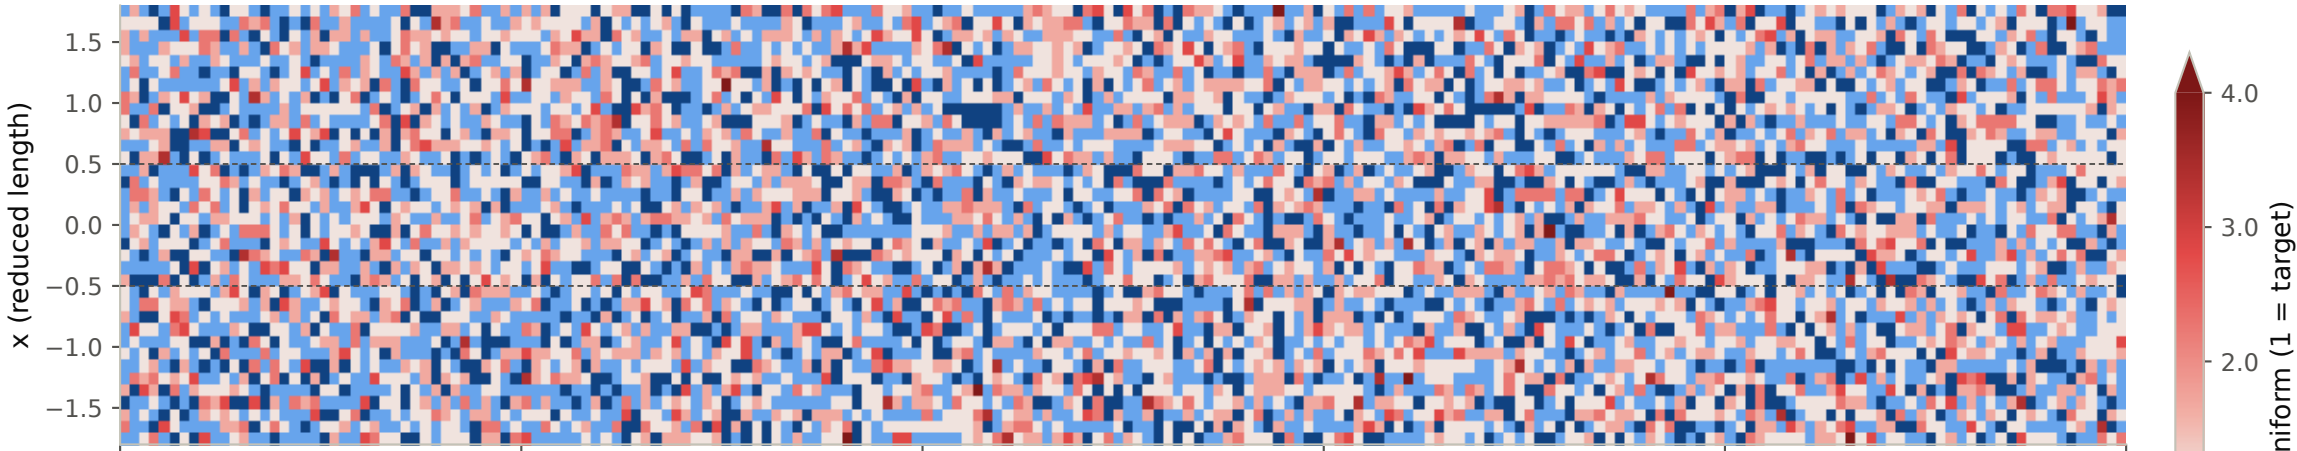

(b) ABF+FR (mean over 32 seeds of $hist_inst / N$)

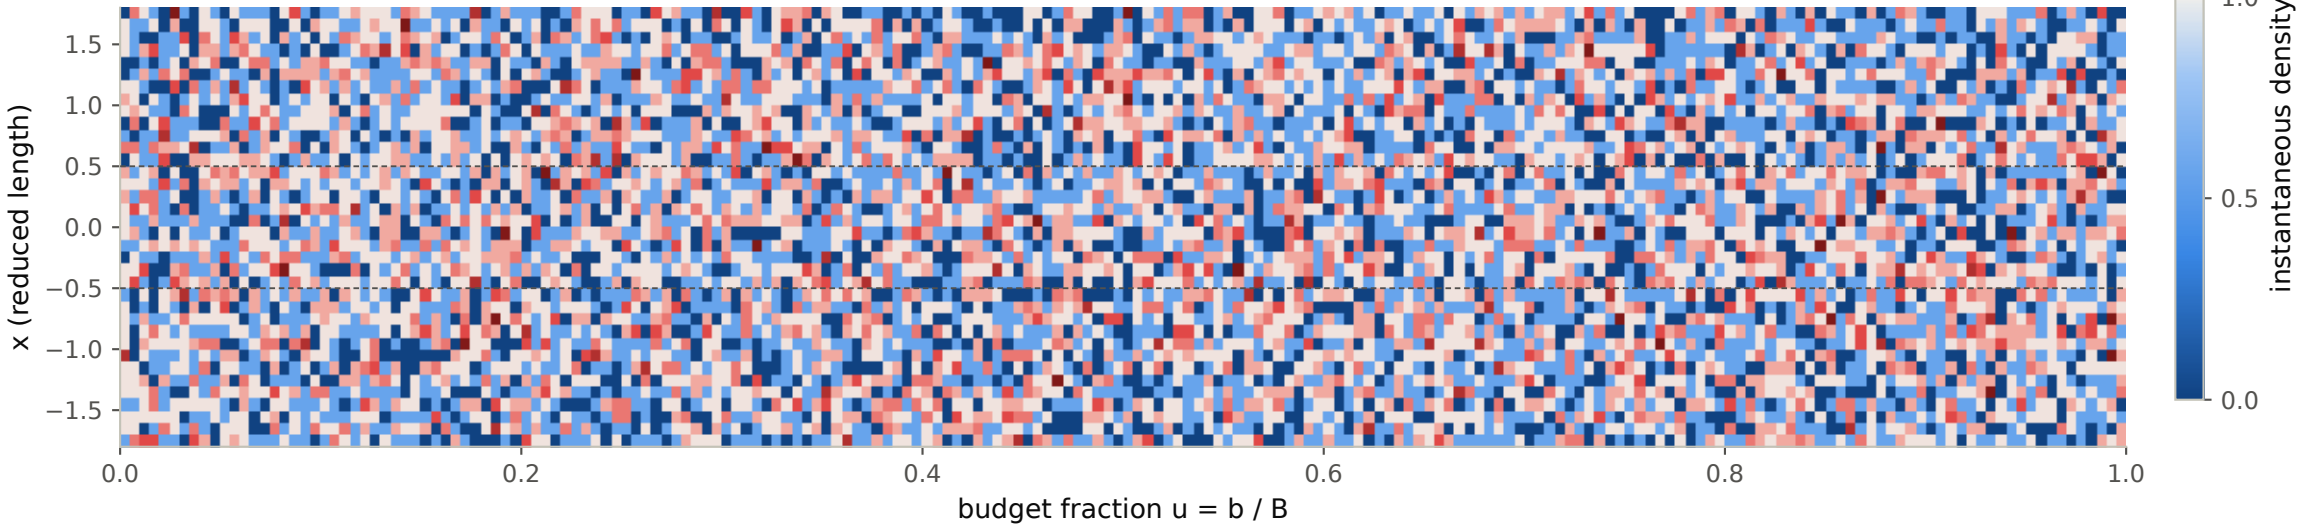

Identical diverging colour scale for every panel (and every N): blue = below the uniform target, grey = at target, red = above; clipped at 4x. Displayed on 36 CV bins (5 production bins each). Columns = the 200 uniform budget saves $u = k/200$.

Each column pools only $N \times seeds = 64$ walkers over 36 cells (one walker = $0.56 \times$ uniform), so the map is necessarily speckled; read it for where the population sits, not for cell-level values.

Small N ($N = 2$, i.e. ≤ 4): each seed contributes only 2 walkers to an instantaneous histogram, so instantaneous marginals are necessarily discrete ($TV_inst \text{ floor } E_N[TV] = 0.892$).

Dashed horizontal guides: $x = \pm 0.5$ (left well / gate / right well).

eqb_plot_config/2 · config_gateway_production.json · 2026-10-10 09:47 UTC