


Entropic gateway · $N = 2$ · $T_N = 40960$ t.u.

$n_steps = 1,638,400,000$ · $h = 2.5e-05$ · $B = N \cdot n_steps = 3.277e+09$ walker-steps · complete seeds: ABF 32/32, ABF+FR 32/32

Configuration summary vs budget fraction u (budget-normalised)

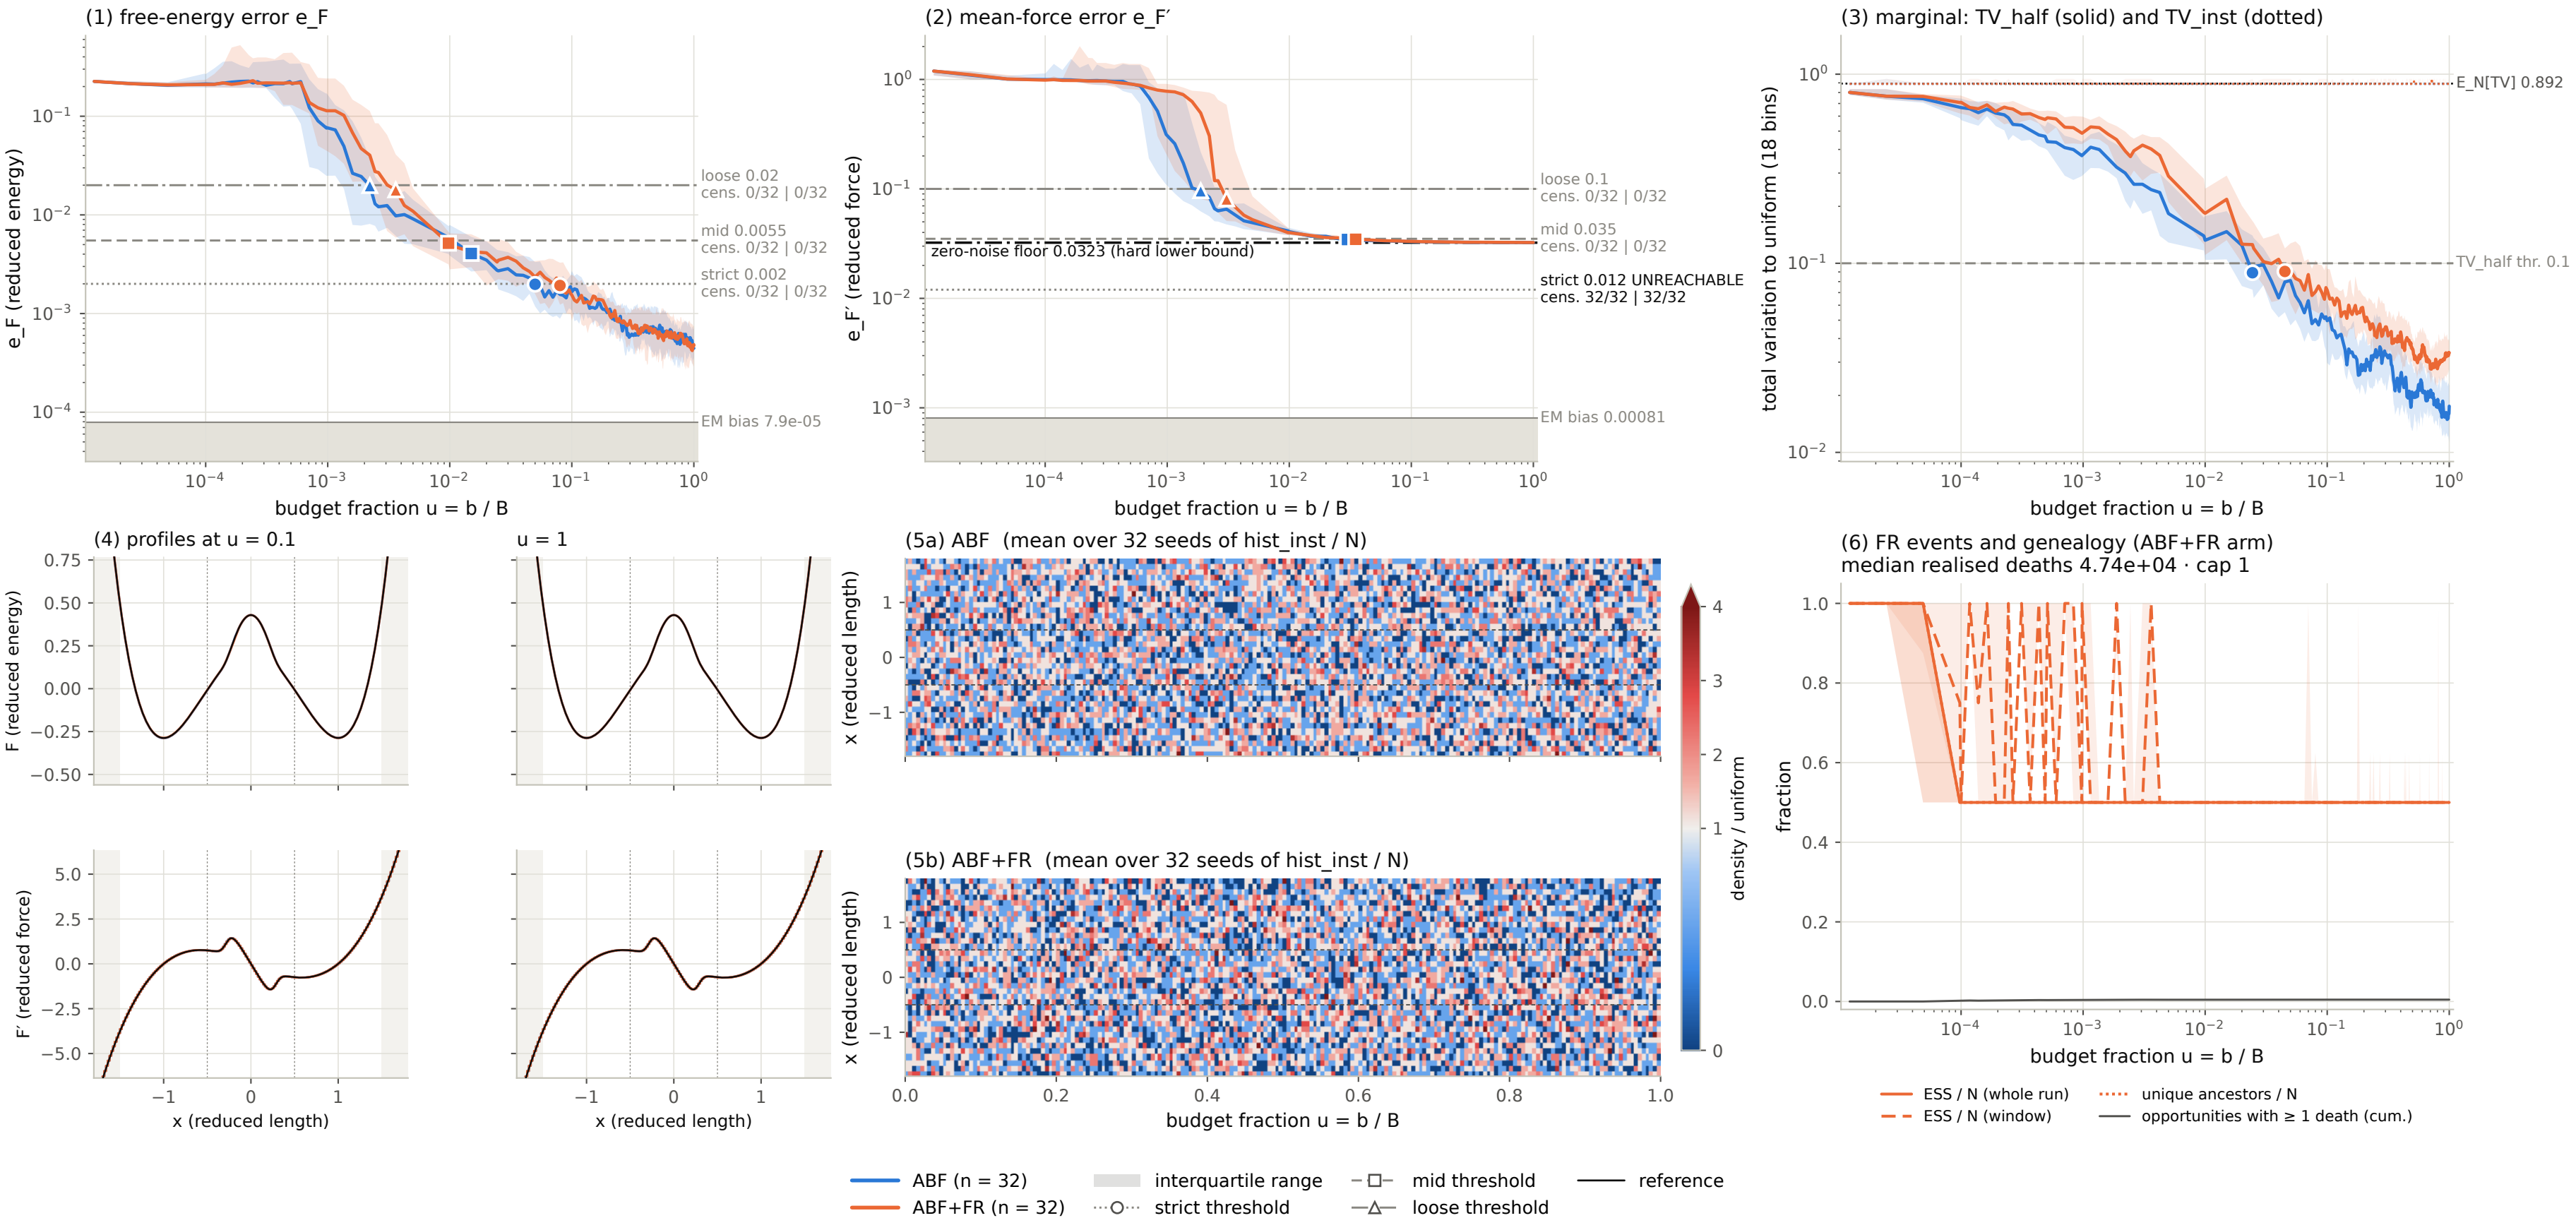

Line = median across seeds; band = interquartile range (25th-75th percentile) across seeds. Metrics are the frozen SCIENTIFIC_PLAN section-4 quantities, unsmoothed.

Each column pools only $N \times seeds = 64$ walkers over 36 cells (one walker = $0.56 \times$ uniform), so the map is necessarily speckled; read it for where the population sits, not for cell-level values.

(1)-(3): markers = persistent crossing of the seed-median curve; 'cens. a | b' = seeds with a censored tau per arm; shaded below the grey line = EM bias at h (analytic vs EM-consistent reference); dash-dot in (2) = the zero-noise floor 0.0323 of $e_{F'}$ (hard lower bound). (4)

top F , bottom F' at $u = 0.1$ (left) and 1 (right), same alignment as e_F . (5) seed-mean instantaneous density / uniform, diverging scale clipped at 4.

Small N ($N = 2$, i.e. ≤ 4): each seed contributes only 2 walkers to an instantaneous histogram, so instantaneous marginals are necessarily discrete (TV_inst floor $E_N[TV] = 0.892$).

eqb_plot_config/2 · config_gateway_production.json · 2026-10-10 09:47 UTC