


Entropic gateway · N = 4 · T_N = 20480 t.u.

n_steps = 819,200,000 · h = 2.5e-05 · B = N n_steps = 3.277e+09 walker-steps · complete seeds: ABF 32/32, ABF+FR 32/32

Establishment and crossings vs budget fraction u

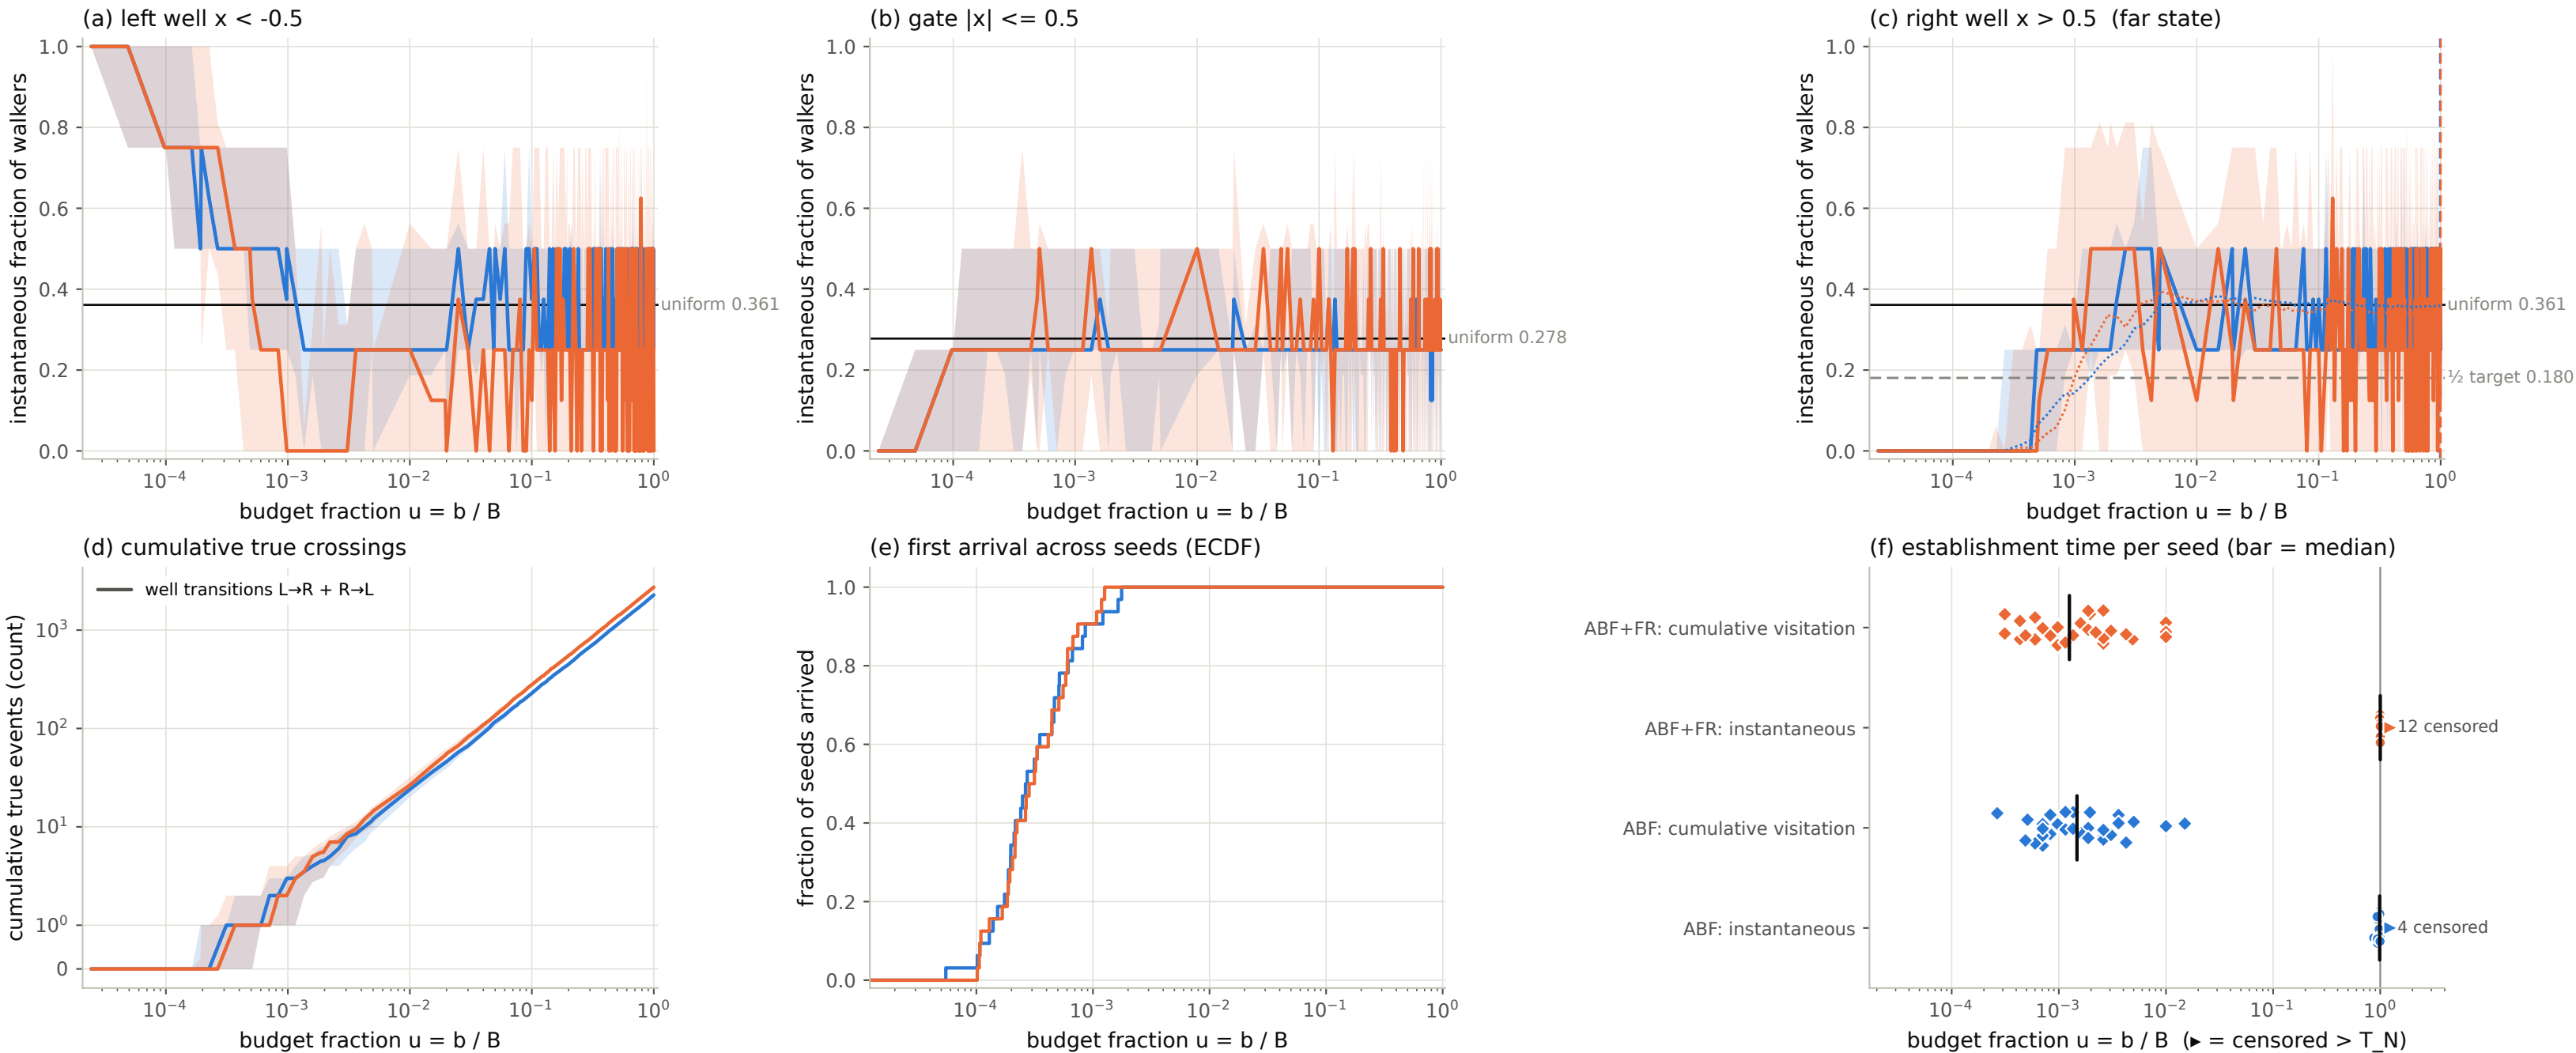

— ABF (n = 32) interquartile range - - - median establishment time (panel c) — first arrival: right well $x > 0.5$
— ABF+FR (n = 32) cumulative far-state visitation fraction (panel c) — uniform-target fraction

Line = median across seeds; band = interquartile range (25th-75th percentile) across seeds. Metrics are the frozen SCIENTIFIC_PLAN section-4 quantities, unsmoothed.

Establishment (frozen): first save after which the instantaneous far-state fraction (right well $x > 0.5$) stays $\geq \frac{1}{2}$ of its uniform target 0.361; the cumulative-visitation version uses C_{all} (far-state bins) against $\frac{1}{2}$ of their bin share. True events never count a copy (clones inherit labels).

Null calibration at $N = 4$: an EXACTLY uniform population (far count $\sim \text{Bin}(N, 0.361)$ per save) fails the instantaneous criterion at a save with $p = 0.167$ and passes every save of the second half with $P = 0.000 \rightarrow \text{UNRELIABLE}$ here: the instantaneous establishment time is censored / late by chance even when established, and FR birth-death can push the count below binomial scatter (an FR advantage in it is not evidence of faster convergence); read the cumulative version and the first arrival.

eqb_plot_config/2 · config_gateway_production.json · 2026-10-10 09:47 UTC