


ethane/LTA 150 K: persistent time to mean-force accuracy, budget fraction

Equal total budget per arm per seed: $B = N \times n_{\text{steps}} = 3.072\text{e}+08$ walker-steps at every N ($h = 0.0002$, $T_N = B \cdot h / N$); 16 seeds per (N , method). $\tau(\epsilon)$ = first save after which $e_F' \leq \epsilon$ at every later save; never met: censored ($> T_N$, > 1).

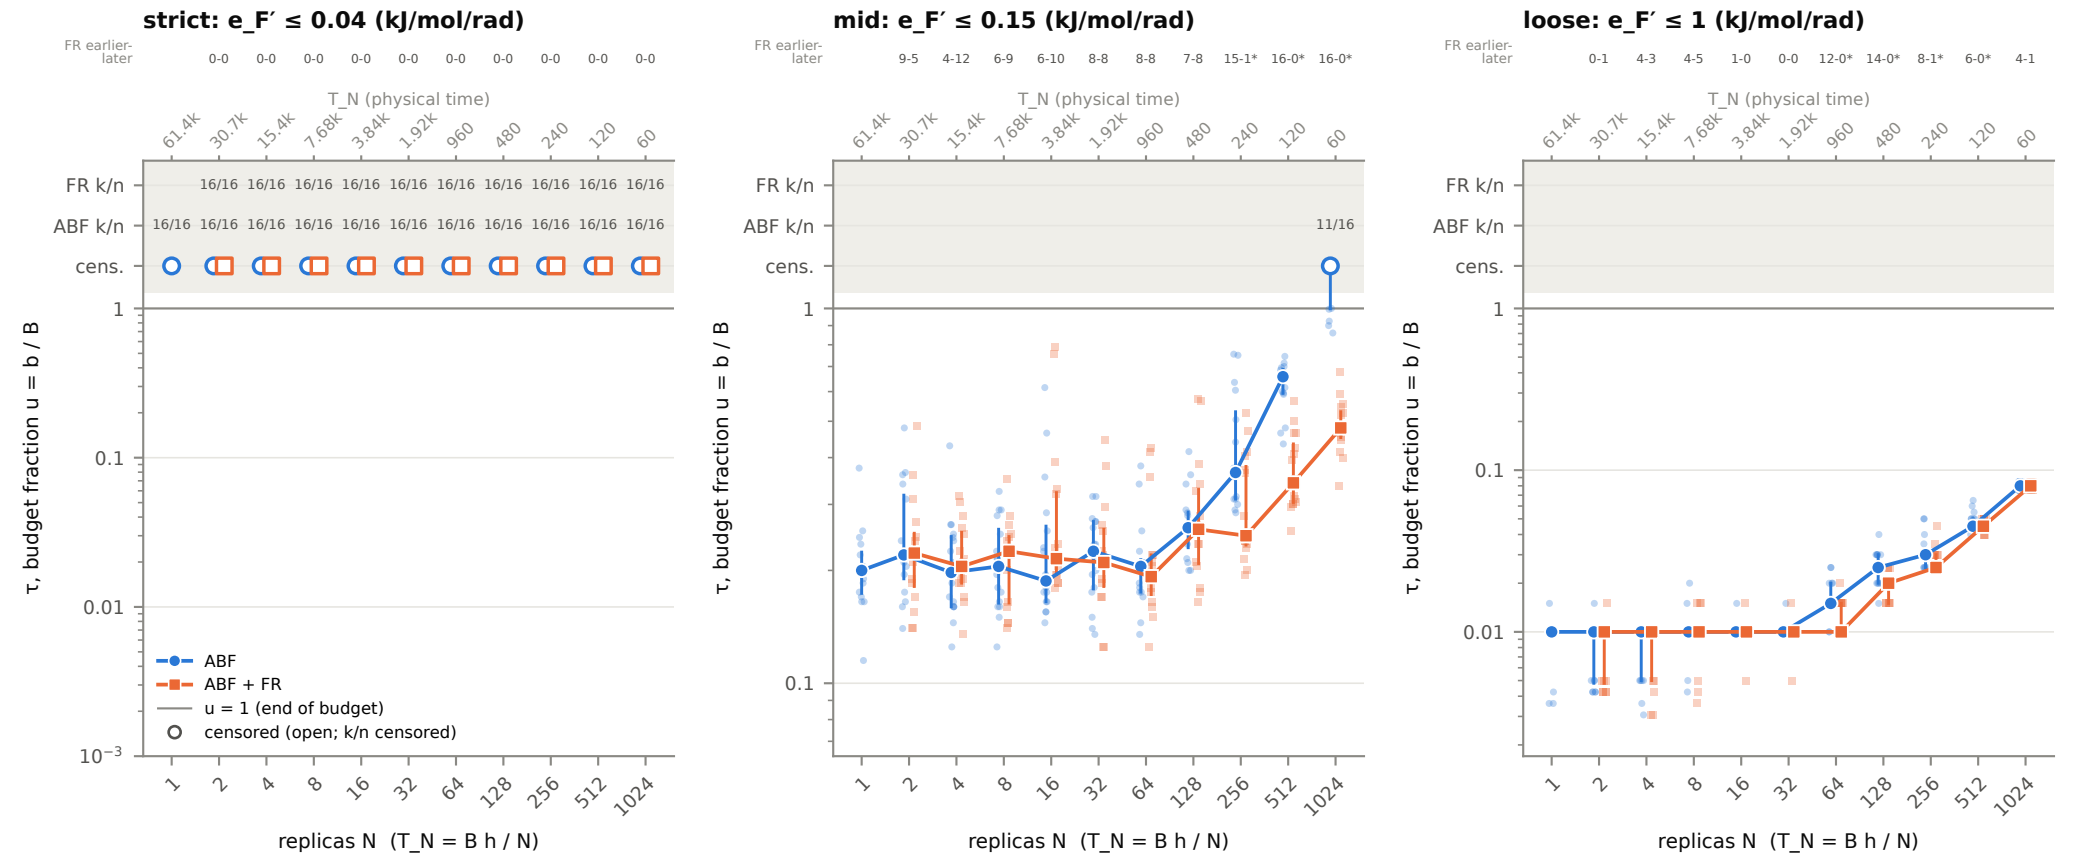

ethane/LTA 150 K · S5b_tau_mean_force_budget · status: all planned (N , seed, method) complete · FR is not defined at $N = 1$ (ABF only, by design) · LTA $N < 50$: FR uses the finite- N cap extension $\max(1, \text{floor}(0.02 \cdot N))$.
Markers: seed median (large open marker in the 'cens.' band = median censored); bars: IQR; faint: seeds; censored seeds are open markers in the band, never success at T_N .
Row above each panel: the PAIRED comparison at that N , seeds with FR earlier - FR later than ABF (finite beats censored, both censored = tie; * = exact sign test $p < 0.05$; medians, G and CIs in summary.json / tables.md). Budget axis: tau on the common budget grid (200 uniform + 24 log-spaced u , identical at every N) so that N are compared at equal resolution.
Source results/equal_budget_v2/lta_T150/analysis/summary.json (generated 2026-10-10T07:14:18Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.