
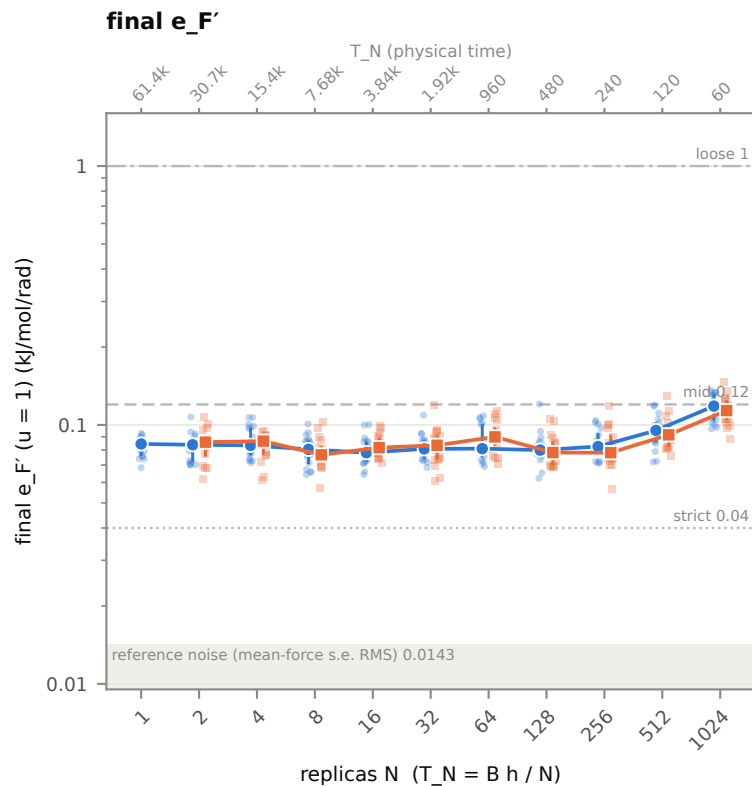


ethane/LTA 300 K: absolute mean-force error vs N

Equal total budget per arm per seed: $B = N \times n_steps = 3.072e+08$ walker-steps at every N ($h = 0.0002$, $T_N = B \cdot h / N$); 16 seeds per (N, method). ABF and ABF + FR: seed median, IQR and per-seed points.

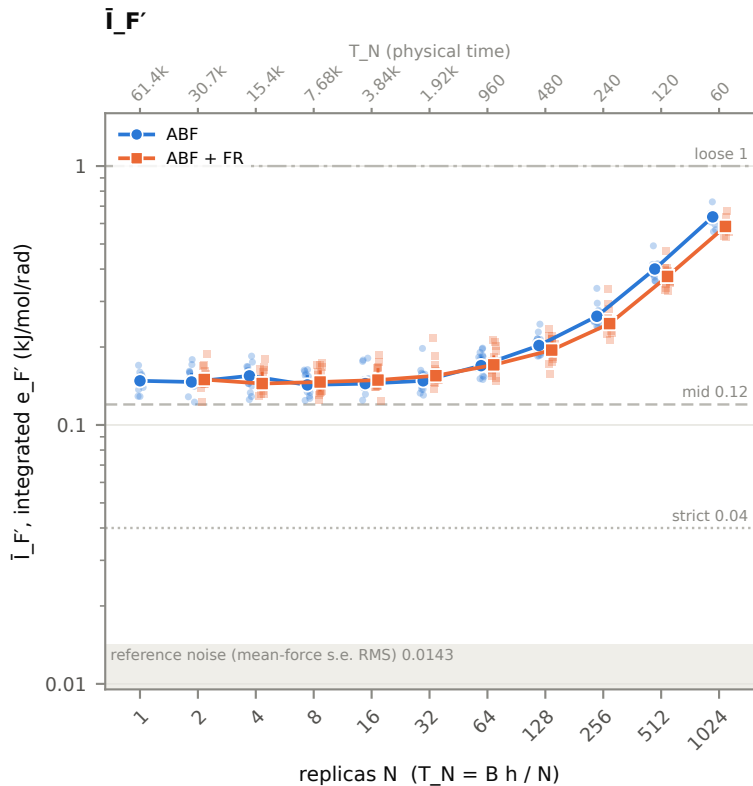

ethane/LTA 300 K · S2_mean_force_abs_vs_N · status: all planned (N, seed, method) complete · FR is not defined at N = 1 (ABF only, by design) · LTA N < 50: FR uses the finite-N cap extension $\max(1, \text{floor}(0.02 \cdot N))$.

Markers: seed median; whiskers: IQR over seeds; faint points: individual seeds. Grey lines: the frozen strict / mid / loose thresholds of $e(t)$ (shown for scale on the integrated errors as well).

Source results/equal_budget_v2/lta_T300/analysis/summary.json (generated 2026-10-10T07:06:16Z, eqb_metrics/2, 10000 bootstrap resamples); plot_synthesis/2.