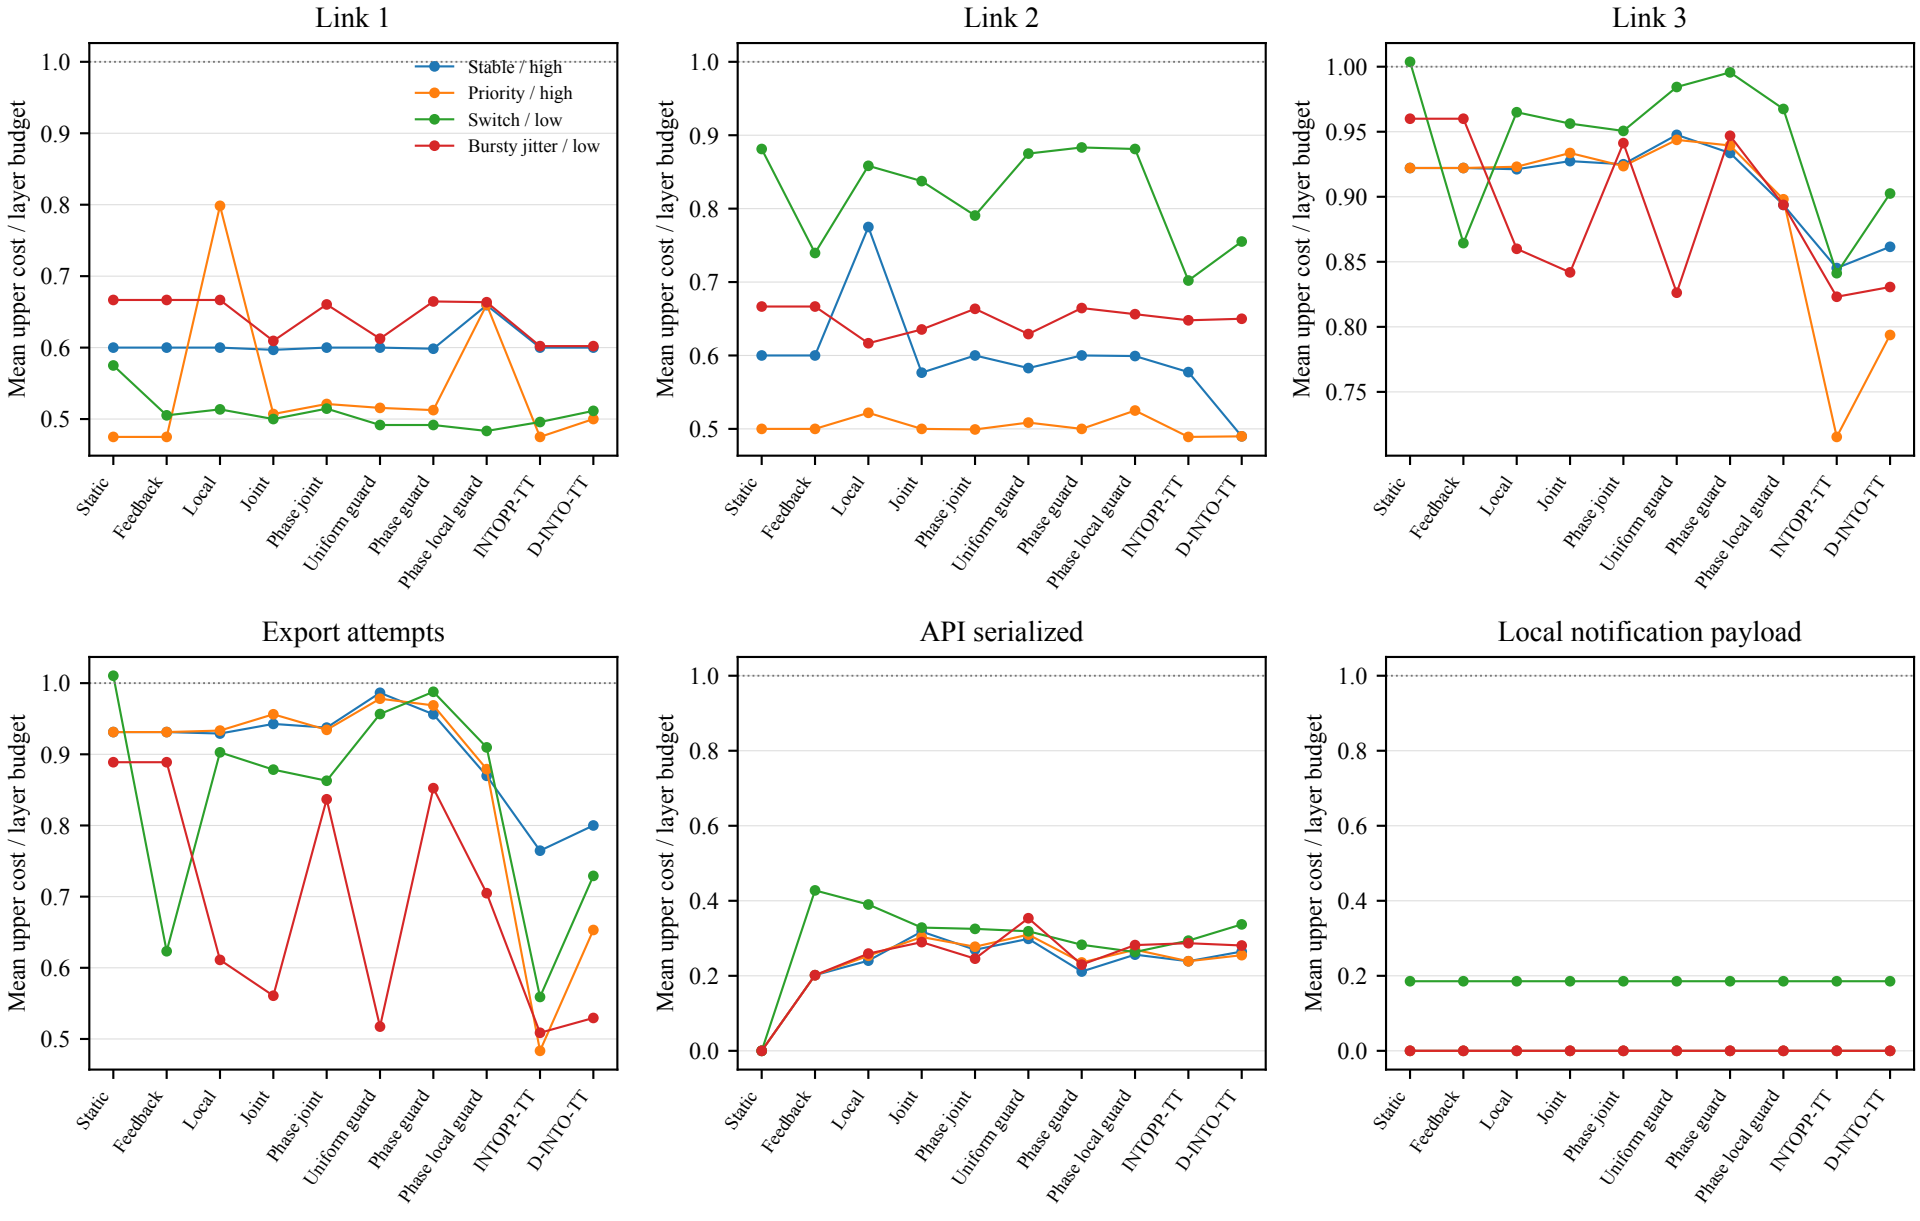

Each layer uses its own byte definition. A missing value leaves a gap; individual budget states remain in the data.