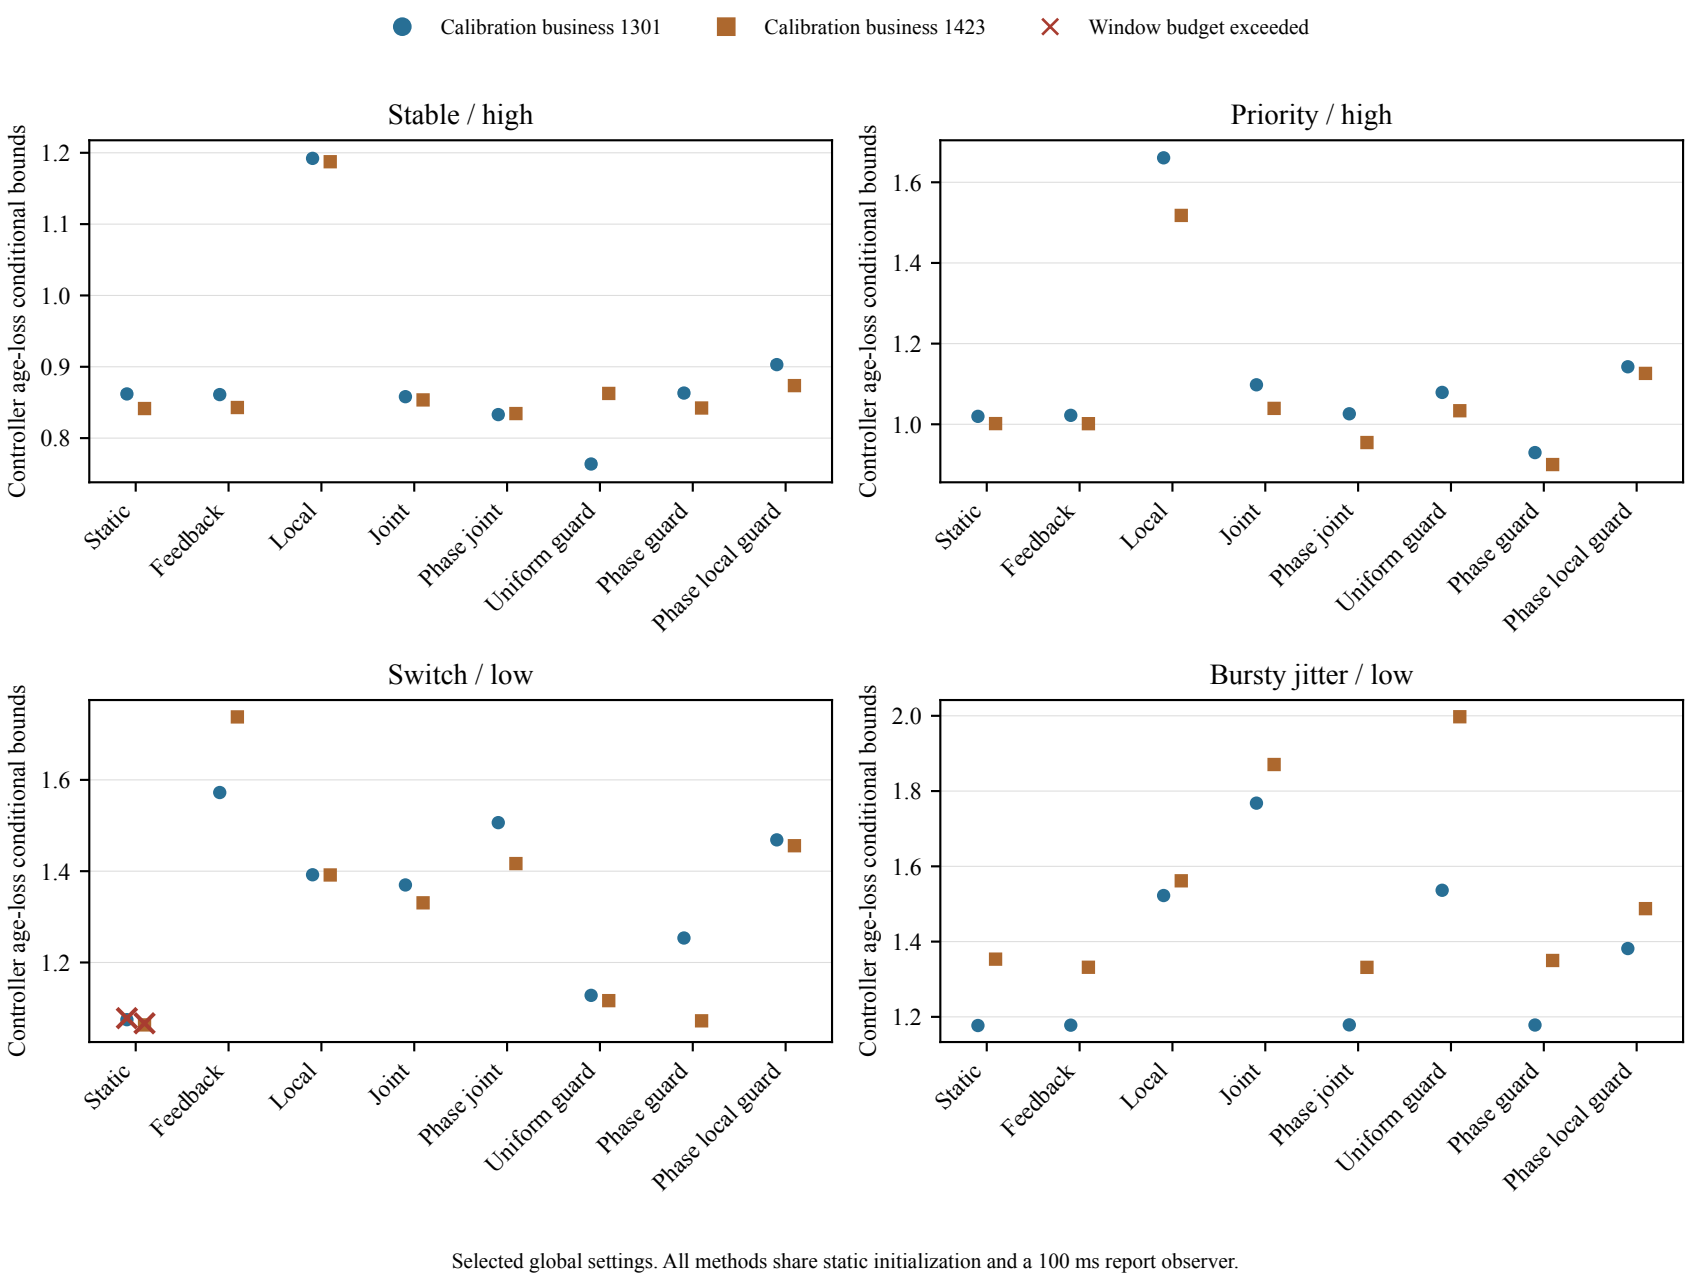

Selected global settings. All methods share static initialization and a 100 ms report observer.