

Affiliation line 1
Affiliation line 2
Author line 1
Author line 2



MyProjectName : Your Title
Messir Analysis Document
- v 0.0 -
(*Report type: Default*)

Tuesday 22nd November, 2016 - 00:36

Contents

1	Introduction	7
1.1	Overview	7
1.2	Purpose and recipients of the document	7
1.3	Application Domain	7
1.4	Definitions, acronyms and abbreviations	7
1.5	Document structure	7
2	General Description	9
2.1	Domain Stakeholders	9
2.2	System's Actors	10
2.3	Use Cases Model	10
2.3.1	Use Cases	10
2.3.2	Use Case Instance(s)	20
3	Environment Model	23
3.1	Environment model view(s)	23
3.2	Actors and Interfaces Descriptions	23
3.2.1	actAbstractDispatchCoordinator Actor	23
3.2.2	actCentralCoordinator Actor	23
3.2.3	actCommunicationCompany Actor	24
3.2.4	actFiremenCoordinator Actor	24
3.2.5	actPoliceCoordinator Actor	24
3.2.6	actTowServiceCoordinator Actor	25
4	Concept Model	27
4.1	PrimaryTypes-Classes	27
4.1.1	Local view 12	27
4.2	PrimaryTypes-Datatypes	27
4.2.1	Local view 01	27
4.2.2	Local view 02	27
4.2.3	Local view 03	27
4.2.4	Local view 04	27
4.2.5	Local view 05	27
4.2.6	Local view 06	27
4.2.7	Local view 07	30
4.3	Concept Model Types Descriptions	30
4.3.1	Primary types - Class types descriptions	30
4.3.2	Primary types - Datatypes types descriptions	31
4.3.3	Primary types - Association types descriptions	31
4.3.4	Primary types - Aggregation types descriptions	32

4.3.5	Secondary types - Class types descriptions	32
4.3.6	Secondary types - Datatypes types descriptions	32
4.3.7	Secondary types - Association types descriptions	32
4.3.8	Secondary types - Aggregation types descriptions	32
4.3.9	Secondary types - Composition types descriptions	32
5	Operation Model	33
5.1	Environment - Out Interface Operation Scheme for actCentralCoordinator	33
5.1.1	Operation Model for oeRequestCrisisEventLocation	33
5.2	Environment - Actor Operation Schemes	33
5.3	Primary Types - Operation Schemes for Classes	34
5.4	Primary Types - Operation Schemes for Datatypes	34
5.5	Primary Types - Operation Schemes for Enumerations	34
5.6	Secondary Types - Operation Schemes for Classes	34
5.7	Secondary Types - Operation Schemes for Datatypes	34
5.8	Secondary Types - Operation Schemes for Enumerations	34
6	Test Model(s)	35
7	Additional Constraints	37
A	Undocumented Messir Specification Elements	39
A.1	Undocumented Primary Types	39
A.1.1	Undocumented Primary Classe Types	39
A.1.2	Undocumented Primary Datatype Types	39
A.2	Undocumented Primary Type Relationships	39
A.2.1	Undocumented Primary Type Associations	39
A.3	Undocumented Secondary Types	39
A.3.1	Undocumented Secondary Datatype Types	39
A.4	Undocumented Operation Specifications	39
B	Messir Specification Files Listing	41
B.1	File /src-gen/messir-spec/.views.msr	41
B.2	File /.../environment-actCentralCoordinator-oeRequestCrisisEventLocation.msr	41
B.3	File /src-gen/messir-spec/environment/environment.msr	42
B.4	File /src-gen/messir-spec/concepts.../primarytypes-associations.msr	43
B.5	File /src-gen/messir-spec/concepts/primarytypes-classes/primarytypes-classes.msr	44
B.6	File /src-gen/messir-spec/concepts.../primarytypes-datatypes.msr	45
B.7	File /src-gen/messir-spec/concepts.../secondarytypes-associations.msr	46
B.8	File /src-gen/messir-spec/concepts.../secondarytypes-classes.msr	46
B.9	File /src-gen/messir-spec/concepts.../secondarytypes-datatypes.msr	47
B.10	File /src-gen/messir-spec/tests/tests.msr	47
B.11	File /.../usecaseinstance-suGlobalManagementOfEvent-ucisuGlobalManagementOfEvent.msr	48
B.12	File /.../usecaseinstance-ugCreateNewCrisisEvent-uciugCreateNewCrisisEvent.msr	49
B.13	File /.../usecaseinstance-ugGlobalDispatchManagement-uciugGlobalDispatchManagement.msr	50
B.14	File /src-gen/messir-spec/usecases/usecases.msr	50

List of Figures

2.1	lu.uni.lassy.excalibur.group09.spec Use Case Diagram: uc-suGlobalManagementOfEvent	11
2.2	lu.uni.lassy.excalibur.group09.spec Use Case Diagram: uc-ugCreateNewCrisisEvent . .	14
2.3	lu.uni.lassy.excalibur.group09.spec Use Case Diagram: uc-ugGlobalDispatchManagement	15
2.4	lu.uni.lassy.excalibur.group09.spec Sequence Diagram: uci-ucisuGlobalManagementOfEvent	21
4.1	Concept Model - PrimaryTypes-Classes local view 12 -	28
4.2	Concept Model - PrimaryTypes-Datatypes local view 01 -	29
4.3	Concept Model - PrimaryTypes-Datatypes local view 02 -	29
4.4	Concept Model - PrimaryTypes-Datatypes local view 03 -	29
4.5	Concept Model - PrimaryTypes-Datatypes local view 04 -	29
4.6	Concept Model - PrimaryTypes-Datatypes local view 05 -	29
4.7	Concept Model - PrimaryTypes-Datatypes local view 06 -	29
4.8	Concept Model - PrimaryTypes-Datatypes local view 07 -	30

Listings

B.1	Messir Spec. file .views.msr.	41
B.2	Messir Spec. file environment-actCentralCoordinator-oeRequestCrisisEventLocation.msr.	41
B.3	Messir Spec. file environment.msr.	42
B.4	Messir Spec. file primarytypes-associations.msr.	43
B.5	Messir Spec. file primarytypes-classes.msr.	44
B.6	Messir Spec. file primarytypes-datatypes.msr.	45
B.7	Messir Spec. file secondarytypes-associations.msr.	46
B.8	Messir Spec. file secondarytypes-classes.msr.	46
B.9	Messir Spec. file secondarytypes-datatypes.msr.	47
B.10	Messir Spec. file tests.msr.	47
B.11	Messir Spec. file usecaseinstance-suGlobalManagementOfEvent-ucisuGlobalManagementOfEvent.msr.	48
B.12	Messir Spec. file usecaseinstance-ugCreateNewCrisisEvent-uciugCreateNewCrisisEvent.msr.	49
B.13	Messir Spec. file usecaseinstance-ugGlobalDispatchManagement-uciugGlobalDispatchManagement.msr.	50
B.14	Messir Spec. file usecases.msr.	50

Chapter 1

Introduction

1.1 Overview

1.2 Purpose and recipients of the document

1.3 Application Domain

1.4 Definitions, acronyms and abbreviations

1.5 Document structure

Chapter 2

General Description

2.1 Domain Stakeholders

2.2 System's Actors

The objective of this section is not to provide the full requirement elicitation document in this section but to reuse a part of this document to provide a informal introduction to the **Messip** specification of the system under development. The use case model is made of a use case diagrams modelling abstractly and informally the actors and their use cases together with a set of use cases descriptions. In addition, those diagrams and description tables are adapted to the **Messip** specification since actor and messages names together with parameters are partly adapted to be consistent with the specification identifiers (see [1] for more details).

2.3 Use Cases Model

This section contains the use cases elicited during the requirements elicitation phase. The use cases are textually described as suggested by the **Messip** method and inspired by the standard Cockburn template [2].

2.3.1 Use Cases

2.3.1.1 summary-suGlobalManagementOfEvent

Shows the suGlobaManagementOfEvent use-case and its actors.

USE-CASE DESCRIPTION	
<i>Name</i>	suGlobalManagementOfEvent
<i>Scope</i>	system
<i>Level</i>	summary
Primary actor(s)	
1	actCentralCoordinator[active]
Secondary actor(s)	
1	actCommunicationCompany[active]
2	actFiremenCoordinator[active]
3	actTowServiceCoordinator[active]
4	actPoliceCoordinator[active]
Goal(s) description	
Shows the suGlobaManagementOfEvent use-case and its actors.	
Protocol condition(s)	
1	
Pre-condition(s)	
1	
Main post-condition(s)	
1	
Main Steps	
a	the actor actCentralCoordinator executes the <u>ugCreateNewCrisisEvent</u> use case
b	the actor actFiremenCoordinator executes the <u>ugGlobalDispatchManagement</u> use case
c	the actor actTowServiceCoordinator executes the <u>ugGlobalDispatchManagement</u> use case
Steps Ordering Constraints	

continues in next page ...

... Use-Case Description table continuation

1	step (a) must be executed before step (b) or step (c)
2	step (b) XOR step (c)
Additional Information	
none	

Figure 2.1 Shows the suGlobalManagementOfEvent use-case and its actors.

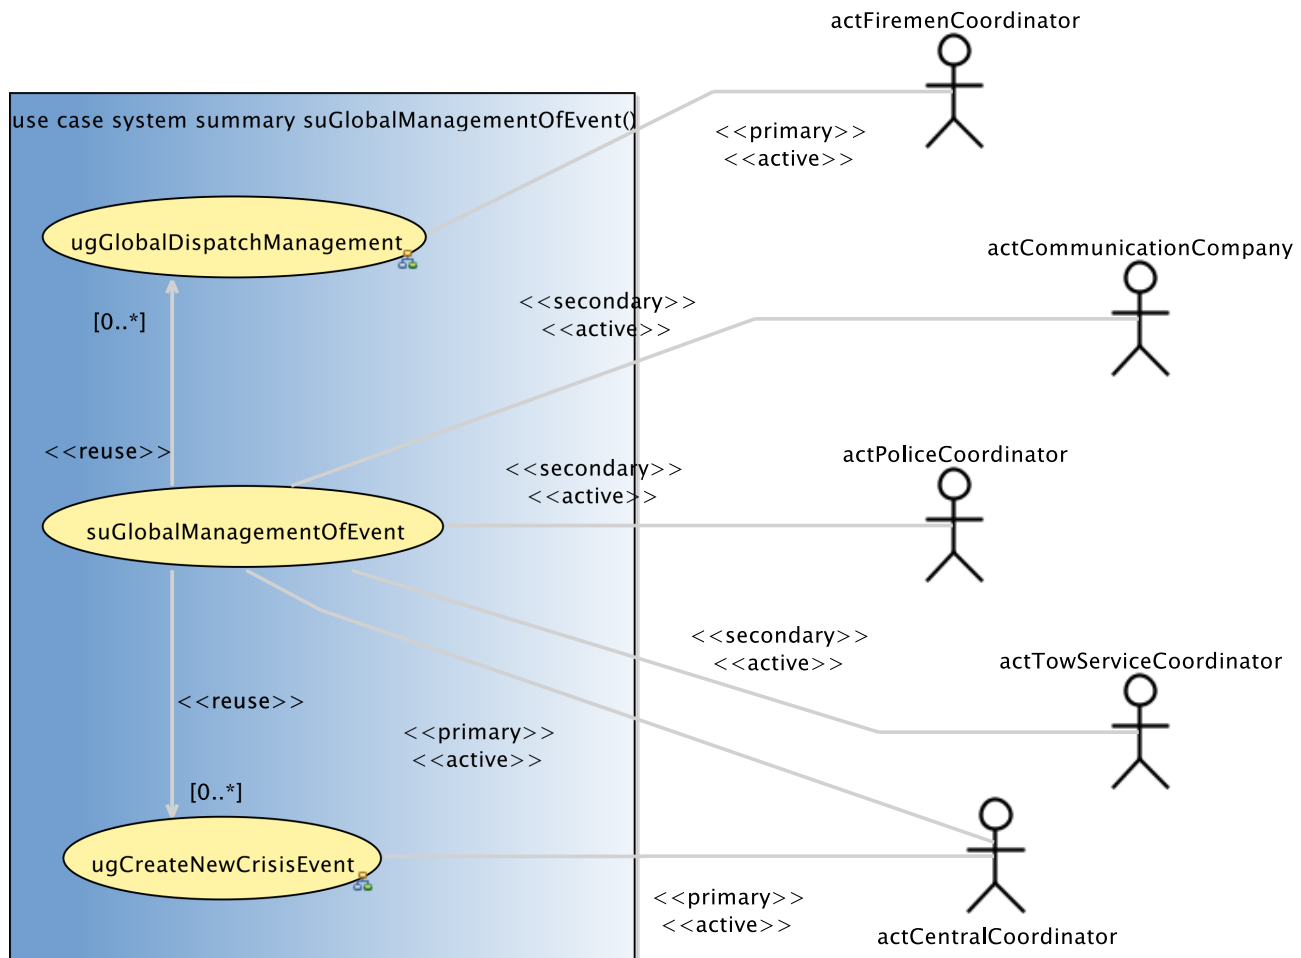


Figure 2.1:

2.3.1.2 usergoal-ugCreateNewCrisisEvent

Shows the ugCreateNewCrisisEvent use-case and its actors.

USE-CASE DESCRIPTION	
Name	ugCreateNewCrisisEvent
Scope	system
Level	usergoal
Primary actor(s)	

continues in next page ...

... Use-Case Description table continuation

1	actCentralCoordinator[active]
Secondary actor(s)	
1	actCommunicationCompany[active]
Goal(s) description	
Shows the ugCreateNewCrisisEvent use-case and its actors.	
Reuse	
1	<u>oeRequestCrisisEventLocation</u> [0..*]
2	<u>oeReceiveCrisisEventLocation</u> [0..*]
3	<u>oeConfirmCrisisEventLocation</u> [1..*]
4	<u>oeCreateNewCrisisEvent</u> [1..*]
Protocol condition(s)	
1	
Pre-condition(s)	
1	
Main post-condition(s)	
1	
Main Steps	
a	the actor actCentralCoordinator executes the <u>oeRequestCrisisEventLocation</u> use case
b	the actor actCommunicationCompany executes the <u>oeReceiveCrisisEventLocation</u> use case
c	the actor actCentralCoordinator executes the <u>oeConfirmCrisisEventLocation</u> use case
d	the actor actCentralCoordinator executes the <u>oeCreateNewCrisisEvent</u> use case
Steps Ordering Constraints	
1	if (b) then previously (a)
2	step (c) must be executed before step (d)
Additional Information	
none	

Figure 2.2 Shows the ugCreateNewCrisisEvent use-case and its actors.

2.3.1.3 usergoal-ugGlobalDispatchManagement

Shows the ugGlobalDispatchManagement use-case and its actors.

USE-CASE DESCRIPTION	
<i>Name</i>	ugGlobalDispatchManagement
<i>Scope</i>	system
<i>Level</i>	usergoal
Primary actor(s)	
1	actFiremenCoordinator[active]
Secondary actor(s)	
1	actFiremenCoordinator[active]
2	actTowServiceCoordinator[active]
3	actPoliceCoordinator[active]

continues in next page ...

... Use-Case Description table continuation

Goal(s) description	
Shows the ugGlobalDispatchManagement use-case and its actors.	
Protocol condition(s)	
1	
Pre-condition(s)	
1	
Main post-condition(s)	
1	
Main Steps	
a	the actor actFiremenCoordinator executes the <u>oeUpdateDispatchStatus</u> use case
b	the actor actTowServiceCoordinator executes the <u>oeRefreshMap</u> use case
c	the actor actTowServiceCoordinator executes the <u>oeMessage</u> use case
d	the actor actTowServiceCoordinator executes the <u>oeUpdateDispatchStatus</u> use case
e	the actor actFiremenCoordinator executes the <u>oeRequestHelp</u> use case
f	the actor actPoliceCoordinator executes the <u>oeUpdateDispatchStatus</u> use case
Steps Ordering Constraints	
1	step (a) must be executed at least two times
2	step (d) must be executed at least two times
3	step (f) can only be executed if step (e) has at least been executed once previously
4	step (f) must be executed at least two times
Additional Information	
none	

Figure 2.3 Shows the ugGlobalDispatchManagement use-case and its actors.

2.3.1.4 subfunction-oeConfirmCrisisEventLocation

sent to confirm the crisis event's location.

USE-CASE DESCRIPTION	
<i>Name</i>	oeConfirmCrisisEventLocation
<i>Scope</i>	system
<i>Level</i>	subfunction
Primary actor(s)	
1	actCentralCoordinator[active]
Goal(s) description	
sent to confirm the crisis event's location.	
Protocol condition(s)	
1	
Pre-condition(s)	
1	
Main post-condition(s)	
1	
Additional Information	
none	

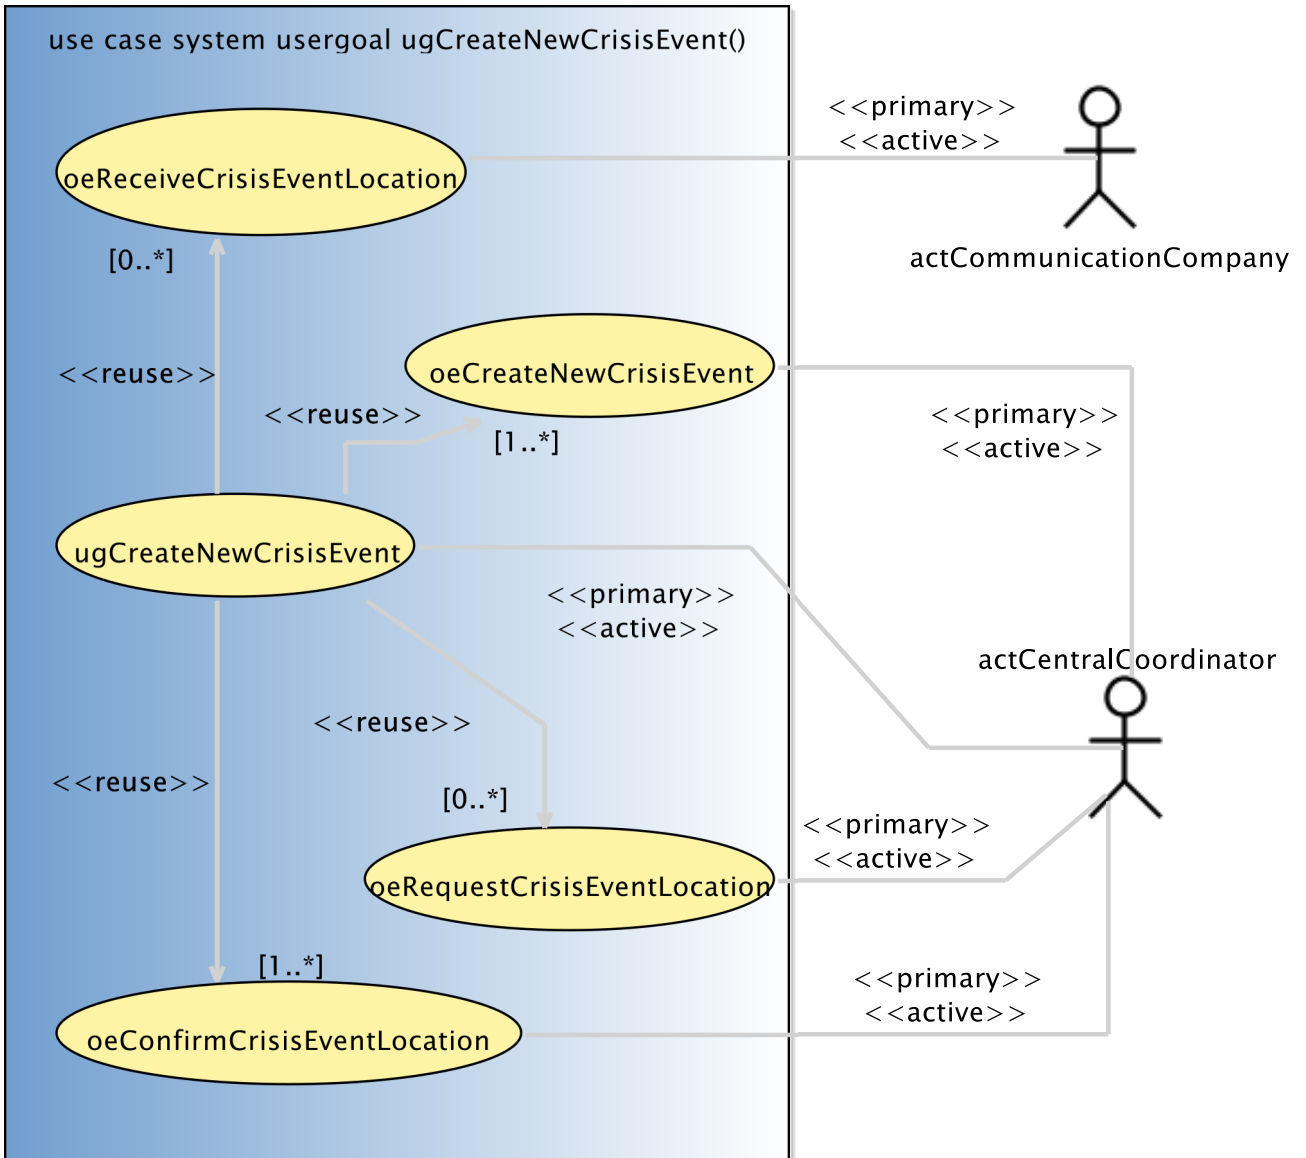


Figure 2.2:

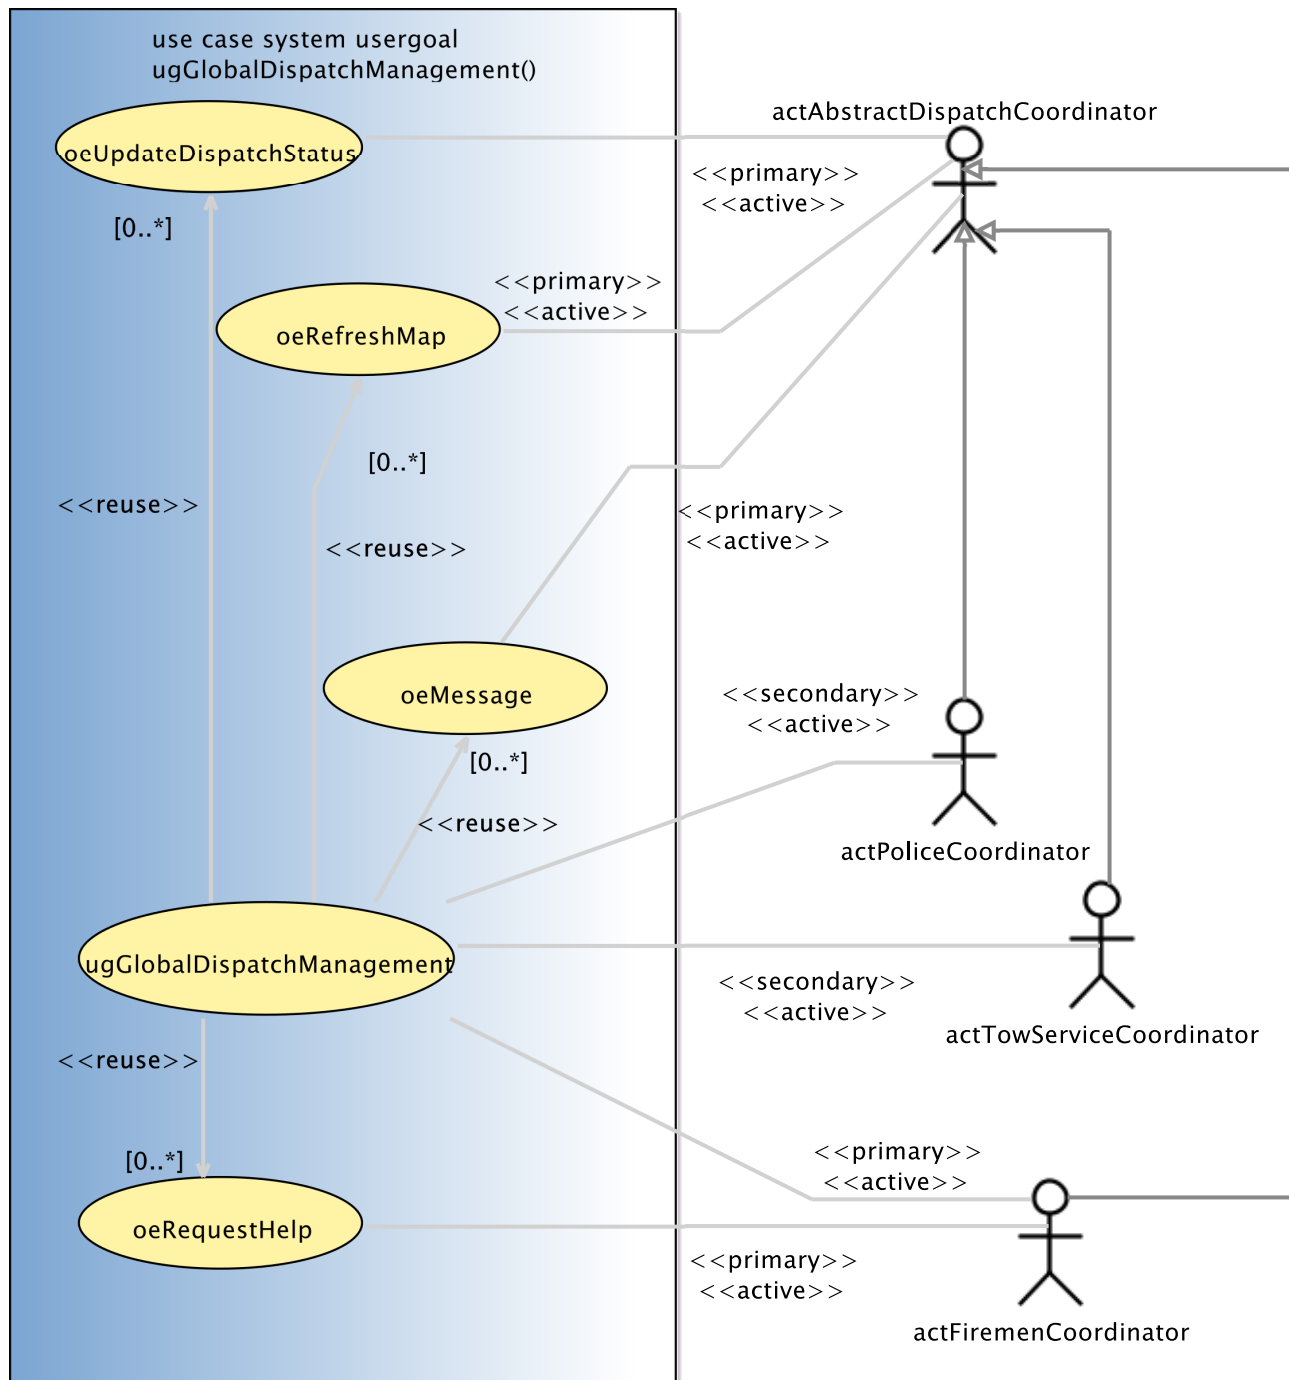


Figure 2.3:

2.3.1.5 subfunction-oeCreateNewCrisisEvent

sent to create an new crisis event and to alert the corresponding coordinators.

USE-CASE DESCRIPTION	
<i>Name</i>	oeCreateNewCrisisEvent
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Parameters</i>	
AdtCrisisID: dtCrisisID 1	
AdtName: ptString 2	
AetHumanType: etHumanType 3	
AdtPhoneNumber: dtPhoneNumber 4	
AdtMapWithPin: dtMapWithPin 5	
<i>Primary actor(s)</i>	
1	actCentralCoordinator[active]
<i>Secondary actor(s)</i>	
1	actAbstractDispatchCoordinator[passive]
<i>Goal(s) description</i>	
sent to create an new crisis event and to alert the corresponding coordinators.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.6 subfunction-oeMessage

sent to transmit a message.

USE-CASE DESCRIPTION	
<i>Name</i>	oeMessage
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Parameters</i>	
AMessage: ptString 1	
<i>Primary actor(s)</i>	
1	actAbstractDispatchCoordinator[active]
<i>Secondary actor(s)</i>	

continues in next page ...

... Use-Case Description table continuation

1	actCentralCoordinator[passive]
2	actAbstractDispatchCoordinator[multiple]
Goal(s) description	
sent to transmit a message.	
Protocol condition(s)	
1	
Pre-condition(s)	
1	
Main post-condition(s)	
1	
Additional Information	
none	

2.3.1.7 subfunction-oeReceiveCrisisEventLocation

sent to return a map with pin.

USE-CASE DESCRIPTION	
<i>Name</i>	oeReceiveCrisisEventLocation
<i>Scope</i>	system
<i>Level</i>	subfunction
Parameters	
AdtMapWithPin: dtMapWithPin 1	
Primary actor(s)	
1	actCommunicationCompany[active]
Secondary actor(s)	
1	actCentralCoordinator[passive]
Goal(s) description	
sent to return a map with pin.	
Protocol condition(s)	
1	
Pre-condition(s)	
1	
Main post-condition(s)	
1	
Additional Information	
none	

2.3.1.8 subfunction-oeRefreshMap

sent to refresh the map.

USE-CASE DESCRIPTION	
<i>Name</i>	oeRefreshMap
<i>Scope</i>	system

continues in next page ...

... Use-Case Description table continuation

<i>Level</i>	subfunction
<i>Parameters</i>	
AdtCrisisID: dtCrisisID 1	
<i>Primary actor(s)</i>	
1	actAbstractDispatchCoordinator[active]
<i>Goal(s) description</i>	
sent to refresh the map.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.9 subfunction-oeRequestCrisisEventLocation

sent to request a crisis event's location.

USE-CASE DESCRIPTION	
<i>Name</i>	oeRequestCrisisEventLocation
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Parameters</i>	
AdtPhoneNumber: dtPhoneNumber 1	
<i>Primary actor(s)</i>	
1	actCentralCoordinator[active]
<i>Secondary actor(s)</i>	
1	actCommunicationCompany[passive]
<i>Goal(s) description</i>	
sent to request a crisis event's location.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.10 subfunction-oeRequestHelp

sent to request help from the corresponding team type.

USE-CASE DESCRIPTION	
<i>Name</i>	oeRequestHelp
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Parameters</i>	
AetTeamType: etTeamType 1	
RequestedNumber: ptInteger 2	
<i>Primary actor(s)</i>	
1	actFiremenCoordinator[active]
<i>Secondary actor(s)</i>	
1	actAbstractDispatchCoordinator[passive]
<i>Goal(s) description</i>	
sent to request help from the corresponding team type.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	

2.3.1.11 subfunction-oeUpdateDispatchStatus

sent to update the dispatch status.

USE-CASE DESCRIPTION	
<i>Name</i>	oeUpdateDispatchStatus
<i>Scope</i>	system
<i>Level</i>	subfunction
<i>Parameters</i>	
AetDispatchStatus: etDispatchStatus 1	
<i>Primary actor(s)</i>	
1	actAbstractDispatchCoordinator[active]
<i>Goal(s) description</i>	
sent to update the dispatch status.	
<i>Protocol condition(s)</i>	
1	
<i>Pre-condition(s)</i>	
1	
<i>Main post-condition(s)</i>	
1	
<i>Additional Information</i>	
none	


2.3.2 Use Case Instance(s)

2.3.2.1 Use-Case Instance - ucisuGlobalManagementOfEvent:suGlobalManagementOfEvent

Shows the suGlobaManagementOfEvent instance.

SUMMARY USE-CASE INSTANCE
<i>Instantiated Use Case</i> suGlobalManagementOfEvent
<i>Instance ID</i> ucisuGlobalManagementOfEvent

Figure 2.4 Shows the suGlobaManagementOfEvent instance.

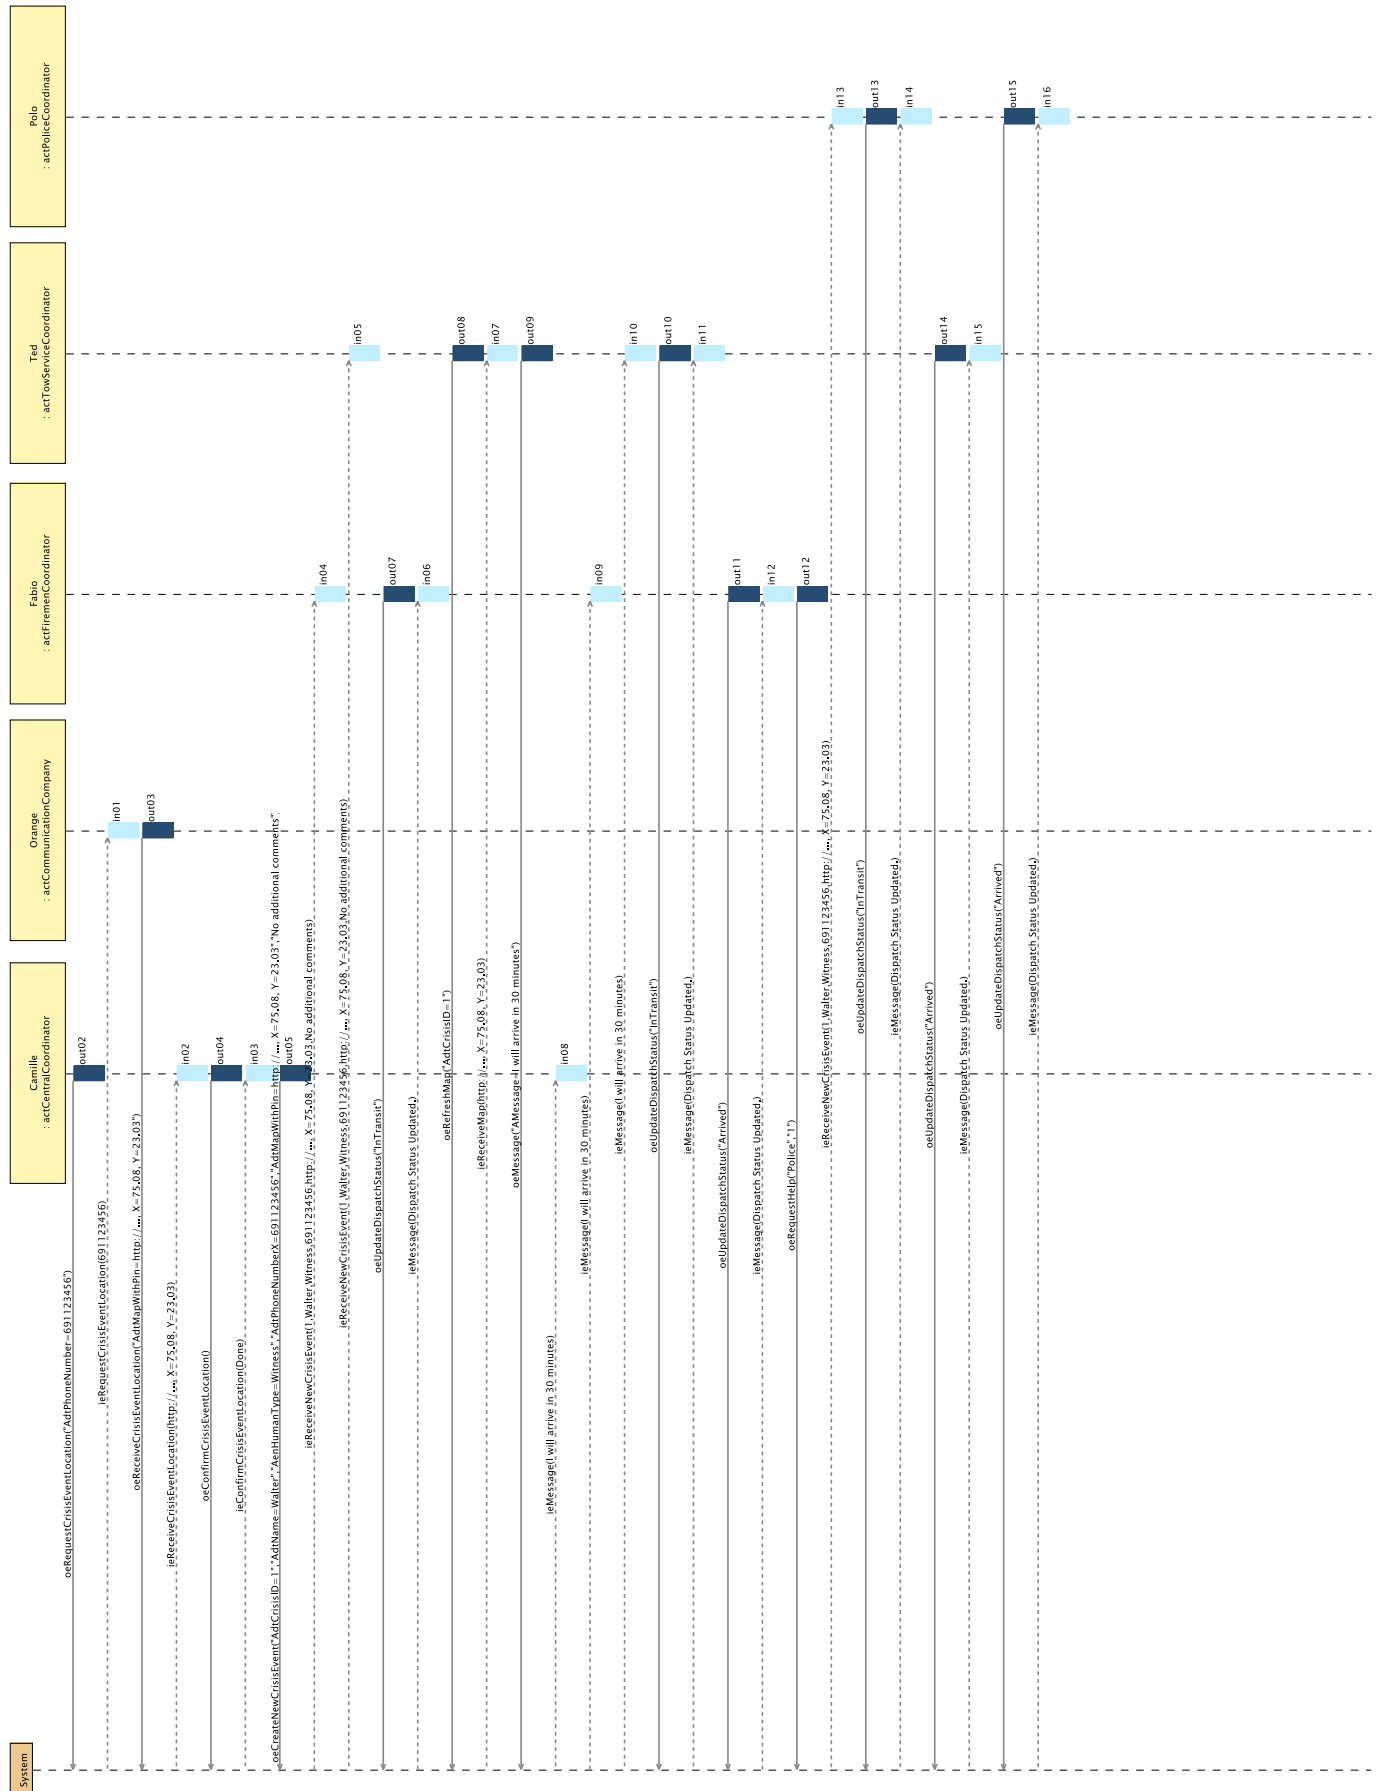

Chapter 3

Environment Model

3.1 Environment model view(s)

There are no view(s) for the **messip** environment model.

3.2 Actors and Interfaces Descriptions

We provide for the given views the description of the actors together with their associated input and output interface descriptions.

3.2.1 **actAbstractDispatchCoordinator** Actor

ACTOR	
<i>actAbstractDispatchCoordinator</i>	
An abstract Actor which brings together the common operations of the FiremanCoordinator, the PoliceCoordinator and the TowServiceCoordinator.	
<i>OutputInterfaces</i>	
OUT 1	oeMessage (AMessage:ptString) :ptBoolean
OUT 2	oeUpdateDispatchStatus (AetDispatchStatus:etDispatchStatus) :ptBoolean
<i>InputInterfaces</i>	
IN 1	ieReceiveNewCrisisEvent (AdtCrisisID:dtCrisisID, AdtName:ptString, AetHumanType:etHumanType, AdtPhoneNumber:dtPhoneNumber, AdtMapWithPin:dtAddress, AMessage:ptString) :ptBoolean
IN 2	ieMessage (AMessage:ptString) :ptBoolean

3.2.2 **actCentralCoordinator** Actor

ACTOR	
<i>actCentralCoordinator</i>	
Is representing the person that receives the victim's or witness' call in the emergency central.	
<i>OutputInterfaces</i>	

continues in next page ...

... **Actor table continuation**

OUT 1	<code>oeRequestCrisisEventLocation (AdtPhoneNumber:dtPhoneNumber) :ptBoolean</code>
OUT 2	<code>oeMessage (AMessage:ptString) :ptBoolean</code>
OUT 3	<code>oeCreateNewCrisisEvent (AdtCrisisID:dtCrisisID, AdtName:ptString, AetHumanType:etHumanType, AdtPhoneNumber:dtPhoneNumber, AdtMapWithPin:dtAddress, AMessage:ptString) :ptBoolean</code>
OUT 4	<code>oeConfirmCrisisEventLocation () :ptBoolean</code>
<i>InputInterfaces</i>	
IN 1	<code>ieReceiveCrisisEventLocation (AdtMapWithPin:dtMapWithPin) :ptBoolean</code>
IN 2	<code>ieMessage (AMessage:ptString) :ptBoolean</code>

3.2.3 actCommunicationCompany Actor

ACTOR	
<i>actCommunicationCompany</i>	
Is representing any communication company in Luxembourg.	
<i>OutputInterfaces</i>	
OUT 1	<code>oeReceiveCrisisEventLocation (AdtMapWithPin:dtMapWithPin) :ptBoolean</code>
<i>InputInterfaces</i>	
IN 1	<code>ieRequestCrisisEventLocation (AdtPhoneNumber:dtPhoneNumber) :ptBoolean</code>

3.2.4 actFiremenCoordinator Actor

ACTOR	
<i>actFiremenCoordinator</i>	
Is representing any firemen team leader able to manage a two Ambulances.	
<i>Extends</i>	
lu.uni.lassy.excalibur.group09.spec.environment.actAbstractDispatchCoordinator	
<i>OutputInterfaces</i>	
OUT 1	<code>oeRequestHelp (AetTeamType:etTeamType, ARequestedNumber:ptInteger) :ptBoolean</code>

3.2.5 actPoliceCoordinator Actor

ACTOR	
<i>actPoliceCoordinator</i>	
Is representing a police team leader.	
<i>Extends</i>	

continues in next page ...

... Actor table continuation

lu.uni.lassy.excalibur.group09.spec.environment.actAbstractDispatchCoordinator
--

3.2.6 actTowServiceCoordinator Actor

ACTOR
<i>actTowServiceCoordinator</i> Is representing a tow service driver.
<i>Extends</i>
lu.uni.lassy.excalibur.group09.spec.environment.actAbstractDispatchCoordinator

Chapter 4

Concept Model

4.1 PrimaryTypes-Classes

4.1.1 Local view 12

Figure 4.1 Illustration of all the associations.

4.2 PrimaryTypes-Datatypes

4.2.1 Local view 01

Figure 4.2 Is representing the address data type.

4.2.2 Local view 02

Figure 4.3 Is representing the crisis id data type.

4.2.3 Local view 03

Figure 4.4 Is representing the map including a pin data type.

4.2.4 Local view 04

Figure 4.5 Is representing the phone number data type.

4.2.5 Local view 05

Figure 4.6 Is representing the dispatch status enumeration type.

4.2.6 Local view 06

Figure 4.7 Is representing the human type enumeration type.




Figure 4.2: Concept Model - PrimaryTypes-Datatypes local view 01. .




Figure 4.3: Concept Model - PrimaryTypes-Datatypes local view 02. .

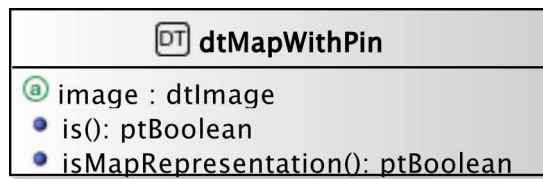


Figure 4.4: Concept Model - PrimaryTypes-Datatypes local view 03. .




Figure 4.5: Concept Model - PrimaryTypes-Datatypes local view 04. .




Figure 4.6: Concept Model - PrimaryTypes-Datatypes local view 05. .




Figure 4.7: Concept Model - PrimaryTypes-Datatypes local view 06. .

4.2.7 Local view 07

Figure 4.8 Is representing the team type enumeration type.




Figure 4.8: Concept Model - PrimaryTypes-Datatypes local view 07. .

4.3 Concept Model Types Descriptions

This section provides the textual descriptions of all the types defined in the concept model and that can be part of the graphical views provided.

4.3.1 Primary types - Class types descriptions

The table below is providing comments on the graphical views given for the class types of the primary types. Type logical operations are precisely specified in the operation model.

CLASSES	
<i>ctCrisisEvent</i>	
A class containing the attributes identifying a crisis event.	
attribute	comment: ptString
attribute	id: ptInteger
attribute	isLocationConfirmed: ptBoolean
attribute	location: dtMapWithPin
operation	init (Aid:ptInteger, Alocation:dtMapWithPin, AisLocationConfirmed:ptBoolean, Acomment:ptString, AgeoPos:dtGeoPos) :ptBoolean
<i>ctDispatchedCoordinator</i>	
A class containing the attributes identifying a dispatched team.	
attribute	status: etDispatchStatus
attribute	type: etTeamType
operation	init (Atype:etTeamType, Astatus:etDispatchStatus, AgeoPos:dtGeoPos) :ptBoolean

continues in next page ...

... Classes table continuation

<i>ctHuman</i>	
A class containing the attributes identifying an human.	
attribute	id: dtPhoneNumber
attribute	name: ptString
attribute	type: etHumanType
operation	init (Aid:dtPhoneNumber, Aname:ptString, Atype:etHumanType):ptBoolean

4.3.2 Primary types - Datatypes types descriptions

The table below is providing comments on the graphical views given for the datatype types of the primary types.

DATATYPES	
<i>dtAddress</i>	
A string used to identify location addresses.	
attribute	value: ptString
<i>dtCrisisID</i>	
An integer used to identify crisis events.	
attribute	value: ptInteger
<i>dtPhoneNumber</i>	
An Integer used to identify phone numbers.	
attribute	value: ptInteger

ENUMERATIONS	
<i>etDispatchStatus</i>	
A String used to identify a dispatch status.	
<i>etHumanType</i>	
A String used to identify an Human type.	
<i>etTeamType</i>	
A String used to identify a team type.	

4.3.3 Primary types - Association types descriptions

The table below is providing comments on the association types of the primary types.

UNDIRECTED ASSOCIATIONS	
<i>assClassActorDisptachCoordinator</i>	
Association of a dispatched coordinator to an actor of the same type.	
<i>assctCrisisEventctHuman</i>	

continues in next page ...

... Undirected associations table continuation

Association of a crisis event to an human.
<i>assctDispatchedCoordinatorctCrisisEvent</i>
Association of a dispatched coordinator to a crisis event.

4.3.4 Primary types - Aggregation types descriptions

There are no aggregation types for the primary types.

4.3.4.1 Primary types - Composition types descriptions

There are no composition types for the primary types.

4.3.5 Secondary types - Class types descriptions

There are no elements in this category in the system analysed.

4.3.6 Secondary types - Datatypes types descriptions

There are no elements in this category in the system analysed.

4.3.7 Secondary types - Association types descriptions

There are no association types for the secondary types.

4.3.8 Secondary types - Aggregation types descriptions

There are no aggregation types for the secondary types.

4.3.9 Secondary types - Composition types descriptions

There are no composition types for the secondary types.

Chapter 5

Operation Model

This section contains the operation schemes of each operation defined in either an actor, its output interface, in a primary or secondary type (class, datatype or enumeration types). The **Messing** OCL code listing is joined to the comment table.

5.1 Environment - Out Interface Operation Scheme for actCentralCoordinator

5.1.1 Operation Model for oeRequestCrisisEventLocation

The oeRequestCrisisEventLocation operation has the following properties:

OPERATION
<i>oeRequestCrisisEventLocation</i> sent to request a crisis event's location.
<i>Parameters</i>
1 AdtPhoneNumber: dtPhoneNumber
<i>Return type</i>
ptBoolean
<i>Pre-Condition (protocol)</i>
PreP 1
<i>Pre-Condition (functional)</i>
PreF 1
<i>Post-Condition (functional)</i>
PostF 1
<i>Post-Condition (protocol)</i>
PostP 1

5.2 Environment - Actor Operation Schemes

There are no elements in this category in the system analysed.

5.3 Primary Types - Operation Schemes for Classes

There are no elements in this category in the system analysed.

5.4 Primary Types - Operation Schemes for Datatypes

There are no elements in this category in the system analysed.

5.5 Primary Types - Operation Schemes for Enumerations

There are no elements in this category in the system analysed.

5.6 Secondary Types - Operation Schemes for Classes

There are no elements in this category in the system analysed.

5.7 Secondary Types - Operation Schemes for Datatypes

There are no elements in this category in the system analysed.

5.8 Secondary Types - Operation Schemes for Enumerations

There are no elements in this category in the system analysed.

Chapter 6

Test Model(s)

There are no elements in this category in the system analysed.

Chapter 7

Additional Constraints

Appendix A

Undocumented Messir Specification Elements

A.1 Undocumented Primary Types

A.1.1 Undocumented Primary Classe Types

- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.classes.ctMapWithPin`
- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.classes.ctState`

A.1.2 Undocumented Primary Datatype Types

- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes.dtGeoPos`
- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes.dtMapWithPin`

A.2 Undocumented Primary Relationships

A.2.1 Undocumented Primary Type Associations

- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.associations.assDispatchedCoordinatorctMapWithPin`
- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.associations.assctCrisisEventctMapWithPin`

A.3 Undocumented Secondary Types

A.3.1 Undocumented Secondary Datatype Types

- `lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes.dtImage`
- `lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes.dtLatitude`
- `lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes.dtLongitude`

A.4 Undocumented Operation Specifications

- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes.dtGeoPos.is`
- `lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes.dtMapWithPin.isMapRepresentation`

- lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes.dtImage.is
- lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes.dtLatitude.is
- lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes.dtLongitude.is

Appendix B

Messir Specification Files Listing

B.1 File ./src-gen/messir-spec/.views.msr

```
1 //
2 //DON'T TOUCH THIS FILE !!!
3 //
4 package uuidff8a216549a64951bf055c8b5a9dde2a {
5   Concept Model {}
6 }
```

Listing B.1: Messir Spec. file .views.msr.

B.2 File ./src-gen/messir-spec/operations/environment/environment-actCentralCoordinator-oeRequestCrisisEventLocation.msr

```
1 package lu.uni.lassy.excalibur.group09.spec.environment.operations.actCentralCoordinator.
   outactCentralCoordinator.oeRequestCrisisEventLocation {
2
3 import lu.uni.lassy.messir.libraries.primitives
4 import lu.uni.lassy.messir.libraries.math
5 import lu.uni.lassy.messir.libraries.string
6 import lu.uni.lassy.messir.libraries.calendar
7 import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
8
9   Operation Model {
10
11   operation: lu.uni.lassy.excalibur.group09.spec.environment.actCentralCoordinator.
       outactCentralCoordinator.oeRequestCrisisEventLocation(AdtPhoneNumber:dtPhoneNumber):ptBoolean{
12   // include below the specification information (pre,post or ocl or prolog)
13   preP {
14     let AvpStarted: ptBoolean in
15     self.rnActor.rnSystem.vpStarted = AvpStarted
16     and AvpStarted = true
17   }
18
19   preF { true }
20
21   postF {
22     let TheactYou:lu.uni.lassy.excalibur.group09.spec.environment.actCentralCoordinator in
23     let AptString:ptString in
24     /* Post Functional:*/
25     /* PostF01 */
26     AptString = 'Hello World !'
27     TheactYou.InterfaceIN = self.rnActor.InterfaceIN
28     and TheactYou.InterfaceIN^ieHelloWorld(AptString)
29   }
30
31   postP { true }
32 }
```

33 }
34 }

Listing B.2: Messir Spec. file environment-actCentralCoordinator-oeRequestCrisisEventLocation.msr.

B.3 File ./src-gen/messir-spec/environment/environment.msr

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.environment {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12
13 import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
14
15 Environment Model {
16
17   actor actCentralCoordinator role rnactCentralCoordinator cardinality [1..*] {
18
19     operation init():ptBoolean
20
21     input interface inactCentralCoordinator {
22       operation ieReceiveCrisisEventLocation(AdtMapWithPin:dtMapWithPin) : ptBoolean
23       operation ieConfirmCrisisEventLocation(AdMessage:ptString) : ptBoolean
24       operation ieMessage(AMessage:ptString) : ptBoolean
25     }
26
27     output interface outactCentralCoordinator {
28       operation oeRequestCrisisEventLocation(AdtPhoneNumber:dtPhoneNumber) : ptBoolean
29       operation oeMessage(AMessage:ptString) : ptBoolean
30       operation oeCreateNewCrisisEvent(AdtCrisisID:dtCrisisID, AdtName:ptString, AetHumanType:
31         etHumanType, AdtPhoneNumber:dtPhoneNumber, AdtMapWithPin:dtAddress, AMessage:ptString) :
32         ptBoolean
33       operation oeConfirmCrisisEventLocation() : ptBoolean
34     }
35   }
36
37   actor actCommunicationCompany role rnactCommunicationCompany cardinality [1..*] {
38
39     operation init() : ptBoolean
40
41     input interface inactCommunicationCompany {
42       operation ieRequestCrisisEventLocation(AdtPhoneNumber:dtPhoneNumber) : ptBoolean
43     }
44
45     output interface outactCommunicationCompany {
46       operation oeReceiveCrisisEventLocation(AdtMapWithPin:dtMapWithPin) : ptBoolean
47     }
48   }
49
50   actor actAbstractDispatchCoordinator role rnactAbstractDispatchCoordinator cardinality [1..*] {
51
52     operation init() : ptBoolean
53
54     input interface inactAbstractDispatchCoordinator {
55       operation ieReceiveNewCrisisEvent(AdtCrisisID:dtCrisisID, AdtName:ptString, AetHumanType:
56         etHumanType, AdtPhoneNumber:dtPhoneNumber, AdtMapWithPin:dtAddress, AMessage:ptString) :
57         ptBoolean
58       operation ieMessage(AMessage: ptString) : ptBoolean
59       operation ieReceiveMap(AdtMapWithPin: dtMapWithPin) : ptBoolean
60     }
61
62     output interface outactAbstractDispatchCoordinator {

```

```

59     operation oeMessage(AMessage:ptString) : ptBoolean
60     operation oeUpdateDispatchStatus(AetDispatchStatus:etDispatchStatus): ptBoolean
61     operation oeRefreshMap(AdtCrisisID:dtCrisisID) : ptBoolean
62 }
63 }
64
65 actor actFiremenCoordinator role rnactFiremenCoordinator cardinality [1..*] extends
    actAbstractDispatchCoordinator {
66
67     operation init() : ptBoolean
68
69     input interface inactFiremenCoordinator {
70     }
71
72     output interface outactFiremenCoordinator {
73         operation oeRequestHelp(AetTeamType: etTeamType, ARequestedNumber:ptInteger) : ptBoolean
74     }
75 }
76
77 actor actPoliceCoordinator role rnPoliceCoordinator cardinality [1..*] extends
    actAbstractDispatchCoordinator {
78
79     operation init() : ptBoolean
80
81     input interface inactPoliceCoordinator {
82     }
83
84     output interface outactPoliceCoordinator {
85     }
86 }
87
88 actor actTowServiceCoordinator role rnTowServiceCoordinator cardinality [1..*] extends
    actAbstractDispatchCoordinator {
89
90     operation init() : ptBoolean
91
92     input interface inactTowServiceCoordinator {
93     }
94
95     output interface outactTowServiceCoordinator {
96     }
97 }
98
99 }
100 }

```

Listing B.3: Messir Spec. file environment.msr.

B.4 File `./src-gen/messir-spec/concepts/primarytypes-associations/primarytypes-associations.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.associations {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12 import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.classes
13 import lu.uni.lassy.excalibur.group09.spec.environment
14
15 Concept Model {
16
17 Primary Types {

```

```

18
19 association assctCrisisEventctHuman
20   ctCrisisEvent(rnctCrisisEvent) [1..1]
21   ctHuman(rnctHuman) [1..*]
22
23 association assctCrisisEventctMapWithPin
24   ctCrisisEvent(rnctCrisisEvent) [1..1]
25   ctMapWithPin(rncdtMapWithPin) [1..1]
26
27 association assDispatchedCoordinatorctMapWithPin
28   ctDispatchedCoordinator(rnctDispatchedCoordinator) [1..1]
29   ctMapWithPin(rncdtMapWithPin) [1..1]
30
31 association assClassActorDisptachCoordinator
32   ctDispatchedCoordinator(rnctDispatchedCoordinator) [1..1]
33   actAbstractDispatchCoordinator(rnactAbstractDispatchCoordinator) [1..1]
34
35 association assctDispatchedCoordinatorctCrisisEvent
36   ctDispatchedCoordinator(rnctDispatchedCoordinator2) [2..*]
37   ctCrisisEvent(rnctCrisisEvent2) [1..1]
38
39 }
40 }
41 }

```

Listing B.4: Messir Spec. file primarytypes-associations.msr.

B.5 File `./src-gen/messir-spec/concepts/primarytypes-classes/primarytypes-classes.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.classes {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12 import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
13
14 import lu.uni.lassy.messir.libraries.primitives
15
16 Concept Model {
17
18   Primary Types {
19
20     state class ctState {
21       attribute vpStarted: ptBoolean
22
23       operation init(AvpStarted:ptBoolean): ptBoolean
24     }
25
26     class ctHuman role rnHuman cardinality [1..*] {
27       attribute id: dtPhoneNumber
28       attribute name: ptString
29       attribute type: etHumanType
30
31       operation init( Aid:dtPhoneNumber,
32         Aname:ptString,
33         Atype:etHumanType
34       ): ptBoolean
35
36     }
37
38     class ctCrisisEvent role rnCrisisEvent cardinality [1..*] {

```

```

39  attribute id: ptInteger
40  attribute location: dtMapWithPin
41  attribute isLocationConfirmed: ptBoolean
42  attribute comment: ptString      //Multiple Comments?
43  attribute geoPos: dtGeoPos
44
45  operation init( Aid:ptInteger,
46                Alocation:dtMapWithPin,
47                AisLocationConfirmed:ptBoolean,
48                Acomment:ptString,
49                AgeoPos:dtGeoPos
50  ): ptBoolean
51
52  }
53
54  class ctDispatchedCoordinator role rnDispatchedCoordinator cardinality [1..*] {
55    attribute type: etTeamType
56    attribute status: etDispatchStatus
57    attribute geoPos: dtGeoPos
58
59    operation init( Atype:etTeamType,
60                  Astatus:etDispatchStatus,
61                  AgeoPos:dtGeoPos
62  ): ptBoolean
63  }
64
65  class ctMapWithPin role rnMapWithPin cardinality [1..*] {
66    attribute mapWithPin: dtMapWithPin
67
68    operation init( AmapWithPin:dtMapWithPin
69  ): ptBoolean
70  }
71
72  }
73 }
74 }

```

Listing B.5: Messir Spec. file primarytypes-classes.msr.

B.6 File `./src-gen/messir-spec/concepts/primarytypes-datatypes/primarytypes-datatypes.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12 import lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes
13
14 Concept Model {
15
16   Primary Types {
17     datatype dtPhoneNumber {
18       attribute value : ptInteger
19       operation is() : ptBoolean
20     }
21
22     datatype dtAddress {
23       attribute value : ptString
24       operation is() : ptBoolean
25     }
26

```

```

27  datatype dtCrisisID {
28      attribute value : ptInteger
29      operation is() : ptBoolean
30  }
31
32  datatype dtMapWithPin{
33      attribute image : dtImage
34      operation is() : ptBoolean
35      external operation isMapRepresentation() : ptBoolean
36  }
37
38  datatype dtGeoPos{
39      attribute latitude: dtLatitude
40      attribute longitude: dtLongitude
41      operation is() : ptBoolean
42  }
43
44  enum etDispatchStatus {
45      constants["InStation", "InTransit", "Arrived"]
46      operation is() : ptBoolean
47  }
48
49  enum etHumanType {
50      constants["Victim", "Witness"]
51      operation is() : ptBoolean
52  }
53
54  enum etTeamType {
55      constants["AmbulanceTeam", "PoliceTeam", "TowServiceTeam"]
56      operation is() : ptBoolean
57  }
58 }
59 }
60 }

```

Listing B.6: Messir Spec. file primarytypes-datatypes.msr.

B.7 File `./src-gen/messir-spec/concepts/secondarytypes-associations/secondarytypes-associations.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.associations {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12
13 Concept Model {
14
15 Secondary Types {
16
17 }
18 }
19 }

```

Listing B.7: Messir Spec. file secondarytypes-associations.msr.

B.8 File `./src-gen/messir-spec/concepts/secondarytypes-classes/secondarytypes-classes.msr`

```

1 /*

```

```

2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.classes {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12
13 Concept Model {
14
15   Secondary Types {
16
17   }
18 }
19 }

```

Listing B.8: Messir Spec. file secondarytypes-classes.msr.

B.9 File `./src-gen/messir-spec/concepts/secondarytypes-datatypes/secondarytypes-datatypes.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.concepts.secondarytypes.datatypes {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12
13 Concept Model {
14
15   Secondary Types {
16
17     datatype dtLongitude {
18       attribute value : ptReal
19       operation is() : ptBoolean
20     }
21
22     datatype dtLatitude {
23       attribute value : ptReal
24       operation is() : ptBoolean
25     }
26
27     datatype dtImage {
28       attribute value : ptString
29       operation is() : ptBoolean
30     }
31   }
32 }
33 }
34 }

```

Listing B.9: Messir Spec. file secondarytypes-datatypes.msr.

B.10 File `./src-gen/messir-spec/tests/tests.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */

```

```

5
6 package lu.uni.lassy.excalibur.group09.spec.tests {
7
8 import lu.uni.lassy.messir.libraries.calendar
9 import lu.uni.lassy.messir.libraries.math
10 import lu.uni.lassy.messir.libraries.primitives
11 import lu.uni.lassy.messir.libraries.string
12
13 Test Model {
14
15 }
16
17 }

```

Listing B.10: Messir Spec. file tests.msr.

B.11 File `./src-gen/messir-spec/usecases/usecaseinstance-suGlobalManagementOfEvent-ucisuGlobalManagementOfEvent.msr`

```

1 package usecases.ucisuGlobalManagementOfEvent {
2 import lu.uni.lassy.excalibur.group09.spec.usecases
3 import lu.uni.lassy.excalibur.group09.spec.environment
4 import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
5
6 Use Case Model {
7
8 use case instance ucisuGlobalManagementOfEvent : suGlobalManagementOfEvent{
9 actors {
10 Camille : actCentralCoordinator
11 Orange : actCommunicationCompany
12 Fabio : actFiremenCoordinator
13 Ted : actTowServiceCoordinator
14 Polo : actPoliceCoordinator
15 }
16
17 use case steps {
18
19 Camille executed instanceof ugCreateNewCrisisEvent() {
20 use case steps {
21 Camille executed instanceof subfunction oeRequestCrisisEventLocation("AdtPhoneNumber
    =691123456") {
22 ieRequestCrisisEventLocation("691123456") returned to Orange
23 }
24
25 Orange executed instanceof subfunction oeReceiveCrisisEventLocation("AdtMapWithPin=http
    ://..., X=75.08, Y=23.03") {
26 ieReceiveCrisisEventLocation("http://..., X=75.08, Y=23.03") returned to Camille
27 }
28
29 Camille executed instanceof subfunction oeConfirmCrisisEventLocation() {
30 ieConfirmCrisisEventLocation("Done") returned to Camille
31 }
32
33 Camille executed instanceof subfunction oeCreateNewCrisisEvent("AdtCrisisID=1", "AdtName=
    Walter", "AenHumanType=Witness", "AdtPhoneNumberX=691123456", "AdtMapWithPin=http://...,
    X=75.08, Y=23.03", "No additional comments") {
34 ieReceiveNewCrisisEvent("1", "Walter", "Witness", "691123456", "http://..., X=75.08, Y=23.03", "
    No additional comments") returned to Fabio
35 ieReceiveNewCrisisEvent("1", "Walter", "Witness", "691123456", "http://..., X=75.08, Y=23.03", "
    No additional comments") returned to Ted
36 }
37 }
38 }
39
40 Fabio executed instanceof ugGlobalDispatchManagement() {
41 use case steps {
42 Fabio executed instanceof subfunction oeUpdateDispatchStatus(AenDispatchStatus="InTransit") {
43 ieMessage("Dispatch Status Updated.") returned to Fabio

```



```

44     }
45
46     Ted executed instance of subfunction oeRefreshMap("AdtCrisisID=1") {
47         ieReceiveMap("http://...", X=75.08, Y=23.03") returned to Ted
48     }
49
50     Ted executed instance of subfunction oeMessage("AMessage=I will arrive in 30 minutes") {
51         ieMessage("I will arrive in 30 minutes") returned to Camille
52         ieMessage("I will arrive in 30 minutes") returned to Fabio
53         ieMessage("I will arrive in 30 minutes") returned to Ted
54     }
55
56     Ted executed instance of subfunction oeUpdateDispatchStatus(AenDispatchStatusX="InTransit") {
57         ieMessage("Dispatch Status Updated.") returned to Ted
58     }
59
60     Fabio executed instance of subfunction oeUpdateDispatchStatus(AenDispatchStatusXX="Arrived") {
61         ieMessage("Dispatch Status Updated.") returned to Fabio
62     }
63
64     Fabio executed instance of subfunction oeRequestHelp(AenTeamType="Police", RequestedNumber="1"
65         ) {
66         ieReceiveNewCrisisEvent("1", "Walter", "Witness", "691123456", "http://...", X=75.08, Y=23.03")
67             returned to Polo
68     }
69
70     Polo executed instance of subfunction oeUpdateDispatchStatus(AenDispatchStatusXXX="InTransit")
71     {
72         ieMessage("Dispatch Status Updated.") returned to Polo
73     }
74
75     Ted executed instance of subfunction oeUpdateDispatchStatus(AenDispatchStatusXXXX="Arrived") {
76         ieMessage("Dispatch Status Updated.") returned to Ted
77     }
78
79     Polo executed instance of subfunction oeUpdateDispatchStatus(AenDispatchStatusXXXXX="Arrived")
80     {
81         ieMessage("Dispatch Status Updated.") returned to Polo
82     }
83 }
84 }
85 }

```

Listing B.11: Messir Spec. file
`usecaseinstance-suGlobalManagementOfEvent-ucisuGlobalManagementOfEvent.msr.`

B.12 File `./src-gen/messir-spec/usecases/usecaseinstance-ugCreateNewCrisisEvent-uciugCreateNewCrisisEvent.msr`

```

1 package usecases.uciugCreateNewCrisisEvent {
2 import lu.uni.lassy.excalibur.group09.spec.usecases
3 import lu.uni.lassy.excalibur.group09.spec.usecases
4 import lu.uni.lassy.excalibur.group09.spec.environment
5 import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
6
7 Use Case Model {
8
9 }
10 }

```

Listing B.12: Messir Spec. file
`usecaseinstance-ugCreateNewCrisisEvent-uciugCreateNewCrisisEvent.msr.`

B.13 File `./src-gen/messir-spec/usecases/usecaseinstance-ugGlobalDispatchManagement-uciugGlobalDispatchManagement.msr`

```

1 package usecases.uciugGlobalDispatchManagement {
2   import lu.uni.lassy.excalibur.group09.spec.usecases
3   import lu.uni.lassy.excalibur.group09.spec.usecases
4   import lu.uni.lassy.excalibur.group09.spec.environment
5   import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
6
7   Use Case Model {
8
9   }
10 }

```

Listing B.13: Messir Spec. file
usecaseinstance-ugGlobalDispatchManagement-uciugGlobalDispatchManagement.msr.

B.14 File `./src-gen/messir-spec/usecases/usecases.msr`

```

1 /*
2 * @author Kira
3 * @date Tue Oct 25 23:54:03 CEST 2016
4 */
5
6 package lu.uni.lassy.excalibur.group09.spec.usecases {
7
8   import lu.uni.lassy.messir.libraries.calendar
9   import lu.uni.lassy.messir.libraries.math
10  import lu.uni.lassy.messir.libraries.primitives
11  import lu.uni.lassy.messir.libraries.string
12  import lu.uni.lassy.excalibur.group09.spec.environment
13  import lu.uni.lassy.excalibur.group09.spec.concepts.primarytypes.datatypes
14
15  Use Case Model {
16
17    use case system summary suGlobalManagementOfEvent() {
18      actor actCentralCoordinator[primary, active]
19      actor actCommunicationCompany[secondary, active]
20      actor actFiremenCoordinator[secondary, active]
21      actor actTowServiceCoordinator[secondary, active]
22      actor actPoliceCoordinator[secondary, active]
23
24      step a: actCentralCoordinator executes ugCreateNewCrisisEvent
25      step b: actFiremenCoordinator executes ugGlobalDispatchManagement
26      step c: actTowServiceCoordinator executes ugGlobalDispatchManagement
27
28      ordering constraint "step (a) must be executed before step (b) or step (c)"
29      ordering constraint "step (b) XOR step (c)"
30
31    }
32
33    use case system usergoal ugCreateNewCrisisEvent() {
34      actor actCentralCoordinator[primary, active]
35      actor actCommunicationCompany[secondary, active]
36
37      reuse oeRequestCrisisEventLocation[0..*]
38      reuse oeReceiveCrisisEventLocation[0..*]
39      reuse oeConfirmCrisisEventLocation[1..*]
40      reuse oeCreateNewCrisisEvent[1..*]
41
42      step a: actCentralCoordinator executes oeRequestCrisisEventLocation
43      step b: actCommunicationCompany executes oeReceiveCrisisEventLocation
44      step c: actCentralCoordinator executes oeConfirmCrisisEventLocation
45      step d: actCentralCoordinator executes oeCreateNewCrisisEvent
46
47      ordering constraint "if (b) then previously (a)"
48      ordering constraint "step (c) must be executed before step (d)"

```

```

49
50 }
51
52 use case system usergoal ugGlobalDispatchManagement() {
53     actor actFiremenCoordinator[primary, active]
54     actor actFiremenCoordinator[secondary, active]
55     actor actTowServiceCoordinator[secondary, active]
56     actor actPoliceCoordinator[secondary, active]
57
58     step a: actFiremenCoordinator executes oeUpdateDispatchStatus
59     step b: actTowServiceCoordinator executes oeRefreshMap
60     step c: actTowServiceCoordinator executes oeMessage
61     step d: actTowServiceCoordinator executes oeUpdateDispatchStatus
62     step e: actFiremenCoordinator executes oeRequestHelp
63     step f: actPoliceCoordinator executes oeUpdateDispatchStatus
64
65     ordering constraint "step (a) must be executed at least two times"
66     ordering constraint "step (d) must be executed at least two times"
67     ordering constraint "step (f) can only be executed if step (e) has at least been executed once
        previously"
68     ordering constraint "step (f) must be executed at least two times"
69 }
70
71 use case system subfunction oeRequestCrisisEventLocation(AdtPhoneNumber:dtPhoneNumber) {
72     actor actCentralCoordinator[primary, active]
73     actor actCommunicationCompany[secondary, passive]
74     returned messages{
75         ieRequestCrisisEventLocation(AdtPhoneNumber) returned to actCommunicationCompany //Slide 208..
76     }
77 }
78
79 use case system subfunction oeReceiveCrisisEventLocation(AdtMapWithPin:dtMapWithPin) {
80     actor actCommunicationCompany[primary, active]
81     actor actCentralCoordinator[secondary, passive]
82     returned messages{
83         ieReceiveCrisisEventLocation(AdtMapWithPin) returned to actCentralCoordinator
84     }
85 }
86
87 use case system subfunction oeConfirmCrisisEventLocation() {
88     actor actCentralCoordinator[primary, active]
89     returned messages{
90         ieConfirmCrisisEventLocation() returned to actCentralCoordinator
91     }
92 }
93
94 use case system subfunction oeCreateNewCrisisEvent(AdtCrisisID:dtCrisisID, AdtName:ptString,
    AetHumanType:etHumanType, AdtPhoneNumber:dtPhoneNumber, AdtMapWithPin:dtMapWithPin, AMessage:
    ptString) {
95     actor actCentralCoordinator[primary, active]
96     actor actAbstractDispatchCoordinator[secondary, passive]
97     returned messages{
98         ieReceiveNewCrisisEvent(AdtCrisisID, AdtName, AetHumanType, AdtPhoneNumber, AdtMapWithPin,
            AMessage) returned to actAbstractDispatchCoordinator
99     }
100 }
101
102 use case system subfunction oeMessage(AMessage:ptString) {
103     actor actAbstractDispatchCoordinator[primary, active]
104     actor actCentralCoordinator[secondary, passive]
105     actor actAbstractDispatchCoordinator[secondary, multiple]
106     returned messages{
107         ieMessage(AMessage) returned to actAbstractDispatchCoordinator
108 //         ieMessage(AMessage) returned to actCentralCoordinator 6 //PROBLEME DE IE DEUX FOIS
        SANS SOUS-TYPAGE
109     }
110 }
111
112 use case system subfunction oeUpdateDispatchStatus(AetDispatchStatus:etDispatchStatus) {
113     actor actAbstractDispatchCoordinator[primary, active]

```

```

114   returned messages{
115     ieMessage(AMessage) returned to actAbstractDispatchCoordinator
116   }
117 }
118
119 use case system subfunction oeRefreshMap(AdtCrisisID:dtCrisisID){
120   actor actAbstractDispatchCoordinator[primary,active]
121   returned messages{
122     ieReceiveMap(AdtMapWithPin) returned to actAbstractDispatchCoordinator
123   }
124 }
125
126 use case system subfunction oeRequestHelp(AetTeamType: etTeamType, RequestedNumber:ptInteger) {
127   actor actFiremenCoordinator[primary,active]
128   actor actAbstractDispatchCoordinator[secondary,passive]
129   returned messages{
130     ieReceiveNewCrisisEvent(AdtCrisisID, AdtName, AetHumanType, AdtPhoneNumber, AdtMapWithPin,
131       AMessage) returned to actAbstractDispatchCoordinator
132   }
133 }
134 }
135
136 }

```

Listing B.14: Messir Spec. file usecases.msr.

Bibliography

- [1] Guelfi, N.: Messir: A Scientific Method for the Software Engineer. to be published (2017)
- [2] Armour, F., Miller, G.: Advanced Use Case Modeling: Software Systems. Addison-Wesley (2001)