

开源软件基础

数据存储

Zhilei Ren



OSCAR Team, School of Software, Dalian University of Technology

November 27, 2023



Outline

① 文件 IO

② CSV

③ Sqlite3

④ JSON

⑤ Pickle

文件打开与关闭

```
open(file, mode='r', buffering=-1, encoding=None,
      errors=None, newline=None,
      closefd=True, opener=None) ^^I
```

标志	含义
'r'	读（默认）
'w'	写（覆盖）
'x'	排他性创建
'a'	写（追加）
'b'	二进制模式
't'	文本模式（默认）
'+'	更新（读写）
'U'	统一 newlines 模式（过时）

文件读写

```
handle = open("input.txt", "r")
content = handle.read()
handle.close()
#playing around with content
handle = open("output.txt", "w")
handle.write(content)
handle.close()
```

Outline

- 1 文件 IO
- 2 CSV
- 3 Sqlite3
- 4 JSON
- 5 Pickle

CSV

The so-called CSV (Comma Separated Values) format is the most common import and export format for spreadsheets and databases. CSV format was used for many years prior to attempts to describe the format in a standardized way in RFC 4180. The lack of a well-defined standard means that subtle differences often exist in the data produced and consumed by different applications. These differences can make it annoying to process CSV files from multiple sources.

CSV

读写方法

- 使用 `reader()` 和 `writer()` 构造读写对象
- 参数均为文件句柄
- `reader` 对象可以遍历（或转为 `list`）
- `writer` 对象用 `writerows/writerow` 写行

CSV

```
>>> import csv
>>> students = [['name', 'gender', 'age'],
... ['zhangsan', 'male', 13],
... ['lisi', 'female', 14]]
>>> handle = open('students.csv', 'w')
>>> writer = csv.writer(handle)
>>> writer.writerows(students)
>>> handle.close()
>>> handle = open('students.csv', 'r')
>>> reader = csv.reader(handle)
>>> for row in reader:
...     print(row)
```


Outline

- 1 文件 IO
- 2 CSV
- 3 Sqlite3**
- 4 JSON
- 5 Pickle

sqlite3 — DB-API 2.0 interface for SQLite databases

SQLite is a C library that provides a lightweight disk-based database that doesn't require a separate server process and allows accessing the database using a nonstandard variant of the SQL query language. Some applications can use SQLite for internal data storage. It's also possible to prototype an application using SQLite and then port the code to a larger database such as PostgreSQL or Oracle.

sqlite3 — DB-API 2.0 interface for SQLite databases

The sqlite3 module was written by Gerhard Häring. It provides a SQL interface compliant with the DB-API 2.0 specification described by PEP 249.

sqlite3 — DB-API 2.0 interface for SQLite databases

To use the module, you must first create a Connection object that represents the database.

You can also supply the special name `:memory:` to create a database in RAM.

sqlite3 — DB-API 2.0 interface for SQLite databases

```
import sqlite3
conn = sqlite3.connect('example.db')
# or use :memory:
conn_memory = sqlite3.connect(':memory:')
```

sqlite3 — DB-API 2.0 interface for SQLite databases

Once you have a Connection, you can create a Cursor object and call its Cursor.execute method to perform SQL commands:

sqlite3 — DB-API 2.0 interface for SQLite databases

```
c = conn.cursor()

# Create table
c.execute('''CREATE TABLE stocks
            (date text, trans text, symbol text, qty real, price real)''')

# Insert a row of data
c.execute("INSERT INTO stocks VALUES
          ('2006-01-05', 'BUY', 'RHAT', 100, 35.14)")

# Save (commit) the changes
conn.commit()

# We can also close the connection if we are done with it.
# Just be sure any changes have been committed or they will be lost.
conn.close()
```

sqlite3 — DB-API 2.0 interface for SQLite databases


The data you've saved is persistent and is available in subsequent sessions:

sqlite3 — DB-API 2.0 interface for SQLite databases

```
import sqlite3
conn = sqlite3.connect('example.db')
c = conn.cursor()
```

sqlite3 — DB-API 2.0 interface for SQLite databases

Usually your SQL operations will need to use values from Python variables. You shouldn't assemble your query using Python's string operations because doing so is insecure; it makes your program vulnerable to an SQL injection attack.

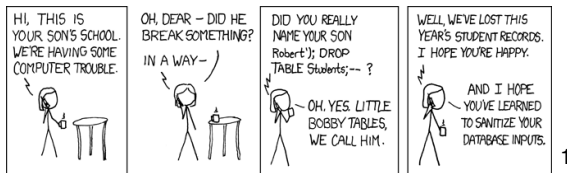

1

¹<https://xkcd.com/327/>

sqlite3 — DB-API 2.0 interface for SQLite databases

Instead, use the DB-API's parameter substitution. Put ? as a placeholder wherever you want to use a value, and then provide a tuple of values as the second argument to the cursor's `Cursor.execute` method. (Other database modules may use a different placeholder, such as %s or :1.) For example:

sqlite3 — DB-API 2.0 interface for SQLite databases

```
# Never do this -- insecure!
symbol = 'RHAT'
c.execute("SELECT * FROM stocks WHERE symbol = '%s'" % symbol)

# Do this instead
t = ('RHAT',)
c.execute('SELECT * FROM stocks WHERE symbol=?', t)
print(c.fetchone())

# Larger example that inserts many records at a time
purchases = [('2006-03-28', 'BUY', 'IBM', 1000, 45.00),
              ('2006-04-05', 'BUY', 'MSFT', 1000, 72.00),
              ('2006-04-06', 'SELL', 'IBM', 500, 53.00),
              ]
c.executemany('INSERT INTO stocks VALUES (?, ?, ?, ?, ?)', purchases)
```

Using shortcut methods

Using the nonstandard `execute`, `executemany` and `executescript` methods of the `Connection` object, your code can be written more concisely because you don't have to create the (often superfluous) `Cursor` objects explicitly.

Using shortcut methods

```
$ cat a.sql
```

```
create table news (id integer, score integer, title text, href text);
insert into news values (1, 8, "hello world", "http://oscar-lab.org");
insert into news values (2, 2, "hello charlie", "http://www.dlut.edu.cn");
$ python3
>>> import sqlite3
>>> conn = sqlite3.connect('a.db')
>>> c = conn.cursor()
>>> c.executescript(open('a.sql').read())
>>> list(c.execute('select * from news'))
[(1, 8, 'hello world', 'http://oscar-lab.org'),
 (2, 2, 'hello charlie', 'http://www.dlut.edu.cn')]
```

Row Objects

```
>>> conn.row_factory = sqlite3.Row
>>> c = conn.cursor()
>>> c.execute('select * from stocks')
<sqlite3.Cursor object at 0x7f4e7dd8fa80>
>>> r = c.fetchone()
>>> type(r)
<class 'sqlite3.Row'>
>>> tuple(r)
('2006-01-05', 'BUY', 'RHAT', 100.0, 35.14)
>>> len(r)
5
>>> r[2]
'RHAT'
```

sqlite3 — DB-API 2.0 interface for SQLite databases

To retrieve data after executing a `SELECT` statement, you can either treat the cursor as an iterator, call the cursor's `Cursor.fetchone` method to retrieve a single matching row, or call `Cursor.fetchall` to get a list of the matching rows.

sqlite3 — DB-API 2.0 interface for SQLite databases

```
>>> for row in c.execute('SELECT * FROM stocks ORDER BY price'):
    print(row)
```

```
('2006-01-05', 'BUY', 'RHAT', 100, 35.14)
('2006-03-28', 'BUY', 'IBM', 1000, 45.0)
('2006-04-06', 'SELL', 'IBM', 500, 53.0)
('2006-04-05', 'BUY', 'MSFT', 1000, 72.0)
```

类型对应

SQLite 默认支持如下类型: NULL, INTEGER, REAL, TEXT, BLOB.

Table 1: 与 Python 类型间对应关系

Python type	SQLite type
None	NULL
int	INTEGER
float	REAL
str	TEXT
bytes	BLOB

Outline

- 1 文件 IO
- 2 CSV
- 3 Sqlite3
- 4 JSON**
- 5 Pickle

JSON

JSON

JSON(JavaScript Object Notation, JS 对象标记) 是一种轻量级的数据交换格式。它基于 ECMAScript (w3c 制定的 js 规范) 的一个子集, 采用完全独立于编程语言的文本格式来存储和表示数据。简洁和清晰的层次结构使得 JSON 成为理想的数据交换语言。易于人阅读和编写, 同时也易于机器解析和生成, 并有效地提升网络传输效率。

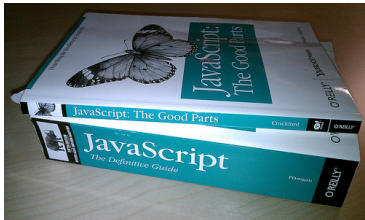


Figure 1: JavaScript: the definitive guide vs. the good parts

JavaScript

今天就能开始用的小知识

- JavaScript 学名 ECMAScript
- JavaScript 与 Java 的关系约等于济科和张继科的关系
- 相比于 Java, 更接近 Lisp/Scheme
- 设计周期为 10 天^{abcd}

^a[https:](https://www.w3.org/community/webed/wiki/A_Short_History_of_JavaScript)

[//www.w3.org/community/webed/wiki/A_Short_History_of_JavaScript](https://www.w3.org/community/webed/wiki/A_Short_History_of_JavaScript)

^b<https://www.bilibili.com/video/av1623152/>

^c[https://www.destroyallsoftware.com/talks/
the-birth-and-death-of-javascript](https://www.destroyallsoftware.com/talks/the-birth-and-death-of-javascript)

^d<https://gist.github.com/zhangchn/29015a7f65ce11c94846>

Example of JSON²

```
{
  "firstName": "John",
  "lastName": "Smith",
  "isAlive": true,
  "age": 25,
  "address": {
    "streetAddress": "21 2nd Street",
    "city": "New York",
    "state": "NY",
    "postalCode": "10021-3100"
  },
  "phoneNumbers": [
    {
      "type": "home",
      "number": "212 555-1234"
    },
    {
      "type": "office",
      "number": "646 555-4567"
    },
    {
      "type": "mobile",
      "number": "123 456-7890"
    }
  ],
  "children": [],
  "spouse": null
}
```

²<https://en.wikipedia.org/wiki/JSON>

JSON

```
>>> import json
>>> json.dumps(['foo', {'bar': ('baz', None, 1.0, 2)}})
'["foo", {"bar": ["baz", null, 1.0, 2]}]'
>>> print(json.dumps({"c": 0, "b": 0, "a": 0}, sort_keys=True))
{"a": 0, "b": 0, "c": 0}
>>> handle = open("output.json", "w")
>>> json.dump({'foo': 123, 'bar': 'buz'}, handle)
>>> handle.close()
```

JSON

```
>>> import json
>>> json.loads('["foo", {"bar":["baz", null, 1.0, 2]}]')
['foo', {'bar': ['baz', None, 1.0, 2]}]
>>> from io import StringIO
>>> handle = open('output.json', ``r``)

>>> b = json.load(handle)

>>> print(b)
{'foo': 123, 'bar': 'buz'}
```


Outline

- 1 文件 IO
- 2 CSV
- 3 Sqlite3
- 4 JSON
- 5 Pickle**

Pickle

Pickle

The pickle module implements binary protocols for serializing and de-serializing a Python object structure. “Pickling” is the process whereby a Python object hierarchy is converted into a byte stream, and “unpickling” is the inverse operation, whereby a byte stream (from a binary file or bytes-like object) is converted back into an object hierarchy.

Pickle vs. JSON

Comparison with JSON

- 1 JSON is a text serialization format (it outputs unicode text, although most of the time it is then encoded to utf-8), while pickle is a binary serialization format;
- 2 JSON is human-readable, while pickle is not;
- 3 JSON is interoperable and widely used outside of the Python ecosystem, while pickle is Python-specific;
- 4 JSON, by default, can only represent a subset of the Python built-in types, and no custom classes; pickle can represent an extremely large number of Python types (many of them automatically, by clever usage of Python's introspection facilities; complex cases can be tackled by implementing specific object APIs);
- 5 Unlike pickle, deserializing untrusted JSON does not in itself create an arbitrary code execution vulnerability.

Example of Pickle

```
>>> import pickle
# Save a dictionary into a pickle file.

>>> favorite_color = {"lion": "yellow", "kitty": "red"}

>>> pickle.dump(favorite_color, open( "save.p", "wb"))

>>> favorite_color = pickle.load(open( "save.p", "rb"))

>>> serialized = pickle.dumps(favorite_color)

>>> deserialized = pickle.loads(serialized)
```