Commit order and reusable state depend on the sampler

Snapshots show dependency order, not elapsed time or speedup.

A Autoregressive: append one token



Accepted IDs extend the prefix; K/V are cached when processed.
Solid brackets mark finalized prefix state, not just accepted IDs.

B Full-canvas masked sampler: accept selected IDs

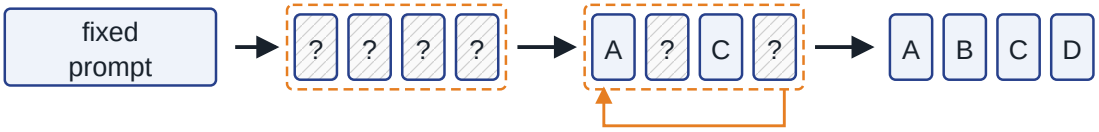

Full bidirectional forwards: fixed IDs can still acquire new K/V.
Here, accepted IDs stay fixed; prompt-state reuse is not assumed.

C Block-causal diffusion: refine, commit, advance

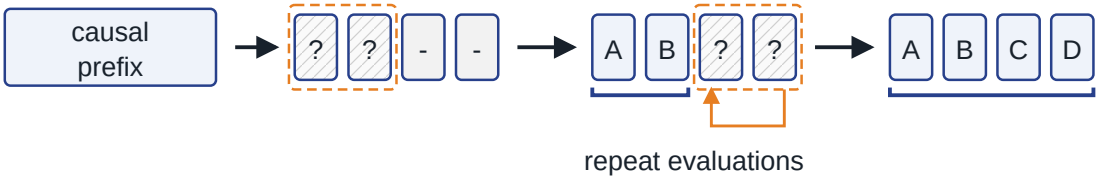

Refine the active block; finalize/cache its state before advancing.
A valid block-causal boundary prevents later blocks changing it.

Letters = accepted IDs; hatched ? = unresolved; - = inactive future.
Dashed outline = recomputed output region; loops = repeated work.
Editing and renoising samplers can differ from these examples.