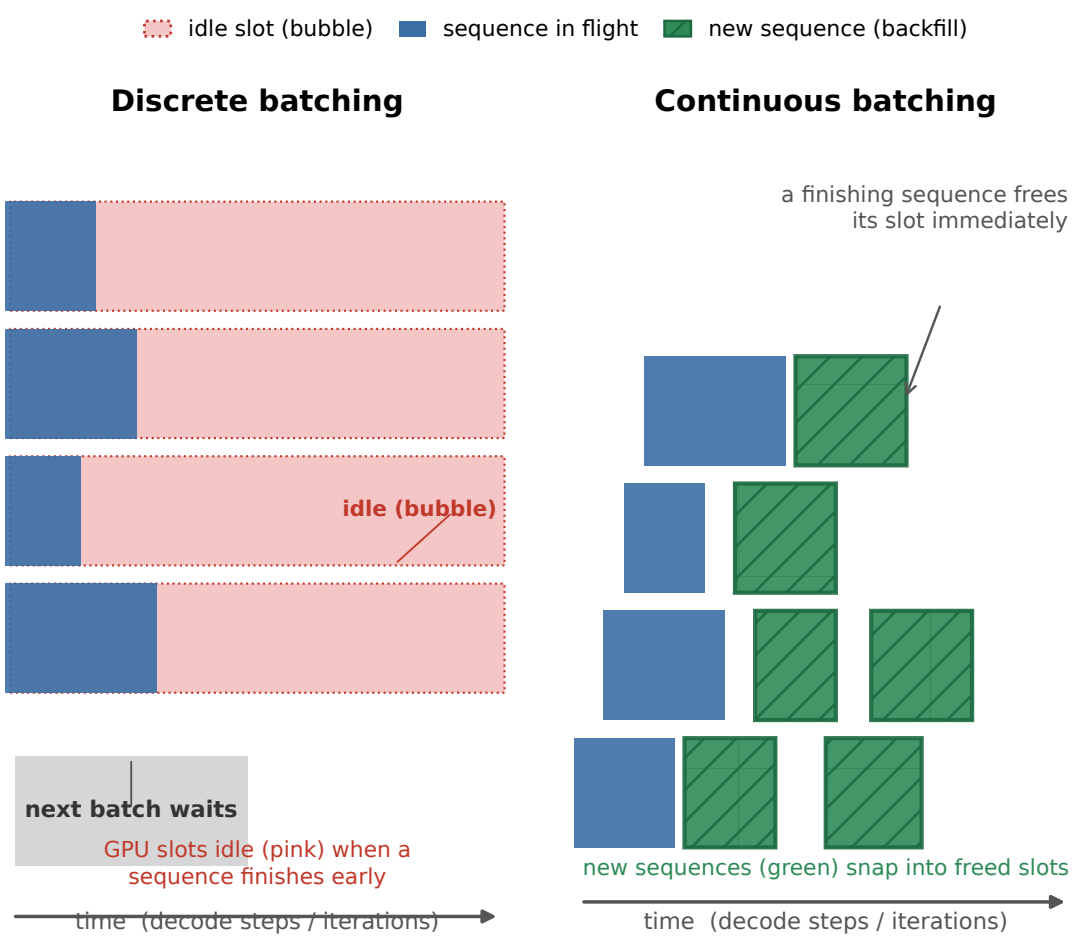


*Decode-only illustration: every shown request is in the per-token decode phase.*
*A real system also interleaves prefill of new requests into the same steps (§11.4, Ch 15).*