Four-bit values, different scale bills

Payload and local-scale bar widths are proportional to bytes.

MXFP4: one E8M0 scale per 32 values

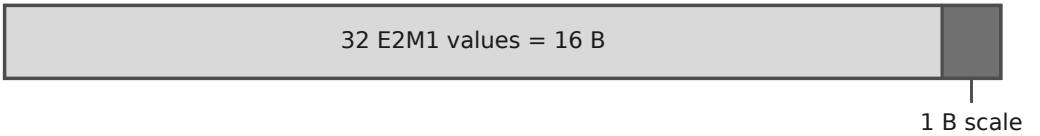

Local: 17 B / 32 = 0.53125 B/value = 4.25 bit/value

NVFP4 (common 1D): one E4M3 scale per 16 values

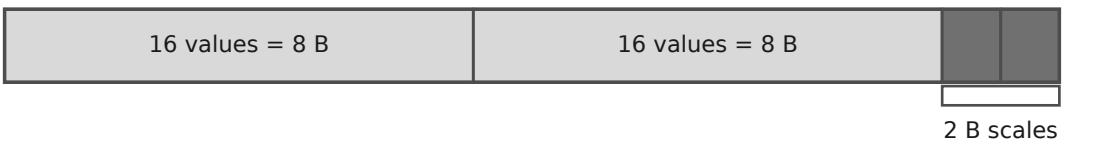

Local: 18 B / 32 = 0.5625 B/value = 4.5 bit/value

NVFP4 global FP32 scale: 4 B per tensor, not per block.

Byte accounting only; not a physical packing order.

No padding, extra copies, headers or high-precision exceptions.