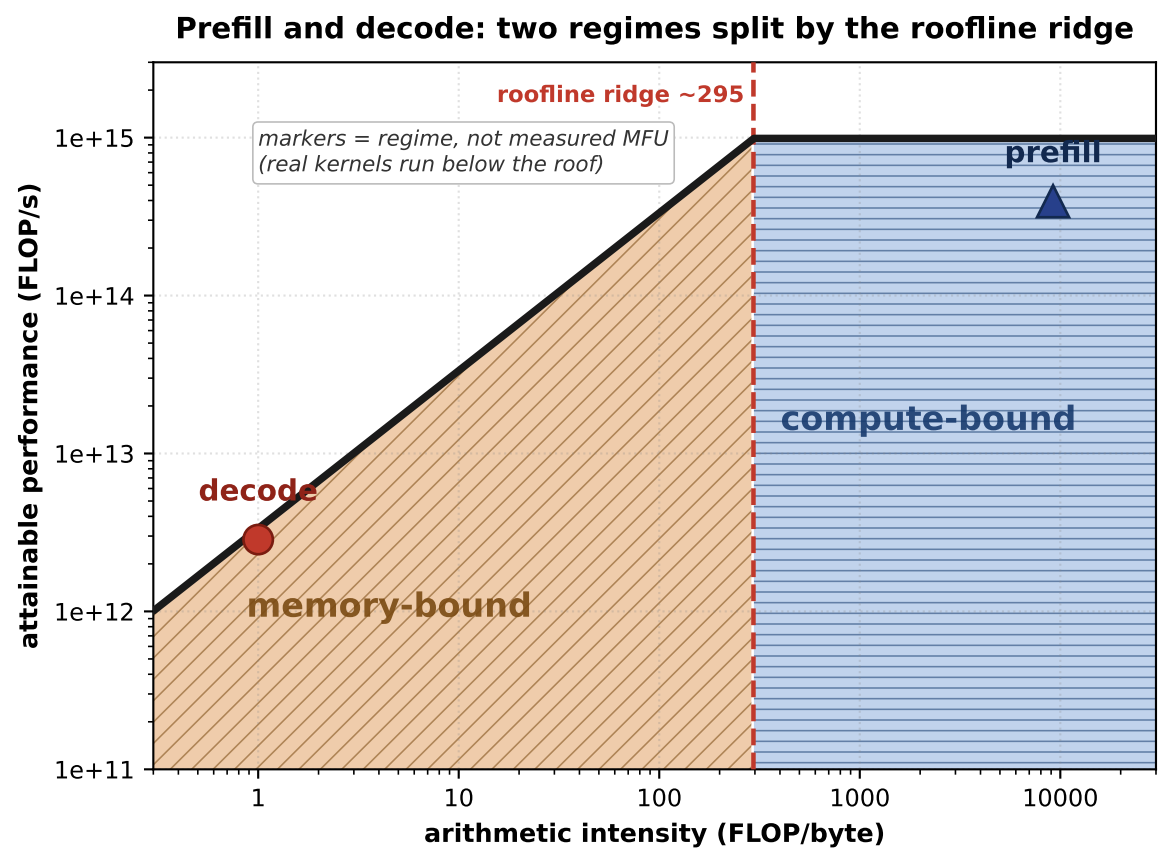
Prefill and decode: two regimes split by the roofline ridge
roofline ridge ~295
markers = regime, not measured MFU
(real kernels run below the roof)
prefill
compute-bound
decode
memory-bound
attainable performance (FLOP/s)
1e+15
1e+14
1e+13
1e+12
1e+11
1
10
100
1000
10000
arithmetic intensity (FLOP/byte)