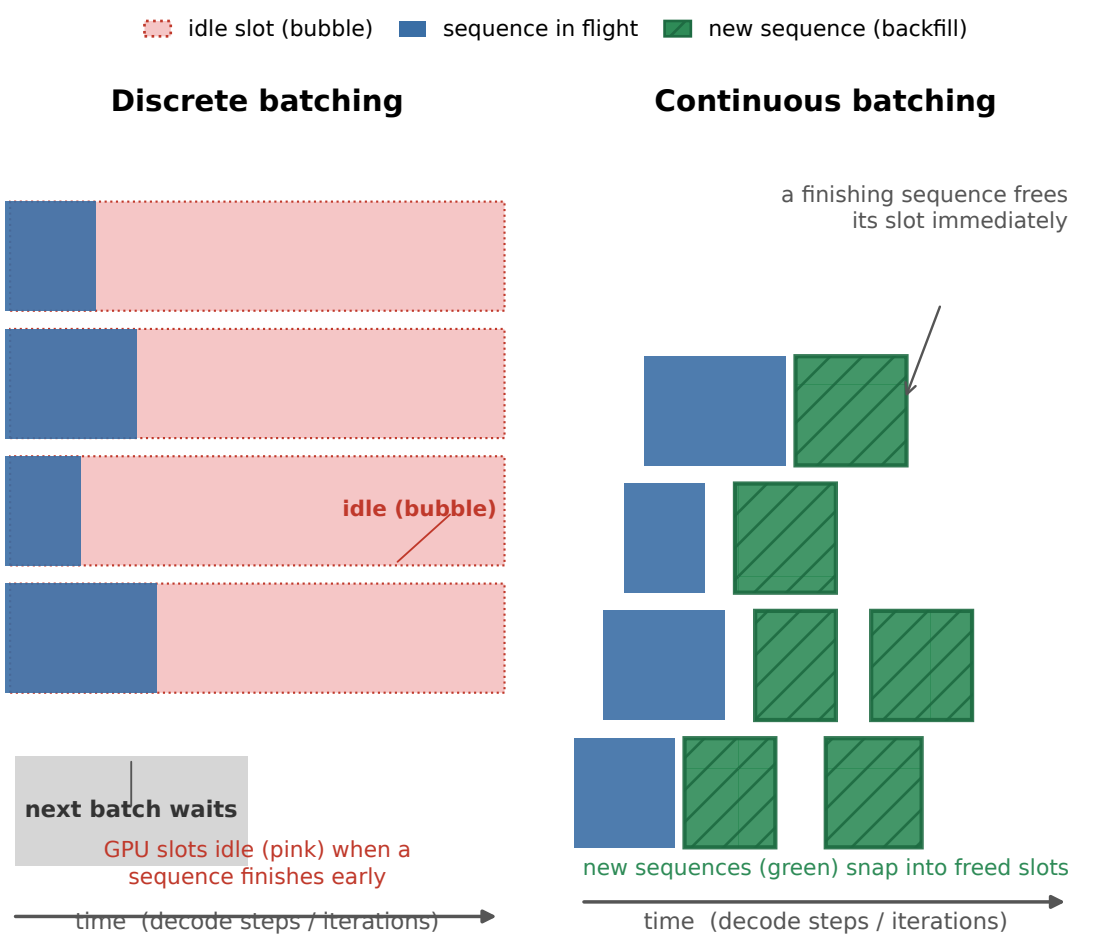

Decode-only illustration: every shown request is in the per-token decode phase.
A real stack also interleaves prefill of new requests into the same steps (Ch 11 Sec. 4, Ch 15).