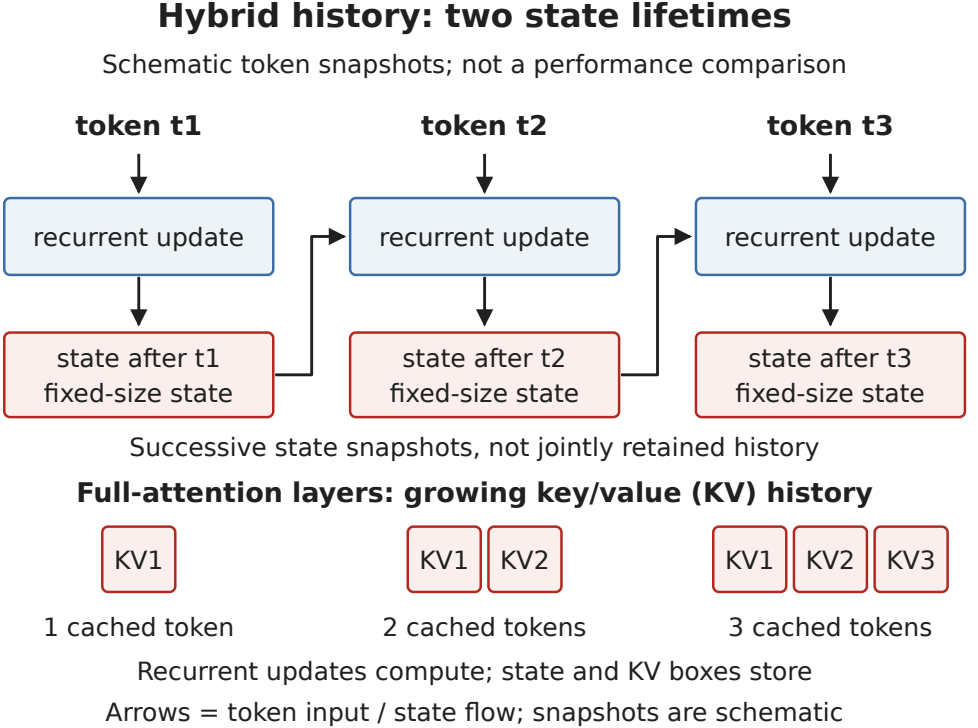
Hybrid history: two state lifetimes
Schematic token snapshots; not a performance comparison
token t1
token t2
token t3
recurrent update
recurrent update
recurrent update
state after t1
fixed-size state
state after t2
fixed-size state
state after t3
fixed-size state
Successive state snapshots, not jointly retained history
Full-attention layers: growing key/value (KV) history
KV1
KV1
KV2
KV1
KV2
KV3
1 cached token
2 cached tokens
3 cached tokens
Recurrent updates compute; state and KV boxes store
Arrows = token input / state flow; snapshots are schematic