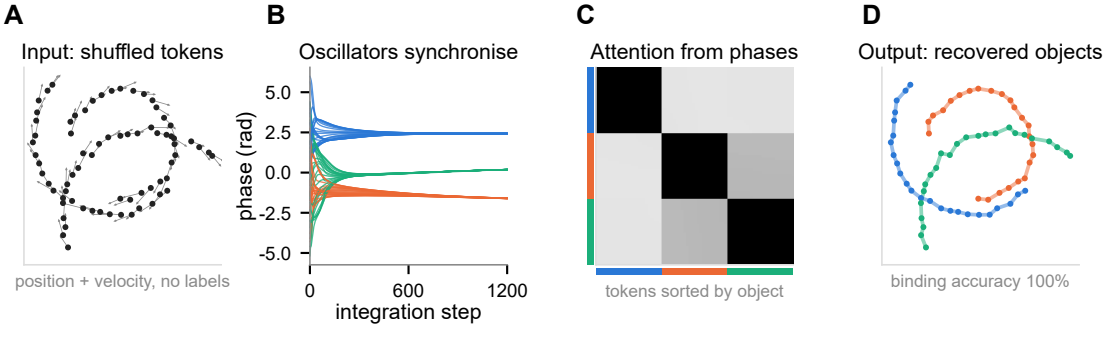

A
Input: shuffled tokens
position + velocity, no labels
B
Oscillators synchronise
phase (rad)
5.0
2.5
0.0
-2.5
-5.0
0
600
1200
integration step
C
Attention from phases
tokens sorted by object
D
Output: recovered objects
binding accuracy 100%