



SOLAR WATER PUMPS




SOLAR WATER PUMPS


A DC solar pumping system captures sunlight using solar panels, converting it into direct current(DC)electricity. This DC power then drives a pump, equipped with a brushless motor for efficiency. A controller monitors and optimizes the pump's performance based on the available solar energy, ensuring consistent water flow even under varying sunlight conditions.

Controller Unit

- Waterproof Rating:** IP65 ensures resilience against moisture.
- Temperature Tolerance:** Operates effectively between -15°C to 60°C.
- Efficient Energy Use:** Integrated MPPT maximizes solar energy utilization.
- Comprehensive Display:** Monitors power, voltage, current, speed, and other operational metrics.
- Automated Operation:** Controller manages start/stop cycles, allowing 24/7 operation without manual oversight.
- Adaptive Speed Control:** Auto-adjusts to sunlight intensity and offers manual speed modification for customized needs.
- Soft Start Feature:** Eliminates surge currents, safeguarding the pump motor.
- Advanced Protections:** Shields against over/under voltage, excessive current, phase anomalies, short circuits, water scarcity, and high temperatures.

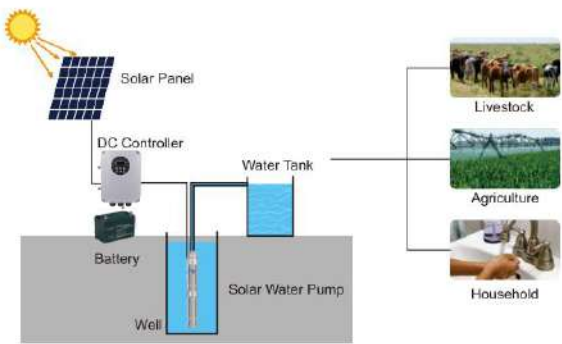


How to select the right pump

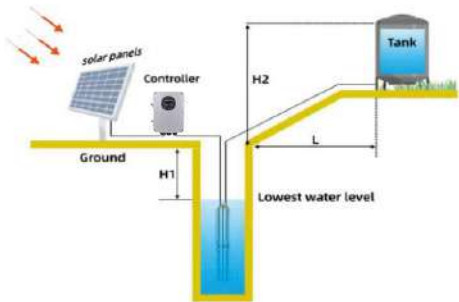

How to calculate lift (deep well pump)?

H1(Lift from lowest water level to ground):mt
H2 (Tank height and additional lift if available) :mt
L (Horizontal distance of water delivery):mt
Rated head >H1+H2+10%L

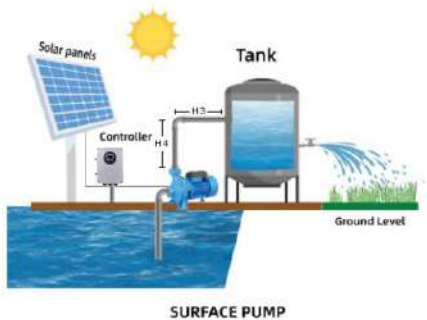

How to calculate Total Head (surface water):

L the horizontal distance from the water source to the water tank
H2 vertical height from water source to water tank
 $H=h3/10+h4$

How to dimension the Solar Panels



The power of the solar photovoltaic panel array is recommended to be 1.3 times or more than the power of the water pump.The voltage of the solar photovoltaic panel array needs to meet the voltage range of the water pump.


- Step 1 :** Pump power × 1.3 ÷ Solar panels' power = Nr of Solar panels
- Step 2 :** Number of solar panels * Open circuit voltage < Controller maximum voltage (series mode is selected)
(If greater than the maximum voltage, consider paral
- Step 3 :** Number of solar panels * Operating voltage
Within MPPT voltage range of the controller

CONTENTS

2SS/3SS	PAGE 01
2SC	PAGE 02
3SC	PAGE 03-04
4SC	PAGE 05-06
3SSC	PAGE 08
4SSC	PAGE 09-10
4/6SSC	PAGE 11
3SC-A/D	PAGE 12
4SC-A/D	PAGE 13-16
3SSC-A/D	PAGE 17
4SSC-A/D HD-4/6SSC-A/D	PAGE 18-22
6SSC-A/D HD-8SSC-A/D	PAGE 23-24
SQB	PAGE 25
SSP	PAGE 26
SJ	PAGE 27
SDJ	PAGE 28
SWP	PAGE 29
SCPM	PAGE 30
SSCPM	PAGE 31
SQD	PAGE 32
SWQD	PAGE 33
SA/SWA/SIA/SPQ	PAGE 34
SOLAR CONTROLLER	PAGE 35



PERFORMANCE CURVES

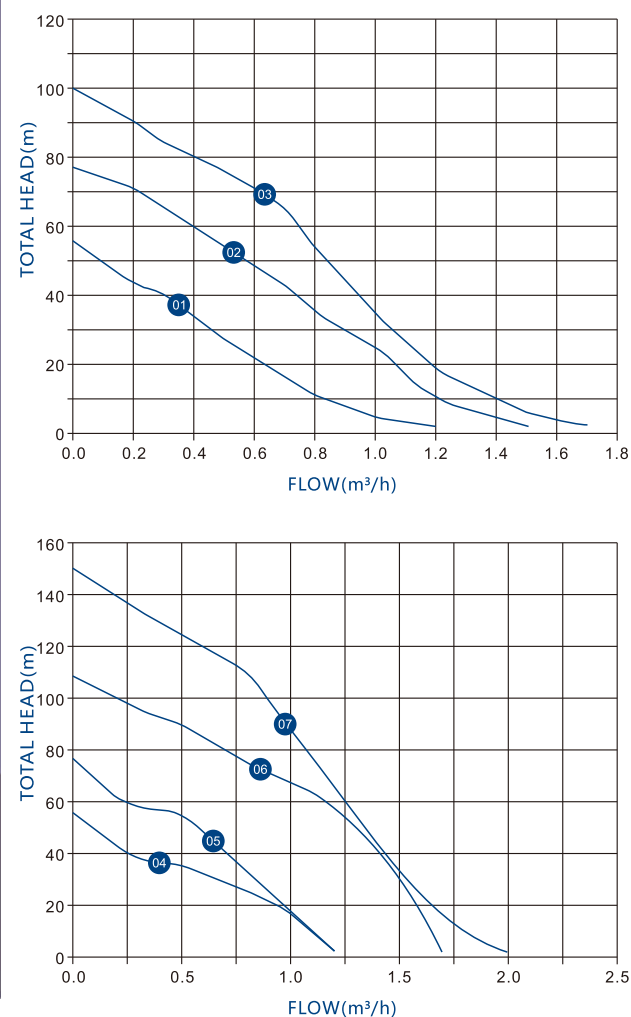


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
1	2SS1.2-56-24-120	0.12	0.16	1.2m³/h	56m	0.75"	1.5m	550W*1
2	2SS1.5-77-24-210	0.21	0.28	1.5m³/h	77m	0.75"	1.5m	550W*1
3	2SS1.7-100-48-500	0.5	0.67	1.7m³/h	100m	0.75"	1.5m	550W*2

NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
4	3SS1.2-56-24-120	0.12	0.16	1.2m³/h	56m	0.75"	2m	550W*1
5	3SS1.2-77-24-210	0.21	0.28	1.2m³/h	77m	0.75"	2m	550W*1
6	3SS1.7-109-48-500	0.5	0.67	1.7m³/h	109m	0.75"	2m	550W*2
7	3SS2.0-150-72-750	0.75	1	2.0m³/h	150m	0.75"	2m	550W*3



MODEL DEFINITION

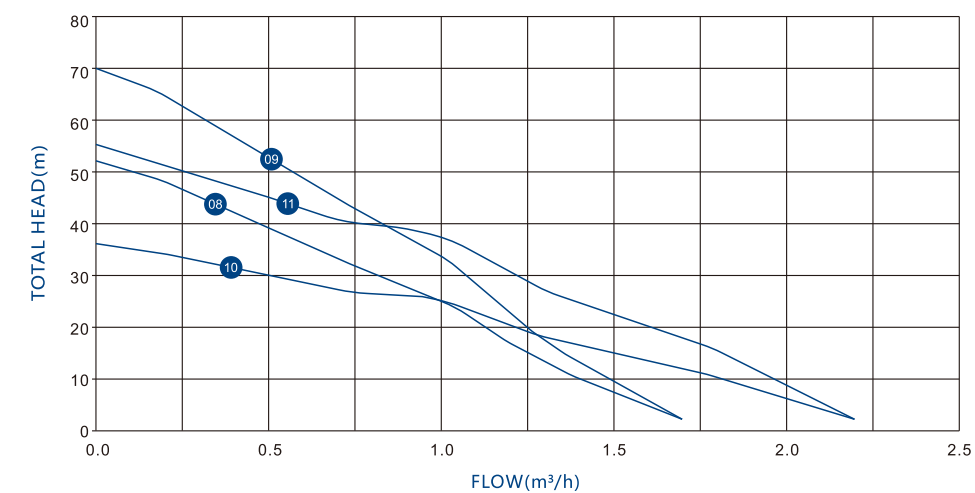


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
8	2SC1.7-52-24-300	0.3	0.4	1.7m³/h	52m	0.75"	1.5m	550W*1
9	2SC1.7-70-48-400	0.4	0.55	1.7m³/h	70m	0.75"	1.5m	550W*2
10	2SC2.2-36-24-300	0.3	0.4	2.2m³/h	36m	0.75"	1.5m	550W*1
11	2SC2.2-55-48-400	0.4	0.55	2.2m³/h	55m	0.75"	1.5m	550W*2



PERFORMANCECURVES

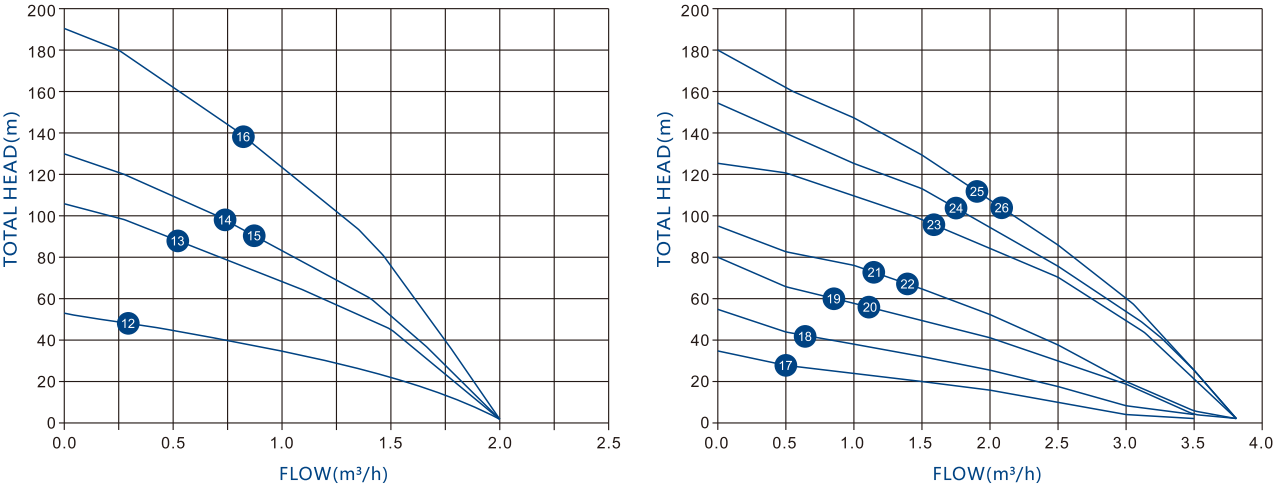

PERFORMANCECURVES

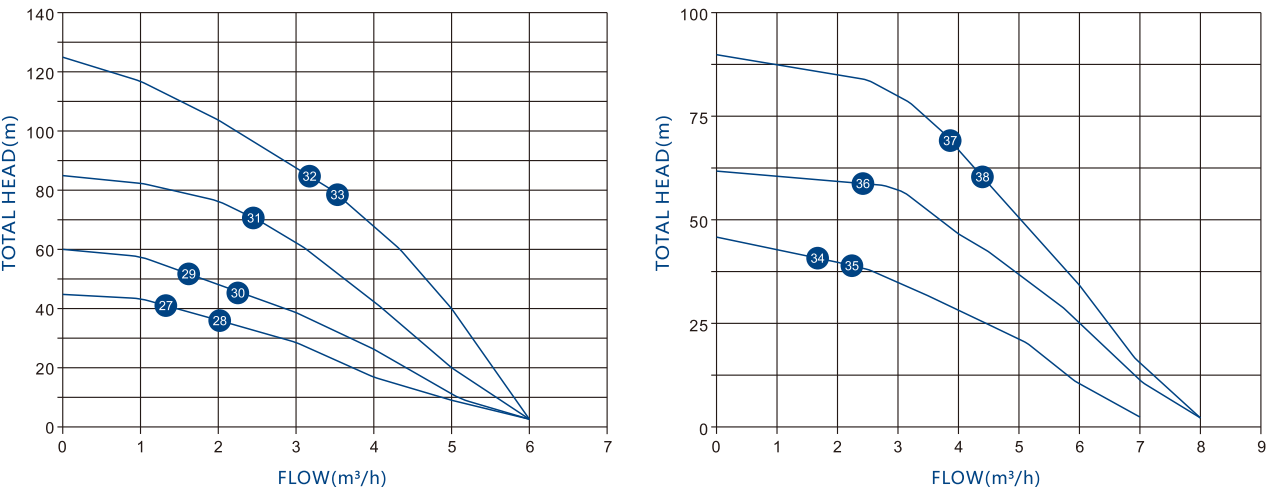


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
12	3SC2-53-24-300	0.3	0.4	2m³/h	53m	1.25"	2m	550W*1
13	3SC2-105-48-600	0.6	0.8	2m³/h	105m	1.25"	2m	550W*2
14	3SC2-130-48-750	0.75	1	2m³/h	130m	1.25"	2m	550W*2
15	3SC2-130-72-750	0.75	1	2m³/h	130m	1.25"	2m	550W*3
16	3SC2-190-110-1100	1.1	1.5	2m³/h	190m	1.25"	2m	550W*3
17	3SC3.5-35-24-300	0.3	0.4	3.5m³/h	35m	1.25"	2m	550W*1
18	3SC3.8-55-48-400	0.4	0.55	3.8m³/h	55m	1.25"	2m	550W*2
19	3SC3.8-80-48-600	0.6	0.8	3.8m³/h	80m	1.25"	2m	550W*2
20	3SC3.8-80-72-600	0.6	0.8	3.8m³/h	80m	1.25"	2m	550W*3
21	3SC3.8-95-48-750	0.75	1	3.8m³/h	95m	1.25"	2m	550W*2
22	3SC3.8-95-72-750	0.75	1	3.8m³/h	95m	1.25"	2m	550W*3
23	3SC3.8-125-110-1100	1.1	1.5	3.8m³/h	125m	1.25"	2m	550W*3
24	3SC3.8-155-110-1300	1.3	1.75	3.8m³/h	155m	1.25"	2m	550W*3
25	3SC3.8-180-110-1500	1.5	2	3.8m³/h	180m	1.25"	2m	550W*4
26	3SC3.8-180-180-1500	1.5	2	3.8m³/h	180m	1.25"	2m	550W*5
27	3SC6-45-48-600	0.6	0.8	6.0m³/h	45m	1.25"/1.5"	2m	550W*2
28	3SC6-45-72-600	0.6	0.8	6.0m³/h	45m	1.25"/1.5"	2m	550W*3
29	3SC6-60-48-750	0.75	1	6.0m³/h	60m	1.25"/1.5"	2m	550W*2
30	3SC6-60-72-750	0.75	1	6.0m³/h	60m	1.25"/1.5"	2m	550W*3
31	3SC6-85-110-1100	1.1	1.5	6.0m³/h	85m	1.25"/1.5"	2m	550W*3
32	3SC6-125-110-1500	1.5	2	6.0m³/h	125m	1.25"/1.5"	2m	550W*4
33	3SC6-125-180-1500	1.5	2	6.0m³/h	125m	1.25"/1.5"	2m	550W*5
34	3SC7-46-48-750	0.75	1	7.0m³/h	46m	1.25"/1.5"	2m	550W*2
35	3SC7-46-72-750	0.75	1	7.0m³/h	46m	1.25"/1.5"	2m	550W*3
36	3SC8-62-110-1100	1.1	1.5	8.0m³/h	62m	1.25"/1.5"	2m	550W*3
37	3SC8-90-110-1500	1.5	2	8.0m³/h	90m	1.25"/1.5"	2m	550W*4
38	3SC8-90-180-1500	1.5	2	8.0m³/h	90m	1.25"/1.5"	2m	550W*5



PERFORMANCE CURVES

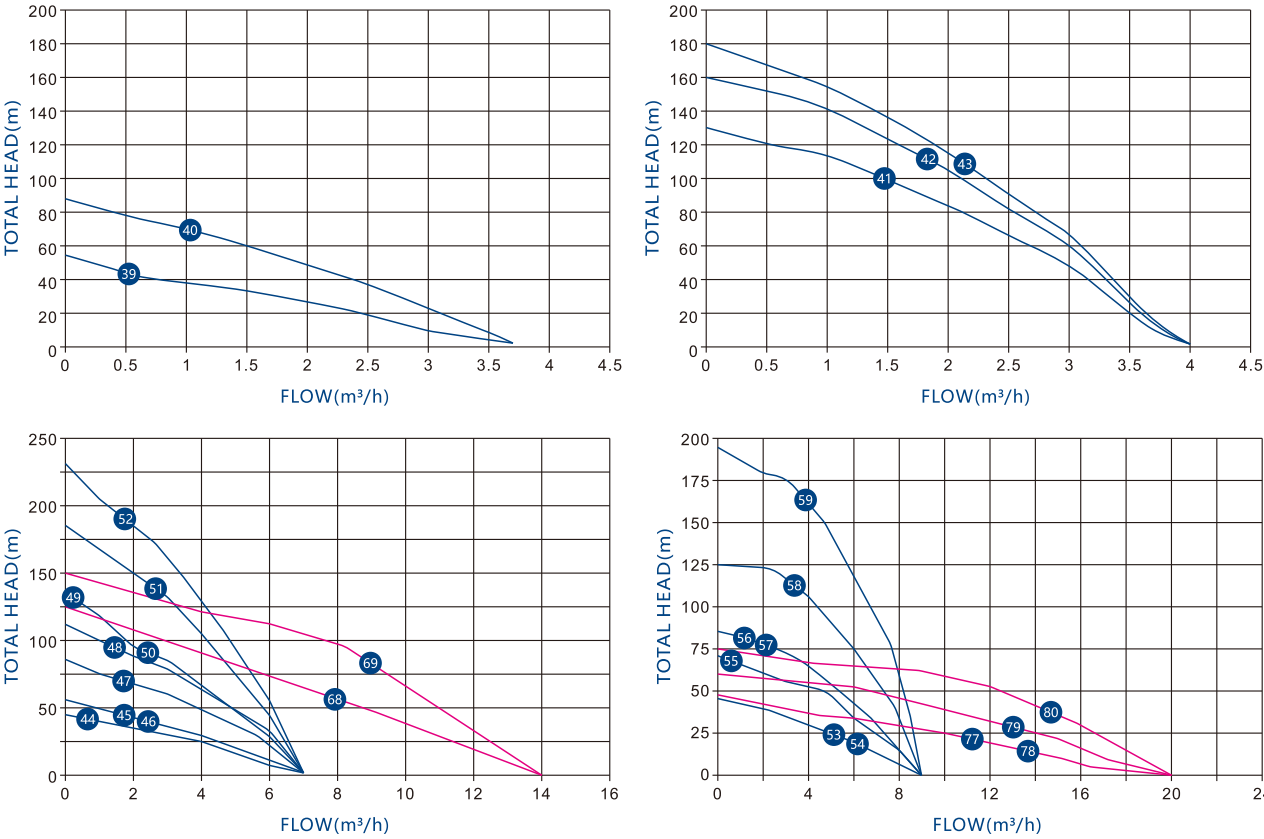

PERFORMANCE CURVES

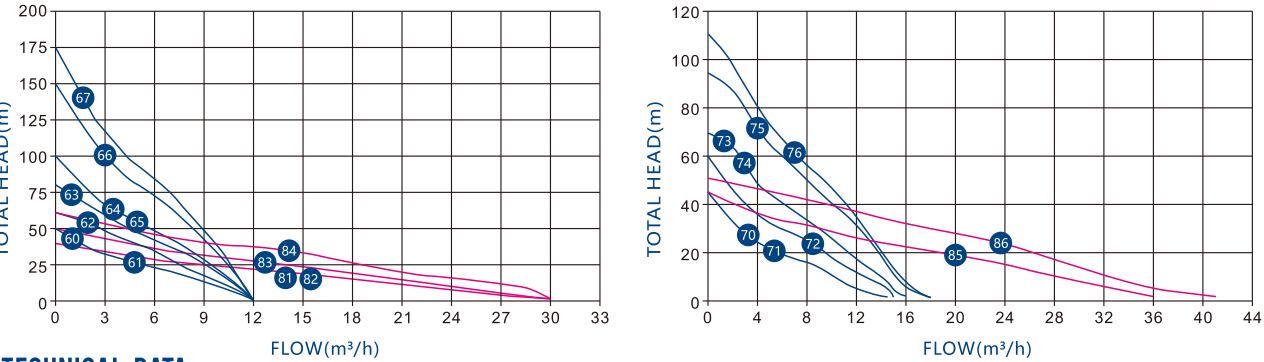

TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
39	4SC3.6-55-48-500	0.5	0.7	3.6m³/h	55m	1.25"	2m	550W*2
40	4SC3.6-88-72-750	0.75	1	3.6m³/h	88m	1.25"	2m	550W*3
41	4SC4-130-110-1100	1.1	1.5	4.0m³/h	130m	1.25"	2m	550W*3
42	4SC4-160-110-1300	1.3	1.75	4.0m³/h	160m	1.25"	2m	550W*3
43	4SC4-180-110-1500	1.5	2	4.0m³/h	180m	1.25"	2m	550W*4
44	4SC7-45-48-600	0.6	0.8	7.0m³/h	45m	1.25"/1.5"/2"	2m	550W*2
45	4SC7-56-48-750	0.75	1	7.0m³/h	56m	1.25"/1.5"/2"	2m	550W*2
46	4SC7-56-72-750	0.75	1	7.0m³/h	56m	1.25"/1.5"/2"	2m	550W*3
47	4SC7-86-110-1100	1.1	1.5	7.0m³/h	86m	1.25"/1.5"/2"	2m	550W*3
48	4SC7-112-110-1300	1.3	1.75	7.0m³/h	112m	1.25"/1.5"/2"	2m	550W*3
49	4SC7-135-110-1500	1.5	2	7.0m³/h	135m	1.25"/1.5"/2"	2m	550W*4
50	4SC7-135-180-1500	1.5	2	7.0m³/h	135m	1.25"/1.5"/2"	2m	550W*5
51	4SC7-185-280-2200	2.2	3	7.0m³/h	185m	1.25"/1.5"/2"	2m	550W*7
52	4SC7-230-300-3000	3	4	7.0m³/h	230m	1.25"/1.5"/2"	2m	550W*8
53	4SC9-45-48-750	0.75	1	9.0m³/h	45m	1.5"/2"	2m	550W*2
54	4SC9-45-72-750	0.75	1	9.0m³/h	45m	1.5"/2"	2m	550W*3
55	4SC9-71-110-1300	1.3	1.75	9.0m³/h	71m	1.5"/2"	2m	550W*3
56	4SC9-85-110-1500	1.5	2	9.0m³/h	85m	1.5"/2"	2m	550W*4
57	4SC9-85-180-1500	1.5	2	9.0m³/h	85m	1.5"/2"	2m	550W*5
58	4SC9-125-280-2200	2.2	3	9.0m³/h	125m	1.5"/2"	2m	550W*7
59	4SC9-195-300-3000	3	4	9.0m³/h	195m	1.5"/2"	2m	550W*8
60	4SC12-50-48-750	0.75	1	12.0m³/h	50m	2"	2m	550W*2
61	4SC12-50-72-750	0.75	1	12.0m³/h	50m	2"	2m	550W*3
62	4SC12-60-110-1100	1.1	1.5	12.0m³/h	60m	2"	2m	550W*3
63	4SC12-80-110-1300	1.3	1.75	12.0m³/h	80m	2"	2m	550W*3
64	4SC12-100-110-1500	1.5	2	12.0m³/h	100m	2"	2m	550W*4
65	4SC12-100-180-1500	1.5	2	12.0m³/h	100m	2"	2m	550W*5
66	4SC12-150-280-2200	2.2	3	12.0m³/h	150m	2"	2m	550W*7
67	4SC12-175-300-3000	3	4	12.0m³/h	175m	2"	2m	550W*8
68	4SC14-125-280-2200	2.2	3	14.0m³/h	125m	2"	2m	550W*7
69	4SC14-150-300-3000	3	4	14.0m³/h	150m	2"	2m	550W*8
70	4SC15-45-48-750	0.75	1	15.0m³/h	45m	2"	2m	550W*2
71	4SC15-45-72-750	0.75	1	15.0m³/h	45m	2"	2m	550W*3
72	4SC15-60-110-1100	1.1	1.5	15.0m³/h	60m	2"	2m	550W*3
73	4SC16-70-110-1500	1.5	2	16.0m³/h	70m	2"	2m	550W*4
74	4SC16-70-180-1500	1.5	2	16.0m³/h	70m	2"	2m	550W*5
75	4SC18-95-280-2200	2.2	3	18.0m³/h	95m	2"	2m	550W*7
76	4SC18-112-300-3000	3	4	18.0m³/h	112m	2"	2m	550W*8
77	4SC20-48-110-1500	1.5	2	20.0m³/h	48m	2"	2m	550W*4
78	4SC20-48-180-1500	1.5	2	20.0m³/h	48m	2"	2m	550W*5
79	4SC20-60-280-2200	2.2	3	20.0m³/h	60m	2"	2m	550W*7
80	4SC20-75-300-3000	3	4	20.0m³/h	75m	2"	2m	550W*8
81	4SC30-40-110-1500	1.5	2	30.0m³/h	40m	2"	2m	550W*4
82	4SC30-40-180-1500	1.5	2	30.0m³/h	40m	2"	2m	550W*5
83	4SC30-50-280-2200	2.2	3	30.0m³/h	50m	2"	2m	550W*7
84	4SC30-60-300-3000	3	4	30.0m³/h	60m	2"	2m	550W*8
85	4SC36-45-280-2200	2.2	3	36.0m³/h	45m	2"	2m	550W*7
86	4SC41-52-300-3000	3	4	41.0m³/h	52m	2"	2m	550W*8



3SSC



PERFORMANCE CURVES

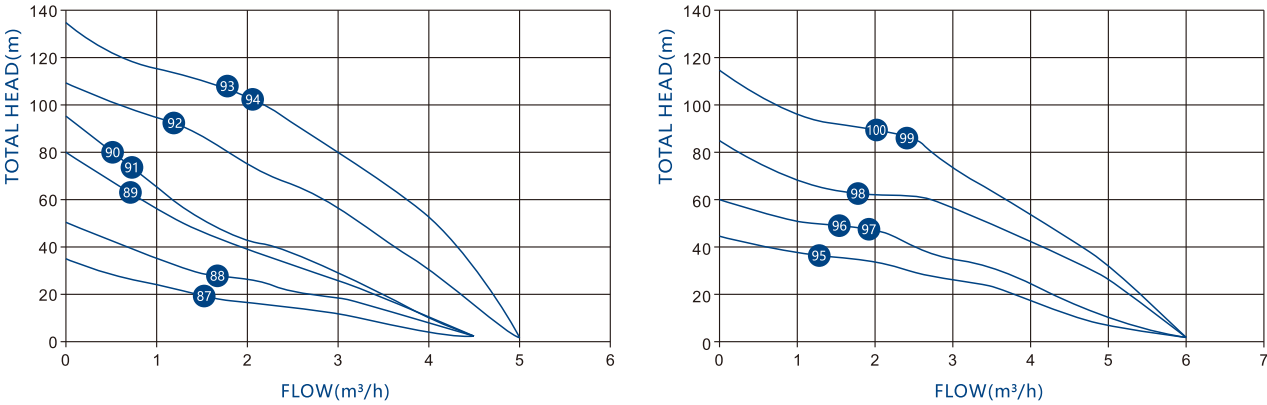


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
87	3SSC4.5-35-24-300	0.3	0.4	4.5m³/h	35m	1.25"	2m	550W*1
88	3SSC4.5-50-48-400	0.4	0.55	4.5m³/h	50m	1.25"	2m	550W*2
89	3SSC4.5-80-48-600	0.6	0.8	4.5m³/h	80m	1.25"	2m	550W*2
90	3SSC4.5-95-48-750	0.75	1	4.5m³/h	95m	1.25"	2m	550W*2
91	3SSC4.5-95-72-750	0.75	1	4.5m³/h	95m	1.25"	2m	550W*3
92	3SSC5-110-110-1100	1.1	1.5	5.0m³/h	110m	1.25"	2m	550W*3
93	3SSC5-135-110-1500	1.5	2	5.0m³/h	135m	1.25"	2m	550W*4
94	3SSC5-135-180-1500	1.5	2	5.0m³/h	135m	1.25"	2m	550W*5
95	3SSC6-44-48-600	0.6	0.8	6.0m³/h	44m	1.25"	2m	550W*2
96	3SSC6-60-48-750	0.75	1	6.0m³/h	60m	1.25"	2m	550W*2
97	3SSC6-60-72-750	0.75	1	6.0m³/h	60m	1.25"	2m	550W*3
98	3SSC6-85-110-1100	1.1	1.5	6.0m³/h	85m	1.25"	2m	550W*3
99	3SSC6-115-110-1500	1.5	2	6.0m³/h	115m	1.25"	2m	550W*4
100	3SSC6-115-180-1500	1.5	2	6.0m³/h	115m	1.25"	2m	550W*5



PERFORMANCE CURVES

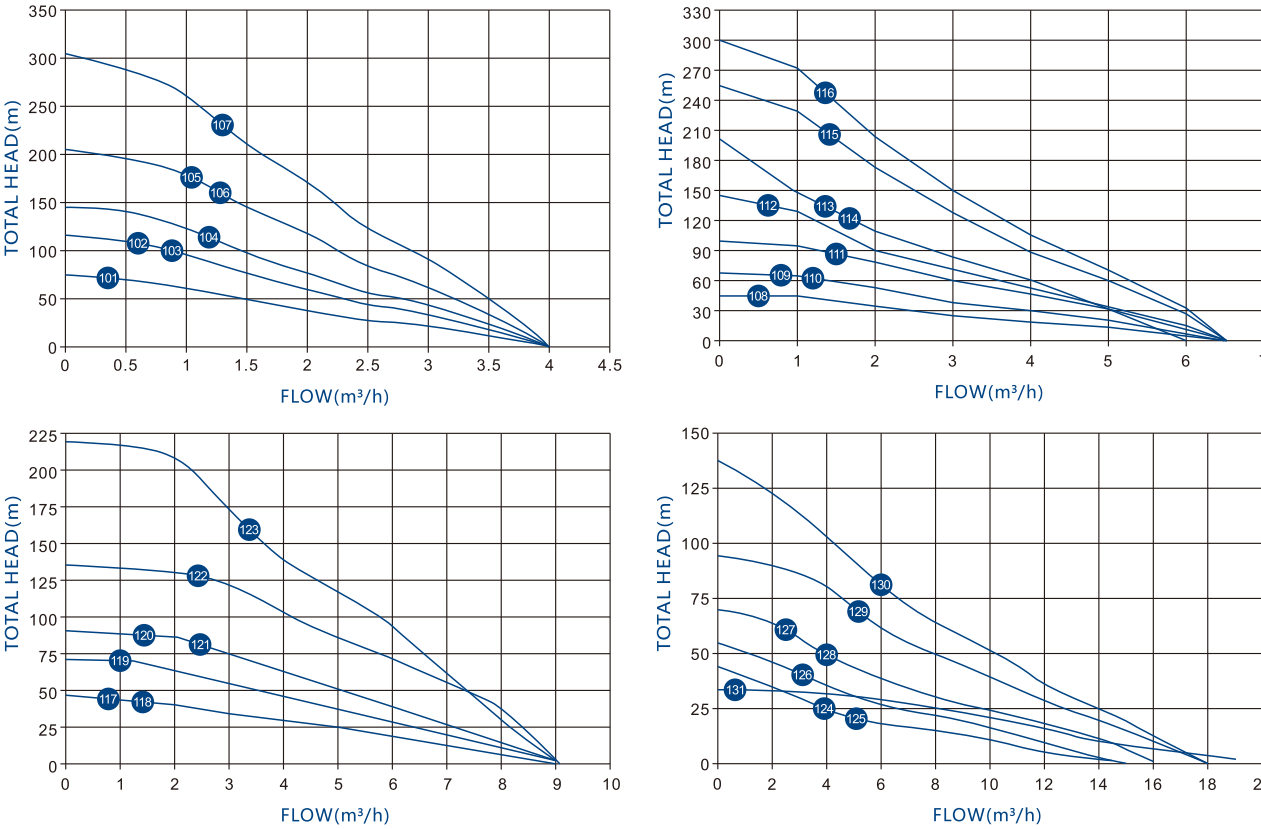

PERFORMANCE CURVES

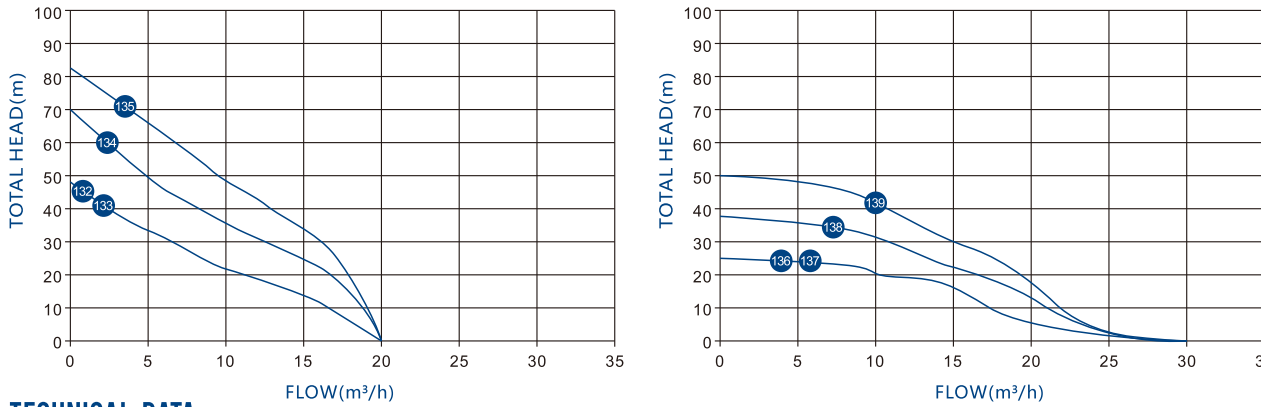


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
101	4SSC4-75-48-600	0.6	0.8	4.0m³/h	75m	1.25"	2m	550W*2
102	4SSC4-115-48-750	0.75	1	4.0m³/h	115m	1.25"	2m	550W*2
103	4SSC4-115-72-750	0.75	1	4.0m³/h	115m	1.25"	2m	550W*3
104	4SSC4-145-110-1100	1.1	1.5	4.0m³/h	145m	1.25"	2m	550W*3
105	4SSC4-205-110-1500	1.5	2	4.0m³/h	205m	1.25"	2m	550W*4
106	4SSC4-205-180-1500	1.5	2	4.0m³/h	205m	1.25"	2m	550W*5
107	4SSC4-303-280-2200	2.2	3	4.0m³/h	303m	1.25"	2m	550W*7
108	4SSC6.5-45-48-500	0.5	0.7	6.5m³/h	45m	1.25"	2m	550W*2
109	4SSC6.5-67-48-750	0.75	1	6.5m³/h	67m	1.25"	2m	550W*2
110	4SSC6.5-67-72-750	0.75	1	6.5m³/h	67m	1.25"	2m	550W*3
111	4SSC6.5-101-110-1100	1.1	1.5	6.5m³/h	101m	1.25"	2m	550W*3
112	4SSC6.5-146-110-1300	1.3	1.75	6.5m³/h	146m	1.25"	2m	550W*3
113	4SSC6-203-110-1500	1.5	2	6.0m³/h	203m	1.25"	2m	550W*4
114	4SSC6-203-180-1500	1.5	2	6.0m³/h	203m	1.25"	2m	550W*5
115	4SSC6.5-255-280-2200	2.2	3	6.5m³/h	255m	1.25"	2m	550W*7
116	4SSC6.5-300-300-3000	3	4	6.5m³/h	300m	1.25"	2m	550W*8
117	4SSC9-48-48-750	0.75	1	9.0m³/h	48m	2"	2m	550W*2
118	4SSC9-48-72-750	0.75	1	9.0m³/h	48m	2"	2m	550W*3
119	4SSC9-70-110-1100	1.1	1.5	9.0m³/h	70m	2"	2m	550W*3
120	4SSC9-90-110-1500	1.5	2	9.0m³/h	90m	2"	2m	550W*4
121	4SSC9-90-180-1500	1.5	2	9.0m³/h	90m	2"	2m	550W*5
122	4SSC9-135-280-2200	2.2	3	9.0m³/h	135m	2"	2m	550W*7
123	4SSC9-220-300-3000	3	4	9.0m³/h	220m	2"	2m	550W*8
124	4SSC14.5-45-48-750	0.75	1	14.5m³/h	45m	2"	2m	550W*2
125	4SSC14.5-45-72-750	0.75	1	14.5m³/h	45m	2"	2m	550W*3
126	4SSC15-55-110-1100	1.1	1.5	15.0m³/h	55m	2"	2m	550W*3
127	4SSC16-70-110-1500	1.5	2	16.0m³/h	70m	2"	2m	550W*4
128	4SSC16-70-180-1500	1.5	2	16.0m³/h	70m	2"	2m	550W*5
129	4SSC18-95-280-2200	2.2	3	18.0m³/h	95m	2"	2m	550W*7
130	4SSC18-137-300-3000	3	4	18.0m³/h	137m	2"	2m	550W*8
131	4SSC19-35-110-1100	1.1	1.5	19.0m³/h	35m	2"	2m	550W*3
132	4SSC20-48-110-1500	1.5	2	20.0m³/h	48m	2"	2m	550W*4
133	4SSC20-48-180-1500	1.5	2	20.0m³/h	48m	2"	2m	550W*5
134	4SSC20-70-280-2200	2.2	3	20.0m³/h	70m	2"	2m	550W*7
135	4SSC20-82-300-3000	3	4	20.0m³/h	82m	2"	2m	550W*8
136	4SSC25-25-110-1500	1.5	2	25.0m³/h	25m	2"	2m	550W*4
137	4SSC25-25-180-1500	1.5	2	25.0m³/h	25m	2"	2m	550W*5
138	4SSC30-38-280-2200	2.2	3	30.0m³/h	38m	2"	2m	550W*7
139	4SSC30-50-300-3000	3	4	30.0m³/h	50m	2"	2m	550W*8



PERFORMANCECURVES

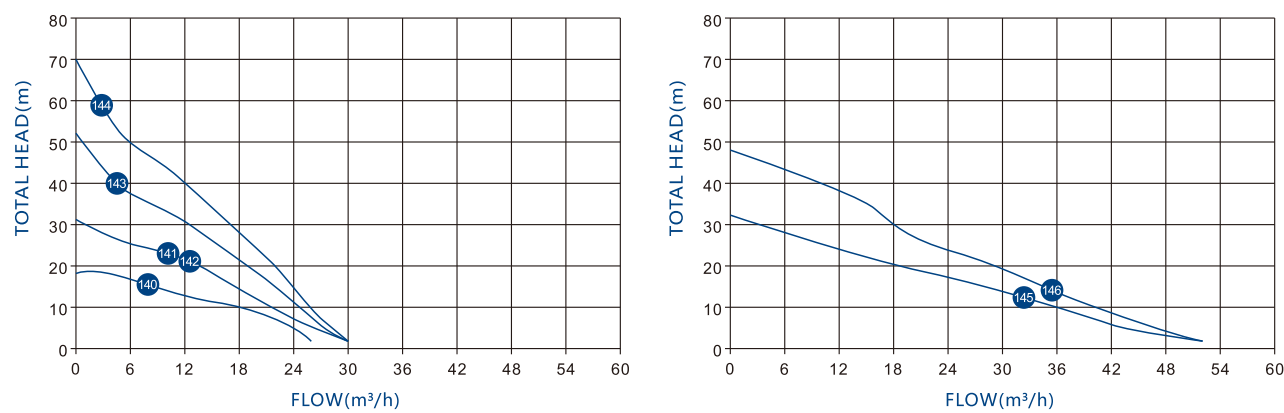


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
140	4/6SSC26-18-110-1100	1.1	1.5	26.0m³/h	18m	3"	2m	550W*3
141	4/6SSC30-31-110-1500	1.5	2	30.0m³/h	31m	3"	2m	550W*4
142	4/6SSC30-31-180-1500	1.5	2	30.0m³/h	31m	3"	2m	550W*5
143	4/6SSC30-52-280-2200	2.2	3	30.0m³/h	52m	3"	2m	550W*7
144	4/6SSC30-70-300-3000	3	4	30.0m³/h	70m	3"	2m	550W*8
145	4/6SSC52-32-280-2200	2.2	3	52.0m³/h	32m	3"	2m	550W*7
146	4/6SSC52-48-300-3000	3	4	52.0m³/h	48m	3"	2m	550W*8



PERFORMANCECURVES

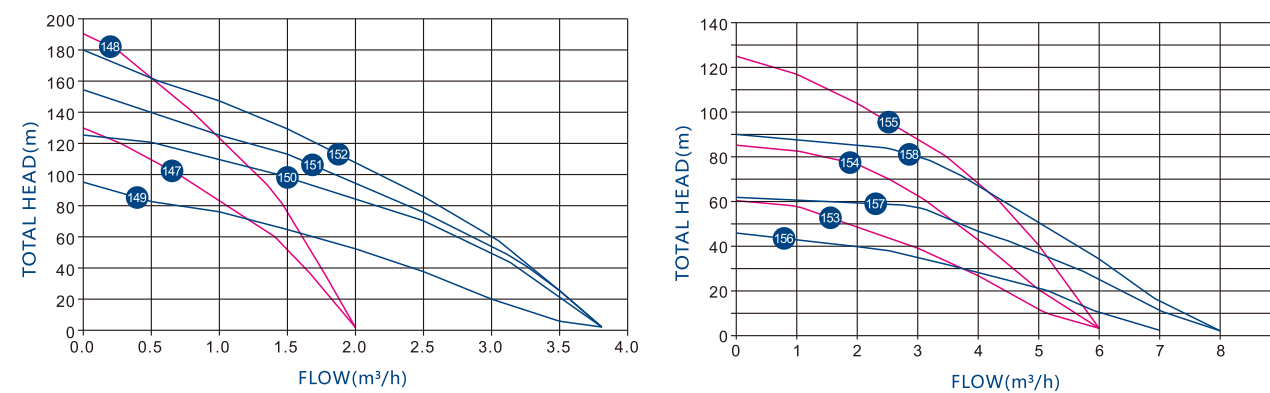


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
147	3SC2-130-96-750-A/D	0.75	1	2m³/h	130m	1.25"	2m	550W*3
148	3SC2-190-150-1100-A/D	1.1	1.5	2m³/h	190m	1.25"	2m	550W*4
149	3SC3.8-95-96-750-A/D	0.75	1	3.8m³/h	95m	1.25"	2m	550W*3
150	3SC3.8-125-150-1100-A/D	1.1	1.5	3.8m³/h	125m	1.25"	2m	550W*4
151	3SC3.8-155-170-1300-A/D	1.3	1.75	3.8m³/h	155m	1.25"	2m	550W*5
152	3SC3.8-180-180-1500-A/D	1.5	2	3.8m³/h	180m	1.25"	2m	550W*5
153	3SC6-60-96-750-A/D	0.75	1	6.0m³/h	60m	1.25"/1.5"	2m	550W*3
154	3SC6-85-150-1100-A/D	1.1	1.5	6.0m³/h	85m	1.25"/1.5"	2m	550W*4
155	3SC6-125-180-1500-A/D	1.5	2	6.0m³/h	125m	1.25"/1.5"	2m	550W*5
156	3SC7-46-96-750-A/D	0.75	1	7.0m³/h	46m	1.25"/1.5"	2m	550W*3
157	3SC8-62-150-1100-A/D	1.1	1.5	8.0m³/h	62m	1.25"/1.5"	2m	550W*4
158	3SC8-90-180-1500-A/D	1.5	2	8.0m³/h	90m	1.25"/1.5"	2m	550W*5



PERFORMANCE CURVES

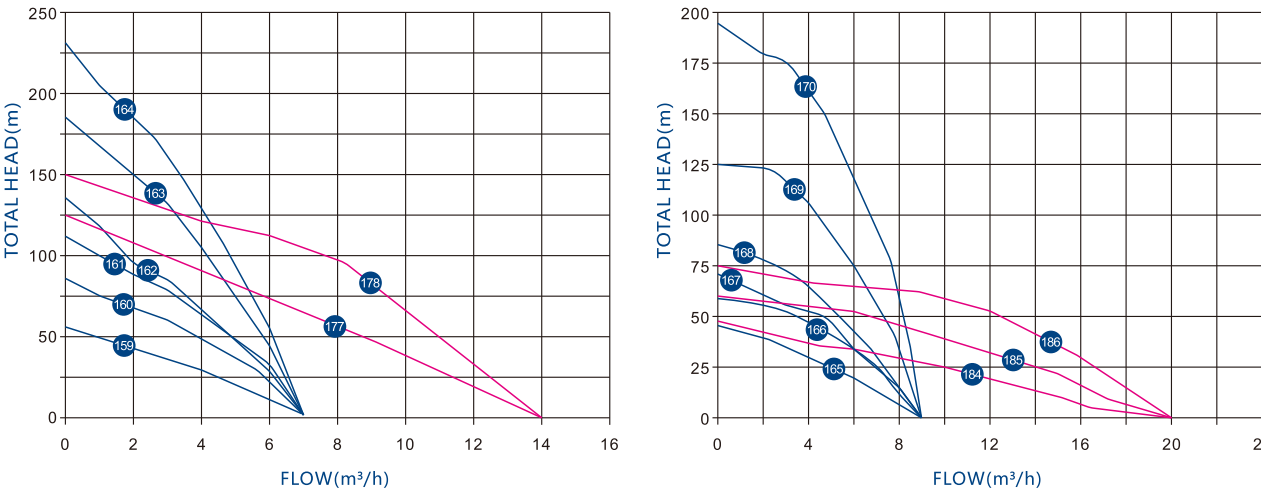

PERFORMANCE CURVES

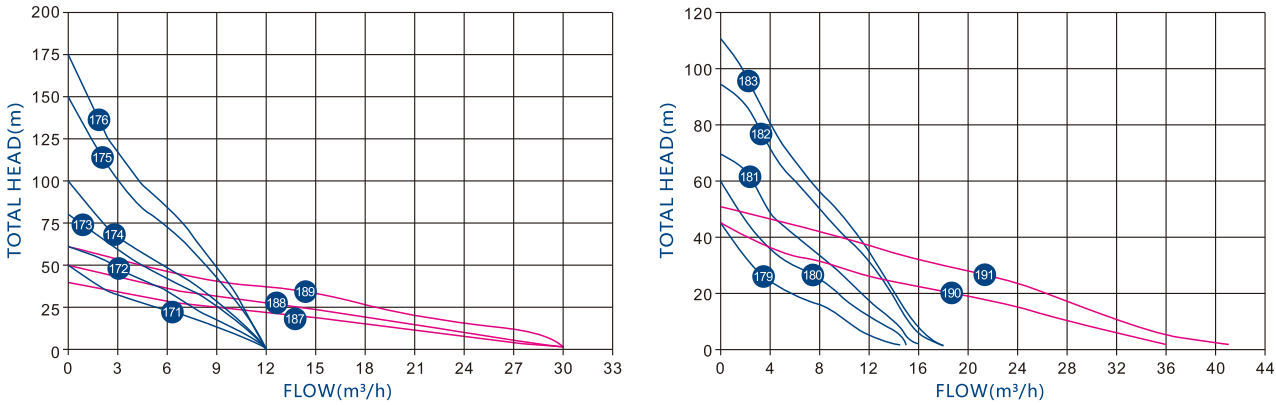


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
159	4SC7-56-96-750-A/D	0.75	1	7.0m³/h	56m	1.25"/1.5"/2"	2m	550W*3
160	4SC7-86-150-1100-A/D	1.1	1.5	7.0m³/h	86m	1.25"/1.5"/2"	2m	550W*4
161	4SC7-112-170-1300-A/D	1.3	1.75	7.0m³/h	112m	1.25"/1.5"/2"	2m	550W*5
162	4SC7-135-180-1500-A/D	1.5	2	7.0m³/h	135m	1.25"/1.5"/2"	2m	550W*5
163	4SC7-185-280-2200-A/D	2.2	3	7.0m³/h	185m	1.25"/1.5"/2"	2m	550W*7
164	4SC7-230-300-3000-A/D	3	4	7.0m³/h	230m	1.25"/1.5"/2"	2m	550W*8
165	4SC9-45-96-750-A/D	0.75	1	9.0m³/h	45m	1.5"/2"	2m	550W*3
166	4SC9-58-150-1100-A/D	1.1	1.5	9.0m³/h	58m	1.5"/2"	2m	550W*4
167	4SC9-71-170-1300-A/D	1.3	1.75	9.0m³/h	71m	1.5"/2"	2m	550W*5
168	4SC9-85-180-1500-A/D	1.5	2	9.0m³/h	85m	1.5"/2"	2m	550W*5
169	4SC9-125-280-2200-A/D	2.2	3	9.0m³/h	125m	1.5"/2"	2m	550W*7
170	4SC9-195-300-3000-A/D	3	4	9.0m³/h	195m	1.5"/2"	2m	550W*8
171	4SC12-50-96-750-A/D	0.75	1	12.0m³/h	50m	2"	2m	550W*3
172	4SC12-60-150-1100-A/D	1.1	1.5	12.0m³/h	60m	2"	2m	550W*4
173	4SC12-80-170-1300-A/D	1.3	1.75	12.0m³/h	80m	2"	2m	550W*5
174	SC12-100-180-1500-A/D	1.5	2	12.0m³/h	100m	2"	2m	550W*5
175	4SC12-150-280-2200-A/D	2.2	3	12.0m³/h	150m	2"	2m	550W*7
176	4SC12-175-300-3000-A/D	3	4	12.0m³/h	175m	2"	2m	550W*8
177	4SC14-125-280-2200-A/D	2.2	3	14.0m³/h	125m	2"	2m	550W*7
178	4SC14-150-300-3000-A/D	3	4	14.0m³/h	150m	2"	2m	550W*8
179	4SC15-45-96-750-A/D	0.75	1	15.0m³/h	45m	2"	2m	550W*3
180	4SC15-60-150-1100-A/D	1.1	1.5	15.0m³/h	60m	2"	2m	550W*4
181	4SC16-70-180-1500-A/D	1.5	2	16.0m³/h	70m	2"	2m	550W*5
182	4SC18-95-280-2200-A/D	2.2	3	18.0m³/h	95m	2"	2m	550W*7
183	4SC18-112-300-3000-A/D	3	4	18.0m³/h	112m	2"	2m	550W*8
184	4SC20-48-180-1500-A/D	1.5	2	20.0m³/h	48m	2"	2m	550W*5
185	4SC20-60-280-2200-A/D	2.2	3	20.0m³/h	60m	2"	2m	550W*7
186	4SC20-75-300-3000-A/D	3	4	20.0m³/h	75m	2"	2m	550W*8
187	4SC30-40-180-1500-A/D	1.5	2	30.0m³/h	40m	2"	2m	550W*5
188	4SC30-50-280-2200-A/D	2.2	3	30.0m³/h	50m	2"	2m	550W*7
189	4SC30-60-300-3000-A/D	3	4	30.0m³/h	60m	2"	2m	550W*8
190	4SC36-45-280-2200-A/D	2.2	3	36.0m³/h	45m	3"	2m	550W*7
191	4SC41-52-300-3000-A/D	3	4	41.0m³/h	52m	3"	2m	550W*8



PERFORMANCE CURVES

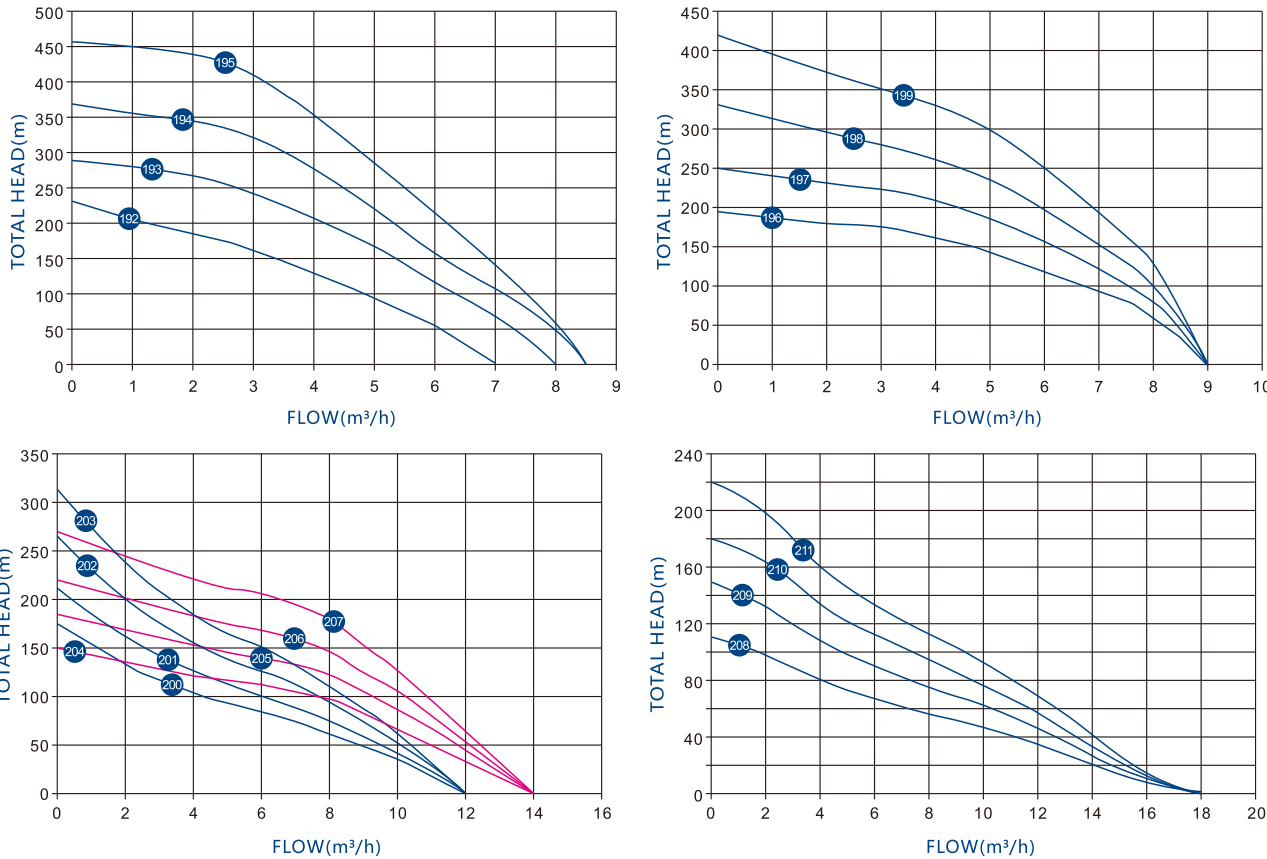

PERFORMANCE CURVES

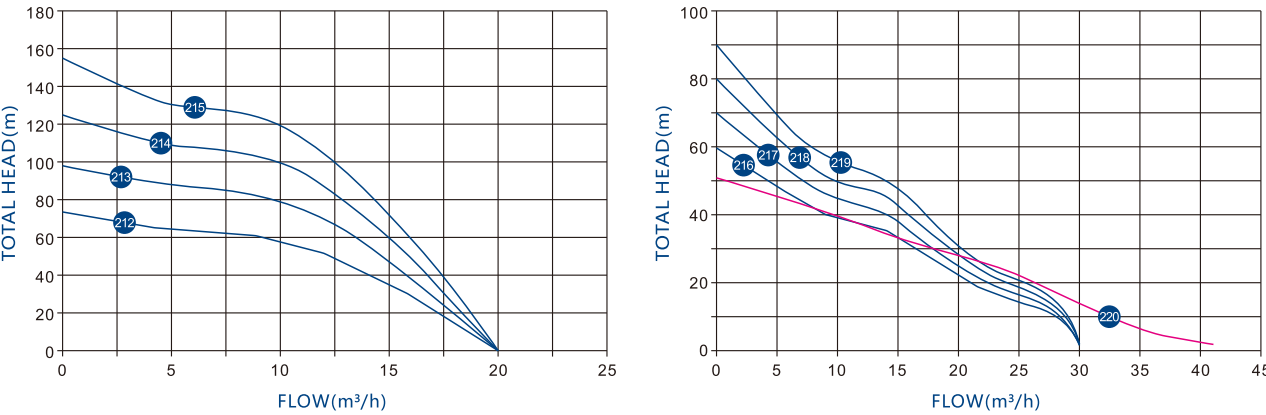


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	HP					
192	4SC7-230-530-3000-A/D	3	4	7.0m³/h	230m	1.25"/1.5"/2"	2m	550W*12
193	4SC8-290-530-4000-A/D	4	5.5	8.0m³/h	290m	1.25"/1.5"/2"	2m	550W*12
194	4SC8.5-370-530-5500-A/D	5.5	7.5	8.5m³/h	370m	1.25"/1.5"/2"	2m	550W*13
195	4SC8.5-456-530-7500-A/D	7.5	10	8.5m³/h	456m	1.25"/1.5"/2"	2m	550W*13*2
196	4SC9-195-530-3000-A/D	3	4	9.0m³/h	195m	1.5"/2"	2m	550W*12
197	4SC9-250-530-4000-A/D	4	5.5	9.0m³/h	250m	1.5"/2"	2m	550W*12
198	4SC9-330-530-5500-A/D	5.5	7.5	9.0m³/h	330m	1.5"/2"	2m	550W*13
199	4SC9-420-530-7500-A/D	7.5	10	9.0m³/h	420m	1.5"/2"	2m	550W*13*2
200	4SC12-175-530-3000-A/D	3	4	12.0m³/h	175m	2"	2m	550W*12
201	4SC12-213-530-4000-A/D	4	5.5	12.0m³/h	213m	2"	2m	550W*12
202	4SC12-265-530-5500-A/D	5.5	7.5	12.0m³/h	265m	2"	2m	550W*13
203	4SC12-315-530-7500-A/D	7.5	10	12.0m³/h	315m	2"	2m	550W*13*2
204	4SC14-150-530-3000-A/D	3	4	14.0m³/h	150m	2"	2m	550W*12
205	4SC14-185-530-4000-A/D	4	5.5	14.0m³/h	185m	2"	2m	550W*12
206	4SC14-220-530-5500-A/D	5.5	7.5	14.0m³/h	220m	2"	2m	550W*13
207	4SC14-270-530-7500-A/D	7.5	10	14.0m³/h	270m	2"	2m	550W*13*2
208	4SC18-112-530-3000-A/D	3	4	18.0m³/h	112m	2"	2m	550W*12
209	4SC18-150-530-4000-A/D	4	5.5	18.0m³/h	150m	2"	2m	550W*12
210	4SC18-180-530-5500-A/D	5.5	7.5	18.0m³/h	180m	2"	2m	550W*13
211	4SC18-220-530-7500-A/D	7.5	10	18.0m³/h	220m	2"	2m	550W*13*2
212	4SC20-75-530-3000-A/D	3	4	20.0m³/h	75m	2"	2m	550W*12
213	4SC20-98-530-4000-A/D	4	5.5	20.0m³/h	98m	2"	2m	550W*12
214	4SC20-125-530-5500-A/D	5.5	7.5	20.0m³/h	125m	2"	2m	550W*13
215	4SC20-155-530-7500-A/D	7.5	10	20.0m³/h	155m	2"	2m	550W*13*2
216	4SC30-60-530-3000-A/D	3	4	30.0m³/h	60m	2"	2m	550W*12
217	4SC30-70-530-4000-A/D	4	5.5	30.0m³/h	70m	2"	2m	550W*12
218	4SC30-80-530-5500-A/D	5.5	7.5	30.0m³/h	80m	2"	2m	550W*13
219	4SC30-90-530-7500-A/D	7.5	10	30.0m³/h	90m	2"	2m	550W*13*2
220	4SC41-52-530-3000-A/D	3	4	41.0m³/h	52m	3"	2m	550W*12



PERFORMANCECURVES

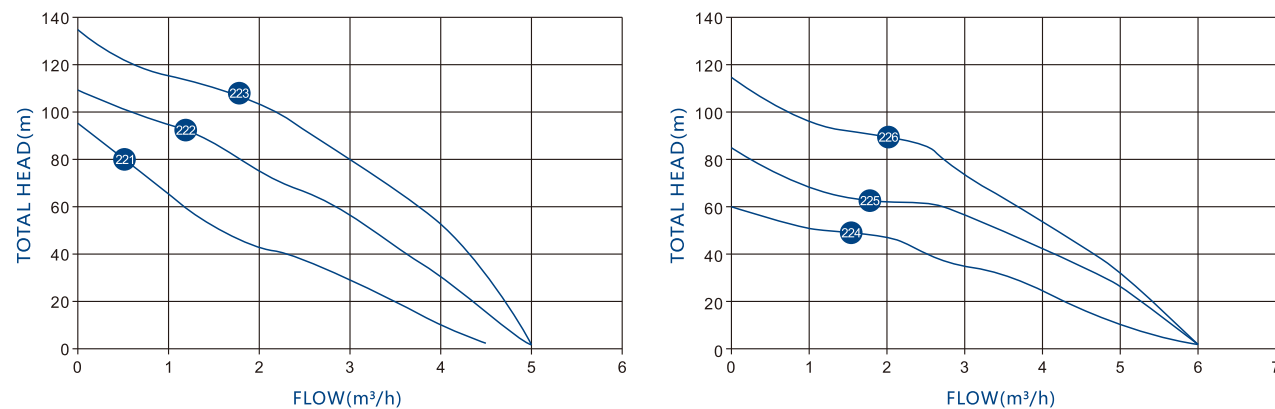


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
221	3SSC4.5-95-96-750-A/D	0.75	1	4.5m³/h	95m	1.25"	2m	550W*3
222	3SSC5-110-150-1100-A/D	1.1	1.5	5.0m³/h	110m	1.25"	2m	550W*4
223	3SSC5-135-180-1500-A/D	1.5	2	5.0m³/h	135m	1.25"	2m	550W*5
224	3SSC6-60-96-750-A/D	0.75	1	6.0m³/h	60m	1.25"	2m	550W*3
225	3SSC6-85-150-1100-A/D	1.1	1.5	6.0m³/h	85m	1.25"	2m	550W*4
226	3SSC6-115-180-1500-A/D	1.5	2	6.0m³/h	115m	1.25	2m	550W*5



PERFORMANCECURVES

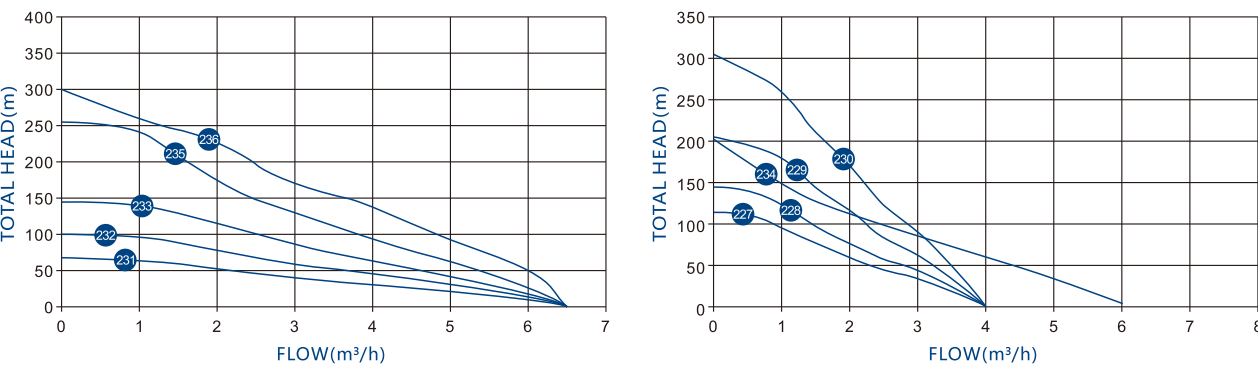


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
227	4SSC4-115-96-750-A/D	0.75	1	4.0m³/h	115m	1.25"	2m	550W*3
228	4SSC4-145-150-1100-A/D	1.1	1.5	4.0m³/h	145m	1.25"	2m	550W*4
229	4SSC4-205-180-1500-A/D	1.5	2	4.0m³/h	205m	1.25"	2m	550W*5
230	4SSC4-303-280-2200-A/D	2.2	3	4.0m³/h	303m	1.25"	2m	550W*7
231	4SSC6.5-67-96-750-A/D	0.75	1	6.5m³/h	67m	1.25"	2m	550W*3
232	4SSC6.5-101-150-1100-A/D	1.1	1.5	6.5m³/h	101m	1.25"	2m	550W*4
233	4SSC6.5-146-170-1300-A/D	1.3	1.75	6.5m³/h	146m	1.25"	2m	550W*5
234	4SSC6-203-180-1500-A/D	1.5	2	6.0m³/h	203m	1.25"	2m	550W*5
235	4SSC6.5-255-280-2200-A/D	2.2	3	6.5m³/h	255m	1.25"	2m	550W*7
236	4SSC6.5-300-300-3000-A/D	3	4	6.5m³/h	300m	1.25"	2m	550W*8



PERFORMANCECURVES

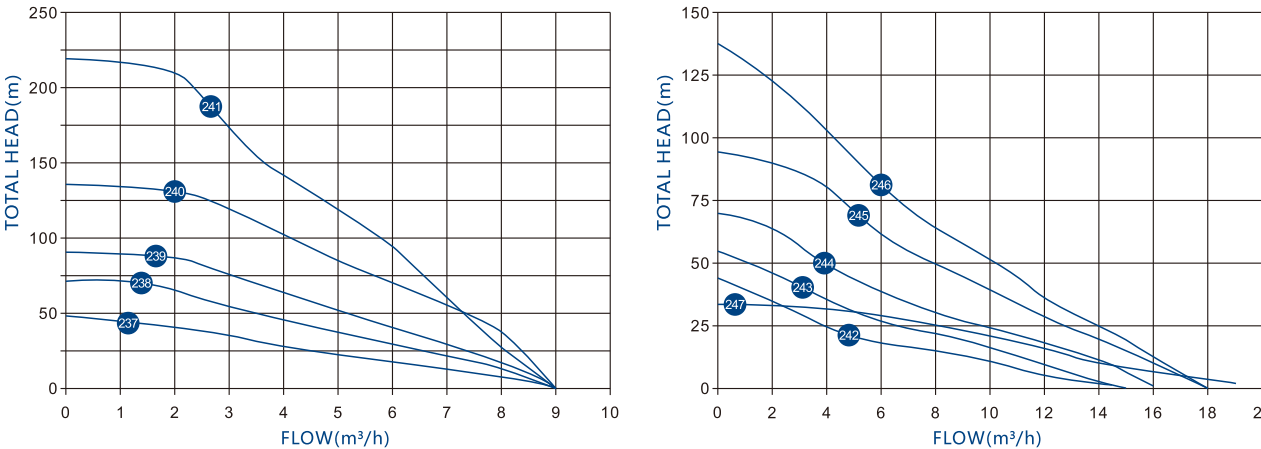

PERFORMANCECURVES

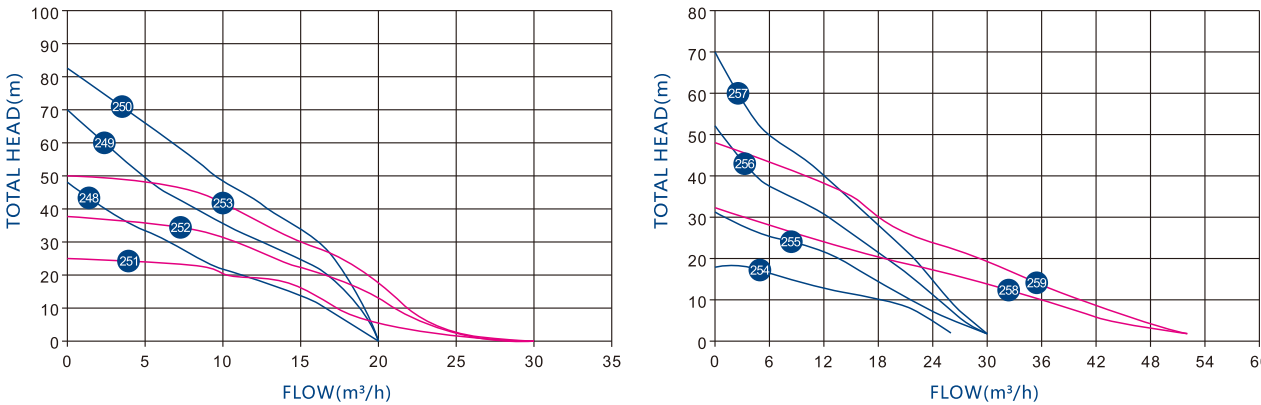


TECHNICAL DATA


NO.	Model	Power		Max. Flow	Max. Head	Outlet (Inch)	Cable	Solar Panels
		Kw	Hp					
237	4SSC9-48-96-750-A/D	0.75	1	9.0m³/h	48m	2"	2m	550W*3
238	4SSC9-70-150-1100-A/D	1.1	1.5	9.0m³/h	70m	2"	2m	550W*4
239	4SSC9-90-180-1500-A/D	1.5	2	9.0m³/h	90m	2"	2m	550W*5
240	4SSC9-135-280-2200-A/D	2.2	3	9.0m³/h	135m	2"	2m	550W*7
241	4SSC9-220-300-3000-A/D	3	4	9.0m³/h	220m	2"	2m	550W*8
242	4SSC14.5-45-96-750-A/D	0.75	1	14.5m³/h	45m	2"	2m	550W*3
243	4SSC15-55-150-1100-A/D	1.1	1.5	15.0m³/h	55m	2"	2m	550W*4
244	4SSC16-70-180-1500-A/D	1.5	2	16.0m³/h	70m	2"	2m	550W*5
245	4SSC18-95-280-2200-A/D	2.2	3	18.0m³/h	95m	2"	2m	550W*7
246	4SSC18-137-300-3000-A/D	3	4	18.0m³/h	137m	2"	2m	550W*8
247	4SSC19-35-150-1100-A/D	1.1	1.5	19.0m³/h	35m	2"	2m	550W*4
248	4SSC20-48-180-1500-A/D	1.5	2	20.0m³/h	48m	2"	2m	550W*5
249	4SSC20-70-280-2200-A/D	2.2	3	20.0m³/h	70m	2"	2m	550W*7
250	4SSC20-82-300-3000-A/D	3	4	20.0m³/h	82m	2"	2m	550W*8
251	4SSC25-25-180-1500-A/D	1.5	2	25.0m³/h	25m	2"	2m	550W*5
252	4SSC30-38-280-2200-A/D	2.2	3	30.0m³/h	38m	2"	2m	550W*7
253	4SSC30-50-300-3000-A/D	3	4	30.0m³/h	50m	2"	2m	550W*8
254	4/6SSC26-18-150-1100-A/D	1.1	1.5	26.0m³/h	18m	3"	2m	550W*4
255	4/6SSC30-31-180-1500-A/D	1.5	2	30.0m³/h	31m	3"	2m	550W*5
256	4/6SSC30-52-280-2200-A/D	2.2	3	30.0m³/h	52m	3"	2m	550W*7
257	4/6SSC30-70-300-3000-A/D	3	4	30.0m³/h	70m	3"	2m	550W*8
258	4/6SSC52-32-280-2200-A/D	2.2	3	52.0m³/h	32m	3"	2m	550W*7
259	4/6SSC52-48-300-3000-A/D	3	4	52.0m³/h	48m	3"	2m	550W*8



PERFORMANCECURVES

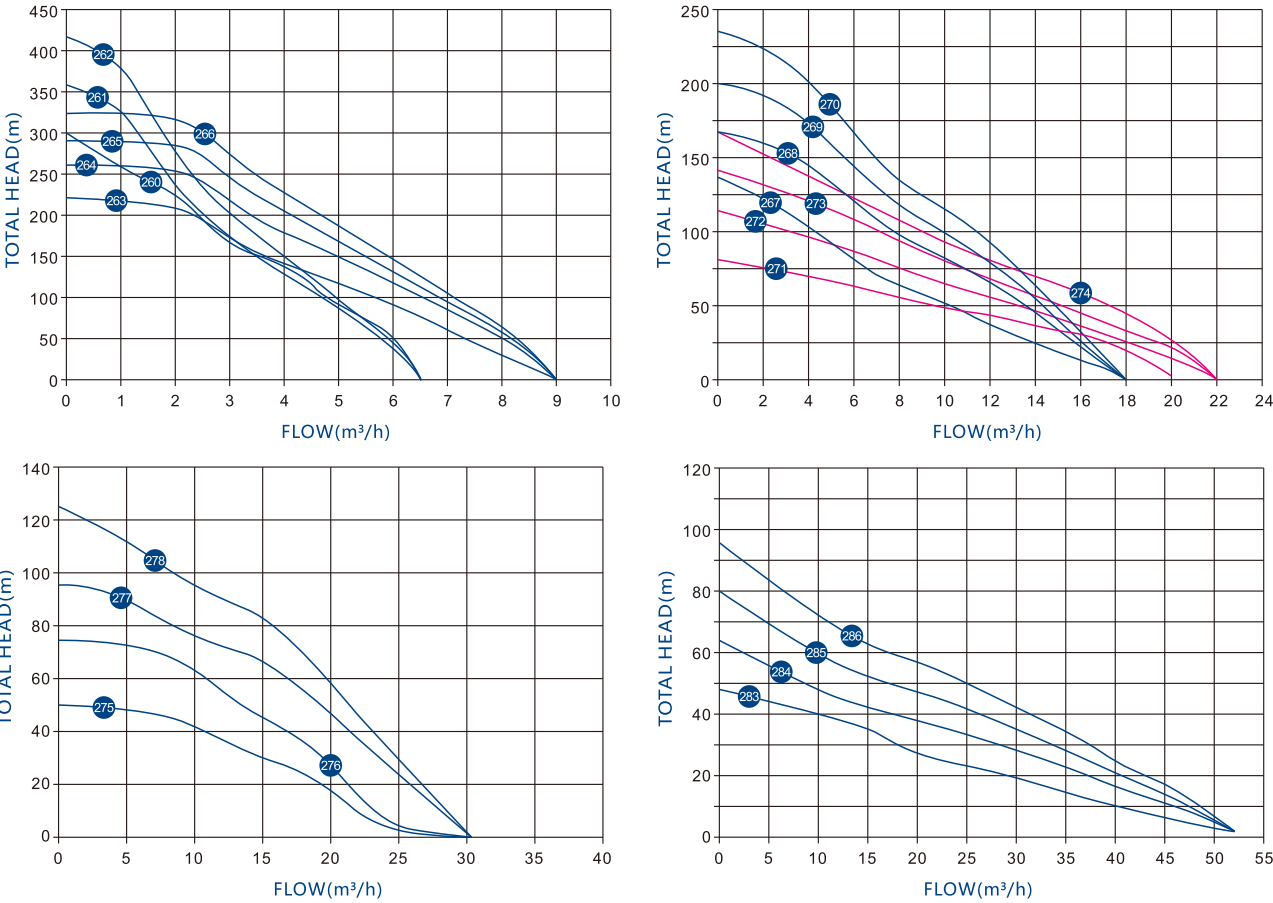

PERFORMANCECURVES

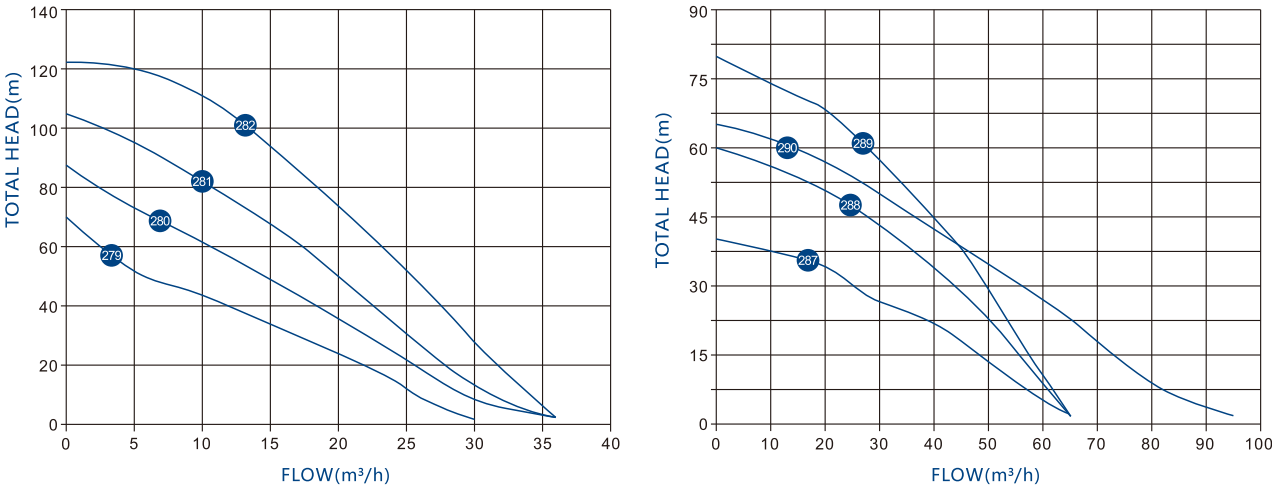


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	HP					
260	4SSC6.5-300-530-3000-A/D	3	4	6.5m³/h	300m	1.25"	2m	550W*12
261	4SSC6.5-360-530-4000-A/D	4	5.5	6.5m³/h	360m	1.25"	2m	550W*12
262	4SSC6.5-420-530-5500-A/D	5.5	7.5	6.5m³/h	420m	1.25"	2m	550W*13
263	4SSC9-220-530-3000-A/D	3	4	9.0m³/h	220m	2"	2m	550W*12
264	4SSC9-260-530-4000-A/D	4	5.5	9.0m³/h	260m	2"	2m	550W*12
265	4SSC9-295-530-5500-A/D	5.5	7.5	9.0m³/h	295m	2"	2m	550W*13
266	4SSC9-325-530-7500-A/D	7.5	10	9.0m³/h	325m	2"	2m	550W*13*2
267	4SSC18-137-530-3000-A/D	3	4	18.0m³/h	137m	2"	2m	550W*12
268	4SSC18-168-530-4000-A/D	4	5.5	18.0m³/h	168m	2"	2m	550W*12
269	4SSC18-200-530-5500-A/D	5.5	7.5	18.0m³/h	200m	2"	2m	550W*13
270	4SSC18-235-530-7500-A/D	7.5	10	18.0m³/h	235m	2"	2m	550W*13*2
271	4SSC20-82-530-3000-A/D	3	4	20.0m³/h	82m	2"	2m	550W*12
272	4SSC22-115-530-4000-A/D	4	5.5	22.0m³/h	115m	2"	2m	550W*12
273	4SSC22-143-530-5500-A/D	5.5	7.5	22.0m³/h	143m	2"	2m	550W*13
274	4SSC22-169-530-7500-A/D	7.5	10	22.0m³/h	169m	2"	2m	550W*13*2
275	4SSC30-50-530-3000-A/D	3	4	30.0m³/h	50m	2"	2m	550W*12
276	4SSC30-75-530-4000-A/D	4	5.5	30.0m³/h	75m	2"	2m	550W*12
277	4SSC30-96-530-5500-A/D	5.5	7.5	30.0m³/h	96m	2"	2m	550W*13
278	4SSC30-125-530-7500-A/D	7.5	10	30.0m³/h	125m	2"	2m	550W*13*2
279	4/6SSC30-70-530-3000-A/D	3	4	30.0m³/h	70m	3"	2m	550W*12
280	4/6SSC36-88-530-4000-A/D	4	5.5	36.0m³/h	88m	3"	2m	550W*12
281	4/6SSC36-105-530-5500-A/D	5.5	7.5	36.0m³/h	105m	3"	2m	550W*13
282	4/6SSC36-122-530-7500-A/D	7.5	10	36.0m³/h	122m	3"	2m	550W*13*2
283	4/6SSC52-48-530-3000-A/D	3	4	52.0m³/h	48m	3"	2m	550W*12
284	4/6SSC52-64-530-4000-A/D	4	5.5	52.0m³/h	64m	3"	2m	550W*12
285	4/6SSC52-80-530-5500-A/D	5.5	7.5	52.0m³/h	80m	3"	2m	550W*13
286	4/6SSC52-96-530-7500-A/D	7.5	10	52.0m³/h	96m	3"	2m	550W*13*2
287	4/6SSC65-40-530-4000-A/D	4	5.5	65.0m³/h	40m	3"	2m	550W*12
288	4/6SSC65-60-530-5500-A/D	5.5	7.5	65.0m³/h	60m	3"	2m	550W*13
289	4/6SSC65-80-530-7500-A/D	7.5	10	65.0m³/h	80m	3"	2m	550W*13*2
290	4/6SSC95-65-530-7500-A/D	7.5	10	95.0m³/h	65m	3"	2m	550W*13*2





PERFORMANCECURVES


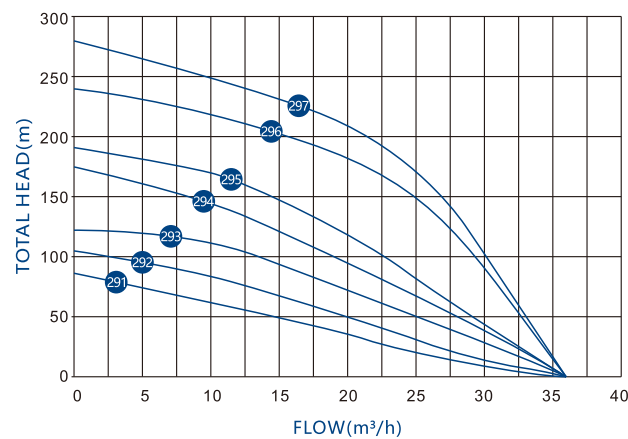


6 SSC 36 - 88 - 530 - 4000 - A/D

- A/D Type
- Power
- Voltage
- Max. Head
- Max. Flow
- SSC Series
- Well Diameter

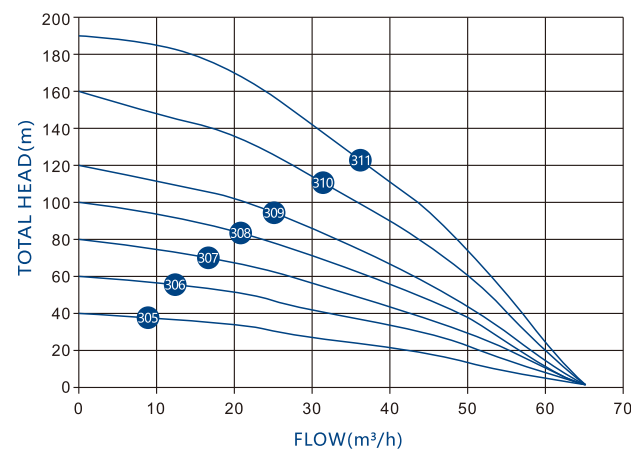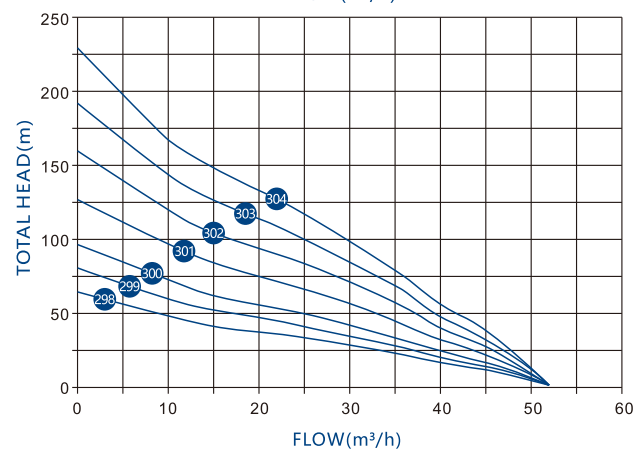


PERFORMANCECURVES

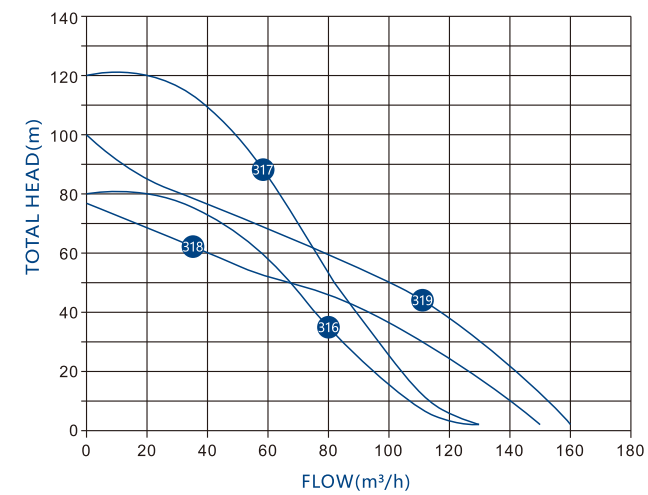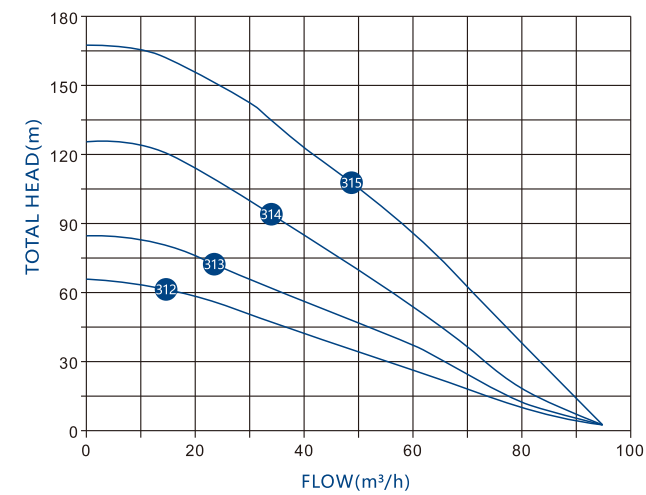


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	HP					
291	6SSC36-88-530-4000-A/D	4	5.5	36m³/h	88m	3"	2m	550W*12
292	6SSC36-105-530-5500-A/D	5.5	7.5	36m³/h	105m	3"	2m	550W*13
293	6SSC36-122-530-7500-A/D	7.5	10	36m³/h	122m	3"	2m	550W*13*2
294	6SSC36-175-530-9200-A/D	9.2	12.5	36m³/h	175m	3"	2m	550W*13*2
295	6SSC36-190-530-11000-A/D	11	15	36m³/h	190m	3"	2m	550W*15*2
296	6SSC36-240-530-15000-A/D	15	20	36m³/h	240m	3"	2m	550W*13*3
297	6SSC36-280-530-22000-A/D	22	30	36m³/h	280m	3"	2m	550W*13*4
298	6SSC52-64-530-4000-A/D	4	5.5	52m³/h	64m	3"	2m	550W*12
299	6SSC52-80-530-5500-A/D	5.5	7.5	52m³/h	80m	3"	2m	550W*13
300	6SSC52-96-530-7500-A/D	7.5	10	52m³/h	96m	3"	2m	550W*13*2
301	6SSC52-128-530-9200-A/D	9.2	12.5	52m³/h	128m	3"	2m	550W*13*2
302	6SSC52-160-530-11000-A/D	11	15	52m³/h	160m	3"	2m	550W*15*2
303	6SSC52-192-530-15000-A/D	15	20	52m³/h	192m	3"	2m	550W*13*3
304	6SSC52-230-530-22000-A/D	22	30	52m³/h	230m	3"	2m	550W*13*4
305	6SSC65-40-530-4000-A/D	4	5.5	65m³/h	40m	3"	2m	550W*12
306	6SSC65-60-530-5500-A/D	5.5	7.5	65m³/h	60m	3"	2m	550W*13
307	6SSC65-80-530-7500-A/D	7.5	10	65m³/h	80m	3"	2m	550W*13*2
308	6SSC65-100-530-9200-A/D	9.2	12.5	65m³/h	100m	3"	2m	550W*13*2
309	6SSC65-120-530-11000-A/D	11	15	65m³/h	120m	3"	2m	550W*15*2
310	6SSC65-160-530-15000-A/D	15	20	65m³/h	160m	3"	2m	550W*13*3
311	6SSC65-190-530-22000-A/D	22	30	65m³/h	190m	3"	2m	550W*13*4
312	6SSC95-65-530-7500-A/D	7.5	10	95m³/h	65m	4"	2m	550W*13*2
313	6SSC95-85-530-11000-A/D	11	15	95m³/h	85m	4"	2m	550W*15*2
314	6SSC95-125-530-15000-A/D	15	20	95m³/h	125m	4"	2m	550W*13*3
315	6SSC95-166-530-22000-A/D	22	30	95m³/h	166m	4"	2m	550W*13*4
316	6SSC130-80-530-15000-A/D	15	20	130m³/h	80m	4"	2m	550W*13*3
317	6SSC130-120-530-22000-A/D	22	30	130m³/h	120m	4"	2m	550W*13*4
318	8SSC150-77-530-15000-A/D	15	20	150m³/h	77m	5"	2m	550W*13*3
319	8SSC160-100-530-22000-A/D	22	30	160m³/h	100m	5"	2m	550W*13*4

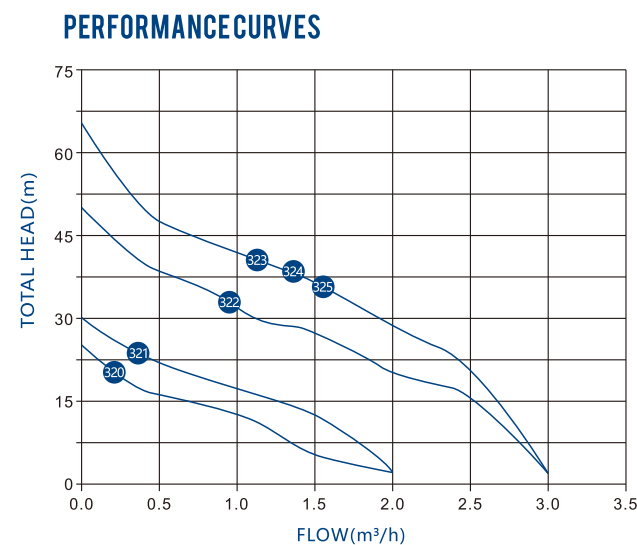

TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
320	SQB2-25-24-210(IN)	0.21	0.28	2.0m³/h	25m	1"	2m	550W*1
321	SQB2-30-24-280(IN)	0.28	0.38	2.0m³/h	30m	1"	2m	550W*1
322	SQB3-50-48-550(IN)	0.55	0.75	3.0m³/h	50m	1"	2m	550W*2
323	SQB3-65-48-750(IN)	0.75	1	3.0m³/h	65m	1"	2m	550W*2
324	SQB3-65-72-750(IN)	0.75	1	3.0m³/h	65m	1"	2m	550W*3
325	SQB3-65-96-750-A/D	0.75	1	3.0m³/h	65m	1"	2m	550W*3

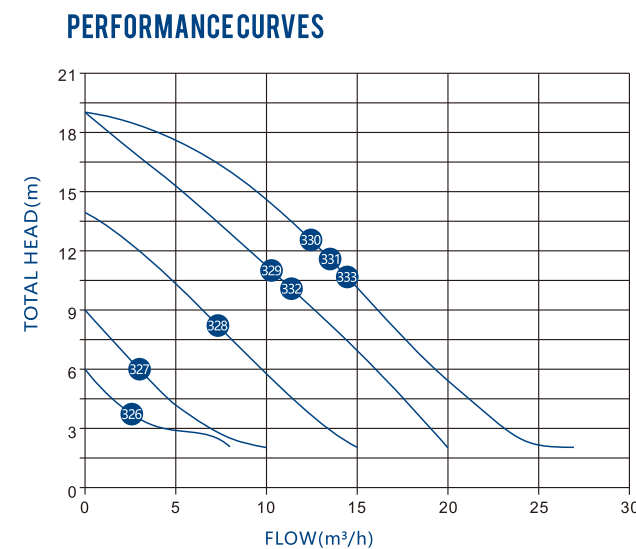

TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (mm)	Cable	Solar Panels
		Kw	Hp					
326	SSP8-6-12-100-IN	0.1	0.13	8m³/h	6m	38*38 (Hose)	2m	550W*1
327	SSP10-9-12-180-IN	0.18	0.24	10m³/h	9m	38*38 (Hose)	2m	550W*1
328	SSP15-14-48-500(IN)	0.5	0.7	15m³/h	14m	48*48/50*50	2m	550W*2
329	SSP20-19-72-900(IN)	0.9	1.2	20m³/h	19m	48*48/50*50	2m	550W*3
330	SSP27-19-110-1200(IN)	1.2	1.6	27m³/h	19m	60*60/63*63	2m	550W*3
331	SSP27-19-150-1200	1.2	1.6	27m³/h	19m	60*60/63*63	2m	550W*4
332	SSP20-19-96-900-A/D	0.9	1.2	20m³/h	19m	48*48/50*50	2m	550W*3
333	SSP27-19-150-1200-A/D	1.2	1.6	27m³/h	19m	60*60/63*63	2m	550W*4




SJ 2.7 - 10 - 12 - 100 - IN

With (IN): internal controller
Without (IN): external controller

Power
Voltage
Max. Head
Max. Flow
SJ Series

PERFORMANCECURVES

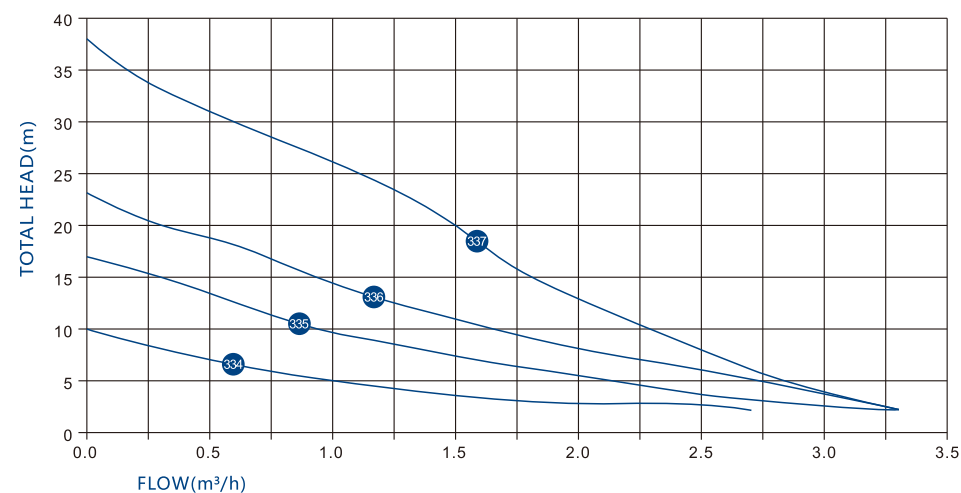

TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
334	SJ2.7-10-12-100-IN	0.1	0.13	2.7m³/h	10m	1"	2m	550W*1
335	SJ3.3-17-18-200-IN	0.2	0.24	3.3m³/h	17m	1"	2m	550W*1
336	SJ3.3-23-24-300-IN	0.3	0.4	3.3m³/h	23m	1"	2m	550W*1
337	SJ3.3-38-48-550-IN	0.55	0.75	3.3m³/h	38m	1"	2m	550W*2




SDJ 4 - 24 - 24 - 300

Power
Voltage
Max. Head
Max. Flow
SDJ Series




PERFORMANCECURVES

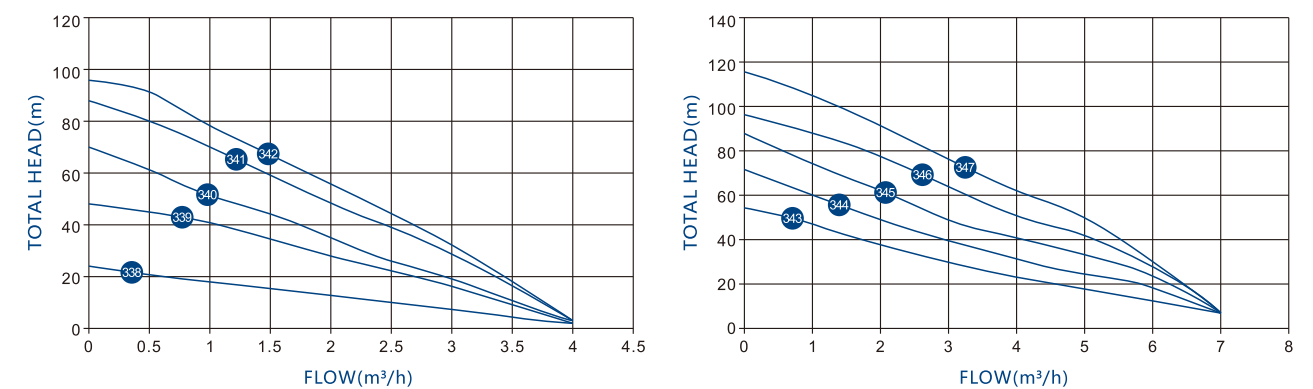


TECHNICAL DATA

NO.	Model	Power	Max. Flow	Max. Head	Cable	Solar Panels
338	SDJ4-24-24-300	300	4m³/h	24m	2m	550W*1
339	SDJ4-48-48-500	500	4m³/h	48m	2m	550W*2
340	SDJ4-70-48-600	600	4m³/h	70m	2m	550W*2
341	SDJ4-88-72-750	750	4m³/h	88m	2m	550W*3
342	SDJ4-96-96-900	900	4m³/h	96m	2m	550W*3
343	SDJ7-54-72-750	750	7m³/h	54m	2m	550W*3
344	SDJ7-72-96-900	900	7m³/h	72m	2m	550W*3
345	SDJ7-88-110-1100	1100	7m³/h	88m	2m	550W*3
346	SDJ7-96-110-1300	1300	7m³/h	96m	2m	550W*4
347	SDJ7-116-110-1500	1500	7m³/h	116m	2m	550W*4

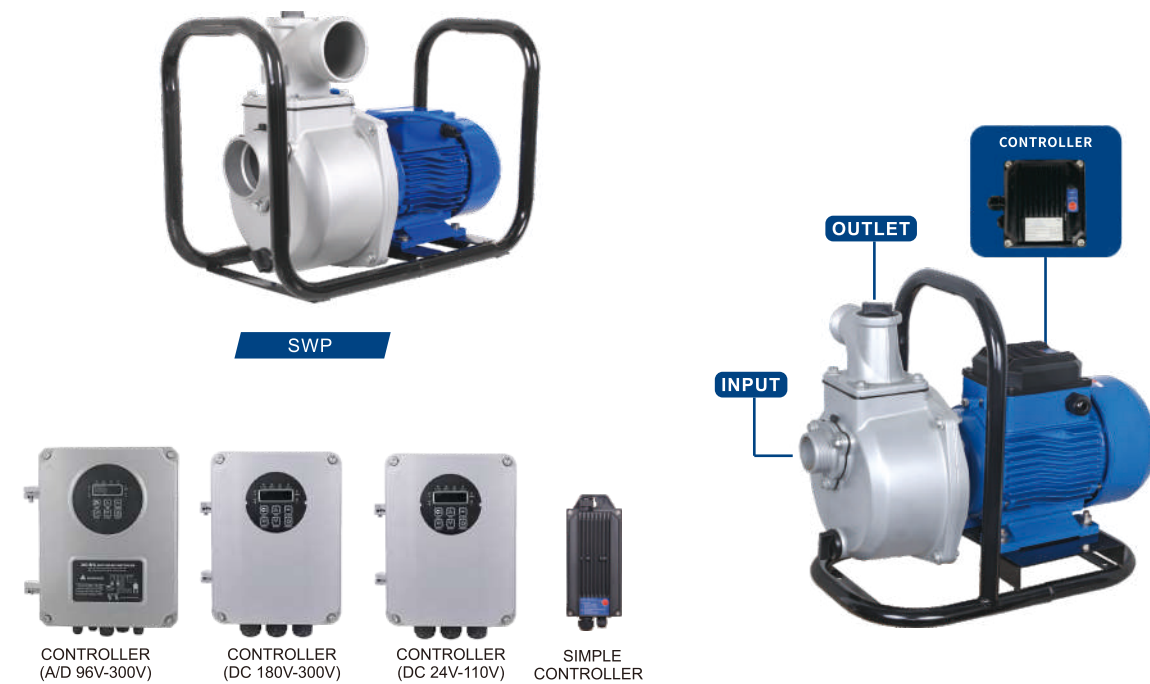

PERFORMANCE CURVES

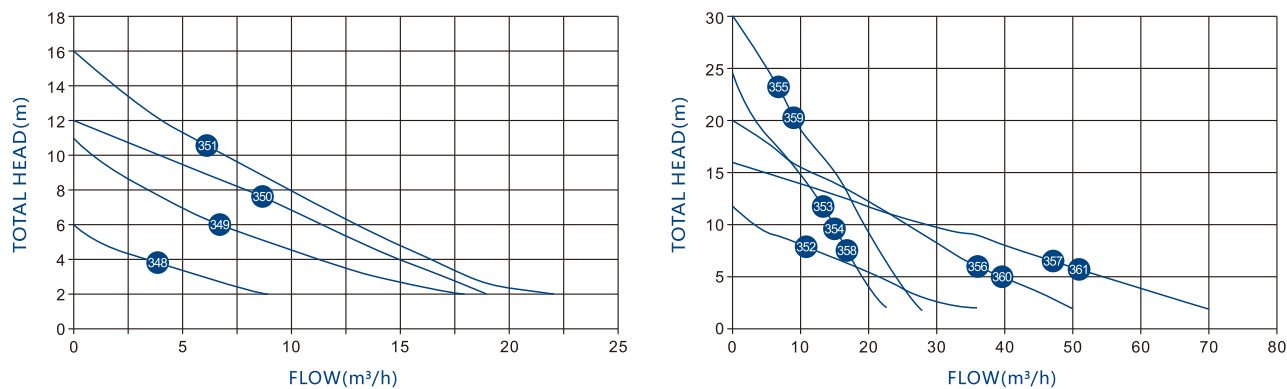


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
348	SWP9-6-24-300-IN	0.3	0.4	9m³/h	6m	1.5"	2m	550W*1
349	SWP18-11-48-600-IN	0.6	0.8	18m³/h	11m	2"	2m	550W*2
350	SWP19-12-72-750-IN	0.75	1	19m³/h	12m	2"	2m	550W*3
351	SWP22-16-110-1100-IN	1.1	1.5	22m³/h	16m	2"	2m	550W*3
352	SWP36-12-110-1100-IN	1.1	1.5	36m³/h	12m	3"	2m	550W*3
353	SWP23-25-110-1500	1.5	2	23m³/h	25m	2"	2m	550W*4
354	SWP23-25-180-1500	1.5	2	23m³/h	25m	2"	2m	550W*5
355	SWP28-30-280-2200	2.2	3	28m³/h	30m	2"	2m	550W*7
356	SWP50-20-280-2200	2.2	3	50m³/h	20m	3"	2m	550W*7
357	SWP70-16-280-2200	2.2	3	70m³/h	16m	4"	2m	550W*7
358	SWP23-25-180-1500-A/D	1.5	2	23m³/h	25m	2"	2m	550W*5
359	SWP28-30-280-2200-A/D	2.2	3	28m³/h	30m	2"	2m	550W*7
360	SWP50-20-280-2200-A/D	2.2	3	50m³/h	20m	3"	2m	550W*7
361	SWP70-16-280-2200-A/D	2.2	3	70m³/h	16m	4"	2m	550W*7




PERFORMANCE CURVES

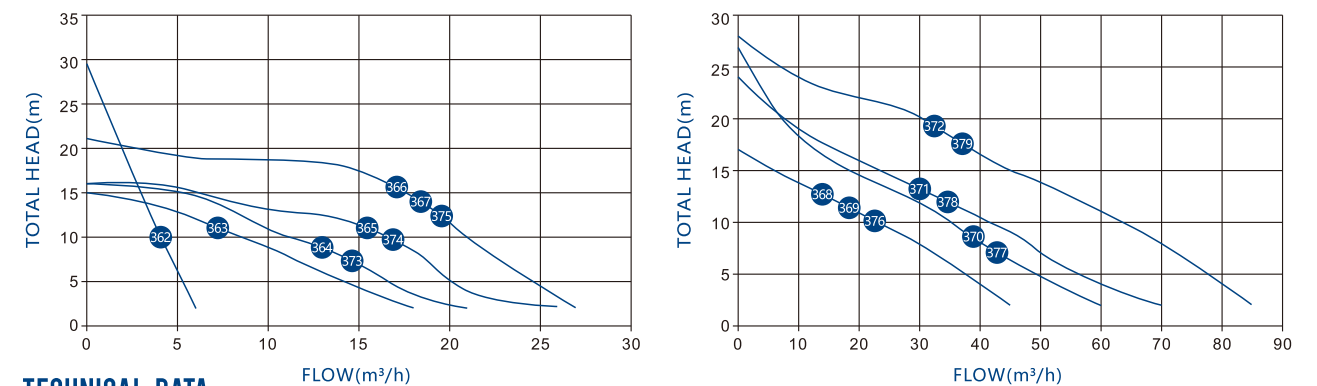


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
362	SCPM6-30-48-550(IN)	0.55	0.75	6m³/h	30m	1"	2m	550W*2
363	SCPM18-15-48-550(IN)	0.55	0.75	18m³/h	15m	2"	2m	550W*2
364	SCPM21-16-72-750(IN)	0.75	1	21m³/h	16m	2"	2m	550W*3
365	SCPM26-16-110-1100(IN)	1.1	1.5	26m³/h	16m	2"	2m	550W*3
366	SCPM27-21-110-1500	1.5	2	27m³/h	21m	2"	2m	550W*4
367	SCPM27-21-180-1500	1.5	2	27m³/h	21m	2"	2m	550W*5
368	SCPM45-17-110-1500	1.5	2	45m³/h	17m	3"	2m	550W*4
369	SCPM45-17-180-1500	1.5	2	45m³/h	17m	3"	2m	550W*5
370	SCPM60-27-280-2200	2.2	3	60m³/h	27m	3"	2m	550W*7
371	SCPM70-24-280-2200	2.2	3	70m³/h	24m	4"	2m	550W*7
372	SCPM85-28-300-3000	3	4	85m³/h	28m	4"	2m	550W*8
373	SCPM21-16-96-750-A/D	0.75	1	21m³/h	16m	2"	2m	550W*3
374	SCPM26-16-150-1100-A/D	1.1	1.5	26m³/h	16m	2"	2m	550W*4
375	SCPM27-21-180-1500-A/D	1.5	2	27m³/h	21m	2"	2m	550W*5
376	SCPM45-17-180-1500-A/D	1.5	2	45m³/h	17m	3"	2m	550W*5
377	SCPM60-27-280-2200-A/D	2.2	3	60m³/h	27m	3"	2m	550W*7
378	SCPM70-24-280-2200-A/D	2.2	3	70m³/h	24m	4"	2m	550W*7
379	SCPM85-28-300-3000-A/D	3	4	85m³/h	28m	4"	2m	550W*8

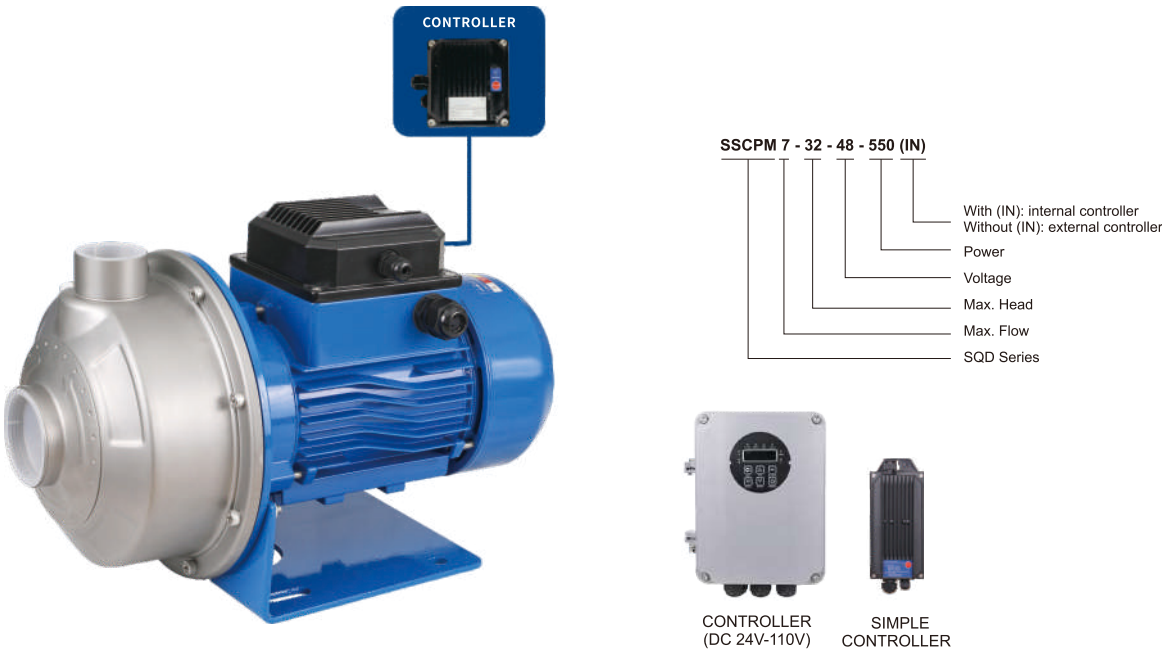

PERFORMANCECURVES

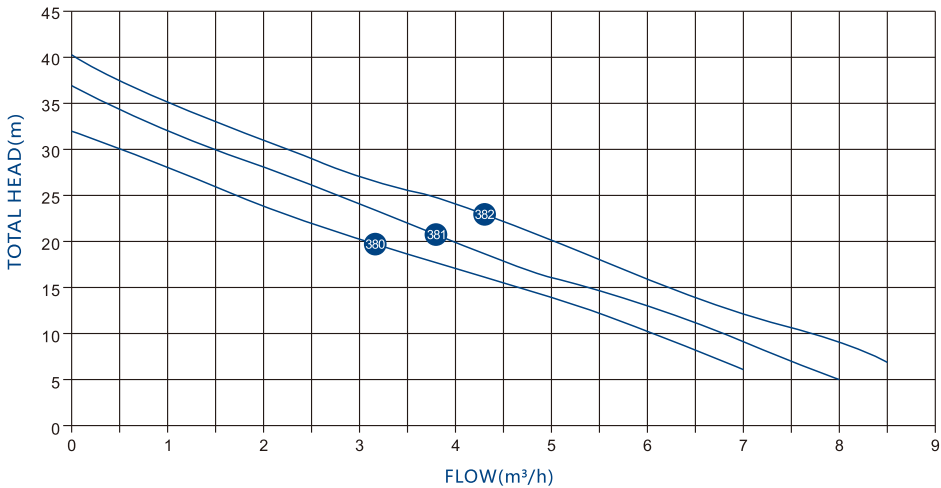


TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
380	SSCPM7-32-48-550(IN)	0.55	0.75	7m³/h	32m	1.25*1"	2m	
381	SSCPM8-37-72-750(IN)	0.75	1	8m³/h	37m	1.25*1"	2m	
382	SSCPM8.5-40-72-900(IN)	0.9	1.2	8.5m³/h	40m	1.25*1"	2m	



PERFORMANCECURVES

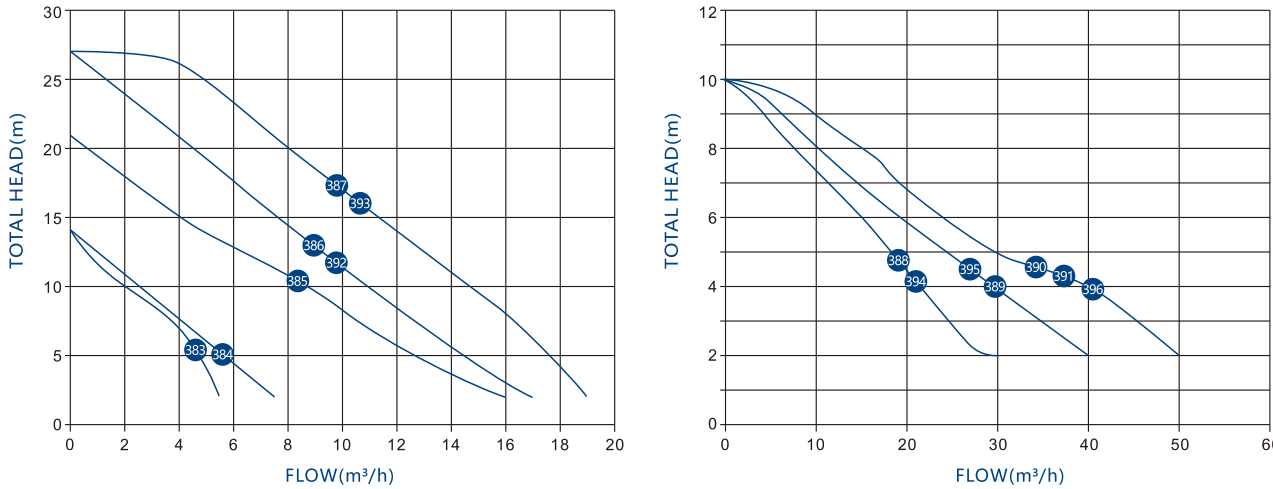

TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
383	SQD5.5-14-24-300(IN)	0.3	0.4	5.5m³/h	14m	1"	5m	550W*1
384	SQD7.5-14-24-300(IN)	0.3	0.4	7.5m³/h	14m	1.5"	5m	550W*1
385	SQD16-21-48-600(IN)	0.6	0.8	16m³/h	21m	2"	5m	550W*2
386	SQD17-27-72-750(IN)	0.75	1	17m³/h	27m	2"	5m	550W*3
387	SQD19-27-110-1100(IN)	1.1	1.5	19m³/h	27m	2"	5m	550W*3
388	SQD30-10-72-750	0.75	1	30m³/h	10m	1"	5m	550W*3
389	SQD40-10-110-1100	1.1	1.5	40m³/h	10m	1.5"	5m	550W*3
390	SQD50-10-110-1500	1.5	2	50m³/h	10m	2"	5m	550W*4
391	SQD50-10-180-1500	1.5	2	50m³/h	10m	2"	5m	550W*5
392	SQD17-27-96-750-A/D	0.75	1	17m³/h	27m	2"	5m	550W*3
393	SQD19-27-150-1100-A/D	1.1	1.5	19m³/h	27m	3"	5m	550W*4
394	SQD30-10-96-750-A/D	0.75	1	30m³/h	10m	3"	5m	550W*3
395	SQD40-10-150-1100-A/D	1.1	1.5	40m³/h	10m	3"	5m	550W*4
396	SQD50-10-180-1500-A/D	1.5	2	50m³/h	10m	3"	5m	550W*5



SWQD

SWQD 24 - 18 - 72 - 750

Power
Voltage
Max. Head
Max. Flow
SWQD Series



CONTROLLER
(A/D 96V-300V)



CONTROLLER
(DC 180V-300V)





CONTROLLER
(DC 24V-110V)



SIMPLE
CONTROLLER

PERFORMANCE CURVES

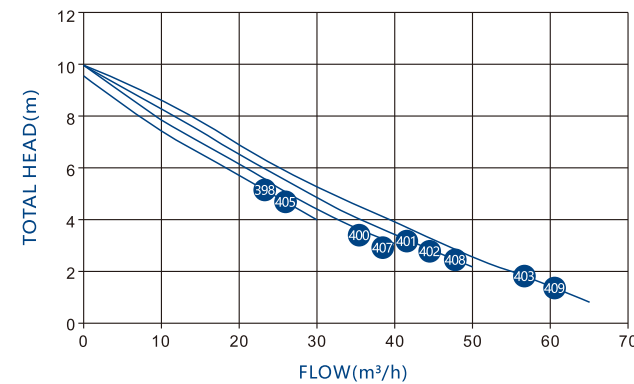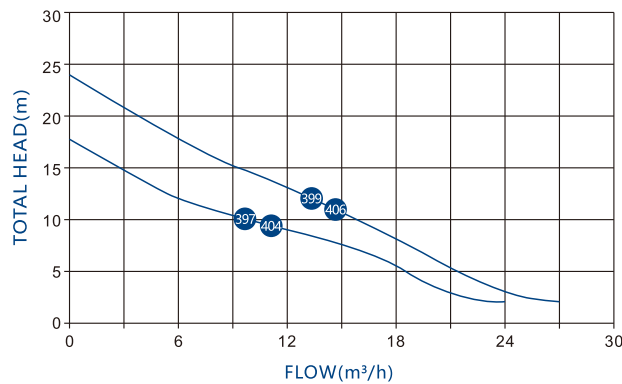

TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
397	SWQD24-18-72-750	0.75	1	24m³/h	18m	2"	5m	550W*3
398	SWQD30-9-72-750	0.75	1	30m³/h	9m	3"	5m	550W*3
399	SWQD27-24-110-1100	1.1	1.5	27m³/h	24m	2"	5m	550W*3
400	SWQD40-10-110-1100	1.1	1.5	40m³/h	10m	3"	5m	550W*3
401	SWQD50-10-110-1500	1.5	2	50m³/h	10m	3"	5m	550W*4
402	SWQD50-10-180-1500	1.5	2	50m³/h	10m	3"	5m	550W*5
403	SWQD65-10-280-2200	2.2	3	65m³/h	10m	4"	5m	550W*7
404	SWQD24-18-96-750-A/D	0.75	1	24m³/h	18m	2"	5m	550W*3
405	SWQD30-9-96-750-A/D	0.75	1	30m³/h	9m	3"	5m	550W*3
406	SWQD27-24-150-1100-A/D	1.1	1.5	27m³/h	24m	2"	5m	550W*4
407	SWQD40-10-150-1100-A/D	1.1	1.5	40m³/h	10m	3"	5m	550W*4
408	SWQD50-10-180-1500-A/D	1.5	2	50m³/h	10m	3"	5m	550W*5
409	SWQD65-10-280-2200-A/D	2.2	3	65m³/h	10m	4"	5m	550W*7



CONTROLLER
(A/D 96V-300V)



CONTROLLER
(DC 180V-300V)



CONTROLLER
(DC 24V-110V)



SIMPLE
CONTROLLER

TECHNICAL DATA

NO.	Model	Power		Max. Flow	Max. Head	Outlet (inch)	Cable	Solar Panels
		Kw	Hp					
410	SA20-5-24-370	0.37	0.5	20m³/h	5m		2m	550W*3
411	SA27-5-72-750	0.75	1	27m³/h	5m	3"	2m	550W*3
412	SA32-7-110-1100	1.1	1.5	32m³/h	7m	3"	2m	550W*4
413	SA43-7-110-1500	1.5	2	43m³/h	7m	3"	2m	550W*5
414	SA43-7-180-1500	1.5	2	43m³/h	7m	3"	2m	550W*7
415	SA60-5-280-2200	2.2	3	60m³/h	5m	4"	2m	550W*3
416	SA27-5-96-750-A/D	0.75	1	27m³/h	5m	3"	2m	550W*4
417	SA32-7-150-1100-A/D	1.1	1.5	32m³/h	7m	3"	2m	550W*5
418	SA43-7-180-1500-A/D	1.5	2	43m³/h	7m	3"	2m	550W*7
419	SA60-5-280-2200-A/D	2.2	3	60m³/h	5m	4"	2m	550W*7



Solar Aerator

TECHNICAL DATA

NO.	Model	Power		Oxygenation rate	Covering Area (m²)	QTY of impeller	Cable	Solar Panels
		Kw	Hp					
420	SWA-110-1500	1.5	2	≥ 1.1	2000-6000	4	2m	550W*4
421	SWA-180-1500	1.5	2	≥ 1.1	2000-6000	4	2m	550W*5
422	SWA-280-2200	2.2	3	≥ 1.5	2665-8000	6	2m	550W*7



Solar Paddle Wheel Aerator

NO.	Model	Power		Oxygenation rate	Covering Area (m²)	QTY of impeller	Cable	Solar Panels
		Kw	Hp					
423	SWA-180-1500-A/D	1.5	2	≥ 1.1	2000-6000	4	2m	550W*5
424	SWA-280-2200-A/D	2.2	3	≥ 1.5	2665-8000	6	2m	550W*7

TECHNICAL DATA

NO.	ITEM	Voltage	P ₂		Oxygenation rate (kg/h)	Covering Area (m²)	Solar Panel		Solar Panels
			KW	HP			open voltage	power	
425	SIA-110-1500	110V	1.5	2	≥ 1.6	2000-4000	<210V	≥2000W	550W*4
426	SIA-180-1500	180V	1.5	2	≥ 1.6	2000-4000	<430V	≥2000W	550W*5



Solar Impeller Aerator

NO.	ITEM	AC Voltage	DC Voltage	P ₂		Oxygenation rate (kg/h)	Covering Area (m²)	Solar Panel		Solar Panels
				KW	HP			open voltage	power	
427	SIA-180-1500-A/D	110V-240V	60V-430V	1.5	2	≥ 1.6	2000-4000	<430V	≥ 2000W	550W*5
428	SIA-280-2200-A/D	180V-240V	60V-430V	2.2	3	≥ 1.8	2665-5320	<430V	≥ 3000W	550W*7
429	SIA-300-3000-A/D	350V-460V	60V-430V	3	4	≥ 4.5	2665-5328	<800V	≥ 4000W	550W*8

TECHNICAL DATA

NO.	ITEM	Voltage	P ₂		Oxygenation rate (kg/h)	Covering Area (m²)	Solar Panel		Solar Panels
			KW	HP			open voltage	power	
430	HD-SPQ-110-1100	110V	1.1	1.5	≥1.1	2000-3500	<220V	≥1500W	550W*3
431	HD-SPQ-110-1500	110V	1.1	1.5	≥1.5	3500-5500	<220V	≥2000W	550W*4
432	HD-SPQ-180-1500	180V	1.5	2	≥1.5	3500-5500	<430V	≥2000W	550W*5
433	HD-SPQ-280-2200	280V	2.2	3	≥3	5500-8000	<430V	≥3000W	550W*7

NO.	ITEM	AC Voltage	DC Voltage	P ₂		Oxygenation rate (kg/h)	Covering Area (m²)	Solar Panel		Solar Panels
				KW	HP			open voltage	power	
434	SPQ-180-1500-A/D	110V-240V	60V-430V	1.5	2	≥1.5	3500-5500	<430V	≥2000W	550W*5
435	SPQ-280-2200-A/D	110V-240V	60V-430V	2.2	3	≥3	5500-8000	<430V	≥3000W	550W*7



Steam explosion

SOLAR CONTROLLER

 CONTROLLER (DC 24V-110V)	 CONTROLLER (DC 180V-300V)	 CONTROLLER (A/D 96V-300V)
 AUTO TYPE (3000W-5500W)	 MANUAL TYPE(15KW-22KW)	 MANUAL TYPE (3000-11000W)
 LV CONTROLLER	 HYBIRD CONTROLLER	 SIMPLE CONTROLLER


CONTROLLER AND PUMP MATACHING METHOD

CONTROLLER TYPE	Adaptable Pump	Max.Input Current(A)	Max.Open Circuit Voltage(V)	AC Voltage(V)	MPPT Voltage Range(V)	Working Temperature °C	Voltage Range (V)
24	Rated 24V	18	<60	/	30-48	-15~60	18-60
36	Rated 36V	18	<60	/	30-48	-15~60	18-60
48	Rated 48V	18	<110	/	60-90	-15~60	30-110
72	Rated 72V	18	<170	/	90-120	-15~60	50-170
96/110	Rated 96/110V	18	<220	/	96-150	-15~60	60-220
96-HV	Rated 96V-HV	18	<430	/	96-350	-15~60	80-430
150-HV	Rated 150V-HV	18	<430	/	150-350	-15~60	80-430
180-HV	Rated 180V-HV	18	<430	/	180-350	-15~60	80-430
280-HV	Rated 280V-HV	18	<430	/	280-350	-15~60	80-430
300-HV	Rated 300V-HV	18	<430	/	300-350	-15~60	80-430
96-AD	Rated 96V-AD	18	<430	80~280	96-350	-15~60	80-430
150-AD	Rated 150V-AD	18	<430	80~280	150-350	-15~60	80-430
180-AD	Rated 180V-AD	18	<430	80~280	180-350	-15~60	80-430
280-AD	Rated 280V-AD	18	<430	80~280	280-350	-15~60	80-430
300-AD	Rated 300V-AD	18	<430	80~280	300-350	-15~60	80-430
530-AD	Rated 530V-AD		<780	260~480	480-650	-15~60	200-780

PUMP MODEL (Power-Voltage)	SOLAR PANEL PARAMETER				Control Box Parameter	
	450W		550W			
	G.W.	Volume	G.W.	Volume	Best Working Voltage	Open Voltage
	23kg/pc	1762*1134*35mm	27kg/pc	2278*1134*35mm		
	Vmp	Voc	Vmp	Voc		
	43V	51V	42V	51V		
120W-24V 210W-24V 210W-36V	1 pcs	1 pcs	30V-48V	<60V		
280W-24V 300W-24V	1 pcs	1 pcs	30V-48V	<60V		
400W-48V	2 pcs in series	2 pcs in series	60V-90V	<110V		
500W-48V 550W-48V	2 pcs in series	2 pcs in series	60V-90V	<110V		
600W-48V	2 pcs in series	2 pcs in series	60V-90V	<110V		
600W-72V	2 or 3 pcs in series	2 or 3 pcs in series	90V-120V	<170V		
750W-72V	3 pcs in series	2 or 3 pcs in series	90V-120V	<170V		
900W-72V	3 pcs in series	3 pcs in series	90V-120V	<170V		
1100W-110V	4 pcs in series	3 pcs in series	110V-150V	<220V		
1200W-110V 1300W-110V	4 pcs in series	3 pcs in series	110V-150V	<220V		
1500W-110V	4 pcs in series	4 pcs in series	110V-150V	<220V		
750W-96V	3 pcs in series	3 pcs in series	96V-350V	<430V		
1100W-150V	4 pcs in series	4 pcs in series	150V-350V	<430V		
1300W-170V	5 pcs in series	5 pcs in series	170V-350V	<430V		
1500W-180V	5 pcs in series	5 pcs in series	180V-350V	<430V		
2200W-280V	7 pcs in series	7 pcs in serie	280V-350V	<430V		
3000W-300V	8 pcs in series	8 pcs in serie	300V-350V	<430V		
3000W-530V	12 pcs in series	12 pcs in series	480V-650V	<780V		
4000W-530V	12 pcs in series	12 pcs in series	480V-650V	<780V		
5500W-530V	15 pcs in series	13 pcs in series	480V-650V	<780V		
7500W-530V	total 24pcs, 12pcs in series and in 2 parallels	total 26pcs, 13pcs in series and in 2 parallels	480V-530V	<780V		
9200W-530V	total 30pcs, 15pcs in series and in 2 parallels	total 26pcs, 13pcs in series and in 2 parallels	480V-530V	<780V		
11KW-530V	total 36pcs, 12pcs in series and in 3 parallels	total 30pcs, 15pcs in series and in 2 parallels	480V-530V	<780V		
15KW-530V	total 48pcs, 12pcs in series and in 4 parallels	total 39pcs, 13pcs in series and in 3 parallels	480V-530V	<780V		
22KW-530V	total 60pcs, 12pcs in series and in 5 parallels	total 52pcs, 13pcs in series and in 4 parallels	480V-530V	<780V		



FREE ACCESSORIES

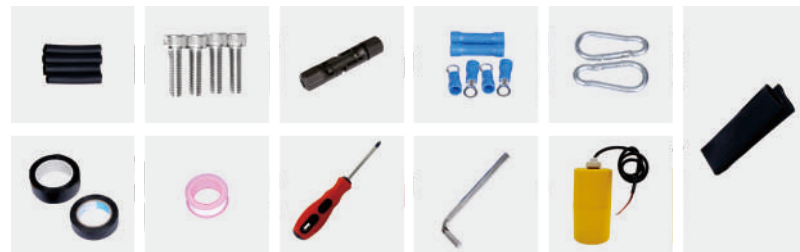

FREE ACCESSORIES



FREE ACCESSORIES

