



UNIVERSITY
OF SOUTHERN
QUEENSLAND

Incorporating Security into Healthcare Applications of WSNs

A dissertation of an investigation submitted in fulfilment
for the award of Doctor of Philosophy (DPHD),
at the University of Southern Queensland

A dissertation is submitted by
Mishall Al-Zubaidie

February 2020

Abstract

The potential of applying electronic health record (EHR), electronic medical record (EMR) and healthcare wireless sensor network (HWSN) in the healthcare (HC) industry are tremendous and boundless. However, the security and privacy issues of HC data must be addressed with great caution and accessibility. The EHR system security and privacy are related to the issues of confidentiality of protected health information (PHI), the integrity of EMRs data and authentication/authorisation of users. Last but not least, EHR data are collecting, communicating among different users' access, along with the sharing of the patients' health data.

In this thesis, we will develop and build up a prototypical EMR-based and EHR-based HC system. This project includes authentication (Robust Authentication Model for Healthcare Users (RAMHU)), authorisation (Pseudonymization and Anonymization with the XACML (PAX)) and data collection (Reliable and Efficient Integrity Scheme of Data Collection in HWSN (REISCH)) schemes. The proposed HC system will be implemented by: (1) taking advantage of EHR repository and users' authentication; (2) relying on an extensible access control markup language (XACML) to secure and authorise communicate EHR among HC providers and patients; and (3) using HWSN, a technique to automatically collect patients' data in EMR repository. In this project, we propose using elliptic curve cryptography (ECC), elliptic curve digital signature algorithm (ECDSA) and lightweight hash algorithms. Because these algorithms provide high performance and security in HWSN and large health environments compared other asymmetric and symmetric algorithms. But because of the increasing attacks on HWSN and EMR/EHR repository, some protocols are needed to improve security and efficiency against various attacks. Also, a critical component of the proposed HC system is a patient medical record (information and data) repository or patient's HC database server. Patients' database in the server needs protection and data management. We propose the use of XML/XACML to manage and access control users (patients and HC providers) to the database. Such a prototype of the HWSN based system would provide better HC services with security to various HC professionals, including patients.

The results of theoretical and experimental security analysis prove that RAMHU, PAX and REISCH schemes are safe against known attacks. Also, the results of theoretical and experimental performance indicate that our schemes are performance efficient. Especially, we have examined REISCH's performance because it uses HWSN

that is constrained resources. REISCH saves %24 live sensors better than the original algorithm (ECDSA).

Certification of Thesis

This thesis is entirely the work of Mishall Al-Zubaidie except where otherwise acknowledged. The work is original and has not previously been submitted for any other award, except where acknowledged.

Signed _____
Mishall Al-Zubaidie
Date _____

Signed _____
Principle Supervisor
Dr. Zhongwei Zhang
Date _____

Signed _____
Associate Supervisor
Associate Professor Ji Zhang
Date _____

Acknowledgements

I like to acknowledge this thesis to many beloved parties.

First of all, I would like to thank Almighty God, for protection, inspiration, guidance, strength, sanity, wellness and continuity to perform my study.

Secondly, I would like to thank Thi-Qar university and ministry of Iraqi higher education and scientific research to give me the opportunity to complete my doctorate study.

Thirdly, I would like to thank the supervision team on my thesis by Dr. Zhongwei Zhang and Dr. Ji Zhang. During my study, they gave me advice, patience, motivation, support and help overcome obstacles, their critical assessment was a great reason to make the dream come fact.

Fourthly, I would like to thank Dr. Barbara Harmes for continuous revision of research and thesis chapters. I also would like to grateful and express my appreciation to Sandara for proofreading my thesis.

Fifthly, I would like to acknowledge and appreciate the support of the University of Southern Queensland and Faculty of Health, Engineering and Sciences and the Australian Commonwealth Government by the Research Training Program (RTP) Fees Offset scheme during my research. I am grateful to them for enlightening and supporting me in the research period.

Finally, I would like to acknowledge all the support and encouragement given by my family and friends. Each of you have contributed in your own special way and helped me during difficult times. The work presented in this thesis would not have been possible if it were not for the help, support, guidance, and friendship of a number of individuals. For those who are not specifically mentioned, I also thank you.

Dedication

I would like to dedicate this thesis:

To my dear father ...

Hammed Al-Zubaidie who by, planted in my heart the love of knowledge. That shining light that taught me the meaning of sacrifice and fulfillment.

To my dear mother ...

Eeda Mutar, Paradise in this world and the Hereafter, my love and all my being, the symbol of purity and chastity, the beacon of peace and tenderness, the truth of eternal fulfillment, the inexhaustible river of tenderness.

To my dear wife ...

Hawa Bahedh, a city of roses and a sincere passion for the taste of honey, who helped me through my difficult years of study, that gave me love, respect, attention, trust and patience.

To my dear friend...

Loretta Gomez, who eased the difficulties of alienation, removed the darkness, and planted the smile on my face.

To my dear brothers and sisters ...

Who taught me the meaning of virtuous life and true brotherhood, who accompanied me and helped me in all the different forums of science.

To my dear country ...

Great Iraq, the country of civilizations of science and knowledge, my nostalgia for all my moments, who helped me in my studies.

To all my teachers, to all who helped me, to every reader of this thesis, who were the inspiration in achieving my dream. To all of them, I dedicate my humble thesis.

Table of Contents

Abstract	i
Certification of Thesis	iii
Acknowledgements	iv
Dedication	v
List of Figures	xii
List of Tables	xv
List of Abbreviations	xvi
List of Publications	xx
Chapter 1 – Introduction	1
1.1 Health Sector	1
1.2 Information and Communications Technology	2
1.3 Security and Privacy	2
1.3.1 Encryption Technique	3
1.3.2 Signature Technique	3
1.4 Significance of the Project	4
1.5 Research Objectives, Questions and Our Contributions	5
1.5.1 Research Objectives	5
1.5.2 Specific Research Questions	6
1.5.3 Our Contributions	6
1.6 Organisation of This Thesis	7
1.7 Summary of the Chapter	8
Chapter 2 – Literature review	9
2.1 Healthcare Applications	10
2.1.1 Electronic Medical Record	11
2.1.2 Electronic Health Record	12

2.1.3	Cons and Pros of Electronic Record	13
2.1.4	Integration of EMR and EHR	14
2.2	WSN in HC Applications	15
2.2.1	Architecture of HWSN	15
2.2.2	Security and Privacy in HWSN	16
2.3	Security of HC Applications	18
2.3.1	Security Issues	19
2.3.1.1	Communication Security	19
2.3.1.2	Datasets Security	20
2.3.1.3	WSN Security	20
2.3.2	Possible Attacks on HC Applications	20
2.3.3	Security Requirements to HC Applications	21
2.3.4	Security Protocols in HC Applications	22
2.4	Related Work	26
2.4.1	Users' Authentication to HC Applications	27
2.4.2	Users' Authorisation to HC Application	30
2.4.3	Storage of Users' Data	33
2.5	Summary of the Chapter	35

Chapter 3 – Cryptography Techniques, General Model and Methodology 36

3.1	Cryptography Techniques	36
3.1.1	Techniques Proposed to Use in the Study	37
3.1.1.1	Proposed Techniques for our Authentication Scheme	37
3.1.1.1.1	Threat Model of Authentication Scheme	38
3.1.1.1.2	Elliptic Curve Integrated Encryption Scheme (ECIES)	38
3.1.1.1.3	Lightweight Hash-Function Algorithm	41
3.1.1.1.4	One Time Password (OTP)	43
3.1.1.1.5	Mutual Authentication	44
3.1.1.1.6	Media Access Control (MAC) Address	45
3.1.1.2	Proposed Techniques for our Authorisation Scheme	46
3.1.1.2.1	Threat Model of Authorisation Scheme	46
3.1.1.2.2	Elliptic Curve Digital Signature Algorithm (ECDSA)	47
3.1.1.2.3	Access Control in EHR Systems	48
3.1.1.2.4	Distributed AC Implementation Technology	50
3.1.1.2.5	Shamir Scheme	51
3.1.1.3	Proposed Techniques for our Storage Scheme	52

3.1.1.3.1	Threat Model of Storage Scheme	52
3.1.1.3.2	SHA Hash Function	53
3.1.1.3.3	BLAKE Hash Function	55
3.1.1.3.4	De-identification Mechanism	56
3.1.1.3.5	Efficient HWSN Data Management Using XML	57
3.1.1.3.6	Homomorphic Scheme	58
3.1.2	To Get Familiar with the HC Domain and the Development of EMR/EHR System	59
3.1.3	To Propose a Model/Framework of Integrating WSN with HC Application	60
3.1.4	To Design Protocols to Improve the Security of Users' Authentication in EHR	61
3.1.5	To Design Protocols to Improve the Privacy of Users' Authorisation in EHR	64
3.1.6	To Design Protocols to Improve the Security of WSN and EMR	66
3.2	Summary of the Chapter	69
Chapter 4 – Authentication Scheme		70
4.1	Information Security in EHR Systems	70
4.1.1	Our Contributions	71
4.2	The Proposed Authentication Scheme	72
4.2.1	Network Model	72
4.2.2	Security Goals	73
4.2.3	Proposed Authentication Scheme Protocols	75
4.2.3.1	Initial Setup Protocol	75
4.2.3.2	Registration and Login Protocol	76
4.2.3.3	Authentication Protocol	79
4.2.3.4	Password Update Protocol	82
4.2.3.5	Revocation Protocol	84
4.3	Summary of the Chapter	86
Chapter 5 – Authorisation Scheme		88
5.1	Data Security in EHR Systems	88
5.1.1	Our Contributions	90
5.2	Our Proposed Authorisation Model	91
5.2.1	Network Model	91
5.2.2	Security Goals	92
5.2.3	Implementation of PAX	94
5.2.3.1	EHR's Users in PAX	94

5.2.3.2	Users' Pseudonym in PAX	95
5.2.3.3	Using ECDSA's Signatures	96
5.2.3.4	Policies Administration in PAX	96
5.2.3.5	Clients' Requests and Server's Responses	96
5.2.3.6	Using Shamir Scheme	98
5.2.4	PAX Authorisation Protocols	98
5.2.4.1	Authorisation Protocols for Direct Subjects and Objects	98
5.2.4.2	Authorisation Protocols for Indirect Subjects and Objects	103
5.3	Summary of the Chapter	106
Chapter 6 – Data Storage Scheme		108
6.1	Security of Data Collection in EMR Systems	108
6.1.1	Our Contributions	109
6.2	Our Proposed Data Storage Model	110
6.2.1	Network Model	110
6.2.2	Security Goals	111
6.2.3	REISCH's Scheme	112
6.2.3.1	Entities Preparation	112
6.2.3.2	Using ECDSA-BLAKE2bp	113
6.2.3.3	Applying Camouflage Signature	113
6.2.3.4	Implementing Homomorphic	114
6.2.3.5	REISCH's Protocols	114
6.2.3.5.1	Protocol1 between <i>SNs</i> and <i>CHs</i>	115
6.2.3.5.2	Protocol2 between <i>CHs</i> and <i>LS</i>	115
6.2.3.5.3	Protocol3 between <i>LS</i> and <i>CS</i>	117
6.3	Summary of the Chapter	119
Chapter 7 – Discussion and Analysis		120
7.1	Security Testing Tools	120
7.1.1	BAN	120
7.1.2	AVISPA	123
7.2	Discussion and Analysis of RAMHU Scheme	126
7.2.1	Security Analysis	126
7.2.1.1	Theoretical Security Analysis	126
7.2.1.1.1	Attacks Analysis on RAMHU Scheme	126
7.2.1.1.2	RAMHU Scheme with BAN	132
7.2.1.2	Experimental Security Analysis	134
7.2.1.2.1	RAMHU Scheme with AVISPA	134

7.2.1.2.2	Simulation Results	137
7.2.1.3	Security Comparison	140
7.2.2	Performance Analysis	141
7.2.2.1	Theoretical Performance Analysis	141
7.2.2.2	Experimental Performance Analysis	143
7.2.2.3	Performance Comparison	144
7.3	Discussion and Analysis of PAX Scheme	146
7.3.1	Direct and Indirect Users Scenarios in PAX	146
7.3.2	Security Analysis	148
7.3.2.1	Theoretical Security Analysis	149
7.3.2.1.1	Attacks Analysis on PAX Scheme	149
7.3.2.1.2	PAX Scheme with BAN	151
7.3.2.2	Experimental Security Analysis	154
7.3.2.2.1	PAX Scheme with AVISPA	154
7.3.2.2.2	Simulation Result	156
7.3.2.3	Security Comparison	159
7.3.3	Performance Analysis	162
7.3.3.1	Theoretical Performance Analysis	162
7.3.3.2	Experimental Performance Analysis	163
7.3.3.3	Performance Comparison	165
7.4	Discussion and Analysis of Storage Scheme	166
7.4.1	Security Analysis	167
7.4.1.1	Theoretical Security Analysis	167
7.4.1.1.1	Attacks Analysis on REISCH Scheme	167
7.4.1.1.2	REISCH Scheme with BAN	169
7.4.1.2	Experimental Security Analysis	172
7.4.1.2.1	REISCH Scheme with AVISPA	172
7.4.1.2.2	Simulation Results	174
7.4.1.3	Security Comparison	175
7.4.2	Performance Analysis	179
7.4.2.1	Theoretical Performance Analysis	179
7.4.2.2	Experimental Performance Analysis	179
7.4.2.3	Performance Comparison	184
7.5	Summary of the Chapter	185
Chapter 8 – Conclusions		187
8.1	Conclusions of the Dissertation	187
8.2	Future Directions	188
8.3	Summary of the Chapter	190

References	191
-------------------	------------

List of Figures

2.1	Integration EMRs with EHR repository	15
2.2	Architecture of healthcare based WSN (Zhang et al. 2014)	17
2.3	An attack on information security (intruder 1) and device se- curity (intruder 2)	18
3.1	The project architecture	37
3.2	Arithmetic operations in ECC hierarchy	39
3.3	The PHOTON hash function	43
3.4	Types of authentication schemes	45
3.5	Scheme of RBAC model.	49
3.6	Scheme of ABAC model.	50
3.7	Scheme of XACML	51
3.8	The Merkle-Damgard construction of SHA (0, 1 and 2) hash functions	54
3.9	Architecture of BLAKE hash function	55
3.10	Taxonomy of HC users	60
3.11	The proposed project model in HC environment	62
3.12	Homomorphic and 1 scalar multiplication with signatures	67
3.13	Comparison of hash functions speed	68
4.1	General network model	73
4.2	Registration and login protocol	77
4.3	Login protocol	78
4.4	NetworkAddress path in system registry	79
4.5	Authentication protocol	80
4.6	Password update protocol	83
4.7	Revocation protocol	85
5.1	PAX model	92
5.2	Authorisation of direct and indirect users	93
5.3	PAX policy	97
5.4	C_i 's request	97
5.5	Authorisation of direct users	99

5.6	Protocol of PAX model between C_i and CS	100
5.7	Protocol of PAX model between CS and AS	101
5.8	Protocol of PAX model between AS and DS	103
5.9	Protocol of PAX model between AS , CS and C_i	104
5.10	Authorisation of indirect users	105
5.11	Protocol of PAX model for indirect users	106
6.1	General REISCH model	111
6.2	Camouflage signature	114
6.3	Data collection protocol	116
6.4	Data aggregation protocol	117
6.5	Data storage protocol	118
7.1	AVISPA's interface	125
7.2	AVISPA's architecture (The AVISPA Team 2006)	126
7.3	RAMHU's framework in AVISPA	135
7.4	C_i role of RAMHU in HLPSL	136
7.5	CS role of RAMHU in HLPSL	138
7.6	AS role of RAMHU in HLPSL	138
7.7	Session, environment, and goal roles of RAMHU in HLPSL	139
7.8	Simulation result of RAMHU using OFMC backend	139
7.9	Simulation result of RAMHU using CL-AtSe backend	139
7.10	Implementations of PHOTON 256-bit and ECIES 256-bit	144
7.11	Users' scenarios in PAX	148
7.12	Part of Sarah's data	148
7.13	Part of a group of medical records for patients	149
7.14	PAX's framework in AVISPA	155
7.15	C_i role of PAX in HLPSL	156
7.16	CS role of PAX in HLPSL	157
7.17	AS role of PAX in HLPSL	158
7.18	DS role of PAX in HLPSL	159
7.19	Session, environment, and goal roles of PAX in HLPSL	160
7.20	Simulation result of PAX using CL-AtSe backend	161
7.21	Implementations of ECDSA 256-bit	164
7.22	REISCH's framework in AVISPA	173
7.23	SN_i role of REISCH in HLPSL	174
7.24	CH_i role of REISCH in HLPSL	174
7.25	LS role of REISCH in HLPSL	176
7.26	CS role of REISCH in HLPSL	177
7.27	Session, environment, and goal roles of REISCH in HLPSL	178

7.28	Simulation result of REISCH using OFMC backend	178
7.29	Simulation result of REISCH using CL-AtSe backend	178
7.30	Comparison of SHA and BLAKE2 with 1MB data	181
7.31	Execution time of ECDSA-SHA1 and ECDSA-BLAKE2bp with 1MB data	181
7.32	Minimum execution time of hash functions with 1MB data . .	182
7.33	Maximum execution time of hash functions with 1MB data . .	182
7.34	Average execution time of hash functions with 1MB data . .	182
7.35	Minimum execution time of ECDSA algorithms with 1MB data	183
7.36	Maximum execution time of ECDSA algorithms with 1MB data	183
7.37	Average execution time of ECDSA algorithms with 1MB data .	183
7.38	Comparison of alive <i>SNs</i>	184

List of Tables

2.1	Comparison between EMR and EHR	13
2.2	Keys sizes and some information for public key algorithms	23
3.1	Comparison of lightweight hash function algorithms	43
3.2	Comparison of SHA family	54
3.3	Versions of BLAKE hash function	56
5.1	Internal and external pseudonyms of users	95
5.2	Parts of <i>SP</i> and <i>OP</i>	95
7.1	Some HLSPL’s symbols and statements	125
7.2	Comparison of resistance in repelling the various threats between RAMHU and other authentication schemes	142
7.3	Comparison of computation cost between RAMHU and existing authentication schemes	146
7.4	Comparison of security features between PAX and other authorisation schemes	161
7.5	Comparison of performance between PAX and existing authorisation schemes	167
7.6	Comparison of security features between REISCH and other data collection schemes	179
7.7	REISCH’s simulation parameters	180
7.8	REISCH’s computational processes	180
7.9	Comparison of ECDSA’s procedures	186

List of abbreviations

\oplus	Exclusive or operation
\parallel	Concatenation operation
A	Aggregation function
AS	Attributes server entity
ASK_{pu_i}, ASK_{pr_i}	AS public and private keys
$ASS_j/ASSig_j$	Signature generated by AS and j is signature number
C_i	Client entity
$C_iK_{pu_i}, C_iK_{pr_i}$	C_i public and private keys
C_iS_j/C_iSig_j	Signature generated by C_i and j is signature number
CH	Cluster head
CM	Check MAC address
CN_i	Client's number
CS	Central server entity
CSK_{pu_i}, CSK_{pr_i}	CS public and private keys
$CSS_j/CSSig_j$	Signature generated by CS and j is signature number
Dec_i	Decryption operation
Dif	Value proves SN_i in the HWSN's area
DS	Data server entity
DSS_j	Signature generated by DS and j is signature number
EI	External intruder

Enc_i	Encryption operation
GM	Get MAC address
$h(.)$	One-way hash function
I	Internal, or external intruder
II	Internal intruder
K_{pu_i}, K_{pr_i}	Public and private keys
LS	Local server
m	Message sent by entity
MID_i	Medical centre identity
MS	Master secret/Master signature
N, SN	Random nonces and random secret nonce
N_{C_i}, N_{CS}, N_{AS}	Nonce random generated by C_i, CS, AS
OP, SP	Object 's pseudonym, subject's pseudonym
OTP_i	One time password to authenticate first time
P	Entity parameters
$Parity$	The value specifies the signature of even/odd
$Pseud$	Pseudonym generated by entities (SN, CH, LS, CS)
$PW_i, tmpPW_i$	C_i 's password, temporary password
R_i	Role of patient, patient relative or provider
RN	The random number generated by entities
RN_{op}, UN_{op}	Role's number, user's number for OP
RN_{sp}, UN_{sp}	Role's number, user's number for SP
RR_i	Revocation reason
S_{ID}, O_{ID}	Subject ID, object ID
$S_N C_H D$	Distance between SN and CH

$S_N L_S D$	Distance between SN and LS
S_R, O_R	Subject role, object role
S_{sp}, S_{op}	Signature of SP , Signature of OP
$SigLS, SigCS$	Signatures generated by LS, CS
$SigSN, SigCH$	Signatures generated by SN, CH
$SigSnEi, SigLsEi$	Random ephemeral value the same length as the signature generated by SN, LS
SL	Sensor location
SN	Sensor
SS	One secret sharing
tm	Temporary
TS	Timestamp generated by entities
TS_{AS}	Timestamp generated by AS
TS_{C_i}	Timestamp generated by C_i
TS_{CS}	Timestamp generated by CS
U	User
UID_i	C_i 's identity
UN_i	User's number
$UP_{CS}^{AS}, MP_{CS}^{AS}$	U and MC pseudonyms sent by CS and verified by AS
$UP_{CS}^{C_i}, MP_{CS}^{C_i}$	U and MC pseudonyms sent by CS and verified by C_i
$UP_{AS}^{CS}, MP_{AS}^{CS}$	U and MC pseudonyms sent by AS and verified by CS
$UP_{C_i}^{CS}, MP_{C_i}^{CS}$	U and MC pseudonyms sent by C_i and verified by CS
UR_i	User's role (patient, patient relative or provider)
dy	Dolev-Yao model
ABAC	Attribute-based access control
DoS	Denial of service

ECC	Elliptic curve cryptography
ECDSA	Elliptic curve digital signature algorithm
ECIES	Elliptic curve integrated encryption scheme
EHR	Electronic health record
EMR	Electronic medical record
HC	Healthcare
HWSN	Healthcare wireless sensor network
MC	Medical centre
MITM	Man in the middle
PAX	Pseudonymization and anonymization with the XACML
PHI	Protected health information
RAMHU	Robust authentication model for healthcare users
RBAC	Role-based access control
REISCH	Reliable and efficient integrity scheme of data collection in HWSN
XACML	Extensible access control markup language
XML	Extensible markup language

List of Publications

These publications based on thesis.

- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019, 'Effcient and secure edsa algorithm and its applications: A survey', *International Journal of Communication Networks and Information Security*, vol. 11, no. 1, pp. 7-35, 2019.
- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019, RAMHU: A new robust lightweight scheme for mutual users authentication in healthcare applications', *Security and Communication Networks*, doi:10.1155/2019/3263902, vol. 2019, pp. 1-26, 2019.
- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019, 'PAX: Using pseudonymization and anonymization to protect patients' identities and data in the healthcare system', *International Journal of Environmental Research and Public Health*, doi:10.3390/ijerph16091490, vol. 16, no. 9, pp. 1-36, 2019.
- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019, 'REISCH: Incorporating Lightweight and Reliable Algorithms into Healthcare Applications of WSNs', submitted to the *Journal of " "*, 2019.

Chapter 1: Introduction

In this chapter, we will introduce the significance of security/privacy, research objectives/questions/contributions to build reliable schemes in the health sector. Networks communication has become extremely important in the exchange and sharing of information/data. This technology has become the modern era technology because of its unique services at the individual and community level. These networks, whether wireless or Internet, are committed to providing fast, efficient and convenient services to users (Dabbagh & Rayes 2019). These services are provided to users by applying sector-specific techniques. Each sector, such as e-health, e-banking, e-commerce, e-vehicular and e-governance requires specific techniques to manage and provide services to users (Al-Zubaidie et al. 2019a). However, the health sector needs more attention because it deals with people's lives and health. Healthcare (HC) providers need accurate and correct information, whether transmitted or stored on servers to diagnose patients' condition (Vijayakumar et al. 2019). All electronic applications in various sectors need security techniques and privacy to protect data and users' information (Gumaei et al. 2019). Security and privacy issues are closely linked to the health sector. Information and communications technology (ICT) also plays a key role in developing techniques to address these issues in the health sector.

1.1 Health Sector

The health sector in the past has suffered from several problems, such as management, access, complexity, storage and protection of medical records (Meri et al. 2019). These problems are reflected negatively on the provision of quality care. Many governments, such as Australia, UK, USA and Canada, are concerned with the health sector to provide citizens with adequate healthcare and to alleviate the suffering of patients. For decades, researchers have continued to develop the health sector through the development of healthcare applications that operate on electronic systems, such as electronic health record (EHR) and electronic medical record (EMR) to provide stakeholders with accurate data in quick time from anywhere. These systems are a huge development in the health sector and health services. This accurate data helps providers review data, diagnose diseases and prescribe medications to

patients. For example, the European Union is actively pursuing research and development in the health sector that has contributed to disease prevention and healthy living (García-Holgado et al. 2019). Given the importance of the health sector, the European Union supports this sector with large amounts of up to €449.4 million for the development of the Third Health Program. Therefore, in recent years, health sector institutions have relied on several technologies, such as extensible markup language (XML)/ extensible access control markup language (XACML) to facilitate the handling and management of patient data and information. These technologies allow users in the health sector to share medical records. However, this sharing requires strict precautions and security measures to prevent data from being destroyed or modified by intruders.

1.2 Information and Communications Technology

The integration of several new technologies is immeasurably important to increase the effectiveness of healthcare applications and their acceptance of health institutions. Information and communications technology (ICT) is a revolutionary development in the health sector through the development of health services by activating the capabilities of the Internet and technology to provide the best medical services for patients. ICT contributes to the development and improvement of communities in terms of productivity, reduce costs and facilitate information sharing (Haftu 2019). It develops technology based on Internet and wireless services. An analytical study on the use of ICT with the health sector indicated that technology is having a positive impact on healthcare development. This study covered 184 countries, such as Australia, Canada and Germany. Therefore, ICT is considered a technological breakthrough in dealing with medical records by digital devices, such as a computer, phone, wireless sensor network (WSN) (Carvalho et al. 2019). This technology provided services to patients and healthcare providers, such as allowing patients access to medical reports, results of operations or even obtaining a medical history from a remote server. This technology has contributed to the improvement of the quality of service but still requires sophisticated techniques to address security and privacy issues in support of quality of service.

1.3 Security and Privacy

Security and privacy are concepts to prevent threats risks. Security concept indicates to user authentication in the network before access network services (Hamidi 2019). For instance, a provider, such as a doctor has to authenticate before access patients' data. Privacy concept indicates to access level to network data and services. This

level depends on policies and decision engines. Privacy divides users to roles or privileges to specify access to legitimate users to specific data. For instance, a provider, such as an emergency doctor can access specific patient's data, but he/she cannot access patient's information. Security is more comprehensive than privacy since security can be privacy and the opposite is not true. Those concepts are significantly critical in the health sector. Consequently, the health sector needs to apply security and privacy in three respects to ensure the protection of patient secrecy.

- Authentication: Using techniques, such as username and password to allow users communicating network.
- Authorisation: Using techniques such as XACML and access models to allow users to access a specific level in the servers' repository.
- Datasets storage: Using techniques such as hash functions and camouflage to hide users' information on servers.

To ensure that the aforementioned three aspects achieve in healthcare projects correctly, it should support them with encryption and signature mechanisms.

1.3.1 Encryption Technique

Encryption is the process of data/information mathematically within the authentication/authorisation request in a way that allows only the legitimate user (s) to see the data in real form when using the secret key. For example, encryption protects information, such as usernames and passwords within the authentication request when moving from the user's device to the server. Encryption algorithms are divided into symmetric encryption, such as advanced encryption standard (AES) and data encryption standard (DES), and asymmetric encryption, such as elliptic curve cryptography (ECC) and Rivest Shamir Adleman (RSA). In symmetric encryption algorithms, all network members use the same secret key, while asymmetric encryption each network member has a unique secret key (Dwivedi et al. 2019). Security in healthcare projects is not depending only on encryption itself, but also on factors that ensure that the encryption algorithm is effective in protecting patients' secrecy, such as key length, security level, randomness, support for privacy mechanisms and recommendations of prestigious encryption institutions.

1.3.2 Signature Technique

Signature is the process of data/information mathematically within an authorisation/authentication request in a way that allows the legitimate user to obtain com-

plete, accurate and change-free data/information. For instance, WSN collects and signs patients' data by elliptic curve digital signature algorithm (ECDSA) to prevent data from being changed as it travels from sensors to the server. Several ways are to perform digital data signature operations. For example, public key algorithms, such as ECDSA, RSA and Elgamal can be used. It is also possible to use hash functions, such as secure hash algorithm (SHA1), PHOTON, BLAKE and QUARK to perform signature processes (Heigl et al. 2019). Public key algorithms are more secure than hash functions, but the latter is the best performing for some algorithms. As we mentioned earlier, security is the primary and first condition for accepting healthcare systems.

1.4 Significance of the Project

The healthcare application has offered great benefits to the society through providing care for patients and improving their health. Collecting of patients' information and storing it in servers makes the transfer of information faster and more accurate among health centres. However, collecting of modified or inaccurate data (because of the attacks) and storing them on the server as well as access the unauthorised server's database cause significant harm to patients' health. Also, data exchange between different devices in the network requires data security management to deal with medical records in a flexible and accurate manner. The lack of protection of patients' information adversely affects the treatment of patients, which leads to harm, reduced dignity, stigma, discrimination, embarrassment or even death.

Many research studies have shown that patients and professionals in hospitals or clinics have been interested in issues of information security (personal and health information) and protect the rights of patients from tampering. Therefore, the security and privacy of patients' information are a prerequisite and paramount importance to the creation of healthcare application which is a great concern in the society. The research described in this thesis has addressed the security and privacy significance as the following to provide a safe environment for the transfer and storage of medical records for patients.

- Identify legitimate users (security) in network access.
- Determining of the access authorised users (privacy) to the patients' database stored on servers as well as data management securely.
- Protecting of the patients' data collected continuously by WSN to prevent data modification.

1.5 Research Objectives, Questions and Our Contributions

In this Section, we will list the objectives and problems for our research.

1.5.1 Research Objectives

The following objectives are laid out to achieve in our project research.

- **Ensure communication of legitimate users using EHR and signen-cryption**

Preventing illegal users from connecting to the network and sending fake requests to the EHR server is a prerequisite for accepting healthcare systems. EHR requests include confidential information, such as username and password. The disclosure of this possible confidential information leads to data change or even destruction of the network. Therefore, efficient signencryption technique is required to protect users' information. In this objective, we focus on encrypting information only because encrypting the entire data will be expensive for users' devices and especially servers.

- **Beef up healthcare privacy and security using XACML and signa-ture**

When all patient information is stored on a server, that server becomes attractive to attackers. Therefore, the use of security mechanisms to determine access to the server is an immensely important issue. All protected health information (PHI) stored in the EHR repository should be been anonymous and XACML with signature technology would be applied to achieve maximum security. We have used signatures to prevent changing data and XACML to apply policies in making decisions and accept legitimate requests.

- **Automate healthcare data collection using EMR, WSN and XML**

Manually collecting healthcare data is expensive and error-prone. Using WSN to automatically collect and convert to electronic records can significantly improve quality and reduce the cost of the healthcare. In many environments where healthcare professionals, such as nurses and doctors are in practical to monitor patients. WSN can be deployed to continuously monitor a patient's condition and gather data all the time. Patients' data transmitted between sensors (nodes and cluster head) and network devices (such as a nurse and a server device) need data management algorithms to maintain both performance and security at the same time. EMR including patient's confidential

data and private information needs to be accessed by healthcare professionals, thus sharing such EMR without breaching a patient's privacy requires EMR management in an efficient and secure manner. XML technology has begun showing its superiority in the exchanging of complex data over different systems.

1.5.2 Specific Research Questions

In this Section, we will describe some problems that might threaten the privacy and security of information in the proposed healthcare system. That is, we intend to investigate the following research problems to complete our study.

1. *How to authenticate users (providers and patients) when communicating EHR services?*
2. *How to authorise healthcare professionals when accessing the healthcare information and data from the EHR repository?*
3. *How to update the EHR information stored in the repository while maintaining privacy?*
4. *How WSNs can help collect a patient's healthcare data within an EMR system efficiently?*
5. *How to transfer healthcare data for WSN to the EMR repository securely?*

1.5.3 Our Contributions

In this Section, we will clarify our contributions in this thesis as follows:

1. We will develop a new way (Robust Authentication Model for Healthcare Users (RAMHU)) to authenticate users by signencrytption when communicating with EHR network. We will depend on lightweight algorithms in supporting authentication requests and responses. We will use ECC to encrypt and PHOTON to sign as well as secrecy parameters to protect users' information in preventing attacks.
2. We will develop a new way (Pseudonymization and Anonymization with the XACML (PAX)) of access users for patients' database in EHR server. First, we will merge ECDSA with anonymity in a single node. This means that our contribution is dependent on the signature parameters and not on the signing of the other nodes. This scheme will provide a great security against the compromised nodes. Second, we will develop an application based on

XACML, ECDSA, pseudonym and anonymity to determine the access of users (professionals and patients) to medical records in the EHR's repository.

3. We will design a new way (Reliable and Efficient Integrity Scheme of Data Collection in HWSN (REISCH)) of collecting patients' data based on hash function and signature algorithms to prevent attacks, such as collision and preimage attacks. We will develop a new communication scheme based on ECDSA-BLAKE2bp, homomorphic properties, camouflage signature and using of XML technology to manage signed patients' data.

1.6 Organisation of This Thesis

This thesis is divided into eight chapters that includes introduction, literature review, cryptography techniques, authentication scheme, authorisation scheme, storage scheme, discussion and results, and conclusion and future research. All these chapters are interlinked to build a robust HC application project against security and privacy threats. The chapters structure are as follows:

- Chapter 1: This chapter provides an introduction to the significance, questions and objectives our project in protecting the security and privacy of HC's users.
- Chapter 2: This chapter introduces a review of the literature in security and privacy schemes in healthcare applications. It describes security problems and weaknesses in authentication, authorisation and data storage schemes in existing projects.
- Chapter 3: This chapter presents details about cryptography techniques that used in our project, such as elliptic curve cryptography (ECC) and elliptic curve digital signature algorithm (ECDSA). In addition, it provides a general methodology for our whole project.
- Chapter 4: This chapter focuses on our contributions and methodology to build authentication scheme in HC application. This chapter was published as a journal paper.
- Chapter 5: This chapter focuses on our contributions and methodology to build authorisation scheme in HC application. This chapter was published as a journal paper.
- Chapter 6: This chapter focuses on our contributions and methodology to build data collection scheme in HC application. This chapter was submitted as a journal paper.

- Chapter 7: This chapter discusses the theoretical and experimental analyses for our projects' schemes. It describes the results to implement our protocols in each scheme and proves its feasibility in securing medical records.
- Chapter 8: This chapter summarizes conclusions and future research for our project.

1.7 Summary of the Chapter

In this chapter, we described the importance of security and privacy in HC applications. A set of questions asked to reveal the problems of access to medical records (information and data). Also, we have identified project objectives to solve security and privacy issues in authentication, authorisation and data collection. Finally, the structure of the dissertation is to clarify the interconnect of the thesis chapters in the construction of an integrated and solid HC project.

Chapter 2: Literature review

In this chapter, we will present the literature review in terms of authentication, authorisation and data collection schemes in healthcare applications. Disclosure of medical records for patients in HC systems is a result of weak security in these systems. For many years, electronic health record (EHR) and electronic medical record (EMR) systems are extremely useful for managing patients' data. These systems are widely disseminated in the health sector ([Sarkar 2017](#)). The main problem with these systems is how to maintain the security and privacy of sensitive patients' data and information. Furthermore, protecting patients' health data is essential for ensuring the stability of their condition. Due to the inability of protecting the records from unauthenticated and unauthorised users, some of current EMR/EHR systems fail to provide security and privacy for protected health information (PHI) ([Entzeridou et al. 2018](#), [Sittig et al. 2018](#)). They also possibly allow authorised users to exceed their specific privileges. Thus, those systems are not a trustworthy source and are undesirable for patients and healthcare providers. Various attacks expose patients' data for malicious tampering or destruction. For example, transferring health-related data and information between sensors and the health centre, on the one hand, and users and the health centre, on the other, makes them exposed to penetration by adversaries as they may move through an insecure channel ([Liu, Xia, Yang & Yang 2018](#), [Manogaran et al. 2018](#)).

Fortunately, penetration of medical records may be prevented by improved security for HC systems (EMR/EHR). Many schemes of medical records transferring have been developed with authentication, authorisation and data collecting mechanisms. These schemes ensure that only legitimate users are authenticated and authorised to connect. Nonetheless, these schemes still suffer from vulnerable security as discussed in Section [2.4](#). Specifically, security and privacy precautions should be raised for specific categories of users, doctor advisors, physician researchers, emergency doctors, and patients' relatives. Presently, these users can break into electronic systems and even violate patients' privacy. The main reason is due to the privileges granted to them or the inadequate security and privacy mechanisms of these systems ([Madhavi & Lincke 2018](#)). Providing mechanisms to authenticate,

authorise and collect data the users in HC applications is an essential security requirement to prevent both external and internal attackers. This requirement acts as a barrier against penetrating patients' identities and revealing their sensitive data. Therefore, authentication, authorisation and data collecting systems that provide security and privacy when collecting or accessing patients' data are required to address with these security issues. This chapter introduces the following themes:

- History of HC application and integrating WSN into HC application.
- Security and privacy issues on HC application.
- Security protocols of HC application.
- Investigating drawbacks in existing schemes.

2.1 Healthcare Applications

Designing a healthcare (HC) application successfully requires defining health systems standards and information and communications technology (ICT) support. HC is one of the important and sensitive applications of ICT. It has used to improve the health status of patients and thus reduce the harmful effects of diseases. Many standards for healthcare applications, such as Health Level Seven (HL7), Health Insurance Portability and Accountability Act (HIPAA) (Rezaeibagha et al. 2015) and Personal Information Protection and Electronic Documents Action (PIPEDA) have been developed in many countries like Australia, UK, USA, Canada and Germany. These standards have an important role to play creating a healthcare application. For instance, many countries have reprioritized the healthcare industry after the defense and military in terms of budget and strategy ([Consultants to Government and Industries 2015](#)); it is becoming increasingly evident that advanced ICT holds the key to particularly the success of providing better healthcare quality at lower cost.

HC systems services become more efficient when used with the wireless sensor network (WSN). HC or e-health includes many systems, such as EHR, EMR and personal health record (PHR). These systems are used efficiently to share medical records either globally (EHR) or locally (EMR) and are administered either by the authority provider (EHR and EMR) or by the patient (PHR) ([Heart et al. 2017](#)). Healthcare services have become so diversified and demanding that providers of ICT, such as WSN, EMR and EHR systems. These services have to be used in order to deliver efficient but affordable services to the broader healthcare users and communities ([Asan 2017](#)). Among these, WSNs promise to

significantly enhance the care quality over a wide range of clients populations. Whilst e-health systems provide services that allow providers and patients to share medical records across various health centers, such as hospitals, clinics, and even the home. These services provide facilities to improve the health of patients. Because of efficient methods of electronically sharing patient data rather than traditional paper-based methods, patient health data is available anywhere and anytime for healthcare providers and patients. Health institutions and researchers are seeking to develop these applications to improve the quality of care, disease diagnosis, and remote medical surveillance (Khatoun & Zeadally 2017).

The systems developer faces many difficulties when designing a HC application. These applications also suffer from many problems, such as complexity in computations, lack of resources, precision management, and mobility. However, the main problem that threatens the acceptance of these systems for patients and providers is the security and privacy of patients' information and data. This issue should be addressed whether in authentication, authorisation or collecting data process. In the following subsections, we will explain the concepts of EMR, EHR, advantages and disadvantages of the electronic record and integrating of EMR and EHR.

2.1.1 Electronic Medical Record

An electronic medical record (EMR) is important compared to a paper medical record for many different features. A medical record is a communication tool used to know and review patients' health status among members of the medical staff and patients. This tool is divided into two categories paper and electronic record (Harman et al. 2012). The paper record is a traditional that was used in the past to check and record patients' information. This type of medical record methods suffered from many problems in dealing with patients' data. These problems are such as accessibility, availability, update, delay, review, errors, data transfer, lack of coordination of care equality services at different levels, management of health information and data, integration of scientific evidence into HC services and decision-making practices (Beglaryan et al. 2017) and security issues. The second type is the electronic medical record; it processes and transmits data rapidly across digital devices. It is designed to provide HC services continuously and accurately. It has attracted the attention of both the HC industry and researchers because it provides efficiency and effectiveness advantages.

EMR is efficient by providing many features and supporting the use of WSN. EMR normally is a one-organisation system. It provides quality of care and fa-

cilitates monitoring, evaluates health conditions, provides reliability, data quality, minimizes human errors, facilitates access to information, reduces the cost of information and communication technology (Najaftorkaman et al. 2015, Muthee et al. 2018). EMR is rich with patients' data and provides timely collection and retrieval of data (Muthee et al. 2018, Osmani et al. 2018). Currently, most of Australian professionals use EMR, also rates similar in several countries, such as Germany, New Zealand and Netherlands (Heart et al. 2017). EMR stores patient health data within a single institution and uses WSN to store patients' data in local repository for use in reports, disease diagnosis, and treatment. But, EMR contains a patient's medical history partially (Heart et al. 2017). For example, doctors may use an EMR to identify a patient's prescription and avoid errors or the nurse uses EMR to monitor tests and reports for a patient. But if the doctor needs complete data about a patient's medical history, he/she needs to send a request to the central server.

2.1.2 Electronic Health Record

An electronic health record (EHR) is an efficient system to support large health enterprises by sharing data and providing HC services. Opposed to EMR, EHR is defined as an inter-organisational system. It includes complete medical history data for each patient that can be provided to professionals. Moreover, it shares patient data among health centres across providers (Heart et al. 2017). EHR has become widely deployed in healthcare applications (hospitals and medical clinics) (Alkureishi et al. 2018) due to its services to providers and patients. Of these services provided by EHR are, such as errors reduction, increased efficiency, improved care, a rich source of data for researchers, health details including diseases and treatment diagnosis, (Chiu & Hripcak 2017, Levine et al. 2018), laboratory tests, clinical prescriptions and observations (Shickel et al. 2018).

The acceptance of the EHR system in health institutions has become increasingly important in recent decades. Although EHR was used as a tool for archiving patient data, it has recently become a basic communication tool for patient care and service provision (Asan 2017, Shickel et al. 2018, Czaja et al. 2018). According to the latest report from the Office of the National Coordinator (ONC) for health information technology, approximately 84% of hospitals have adopted the EHR primal system. The Health Information Technology for Economic and Clinical Health (HITECH) in the USA has provided \$30 billion as hospital incentives to adopt EHR (Shickel et al. 2018). The provision of these services in HC applications is positively reflected on the individual and organisational level (Beglaryan et al. 2017). For example, physician researchers may use EHR to determine a patient's history for using this study

Table 2.1: Comparison between EMR and EHR

No	Aspect	EMR	EHR
1	Database	One	Many
2	Cost	Less	More
3	Patients' history	Partial	Complete
4	Access data	Anytime	Anytime and anywhere
5	Communication technology	Wireless	Wireless and Internet
6	Support	Hospitals or clinics	Community, State or national organisation
7	Sharing data	One organisation	Inter-organisation

in developing a treatment. EHR stores medical records for patients in a digital central database and it manages these records among medical centres. EHR provides patients risk assessment depending on the medical reports. In addition, it provides the participation of patient information across the Internet. This information sharing between medical institutions makes it easier for doctors to diagnose and treat patients at any medical centre (Chen et al. 2012). However, EHR also suffers from the problem of security weak during the transfer of data over the Internet or access to data in the server database. Therefore, security mechanisms are considered the cornerstone of the work of EHR systems. Table 2.1 presents a comparison between EHR and EMR.

2.1.3 Cons and Pros of Electronic Record

In this Section, we explain advantages and disadvantages for electronic record (EMR/EHR). Past studies indicated that the electronic record has some drawbacks as follows.

1. Increase the burden on professionals, a negative impact on the communication between the patient and the professional side, the patient and the health centre of the other.
2. The attend of a small number of doctors for a large number of patients in a particular medical institution (Asan 2017).
3. Lack of transparency in patient information usage (Alkureishi et al. 2018).
4. On an individual level: impact on functionality, external control limits, resistance to change.
5. On an organisational level: lack of legal framework, structural, financial, technical and lack of confidence in electronic communication (Beglaryan et al. 2017).
6. The problem of security and privacy in accessing patients' data and information.

Ironically, recent studies (Asan 2017, Beglaryan et al. 2017, Gold et al. 2017, Alkureishi et al. 2018, Senteio et al. 2018) have indicated that the electronic record (EMR/EHR) reduces adverse effects among patients and providers for many advantages.

1. Ease of reviewing the patient to his/her information and data.
2. Many users are reviewing the medical record at the same time.
3. Auto-update and search speed in information retrieval.
4. Improved patient understanding of care services.
5. Facilitate patient participation and cooperation in decision-making.
6. Reduce errors in documents.
7. Reduce the embarrassment of the patient with a professional.
8. Transparency of cooperation and improve the interaction between the patient and the providers.
9. The use and quality of health information, quality of care, efficiency and cost of care.
10. Facilitate data collection, not information (real users' attributes), retrieval and use of patients' data.

2.1.4 Integration of EMR and EHR

To create an efficient HC application that requires the integration of the features of different HC systems. Individually, EMR and/or EHR suffer their own from problems. Integration of EMR and EHR is to use systems services into a single HC application. This integration means that each EMR sends a copy of a local repository to a central repository in the EHR to form a massive database. The concept of integration provides a lot of benefits to healthcare providers and patients. Of these benefits provided by integration of electronic systems are, such as providing an overview of the concept of patient care, giving the opportunity to study a patient's disease in several health centres (Osmani et al. 2018), providing better understanding of chronic diseases, and the abundance of data in a central repository is an important source for researchers to develop and analyse treatments. One of the largest HC information technology suppliers, such as Actien-Gesellschaft für Anilin Fabrikationen (AGFA) which has enhanced the concept of integrating healthcare

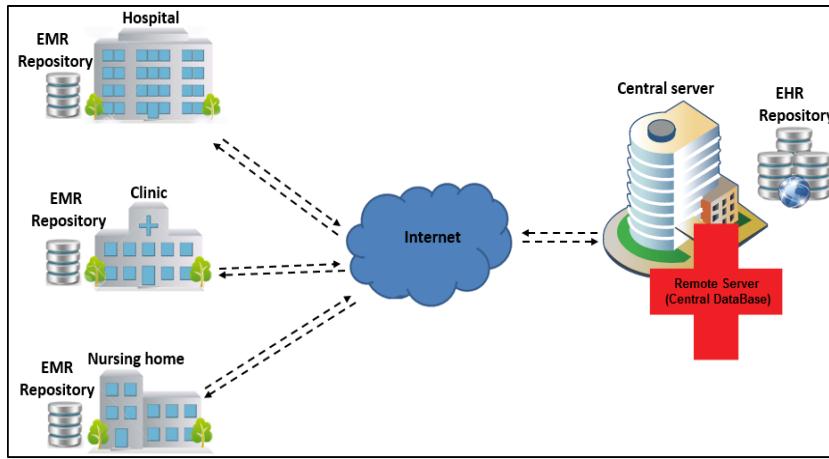


Figure 2.1: Integration EMRs with EHR repository

systems, such as EMR and EHR. This institution said that this integration generates the best medical decisions and improve the quality of patient care at the individual level and public health in general (Heart et al. 2017). Figure 2.1 shows integrate EMRs local repositories with a central repository in EHR on the central server.

2.2 WSN in HC Applications

Wireless sensor network (WSN) technology is widely used in recent years in several applications. The applications that adopt WSN to collect data are such as HC, military, government security policy, environment, office/home automation, commercial, education and transportation (Al Ameen et al. 2012, El Barachi & Alfandi 2013, El-Semary & Abdel-Azim 2013). A WSN consists of a group of nodes that communicate wirelessly with each other to gather information about a particular environment in various applications. A WSN often has restricted sources, such as energy and memory. This type of networks provides comfort, speed, accuracy and safety to humans by monitoring a specific area without human intervention or the presence (Kumar & Lee 2011). An important application that brought the attention of many researchers to sensor networks is HC. Because of it is great importance in our lives to reduce the effects of diseases on the health of patients. Providing better healthcare quality of lower cost will be the key aim of all health industry over the next decades.

2.2.1 Architecture of HWSN

HC applications have become more efficient with the use of WSN; the applications of such kind are known as healthcare wireless sensor networks (HWSN). (Ayyildiz et al.

2019). By using HWSN, physicians can get data and information about patients on an ongoing basis, whether at clinic or in hospital. This medical record leads to the correct diagnosis and thus the improvement of the patient's condition. Where there are a lot of diseases that require constant monitoring and precise care. For example, HWSN is the best method used by doctors to get patient information, as this technology provides patients with comfort and more care at less cost (Kumar & Lee 2011). These applications monitor patient activities without interruption, which leads to improved health condition (Javadi & Razzaque 2013). The architecture of HWSN is shown in Figure 2.2. This architecture consists of three layers which are sensors, communication equipment and back-end network. This process will focus on three aspects of HWSN data:

- **HC data collection**

In the first aspect, sensors collect data about the patient continuously and send it to the server (EMR repository). The data collected properly helps doctors diagnose diseases accurately. Also, patients' data collection needs protection from intrusion.

- **HC data structure**

The second aspect is the data storage in the form of datasets of a server's database. The data structure for EMR/EHR repository should be able to facilitate the sharing of a patients' health information among the HC professionals.

- **HC data access and privacy**

The third aspect is to determine who has the right of users (doctor, nurse, general practitioner, pharmacist and government officer) in the access to these datasets in the data server. All these stages require security and privacy mechanisms to protect the EMR and EHR.

2.2.2 Security and Privacy in HWSN

In this Section, we will discuss the risks and security weakness of HWSN. Many attacks and threats of the HWSN's security-relevant with collecting patients' data and the privacy of the EMR repository. These attacks have been classified into passive and active attacks (Aceto et al. 2018, Gao et al. 2018). In all types of passive attacks, an adversary eavesdrops the transmitted packets between network nodes and server. Also, the attacker analyses these packets to reveal information without change (i.e. trying to break the confidentiality), such as eavesdropping and traffic analysis attacks (Al Ameen & Kwak 2011). The active attack is vastly

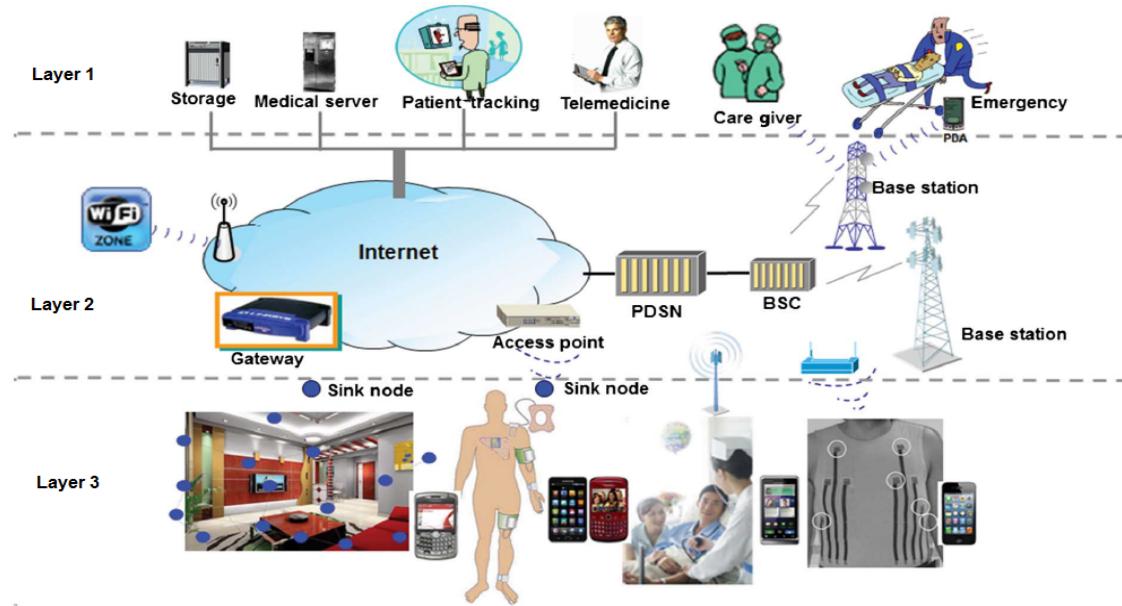


Figure 2.2: Architecture of healthcare based WSN (Zhang et al. 2014)

harmful to the networks of healthcare applications. An attacker tampers with data packets and sends them back to their destination, such as masquerading, reply, modification and denial of service (DoS) attacks (Li, Zhang, Kumari, Choo & Hogrefe 2018). Also, there is another classification of attacks on healthcare applications is internal and external attacks. In the internal attacks, the attacker is a member of the network. This type of attacks is more dangerous than external attacks. Because of the internal attacker has the authority to send and receive messages/requests, which means an attack from the inside is easier. Figure 2.3 describes the attacks on the WSNs which are used to infiltrate data collected/stored.

Potential attacks on data transferred or stored in an EMR repository by WSN are a serious risk to HC systems. As we can see in Figure 2.3, an intruder 1 can listen to information as it is transferred from the patients' sensors to the server (local server or base station). When the attacker gets the message, he/she can get information about the physical location of the patient, identifier (ID), timestamps, source address, target address and the medical report sent by the sensors or directed by medical staff. The patients' data transmitted through the sensor networks requires complete security and privacy. Especially if patient information through the network does not require the consent of the patient, such as moving data through an emergency case. In addition, an intruder 2 can perform an attack on the local/remote server to penetrate the database to get the patients' information. Also, an attacker can get information from the database, such as the patient's name, age, address, type of disease, and the seriousness of the disease. This information allows the attacker to harm the patient in different ways, such as

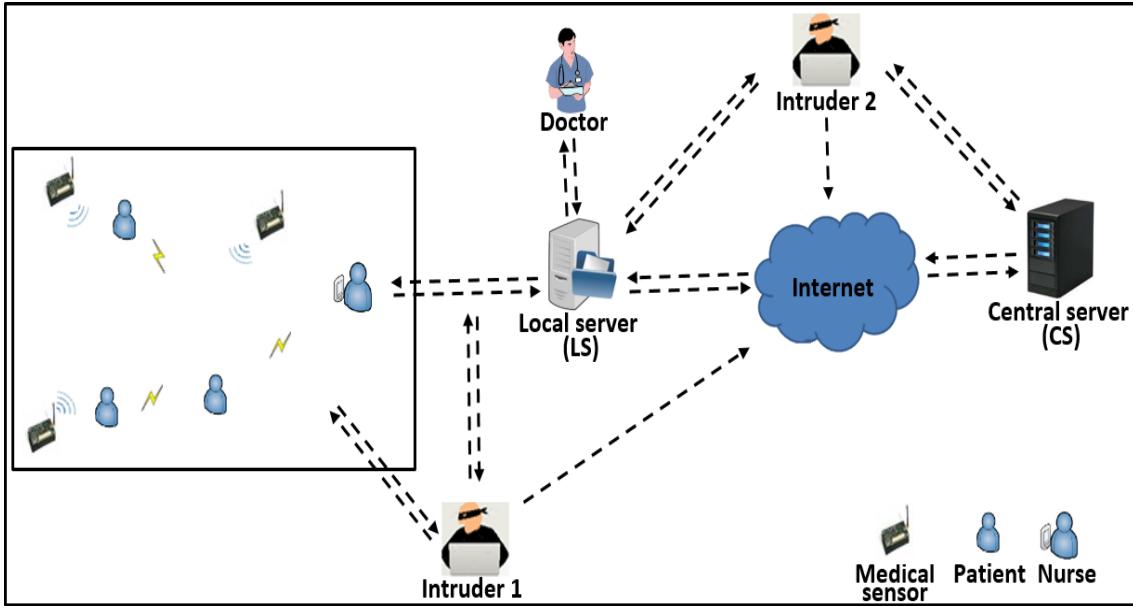


Figure 2.3: An attack on information security (intruder 1) and device security (intruder 2)

changing or destroying data (Kumar & Lee 2011, Pawar et al. 2018). Therefore, privacy and security issues are remarkably important in healthcare applications. If these applications do not provide adequate security for the patient's information, these applications become useless and unusable because the disclosure of patients' information that may affect their health or even death.

2.3 Security of HC Applications

This data or medical reports from WSN, laptop, and phone to a database or EMR/EHR repository are vulnerable to attacks and intrusion. Because of the Internet and wireless network are unsafe environments. Data/information security and privacy is a key issue for any e-application specifically for HC applications. These applications require security and privacy mechanisms, such as authorisation policies, encryption algorithms, and robust signatures. The task of these mechanisms is essential to protect medical repositories in EMR and EHR for patients from malicious attacks. According to the Vormetric report on data security 2016, healthcare is one of the sectors that is most vulnerable to hackers' attacks and thus requires increased efforts to secure health data by 64%. This report stated on 21 January 2016 that 91% of enterprises suffer from vulnerability threatening data security (internal and external attacks). The study of data security included several countries, such as Australia, USA and Germany (Garrett 2016). Therefore, many systems such as national e-health transition authority (NEHTA) in Australia and HIPAA in the USA recommended applying security and privacy in HC appli-

cations correctly and accurately to prevent security threats (Gajanayake et al. 2014).

The accuracy of the data exchanged in HC are significantly crucial to the stability of patients condition and their recovery. The accuracy of medical data is critical in diagnosing diseases and determining the condition of patients during their online or wireless transmission from patient to a HC provider. Also, violation of the medical data with diseases, such as addiction, HIV infection, sexual and dermatological conditions can produce negative effects. It can lead to harassment, discrimination, even death of the patient if data reports change during the transfer from client (source) to local/remote server (destination) (Neubauer & Heurix 2011). These penetrations highlight that medical records in e-health require a high level of security and privacy. Many modern projects that adopt public key encryption and signature algorithms (Ateniese et al. 2017, Masud & Hossain 2017, Ibrahim & Dalkılıç 2017). Firstly, these projects consider the use of high-security encryption and signature algorithms to prevent attacks, such as man-in-the-middle (MITM) attacks, tracking, eavesdropping, impersonation, replay, and cloning. Secondly, high-performance in computation operations and energy consumption in WSN. In the following subsections, we will describe HC applications in terms of security issues, possible attacks, security requirements and security protocols.

2.3.1 Security Issues

Several security issues need to be addressed when designing schemes for authentication, authorisation and collecting data in HC applications. These issues are extremely critical to the acceptance and success of HC applications in the health sector. These issues are represented by the transfer of information and data among network entities (sensors, users' devices and EMR/EHR servers), the storage of databases on the server and the performance of computation processes in resource-constrained devices.

2.3.1.1 Communication Security

To protect data and information between source and destination, security mechanisms, such as encryption and signature should be applied to prevent the attacker from accessing the transferred records between network entities. These mechanisms resist any attacks, such as disclosure, alteration, replication and impersonation of medical records transmitted. The communication channel (wireless and Internet) should be protected end-to-end both at the wireless level and the Internet through the integration of a set of security mechanisms and privacy (Manogaran et al. 2018, Bruland et al. 2018).

2.3.1.2 Datasets Security

Data and information stored on the server repository become the target of malicious attacks. In particular, if a HC application is based on a single server, the process of hacking this server results in both data and information being detected (Chuang & Chen 2014). In addition, access to databases without pseudonym and anonymity mechanisms makes it easy for attackers to detect users' real identities. Therefore, HC application should include separate servers with different tasks. To protect users' medical records, each server has separate duties for users' information and data as well as the implementation of pseudonym and anonymity mechanisms to access patient data. For instance, one server contains only users' identities and another one contains only users' data. Furthermore, the database should be available to legitimate users at anytime and anywhere as well as support authorisation policies for access to the repository (Griggs et al. 2018). Authorisation policies determine the level of access granted to legitimate users.

2.3.1.3 WSN Security

WSN requires efficient security algorithms to work efficiently. EMR systems use WSN to collect patients' data. However, WSN is source-constrained devices, such as energy, computing and memory. Therefore, when using encryption and signature mechanisms, security and performance should be efficient. The efficiency of these algorithms is a major challenge in HC applications. It means that the sensor nodes continue to collect patients' data accurately and for a long time while protecting the data collected from the penetration (Al-Turjman & Alturjman 2018, Verma et al. 2018).

2.3.2 Possible Attacks on HC Applications

This Section presents real examples of authentication and authorisation threats on the HC applications.

- **Authentication attacks** many examples of real-world security threats implemented against users' authentication in HC applications:
 - In 2016, according to the cybersecurity firm layer 8 security report, analysis attacks revealed a huge number of passwords and keys during authentication processes of remote devices in HC organisations (Siwicki 2016).
 - In 2017, the patient's personal information compromised on AU Medical Centre, Children's Hospital and Clinics of Georgia. However, information datasets attacks have not detected until 2018 (Donovan 2018).

- In 2018, according to the proofpoint report, more than 100 million authentication attacks were carried out around the world against clinics, hospitals and insurers companies ([proofpoint 2018](#)).
 - In 2019, Oregon Department of Human Services pointed out that cyber-attacks targeted and breached users' credentials (625000 patients' records) ([Jessica Davis 2019](#)).
- **Authorisation attacks** many examples of real-world security threats implemented against users' authorisation in HC applications:
 - In 2013, penetration attacks were on healthcare data in US hospitals. These attacks revealed 85.4% of the medical records (protected health information (PHI)) of the 5 largest incidents for patients' data ([Paganini 2014](#)).
 - In 2016, Apple Health (Medicaid) was exposed for the data breach. This attack revealed 370,000 records for clients in Apple Health (Washington state) ([Washington Health Care Authority 2016](#)).
 - In 2017, an unauthorised individual penetrated EHR the New Jersey Diamond Institute for Fertility and Menopause. The hacker revealed PHI to 14633 records containing patients' information, such as names, birth dates, social security numbers, and sonograms ([Davis 2017](#)).
 - In 2018, the U.S. Department of Health and Human Services pointed out that unauthorised access/disclosure attacks targeted many health institutions and penetrated huge health records ([U.S. Department of Health and Human Services 2018](#)).

2.3.3 Security Requirements to HC Applications

Most of the attacks can be cancelled when the security requirements, in particular, confidentiality, authentication and integrity in the network are addressed properly and appropriately. To mitigate attacks on the HWSN, EMR and EHR applications the appropriate security services should be added on. These services should be able to protect data from tampering, modification or eavesdropping. The security requirements of the HC applications include:

- **Confidentiality** data encrypted through the encryption algorithm to prevent the attacker from seeing explicit data. When the attacker gets the encrypted data, the attacker will not benefit from this data because it is incomprehensible ([Kumar et al. 2018](#)).

- **Authentication** authentication service is used to authenticate legitimate users or data in the network to prevent anyone else. This means that if the data is a trusted source in the network it is accepted, but if an unknown source is ignored (Rantos et al. 2018).
- **Authorisation** in the authorisation service, each node (sensor or user's device) in the network has specific sources that can access it. This security requirement is tremendously important in preventing unauthorised persons' access to the sources, for example, providing various privileges among users (doctors, nurses, practitioners and pharmacists) in access to the sources (Javadi & Razzaque 2013).
- **Integrity** this service is used to ensure that the transmitted data that has not been tampered or edited by the adversary (Sun et al. 2018).

In addition, the following concerns closely related to patient's EMR/EHR:

- **Availability** some attacks are trying to disrupt network services, by sending a large number of messages to the server and thus the network destruction. Network services should be available upon request (Di Pietro et al. 2014).
- **Anonymity** this service is to hide or distort the network information and data as it transfers from the sender to the receiver or vice versa. When using anonymity with the information and data, the attacker cannot distinguish this information and data to a specific patient (Shen et al. 2018).
- **Unlinkability** the attacker cannot reveal the identity of HC users when linking real information with random pseudonyms. However, Single pseudonym will expose user information for detection (Mehmood et al. 2018).
- **Scalability, Forward Secrecy and Backward Secrecy** environments of healthcare applications require expanding the size of the network continuously. But when a node leaves or joins the network, it does not have the right to access and decrypt the encrypted messages in the future after leaving the network or previous messages before entering the network (Dhillon & Kalra 2018).
- **Freshness and Non-repudiation** the message should be recent to prevent a replay attack, as the sender cannot deny his message to detect the compromised nodes (Di Pietro et al. 2014, Kale & Bhagwat 2018).

2.3.4 Security Protocols in HC Applications

In this Section, we present an overview of security protocols likely used in the HC applications. HC applications require robust protocols in terms of performance

Table 2.2: Keys sizes and some information for public key algorithms

Algorithm	Keys sizes					Ratio	Author(s)	Year	Mathematical problem	Other algorithms
RSA	1024	2048	3072	7680	15360	1:6-30	Rivest, Shamirand, and Adleman	1978	Integer factorization	Rabin
Elgamal							Taher Elgamal	1985	Multiplicative group	Schnorr, Nyberg-Rueppel
DSA							David W. Kravitz	1991	Elliptic curve discrete log. (ECDLP)	ECDH
ECC/ECDSA	160-223	224-255	256-383	384-511	512-more		Scott Vanstone	1992		

and security. Public key encryption protocols, such as elliptic curve cryptography (ECC) and elliptic curve digital signature algorithm (ECDSA) have been used extensively in many applications (Bos et al. 2014). Especially, ECC/ECDSA applied in resource-constrained and large environments due to the effectiveness of their use it in these environments. These algorithms have appropriate efficiency and security for these environments.

Constrained resource environments, such as wireless sensor network (WSN), radio frequency identifier (RFID), and smart card require high-speed, low consumption ability, and less bandwidth. ECC/ECDSA has been considered to be appropriate for these resource-constrained environments (Li, Niu, Bhuiyan, Wu, Karuppiah & Kumari 2018). These algorithms provide important security properties. For example, ECC provides confidentiality, while ECDSA provides integrity, authentication, and non-repudiation. ECC/ECDSA has been proven to be indeed efficient in its performance because it uses small keys; thus the cost of computation is small, compared with traditional public key cryptography algorithms, such as Rivest Shamir Adleman (RSA), traditional digital signature algorithm (DSA) and ElGamal. For example, ECC/ECDSA with a 256-bit key offers the same level of security for the RSA algorithm with a 3072-bit key (Varchola et al. 2015, Ever 2018). Table 2.2 (Barker & Dang 2016, Harkanson & Kim 2017, Tiwari & Kim 2018, Mi et al. 2018) shows a comparison of key sizes for public key signature algorithms in addition to some information about these algorithms. We will consider the security requirement from three perspectives.

- **Performance and efficiency**

The preservation of efficiency in the ECC/ECDSA is crucially important in HC applications. Many approaches have been developed to improve the efficiency of the ECC/ECDSA algorithm to reduce the cost of computation, energy, memory, and consumption of processor capabilities. The ECC/ECDSA uses the point multiplication (PM) or scalar multiplication (SM) where ECC is used PM for encryption and decryption, while ECDSA is used this operation to generate and verify the signature (Pan et al. 2017). One can improve the PM efficiency by improving finite field arithmetic (such as

inversion, multiplication, and squaring), elliptic curve model (such as Hessian and Weierstrass), point representation (such as Projective and Jacobian), the methods of PM (such as Comb and Window method) ([Joye 2008](#)) or improve hash function.

Several researchers have made improvements to increase the performance of the ECC/ECDSA. First of all, in ([De Dormale & Quisquater 2007](#)) performance and flexibility have been investigated in the ECC algorithm with accelerators through hardware implementations. Many points in hardware implementations for ECC were discussed, such as selecting curves, group law, PM algorithms, and selection of coordinates. In addition, it was pointed out that the architecture of multiple PM in ECDSA's verification should support because this architecture leads to efficiency in hardware's implementations. Much research has pointed out that using hardware's accelerators lead to high performance. But accelerators sacrifices flexibility, where reduction circuits should be used to retrieve the flexibility feature. Similarly, [Driessens et al. \(2008\)](#) compared many different signature schemes (ECDSA, XTR-DSA, and NTRUSign) in terms of energy consumption, memory, keys length and signature, and performance. Through implementation, the authors found that NTRUSign algorithm is the best in term performance and memory. However, NTRUSign algorithm suffers from security weakness against attacks.

[Zhong et al. \(2016\)](#) investigated ECDSA algorithm and found that it contains some of the problems that make it inefficient because of the inversion processes used to generate and verify the signature. They removed the inversion process and the results demonstrate that this scheme is more efficient than the previous scheme where it had less time. Unfortunately, there is no proof of ECDSA security without inversion processes in repelling attacks. [Liu et al. \(2017\)](#) adopted the Montgomery method with the lightweight elliptic curve (twisted Edwards curve (p159, p191, p223, and p255)) to improve speed and balance between memory and performance (cost of communication, execution time, memory). During the implementation, they noted that their scheme offers memory efficiency better than the traditional Montgomery scheme. They recommended the exact selection of ECDSA's parameters curves and the balance between security and efficiency requirements.

- **Security and countermeasures**

The security improvement in ECC/ECDSA is no less important than its efficiency. Because of this algorithm is designed primarily for the application

of security properties. ECC/ECDSA, like previous algorithms, may possibly suffer from some of the security vulnerabilities. Random weak, bad random source (Bos et al. 2014), collision, preimage and second preimage in hash value or leaking bits of the private key are considered weaknesses in the ECC/ECDSA. Also, several researchers have made improvements to close security gaps in the ECC/ECDSA algorithm. The aim of these improvements is to provide countermeasures against various attacks. But when selecting countermeasure there should be a balance between security and efficiency (Danger et al. 2013). To maintain the security of these algorithms it is important to use finite fields (either prime or binary) recommended by credible institutions. For instance, the Federal Information Processing Standard (FIPS) or National Institute of Standards and Technology (NIST) are considered reliable. The choice of appropriate curves and finite fields according to the authoritative organisations' standards leads to secure ECC/ECDSA's implementations (Mathur et al. 2017). Therefore, we note from the above that any encryption algorithm or signature should possess a security level to use in HC applications. Many schemes measured ECC/ECDSA in terms of security weakness issues and countermeasures.

Many researchers provided studies to support appropriate countermeasure in ECC/ECDSA. Fan et al. (2010) presented a detailed study on attacks and countermeasures in ECC algorithm is presented. The authors divided attacks to passive and active attacks. They explained that the countermeasure for a specific attack may be vulnerable to other attacks. In addition, countermeasures should have been selected carefully. Therefore, the authors have made some recommendations for selecting countermeasures.

Some surveys have studied public cryptography algorithms in terms of computation of hard problems (integer factorization problem(IFP), discrete logarithm problem (DLP), lattices and error correcting codes) in quantum and classical computers (Abdouli et al. 2011). The authors described RSA, Rabin, ECC, ECDH, ECDSA, ElGamal, lattices (NTRU) and error-correcting code (McEliece cryptography). They pointed out that ECC provides a higher security level than other cryptosystems; in addition, it presents advantages, such as high speed, less storage, and smaller keys sizes. But they did not discuss the use of ECC/ECDSA in applications and implementations of different technologies. Meanwhile, Fan & Verbauwhede (2012), Danger et al. (2013) explained physical attacks on ECC algorithms. They focused on two known

physical attacks: side channel analysis (SCA), and fault attacks. They also described many attacks, including these two types, as they presented countermeasures against these attacks, such as simple power analysis (SPA), differential power analysis (DPA) and fault attack (FA) countermeasures. Also, some recommendations were presented for countermeasures that add randomness, countermeasures selection, and implementation issues. [Bhatia & Verma \(2017\)](#) discussed security issues in terms of network security, identity theft, and insider threats in preventing many attacks, such as MITM, address resolution protocol (ARP) poisoning, insider privileges, reply, DoS, guessing and impersonation. Authors have noted that ECC/ECDSA is the best of public encryption algorithms. It provides a security solution for data protection through the integration of cryptography mechanisms in ensuring remote authentication and authorisation.

- **Implementation and applications**

ECC/ECDSA is suitable for implementation in resource-constrained environments in addition to various applications. A study on security techniques has investigated WSNs ([Yang et al. 2015](#)). It focused on three features in WSN security: key management, authentication, and secure routing. It pointed out that the ECC algorithm was convenient for resource-constrained devices. In addition, a survey of attack strategies was given in relation to ECC/ECDSA in Bitcoin and Ethereum applications ([Mayer 2016](#)). The author pointed out that different standards for curves (such as ANSI X9.63, IEEE P1363, and safecurves). This survey focused on safecurves with SECP256k1 through using ECDSA. Also, it referred to safecurves as one of the strongest curves standards. The author suggested many basic points to prevent attacks on ECDSA or ECC. Finally, [Harkanson & Kim \(2017\)](#) compared RSA and ECC/ECDSA. They pointed out that ECC/ECDSA exhibited the highest performance with the same level of security from RSA. They noted that 69% of websites applications use ECC/ECDSA, 3% used RSA and the rest used other algorithms. They also described ECC with some applications (such as vehicular communication, e-health and iris pattern recognition). However, they had a duplication between implementation and application. For example, RFID is a technology that can be used to implement a particular application.

2.4 Related Work

In this Section, we will concentrate on existing security schemes and protocols in HC applications in terms of authentication, authorisation and storage.

2.4.1 Users' Authentication to HC Applications

In terms of authentication, many schemes in the literature relate to our research area. This Section discusses in brief the suggestions in existing studies to design authentication schemes (He & Zeadally 2015, Giri et al. 2015, Li et al. 2016, Farash et al. 2016, Kumar et al. 2016, Jiang et al. 2016, Rajput, Abbas, Wang, Eun & Oh 2016, Das et al. 2017, Chandrakar & Om 2017, Nizzi et al. 2019, El-Tawab et al. 2019) to secure healthcare's users in the network , and highlights their shortcomings.

Authentication scheme becomes insecure when using the same IDs with unreliable key size in all authentication phases. He & Zeadally (2015) proposed an authentication scheme based on ECC and advanced encryption standards (AES) algorithms. Their scheme uses three entities: user, server, controller. Their scheme accomplishes registration, login, and authentication phases. The authors claimed that their scheme provides many requirements, such as mutual authentication, anonymity, and forward confidentiality. The problem with their scheme is that user and controller identities are statically sent to all three entities. If the attacker can penetrate the encryption, he/she can see the user and controller identities related. The attacker can then generate a random number, temporary key, timestamp, message authentication code. After that, he/she encrypts the user and controller identities and obtains the message authentication code. Then, the attacker sends a message to the network to become a legitimate and authenticated user. Besides, their scheme used a 160-bit key with ECC, which is considered unreliable by trusted institutions, such as NIST.

The storage of medical records (data and information) on a single server represents a serious risk in terms of performance and security. Farash et al. (2016) proposed an authentication scheme based on ECC for healthcare environments. They claimed that their scheme provided forward secrecy. Their scheme accomplishes two stages: setup, and authentication. It provides authentication during the exchange of messages between the server and RFID's tag. However, their scheme shows that the information (identities) and data are stored on a single server. When the server is hacked, the users' information and data are exposed to the detection, tampering, and modification. Also, Jiang et al. (2016) designed a three-factor (biometric, smart card and password) authentication protocol to protect e-health clouds. Their scheme protects authentication requests from impersonation attacks and off-line password guessing if a mobile device is lost or stolen. Their scheme relied on ECC to support the confidentiality and authentication of healthcare's users. They used a fuzzy extractor to keep a biometric secret. But, this scheme relied on

a single server to authenticate users, which is an attacker’s target. In addition, it performs 7 hash operations that can exhaust the single server capabilities if the network has a huge number of healthcare users, especially if it is not a lightweight hash.

Leakage information of the legitimate users or using unnecessarily large keys causes destruction of authentication process. An authentication protocol was proposed to protect patients’ passwords by RSA against off-line password guessing attacks (Giri et al. 2015). Their scheme consists of five phases: initial, registration, login, authentication, and password change. The main problem in their scheme is that the authors used RSA with the 1024 key. This algorithm affects the performance of a huge healthcare network. Many schemes recommend using ECC (Timpner et al. 2016, Sojka-Piotrowska & Langendoerfer 2017, Meddah et al. 2017, AbdAllah et al. 2018), as the ECC-160 is equivalent to RSA-1024 with the same security level. Also, their protocol suffers from sending an ID clearly from client to server at the registration phase. This case causes authentication information to be detected for analysis attacks. Leaking any information that an attacker could use to disclose authentication information. Furthermore, the ECC and a Petri Nets model was proposed to achieve an authentication requirement to protect healthcare applications through the mobile cloud (Kumar et al. 2016). This scheme consists of two phases initial setup and authentication. The authors praised that their scheme is resistant to attacks eavesdropping, tracking, replay, spoofing, and cloning. However, their scheme did not address the issue of steal/loss of tag or device and internal attacks that are more serious than external attacks in accessing patients’ data. With no indication what signature algorithm used to integrity. The other problem is that tag’s ID explicitly sends from server to tag, which makes it easier for the attacker to parse the authentication request.

HC applications are in continuous expanding and become failing if they are not able to provide a scalability requirement. Using shared-key to implement authentication mechanism was designed to prevent the known attacks, especially DoS attacks (Li et al. 2016). They used the wrong password detection mechanism to reduce the risk of DoS attacks. However, the registration phase of this scheme is not reliable if the ID of patients is sent in an unsafe channel. This research also suffers from scalability because of the use of the single shared-key mechanism that needs protection from all parties. Moreover, Das et al. (2017) provided a user authentication scheme for healthcare applications based on AES and secure hash algorithm (SHA1). They used biometrics users and the anonymity feature to repel attacks, such as replay, MITM, and privileged insider. However, because of symmetric encryption suffers from scalability problem, as well as the difficulty

of managing the single secret key. Their scheme will suffer from key management problem if applied to a large health institution with hundreds of users which include managing users' accounts from adding and deleting. Furthermore, the attacker can submit a forgery attack on the login message if it detects the single secret key.

Pseudonym and mutual authentication are important mechanisms to build robust authentication. Cloud-assisted conditional privacy preserving authentication (CACPPA) (Rajput, Abbas, Wang, Eun & Oh 2016) proposed to authenticate the network's nodes. This scheme used the elliptic curve integrated encryption scheme (ECIES) and ECDSA algorithms with a timestamp and pseudonym integration to perform the authentication process. The problem with this scheme is that it does not provide mutual authentication to prevent an attack from a counterfeit party. They also did not explain the size of the keys in the algorithms to make sure their scheme was able to repel the various attacks. Furthermore, a single pseudonym cannot separate the link to the real information to prevent analysing and tracking attacks for authentication requests. Chandrakar & Om (2017) provided an authentication scheme based on ECC and hash. Their scheme has supported on several servers in user authentication with three factors (biometric, smart card, and password). Namely, the user can connect to any server to perform the authentication process. In this scheme, the authors did not specify which hash algorithm used and the size of the message digest (MD). These procedures are mightily necessary for repelling attacks, such as collision, preimage and second preimage. Using multiple servers means that the same users' information is stored on more than one server, penetrating any server that causes users' information to be detected or modified. Also, this scheme did not use a mechanism to prevent the association of real user information with an authentication request, such as pseudonyms.

Recently, Nizzi et al. (2019) proposed the address shuffling algorithm (AShA) method to protect devices' MACs when these addresses transferred from sender to recipient. They used keys and hashes to shuffle MACs' addresses in the network and prevented intruders from executing collisions or privacy breaches. However, their method is vulnerable to security threats especially as it does not provide resistance against the second preimage. Similarly, (El-Tawab et al. 2019) relied on MACs addresses to protect users' privacy. They used techniques such as MAC randomisation and a hash function (SHA-256) to prevent penetration of users' devices. But these techniques are still weak in ensuring the authenticity of the MACs addresses.

2.4.2 Users' Authorisation to HC Application

In terms of authorisation, many works that address the privacy of patients' data in the EHR, but they merely create schemes for access models; fail to use appropriate techniques; or fail to provide a realistic solution to prevent the security vulnerabilities of the EHR from leaking patients' data to attackers. This Section discusses related works about authorisation (Chadwick et al. 2006, Riedl et al. 2008, Quantin et al. 2011, Gajanayake et al. 2014, Sun et al. 2011, Jo & Chung 2015, Seol et al. 2018, Wang et al. 2019, Shafeeq et al. 2019), and highlights their shortcomings.

Authorisation scheme requires a unique signature in authorisation policy for each user and preventing the disclosure of users' IDs for the unauthorised medical staff. As early as 2006, the PERMIS project was proposed by (Chadwick et al. 2006) with the RBAC model. It described the conceptual authorisation of the credential validation service (CVS) before the approval stage of the access decisions for the resource as well as the distributed management of the credentials. However, the PERMIS system does inadequately protect the CVS. PERMIS also suffers from the problem of inheriting managers for all the attributes of their followers (hospital department managers or specialist doctors who inherit all their practitioners' attributes and thus have access to patients' data, which can lead to significant internal attacks). In addition, their project uses one signature of a public key cryptography (PKC#12) file for policies and attributes.

HC server resources, such as memory and processing speed are crucial in implementing the authorisation scheme in large health environments. The pseudonymization of information for privacy in an e-health (PIPE) project was designed to protect health data in the EHR through a layered system. PIPE included many keys, such as an external key pair, an internal key pair, a symmetric key pair, and a shared key. It relied on RBAC to protect the keys (Riedl et al. 2008). This scheme used the Shamir scheme as a backup mechanism to retrieve the patients' keys in the case of the loss of the smart card. But, this scheme did not explain the symmetric and asymmetric encryption algorithms used to generate pseudonym for users. Also, the scheme increases the complexity of the server system with the use of many keys, especially if the scheme is used by a large health institution. In addition, the server must use the keystore to store the keys, and this requires protection and a storage space on the server.

A robust authorisation scheme requires uniform structures and contexts in requests and responses securely without complex operations on the HC server.

Quantin et al. (2011) suggested using non-central medical records to eliminate issues of standardization and structure in data access requests. They used two medical record search engines (MRSEs) and one data aggregator. The first search engine was used to authorise healthcare providers. The second search engine was used to authorise patients. In addition, a hash was used to increase the pseudonym of patients' IDs. However, this scheme suffered from the use of a single aggregator that was similar to the dataset on the central server, which is vulnerable to attacks. Also, patients' data come from different sources and have different structures and standards; this difference causes a burden on the aggregator. Moreover, the authors used RSA's encryption algorithm, and this algorithm uses a large key size of 1024 bits, which causes a burden on the server. Also, the aggregator needs time and storage to convert the data into a single context. Furthermore, their scheme suffered from collision and doubleton problems due to the transference and transformation of patients' data contexts.

Internal attacks on repository or transfer of medical records clearly during the network is a serious risk to patients' health. Gajanayake et al. (2014) integrated four access control models (discretionary [DAC], mandatory [MAC], role-based [RBAC], and purpose-based access control [PBAC]). His target is to obtain a single model that limits illegal user access control of the medical record. In their model, they relied on the sensitivity label for data in the hierarchical structure of the database. Also, they suggested defining the purpose of accessing patients' data. However, their scheme addressed only the doctor and the patient and did not address different classes of healthcare providers. In addition, data and requests are clearly transmitted between client and server. In addition, Jo & Chung (2015) proposed an extensible markup language (XML) access control system (XACS) that enables users to access specific elements in an XML document. This system relies on removing certain parts of the XML document to allow users who are authorised to see certain parts of an XML document. However, requester information is transmitted explicitly over the Internet to a server, which makes it easier for an attacker to penetrate the privacy of users. Also, it does not address internal attacks that are applied by legitimate users even though certain parts of the XML document have been removed.

Cryptographic processes for patient data are extremely expensive on the server compared with the mechanisms of authorisation policies and pseudonyms in the authorisation scheme. The healthcare system for patient privacy (HCPP) project was designed for the EHR to protect the privacy of patient data (Sun et al. 2011). Researchers focused on an emergency scenario regarding the protection of patients'

data. They used a backup mechanism that allows the doctor to access patients' health information without access to confidential parameters. However, this search relies on encrypting all patient data. When a client wants to access patient data, the server uses a keyword (searchable symmetric encryption (SSE)) to perform an encrypted data-mining operation. This process is exceedingly expensive for the server for two reasons. First, the server must encrypt the entire massive database with the continuous addition of new records, and second, the server must continuously mine each access request. In addition, their system did not support levels of authorisation and privileges (roles and attributes) that are more secure in providing privacy to patients' records. Also, researchers have reported that the patient has not been exposed to collusion because the patient does not attack himself. But this is not true because there are impersonation attacks that do the job without the theft or loss of the patient's device. Moreover, this search did not specify the type of encryption algorithm used, which is greatly important for security and server performance, and addressed only emergency cases. [Seol et al. \(2018\)](#) proposed an access control model based on partial encryption and XML signing in EHR's documents within a cloud environment. Their model is supported in two phases: the first phase is access control using extensible access control markup language (XACML) and the second is to encrypt and sign data with XML. However, the cloud environment presents multiple security and privacy problems in the EHR system because of the distributed exchange of data between the various health centres. In addition, their scheme uses encryption in XML requests and responses. Encryption processes will be extremely costly for legitimate entities exchanges in healthcare systems. Also, in the first phase, requests and responses are clearly sent between the legitimate parties and therefore be exposed to attack. They also did not address the pseudonym mechanism that prevents access to real users' information.

Recently, [Wang et al. \(2019\)](#) relied on attribute based encryption (ABE) and searchable encryption to authorise users to access patients' data. Their scheme focuses on supporting privacy and efficiency in hidden policy with search keywords. In addition, their scheme is based on constant expenses for encryption and the secret key. However, their scheme suffers from internal attacks in addition to heavy costs to access the data. In addition, [Shafeeq et al. \(2019\)](#) has proposed a decentralized authorisation scheme to grant users access to patients' data. They used XACML, Merkle tree-based signature and symmetric encryption to prevent unauthorised users from penetrating repository. Although their scheme provides efficient management by XACML and message integrity support by multi-signature, it is vulnerable to threats of single symmetric key penetration as well as the storage expenses required

for the Merkle tree signatures.

2.4.3 Storage of Users' Data

In terms of storage, many data collection schemes in the literature relate to our research area. This Section discusses in brief the existing storage schemes (Wander et al. 2005, Wang & Li 2006, Trakadas et al. 2008, De Meulenaer et al. 2008, Fan & Gong 2012, Kodali 2013, Lavanya & Natarajan 2017a,b, Staudemeyer et al. 2018, Malathy et al. 2018, Sharavanan et al. 2018, Sui & de Meer 2019, Hathaliya et al. 2019, Furtak et al. 2019) to secure patients' data in the EMR, and highlights their shortcomings.

The performance and security presented by ECC/ECDSA algorithm, make it suitable for use in implementation on WSN. Digital signatures in ECDSA have better efficiency in devices with resource-constrained than DSA and RSA. Many authors have pointed out to the possibility of using ECC/ECDSA with environments resource-constrained (memory, energy, and CPU capability). Public key cryptographic algorithms are investigated in many schemes to test their applicability in WSN. For example, Wander et al. (2005) presented a study in energy for the public key cryptography (ECC/ECDSA, RSA) on sensor node Mica2dot with Atmel ATmegal 128L (8bit). They found that transmission cost is double the receiving cost. They analysed signatures in ECDSA with a key of bit-160 and RSA with a key of bit-1024. Where signature verification cost in ECDSA is larger than a signature generation while RSA verification is smaller than a signature generation. They noted that ECDSA has less energy cost than RSA. They concluded that ECC/ECDSA is more effective than RSA and feasible in constrained-source devices (WSN). Because of it generates small keys and certificates with the same security level in RSA. Also, implementation was applied for 160-bit ECC/ECDSA and 1024-bit RSA algorithms on sensor node MICAz (Wang & Li 2006). The authors used hybrid multiplication to reduce access memory. ECDSA results on MICAz are signature generation=1.3s and signature verification = 2.8s. For the purpose of comparison, the authors implemented ECDSA also on TelosB. MICAz results were slightly less than TelosB's results. The authors proved the possibility of using RSA and ECDSA on WSN.

Costs of computation and communication in WSN should be efficient when applying security protocols, such as ECC/ECDSA. ECDSA (SHA1) and RSA (AES) were analysed in several types of sensor nodes in terms of energy (communication and computation) and time (Trakadas et al. 2008). ECDSA uses short keys

(160-bit), which reduces memory, computation, energy and data size transmitted and thus is better than the RSA. De Meulenaer et al. (2008) discussed the cost evaluation of energy (communication and computation) on the WSN (TelosB and MICAz) through the symmetric key distribution protocol and ECDH-ECDSA key agreement protocol (asymmetric encryption). They noted that TelosB sensor node consumes less power than MICAz and symmetric encryption performs better than ECDH-ECDSA. Moreover, Fan & Gong (2012) implemented ECDSA on Micaz motes with the binary field (163-bit). They improved signature verification via cooperation idea of the adjacent nodes. Also, ECDSA's implementation was presented in sensor node (IRIS) (Kodali 2013). But because this node supports 8-bit of the microcontroller, the author modified the SHA1 code from 32 bits original to 8 bits. Through implementation, the original algorithm is better in size and time than a modified algorithm. The author explained the possibility of using ECDSA algorithm with the sensor node (IRIS) held 8-bit microcontroller.

To store patients' data accurately, data collection schemes should rely on reliable and fast hash algorithms in ECDSA. Lavanya & Natarajan (2017a,b) have applied the ECDSA algorithm as a light-weight authentication scheme in the WSN. This demonstrates the effectiveness and efficiency of using ECDSA in WSN in terms of security and performance. Staudemeyer et al. (2018) designed an ECC/ECDSA-based scheme to provide privacy in WSN. However, they did not provide a performance analysis of the security algorithms during exchange of data in WSN. Malathy et al. (2018) focused on the efficiency of transmission in WSN to extend the lifetime of sensor nodes with the use of ECDSA and generate MD with data. Their scheme relied on ant colony optimization scheme to save energy in the WSN. But it did not support privacy parameters during data transfer. Sharavanan et al. (2018) proposed a scheme to monitor the heterogeneous network environments in WSN and protect the medical information of patients using ECDSA. Unfortunately, their scheme addressed only the computation processes of transport. It did not address the complicated computation processes to generate and verify the signature in ECDSA.

Recently, Sui & de Meer (2019) designed a data aggregation scheme that focused on computation in demand-response management to improve performance and security efficiency. Their scheme was based on the identity signature (Bilinear Map) to protect information and data aggregated by integration and authentication. Hathaliya et al. (2019) have proposed an elliptic curve cryptography (160-bits) scheme to encrypt and authenticate the patients' biometric properties. They used wearable sensors to collect patients' data and used mobile to send and store this

data in the medical repository (cloud server). Finally, Furtak et al. (2019) designed a framework based on RSA-2048 bits and trusted modules to secure sensors' domain and prevent unauthorised threats. They have categorised sensors into the master, replica and gateway categories in the network area and data structure in the sensor memory. In their framework, security procedures for the domain and sensor were used to support both integrity and authentication. Moreover, many research (Kittur & Pais 2019, Kuang et al. 2019, Marino et al. 2019, Zhao et al. 2019, Liu, Zhao, Tian, Yu & Du 2019) have pointed out that ECDSA is significantly appropriate for authentication and authorisation schemes because it performs the lightweight processes during security procedures. But also many recent research (Xia et al. 2016, Rasjid et al. 2017, Chiriacò et al. 2017, Merrill 2017, Yang et al. 2017, Giechaskiel et al. 2018, Brockmann 2018, Park & Kim 2018) pointed out that SHA1 suffers from collision, preimage and second preimage attacks. However, all schemes did not address SHA1 performance and security (collision, preimage and second preimage) problems in ECDSA.

2.5 Summary of the Chapter

In this chapter, we have presented details about the HC applications history and HC systems, such as EMR and EHR. Then, we have provided details on integrating WSN into HC applications. Also, we have discussed security and privacy issues when medical records transferred by a communication channel or saved on EMR/HER server. Security protocols have investigated in HC applications. Finally, existing schemes gaps described to be as a basis to build new authentication, authorisation and data collecting schemes.

Chapter 3: Cryptography Techniques, General Model and Methodology

In this chapter, the approach of applying our project techniques is introduced. In general, authentication, authorisation and data collection schemes undertake legitimate users to safely use data and personal information in HC applications. The integration of all these schemes into one system is a source of confidence for patients and HC providers. In this chapter, we will detail the proposed techniques and general model/framework of integration HWSN with HC application. In addition, how our authentication, authorisation and collecting data schemes have used in EMR and EHR systems. Figure 3.1 shows our project architecture in HC application. We will address the following topics:

- Techniques proposed for authentication, authorisation and data collection on the proposed HC application.
- General proposed network model on HC application.
- General methodology for the proposed HC application.

3.1 Cryptography Techniques

In a nutshell, our study will carry out the investigations into three aspects as follows:

- Techniques to provide an authentication mechanism to legitimate users in the HC application.
- Techniques protecting users' privacy, and increase the users' confidence in the advanced HC systems in access EHR repository.
- Secure and efficient application by using algorithms/protocols for integrating HWSN and EMR in the HC industry.

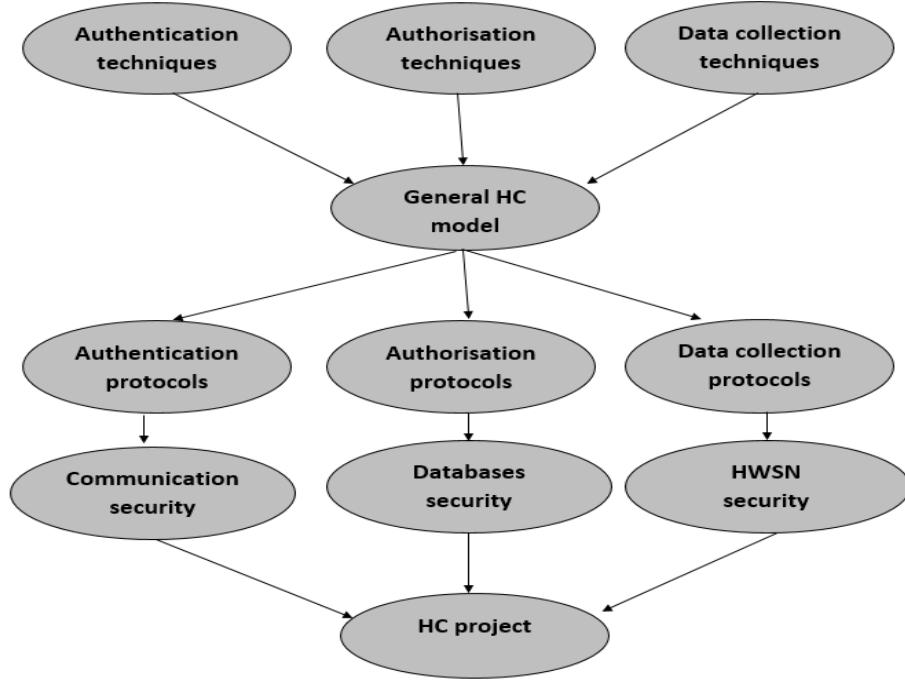


Figure 3.1: The project architecture

3.1.1 Techniques Proposed to Use in the Study

First of all, we list a set of techniques proposed (authentication, authorisation and data collection) to develop the proposed prototype system as explained in the following subsection.

3.1.1.1 Proposed Techniques for our Authentication Scheme

The healthcare system needs a set of techniques to implement the authentication mechanism before accessing patients' records. One authentication technique will not be sufficient to repel known attacks. In this Section, we focus on the security aspect of authenticating legitimate users. To ensure only legitimate users are associated with the HC application network, our scheme includes a set of techniques (such as elliptic curve integrated encryption scheme (ECIES), PHOTON, one-time password, mutual authentication, and media access control (MAC) address) to validate the authentication request. Efficiency and security are important determinants of health applications. Sensitive patients' records require protection from intruders and at the same time require efficiency. Because of health applications involve frequent and continuous exchanges between a large number of users (patients and professionals). In our scheme, we relied on algorithms that provide lightweight operations and a high-security level for encryption and signature operations. This Section describes the threat model and the basic concepts of these techniques.

3.1.1.1.1 Threat Model of Authentication Scheme

The threat model is applied to our authentication scheme based on the Dolev-Yao (dy) model (Dolev & Yao 1983). Our scheme has used dy in order to build a valid authentication process between clients and servers in insecure environments, such as wireless local area network (WLAN) or the Internet. The dy model is an efficient and practical way to illustrate security protocols in the real world. In addition, it is a formal exemplar for modelling the risk of attackers against authentication protocols. This model shows that the attacker can listen to all authentication requests or can perform an internal attack (Challa et al. 2017, Bauer et al. 2018). This model is useful in detecting internal, external, single, and multiple attacks (Ahmad et al. 2017). In our threat model, we assume that an intruder is capable of carrying out an internal, external, passive, or active attack. It tests various attacks, such as MITM, replay, eavesdropping, and spoofing. The attacker tries to collect lots of exchanged requests between clients and server to perform malicious attacks. These threats exploit modifications, replacements, deletions in an attempt to break encryption in the authentication protocol during analysis operations for keys, nonces, pseudonyms, and signatures. Also, we assume that Attributes Server is trustworthy. It is safe against repository penetration attacks. This server contains only users' information datasets. We impose threats in our authentication model as follows:

- The attacker can steal the client application and its files to analyse the data, retrieve the parameters, and reveal the secret key of the user. Then, the attacker can use this application on different devices.
- The attacker can listen for authentication requests in the insecure environment and execute interception, replay, MITM, and modification attacks. The attacker's goal is to become a legitimate user in the network.
- The attacker can execute a forgery or masquerading attack in an attempt to penetrate the authentication process.
- A legitimate user, such as a doctor, nurse, or patient can perform a privileged insider attack based on his/her legitimacy in the network.
- The attacker can successfully guess the real username, password, role and pseudonym associated with it. This guess can accomplish during an intensive analysis of many authentication requests.

3.1.1.1.2 Elliptic Curve Integrated Encryption Scheme (ECIES)

Elliptic curve cryptography (ECC) has been used to provide security requirements, such as confidentiality, integrity, and authentication in the communications

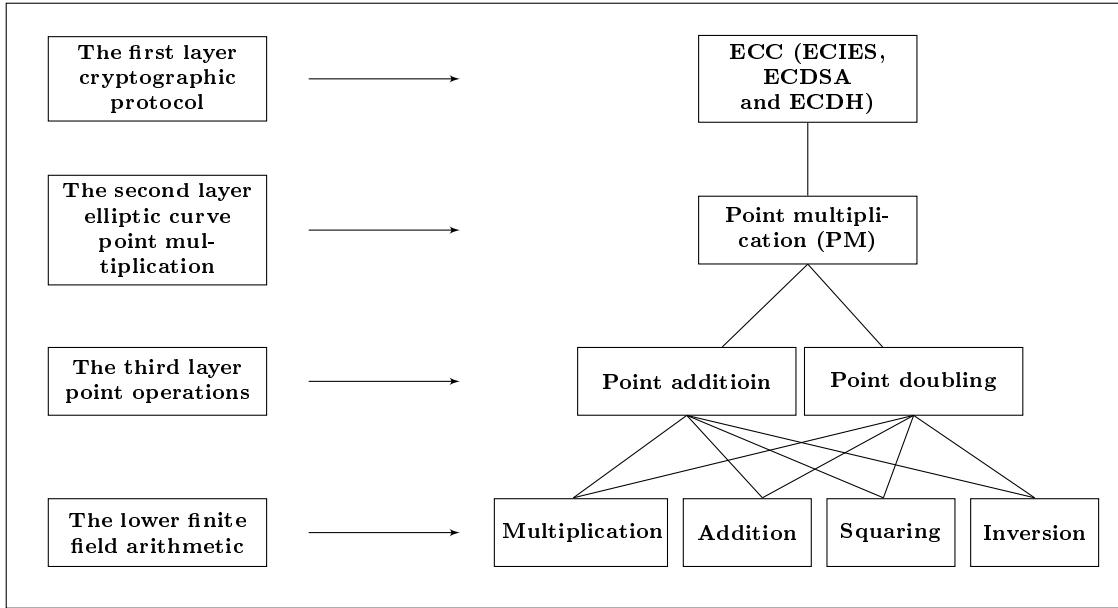


Figure 3.2: Arithmetic operations in ECC hierarchy

networks. In particular, it is used in networks with a limited capacity in terms of power and processing. This algorithm was independently proposed by Neal Koblitz and Victor Miller in 1985 (Imran et al. 2018). It depends on the discrete logarithm problem (DLP), which is impervious to known attacks when selecting parameters accurately (Rafik & Mohammed 2013). Namely, DLP is difficulty obtaining k from P and Q (where k is integer, and P and Q are two points on the curve). Small parameters used in ECC help to perform computations quickly. These computations are important in constrained-source and large environments (such as HC systems) that require processing power, memory, bandwidth, or power consumption (Diro et al. 2017). ECC provides encryption (elliptic curve integrated encryption scheme(ECIES)), signature (elliptic curve digital signature algorithm (ECDSA)), and exchange keys (elliptic cuvre Diffie-Hellman (ECDH)) approaches (Teguig et al. 2017). Many operations are performed in ECC algorithms (described in four layers) as shown in Figure 3.2 (Nabil et al. 2012). ECIES has provided confidentiality and integrity and proven to be extremely efficient in its performance, as it uses small keys. Thus, the cost of computation is small compared with other public key cryptography algorithms, such as RSA. Table 2.2 in Chapter 2 shows a comparison of key sizes for public key encryption algorithms in addition to some information about these algorithms.

ECC uses two finite fields (prime field and binary field). The binary field uses two types to represent basis (normal and polynomial basis) (Imran et al. 2017), and is well suited to implementation in hardware (Nabil et al. 2012). While the prime field is well suited to implement in software more than hardware as well as prime

field is more security operations than binary field. Let F_q indicates field type, if $q=p$ (where $p > 3$) then ECC uses prime field (F_p). In the second case, if $q=2$ then ECC uses binary field (F_{2^m}) where m is the prime integer (Oliveira et al. 2018). ECC consists of a set of points (x_i, y_i) , where x_i, y_i are integers and the point at infinity (O). It uses O to provide an identity for Abelian group rule that satisfies long-form for Weierstrass equation (with Affine coordinate):

$$y^2 + a_1xy + a_3y = x^3 + a_2x^2 + a_4x + a_6 \quad (3.1)$$

When prime field is used over ECC, the simplified equation is as follows:

$$y^2 = x^3 + ax + b \quad (3.2)$$

Where $a, b \in F_p$, $4a^3 + 27b^2 \neq 0 \pmod{p}$. The law of chord-and-tangent is used in ECC to add two points on the curve (Pan et al. 2017). Let us suppose that P and Q are two points on the curve; these two points have coordinates $(x_1, y_1), (x_2, y_2)$ respectively and the sum of these two points is equal to a new point $R(x_3, y_3)$ (i.e $P(x_1, y_1) + Q(x_2, y_2) = R(x_3, y_3)$) (Wang et al. 2006, Islam et al. 2017).

ECC uses two operations for addition that are point addition($P+Q$) and point doubling ($P+P$) (Figure 3.2), as in the following equations:

In the case of the point addition ($P + Q$) where P and $Q \in E(F_p)$:

with using the slope $\lambda = \frac{y_2 - y_1}{x_2 - x_1}$

$$x_3 = \lambda^2 - x_1 - x_2, \quad y_3 = \lambda^2(x_1 - x_3) - y_1 \quad (3.3)$$

In the case of the point doubling ($P + P$) where $P \in E(F_p)$:

with using slope $\lambda = \frac{3x_1^2 + a}{2y_1}$

$$x_3 = \lambda^2 - 2x_1, \quad y_3 = \lambda^2(x_1 - x_3) - y_1 \quad (3.4)$$

When the binary field is used over ECC, the simplified equation is as follows:

$$y^2 + xy = x^3 + ax^2 + b \quad (3.5)$$

Where $a, b \in F_{2^m}, b \neq 0$ (Johnson et al. 2001), as addition operations are in the following form:

In the case point addition ($P + Q$) where P and $Q \in E(F_{2^m})$:

with using the slope $\lambda = \frac{y_1 + y_2}{x_1 + x_2}$

$$x_3 = \lambda^2 + \lambda + x_1 + x_2 + a, \quad y_3 = \lambda(x_1 + x_3) + x_3 + y_1 \quad (3.6)$$

Algorithm 1 ECC encryption and decryption algorithm:

- 1: Alice and Bob use same parameters domain $D = \{a, b, q, G, n, h\}$, where a, b are coefficient, q is field type, G is base point, n is order point and h is cofactor.
 - 2: Alice selects random integer AK_{pr} as private key.
 - 3: Alice generates public key $K_{pu} = AK_{pr}G$ and sends K_{pu} and G to Bob.
 - 4: Bob receives message m from Alice, selects random integer as private key BK_{pr} where $BK_{pr} \leq n$.
 - 5: Bob encrypts m with point P in elliptic curve $E(F_q)$.
 - 6: Bob computes $C_1 = P + BK_{pr}K_{pu}$, $C_2 = BK_{pr}G$ and sends C_1 and C_2 to Alice.
 - 7: Alice receives Bob's m and decrypts the m by computing $C_1 - AK_{pr}C_2$ to obtain plaintext.
-

In the case point doubling ($P + P$) where $P \in E(F_{2^m})$:

$$x_3 = x_1^2 + \frac{b}{x_1^2}, \quad y_3 = x_1^2 + (x_1 + \frac{y_1}{x_1})x_3 + x_3 \quad (3.7)$$

ECC operations for encryption and decryption are explained through the following algorithm 1 (Zhong et al. 2016):

3.1.1.1.3 Lightweight Hash-Function Algorithm

The hash function is a method that takes the variable length of data as input and produces a constant length of the size called message digest (MD). This algorithm is called one-way algorithms. Namely, when the data is encoded into the MD, the process cannot be reversed to access the original data (Wazid et al. 2016). It is eminently useful in data signature processes, offering high efficiency compared to traditional cryptography algorithms. Recently, lightweight hash algorithms (such as PHOTON, QUARK, and SPONGENT) have emerged to improve efficiency and security rather than traditional hash algorithms (such as MD5, SHA1, and SHA2). Many advantages that should be provided in the hash algorithm to satisfy the signature principle, such as first preimage resistant (FPR), second preimage resistant (SPR) and collision resistant (CR) (Giri et al. 2015). Suppose that h is a hash function, MD is a hash result and m is a message, the definition of the signature principles is as follows:

- **FPR:** This principle is also known as one-wayness. When the attacker gets an MD, it is arithmetically difficult to find m and produces the same MD ($h(m) = \text{MD}$) (Harran et al. 2018).
- **SPR:** This principle is also known as weak collision resistant. When the attacker gets MD and m , it is difficult to calculate a different message (m') where $m \neq m'$ to produce the same MD ($h(m) = h(m')$) (Aitzhan & Svetinovic 2018).

- **CR:** This principle is also known as strong collision resistant. It is difficult computationally the attacker to calculate two different messages (m and m') $m \neq m'$ and to produce the same MD ($h(m) = h(m')$). CR is not the FPR guarantee (Esiner & Datta 2019, Cantu et al. 2017).

PHOTON is one of the lightweight hash function algorithms. This algorithm is tremendously suitable for projects that require a robust and reliable signature. This algorithm is based on sponge-like construction and AES-like primitive for domain extension and permutation efficiently (Anandakumar et al. 2014, Porambage et al. 2015, Ijaz & Pasha 2017). PHOTON is available in several versions (80, 128, 160, 224, and 256). It is a balance between the efficiency in the execution of computations on the one hand and security in the implementation of the features of the signature principles (FPR, SPR and CR) on the other hand.

PHOTON algorithm uses sponge construction and applies two phases of absorbing and squeezing as shown in the Figure 3.3. The message (m) in the PHOTON is divided into n blocks (m_0, \dots, m_{n-1}) after adding padding by appending a "1" bit and followed many zeros. In the absorbing phase, the internal state (t -bit) composed of the capacity (c -bit) and the bitrate (r -bit). The t is first initialized with some fixed value. In each iteration, this algorithm achieves the process of changing for t by computing $r + c$ and uses the exclusive-or (\oplus) operation between message blocks. After each \oplus operation, the permutation (P) operation of the internal state has performed. After the end of the absorbing phase where all the blocks of messages were treated begin the squeezing phase. At this stage, the input of the squeezing phase is the output of the absorption phase (internal state and permutation). This phase continues to squeeze the input until the desired MD obtains, the hash output size is $64 \leq \text{MD} \leq 256$, more details are available in (Guo et al. 2011).

Table 3.1 provides a comparison among the lightweight hash algorithms (the latest version of these algorithms) in terms of security and efficiency (Yoshida et al. 2007, Aumasson, Henzen, Meier & Naya-Plasencia 2013, Kavun & Yalcin 2010, Guo et al. 2011, Bogdanov et al. 2011, Berger et al. 2012, Anandakumar et al. 2014). Although standard hash algorithms are still used in applications, such as SHA1 (5527 GE, MD 160-bit) and SHA2 (10868 GE, MD 256-bit). Lightweight hash algorithms, such as PHOTON (2177 GE, MD 256-bit) provides the perfect solution for handling complex signatures in large HC systems.

As Table 3.1 shows that the PHOTON-256 (2177 GE) offers the best performance compared to all lightweight hash functions. It also shows that the PHOTON-256 offers a high level of security through the application of signature features FPR (224), SPR (128) and CR (128). Linear and differential attacks are the most powerful at-

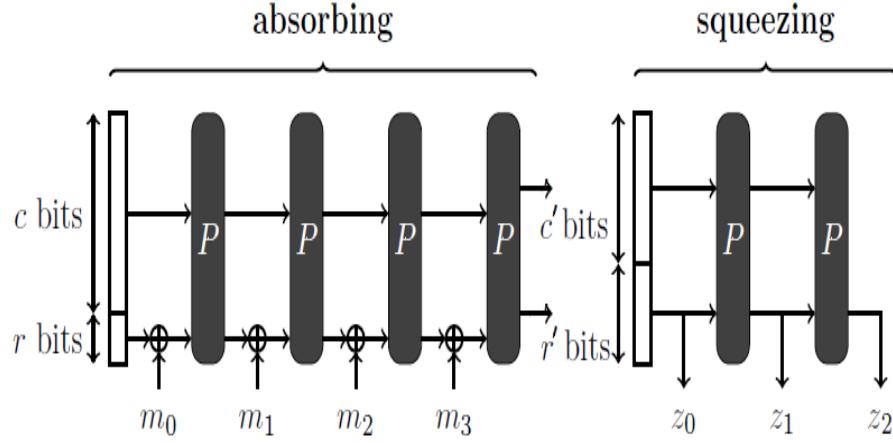


Figure 3.3: The PHOTON hash function

Table 3.1: Comparison of lightweight hash function algorithms

Algorithm	Performance		MD	Security			Author (s)	Year
	Gate equivalent area	Throughput (kbps)		FPR	SPR	CR		
SQUASH	2646 GE	0.15	64	64	64	0	Shamir	2005
MAME	8100 GE	146.7	256	-	-	-	Yoshida et al.	2007
C-PRESENT-192	8048 GE	59.26	192	192	192	96	Bogdanov et al.	2008
ARMADILLO2	8653 GE	9.38	256	256	256	128	Bald et al.	2010
S-QUARK	2296 GE	3.13	256	224	112	112	Aumasson et al.	2010
KECCAK-f[400]	5090 GE	14.4	128	128	128	64	Kavun and Yalcin	2010
GLUON	4724 GE	32	224	224	112	112	Berger et al.	2011
SPONGENT-256	3281 GE	11.43	256	240	128	128	Bogdanov et al.	2011
PHOTON-256	2177 GE	0.88	256	224	128	128	Guo et al.	2011

tacks in the MD analysis of hash functions. Compared to PHOTON, ARMDILLO and SPONGENT-256 also offer signature features. But both are vulnerable to attacks. ARMDILLO2 has been attacked by local linearization (practical semi-free-start collision attack)(Naya-Plasencia & Peyrin 2012). SPONGENT has been attacked by linear distinguishers (23 rounds) (Abdelraheem 2012) and (13 rounds) (Zhang & Liu 2017) for all SPONGENT versions. Both need the most computations (3281 GE and 8653 GE) compared PHOTON-256 (2177 GE). PHOTON is a reliable algorithm against linear and differential attacks (Guo et al. 2011). It has a high level of security and efficiency; therefore, it is emphatically suitable for our scheme to be implemented as a signing mechanism in our authentication protocol between the parties of the HC applications (clients and servers).

3.1.1.4 One Time Password (OTP)

OTP is a way to authenticate legitimate users by generating passcode or nonce only once in a specified time. It becomes not applicable in the next times for authentication. OTP is an effective method for authenticating users in HC applications if used with robust encryption and signature technologies. Using a static password, or nonce without other authentication mechanisms is markedly weak for attacks.

Therefore, OTP significantly provides support to the authentication process. This mechanism prevents many attacks, such as replay, MITM, and guessing (Thiranant et al. 2015, Chen et al. 2017). The attacker can not use this passcode or nonce to connect to the network later. Each client receives a random OTP from the authorities provider via a secure channel, and that is used for the login session. The client sends OTP as part of an authentication request. If the authentication process is valid, the server will delete OTP from the dataset and will not accept it in the next times. OTP is a powerful mechanism to mitigate the risk of hackers' communication in the network.

In this scheme, we apply OTP to generate a random password (to prevent hackers from expecting OTP) with the first link to users in HC applications. This procedure is to ensure only legitimate users connected to the network. In our authentication scheme, users (patient or provider) only use OTP once and will not need to use OTP with name and password in future authentication operations. This mechanism allows the server to record the original physical address in the dataset. Even if the attacker detects OTP, he will not benefit from it in the next times. Besides, we use other mechanisms, such as timestamp, checking the original physical address and multi pseudonyms with OTP.

3.1.1.1.5 Mutual Authentication

The network parties (clients and server) exchange requests for authentication remotely (Internet) or locally (WLAN). This process plays an important role in connecting users to HC applications. The authentication request can include many security parameters, such as name, password, OTP, nonce, pseudonym, signature, and encryption. To design a robust authentication protocol it should include security requirements that are critical in protecting patients' information and data. In addition, traditional methods of authentication (password and name) are not suitable for health applications (Liu & Chung 2017). In general, two kinds of authentication has applied in the various projects (as described in Figure 3.4), simple and mutual. In simple authentication, one party performs the authentication process, such as server verifying the authentication request for the client. This type of authentication is vulnerable to attacks, such as masquerading, spoofing, and impersonation. The attacker can use his/her device as a fake server to receive all clients' requests. Mutual authentication provides a security solution to prevent known attacks. In this type of authentication, each party authenticate the other party and thus prevent counterfeit attacks both by client or server. In our scheme, we adopt the mechanism of mutual authentication in the preservation of users' information and data.

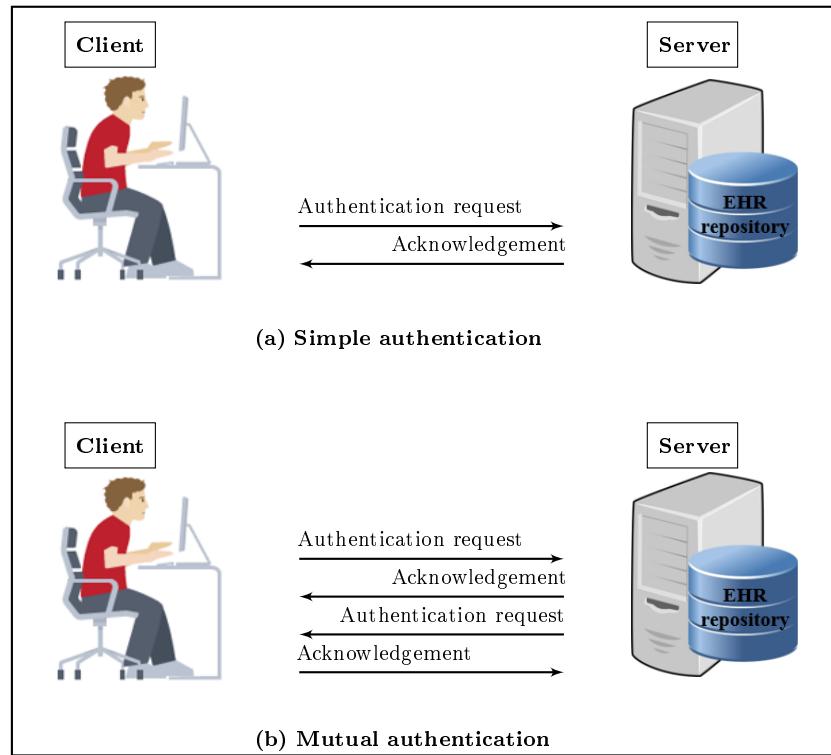


Figure 3.4: Types of authentication schemes

3.1.1.6 Media Access Control (MAC) Address

All network devices of different types should contain a hardware card (interface) to connect to the local or global network. Each wire or wireless interface has a media access control (MAC) or physical address that consists of a 48-bit. It is divided into six octets and wrote in hexadecimal, such as "8C: 70: 5A: 41: 49: BC". This address is a unique identifier (no duplicate address twice) for device defined a globally and persistent (Martin et al. 2017). MAC address is the identifier of the device that can connect to the network. This address is used in WLAN networks because it offers advantages, such as reducing costs and speed in access control procedures (Mattos & Duarte 2016). It can be changed programmatically in various operating systems, such as Linux and Windows. In addition, anyone can use Address Resolution Protocol (ARP) to detect the MAC address of another user in the network (after entering his IP address) (Dallaglio et al. 2015).

The main problem with this address is that the attacker can execute an eavesdropping attack to access the MAC addresses of legitimate devices in the network. Then, he/she selects a legitimate MAC address to use it. For example, an attacker could execute an ARP poisoning or spoofing attack by using a fake identifier of the MAC address (for a legitimate client or server). Consequently, the attacker gains illegal privileges that would enable it to perform other attacks, such as MITM and DOS (Xiao et al. 2016, Masoud et al. 2015). Moreover, randomization operations

for the MAC address have become useless in the protection against tracking attacks (Matte et al. 2016, Vanhoef et al. 2016). Therefore, if the server does not have a mechanism to detect MAC address change, the attacker becomes a legitimate user in the network and has access to network resources.

3.1.1.2 Proposed Techniques for our Authorisation Scheme

The EHR system needs a set of techniques to implement the management and privacy of patients' data. In this Section, we focus on the privacy aspect of authorising legitimate users. The EHR system collects and stores medical records on a server. Each medical record is associated with a set of attributes that allow HC providers or patients to access it later. Several countries, such as Australia, the USA, and the UK have implemented EHR by taking the advantage of dealing with patients' data over the Internet (Alsahafi & Gay 2018, Bachiller et al. 2018). Therefore, our authorisation scheme used a set of techniques (ECDSA, role-based access control (RBAC), attribute-based access control (ABAC), XACML and Shamir scheme) with the EHR. This Section describes the threat model, and the basic concepts of these techniques.

3.1.1.2.1 Threat Model of Authorisation Scheme

Many serious risks to HC authorisation systems that require the building of a threat model to detect weaknesses in these systems. Dolev-Yao threat model (Dolev & Yao 1983) is used to test users' authorisation in our scheme. We assume that attacks can be internal, external, active, and passive. Additionally, we suppose that Attributes Server is trustworthy and safe against information repository penetration attacks. In this model, we address the following threats:

- The attacker can flood the server with intensive authorisation requests, which is to stop the service from healthcare's users and destroy the network.
- The attacker performs an attack to penetrate the repository in the Central Server, to access the patient's data and reveal their identities.
- The attacker performs a MITM attack to modify the data and to become a legitimate user in the network.
- The attacker sends a fake authorisation request during the execution of a forgery/impersonation attack to gain access to patient data.
- The attacker can launch an eavesdropping attack to obtain authorisation requests, and then perform an analysis of these requests to detect the correlation between data, information, and pseudonyms.

- The attacker can execute timing attacks by using the time period to reveal user authorisation information.

3.1.1.2.2 Elliptic Curve Digital Signature Algorithm (ECDSA)

Proposed by Scott Vanstone in 1992 (Johnson et al. 2001, Fan et al. 2016), the elliptic curve digital signature algorithm (ECDSA) is an asymmetric signature algorithm. It depends on the use of the points on the curve to integrate and sign data. It has been used to provide integrity, authentication, and non-repudiation properties in the communications network with limited capacity in terms of power and processing. The algorithm depends on the elliptic curve discrete logarithm problem (ECDLP) (Sghaier et al. 2016, Dikshit & Singh 2017). ECDSA uses small parameters which expedites performance of computations, thus reducing time and storage (Sojka-Piotrowska & Langendoerfer 2017). These features are vastly important for large organisations and constrained-source devices, such as WSN. Because of these networks require processing power, memory, bandwidth, or power consumption (Dou et al. 2017).

Data integrity of the message is exceedingly important in the networks because the attacker can modify the message when it is transferred from source to destination (Bachiller et al. 2018). Many organisations that use it as standard, such as ISO (1998), ANSI (1999) and, IEEE and NIST (2000) (Hoceini et al. 2017). This algorithm is similar to the digital signature algorithm (DSA). Both algorithms depend on the discrete logarithm problem (DPL), but the ECDSA algorithm uses a set of points on the curve and the generating keys are notably small. ECDSA algorithm with key length 160-bit provides the equivalent for symmetric cryptography with a key length of 80-bit (Driessens et al. 2008, Abueh & Liu 2016). It is significantly convenient for devices with constrained-source because it uses tremendously small keys and provides computation speed in the signature (Cheneau et al. 2010). Moreover, four-point multiplication operations used in the ECDSA algorithm: one is in public key generation, one for signature generation and two for signature verification (Xu et al. 2012). In addition, this algorithm consists of three procedures: key generation, signature generation, and signature verification. These operations are explained as follows:

- **Key generation:**

- 1 Select a random or pseudorandom integer d in the interval $[1, n - 1]$.
- 2 Compute $K_{pu} = K_{pr}G$
- 3 Public key is K_{pu} , private key is K_{pr} .

- **Signature generation:**

- 1 Select a random or pseudorandom integer k , $1 \leq k \leq n-1$.
- 2 Compute $\text{SHA1}(m)$ and convert this bit string to an integer e .
- 3 Compute $kG = (x_1, y_1)$ and convert x_1 to an integer \bar{x}_1 .
- 4 Compute $r = x_1 \bmod n$. If $r = 0$ then go to step 1.
- 5 Compute $k^{-1} \bmod n$.
- 6 Compute $s = k^{-1}(e + K_{pr}r) \bmod n$. If $s = 0$ then go to step 1.
- 7 Signature for the message m is (r, s) .

- **Signature verification:**

- 1 Verify that r and s are integers in the interval $[1, n-1]$.
- 2 Compute $\text{SHA1}(m)$ and convert this bit string to an integer e .
- 3 Compute $w = s^{-1} \bmod n$.
- 4 Compute $u_1 = ew \bmod n$ and $u_2 = rw \bmod n$.
- 5 Compute $X = u_1G + u_2K_{pu}$.
- 6 If $X = \theta$ then reject the signature. Otherwise, convert the x -coordinate x_1 of X to an integer \bar{x}_1 , and compute $v = \bar{x}_1 \bmod n$.
- 7 Accept the signature if and only if $v = r$.

ECDSA algorithm becomes unsuitable for signing messages (integration) if used poorly and incorrectly. Validation of domain parameters is significantly important to ensure strong security against different attacks. This algorithm becomes strong if the parameters are well validated ([Save & Chhatani 2015](#), [Fransková et al. 2017](#)). The authors' recommendations are to update the validation scheme. In our authorisation scheme, we used ECDSA-256 bit to add a high-security level and took care to consume system resources. Furthermore, it supports providing anonymity of users' policies and requests. More details about ECDSA's signature and verification are available in ([Rafik & Mohammed 2013](#)).

3.1.1.2.3 Access Control in EHR Systems

Any system needs access control models to determine users' access to the data repository. Many access control models, and each one depends on a particular method and set of rules. One of the most distinct access control models is Role-Based Access Control (RBAC). This model relies on the classification of users into roles, and each role has privileges and rights regarding data access ([Gajanayake et al. 2014](#)). With RBAC, the security of the system is based on the structure of

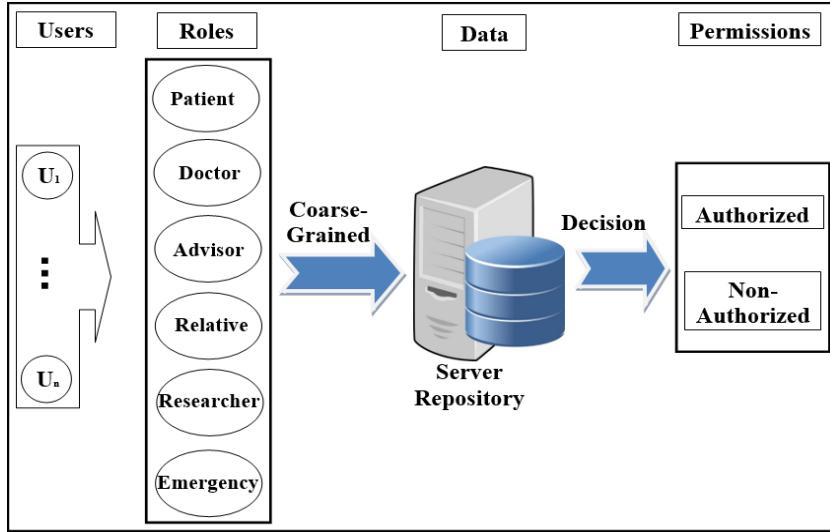


Figure 3.5: Scheme of RBAC model.

the system's roles assigned to users (Sánchez et al. 2017). Each role in the system is assigned according to the job of the user in the organisation (Alturki 2017). RBAC was introduced to solve problems with previous access models, such as Mandatory Access Control (MAC) and Discretionary Access Control (DAC). As shown in Figure 3.5, the RBAC model divides users into roles (such as patient, doctor, and researcher). For example, the researcher role can access the data assigned to that role, which enables him/her to develop medical research to find a cure for a medical condition.

In recent years, there has been significant interest in using the Attribute-Based Access Control (ABAC) model for the protection of data privacy. This model is designed to access data more accurately (fine-grained) and securely. It handles user attributes (such as name, address, age, mobile, location, time) to allow users to access the server's repository. ABAC proposed to go beyond the limitations in the rules and design of the most well-known control access models (DAC, MAC, and RBAC) (Jin et al. 2012, Zhang & Zhang 2017). ABAC is a rich model because it deals with a wide range of user attributes. ABAC supports administration, authorisation of context-aware, risk-intelligence, and scalability in various applications, such as the Internet, IoT, Big Data, cloud computing, and VANET (Brossard et al. 2017). The attributes in ABAC are categorized into subject, object, action, and environment. As shown in Figure 3.6, each user has a set of attributes that allows him/her to access data in the server. In our authorisation scheme, we combine ABAC and RBAC to obtain a model that depends on both roles and attributes.

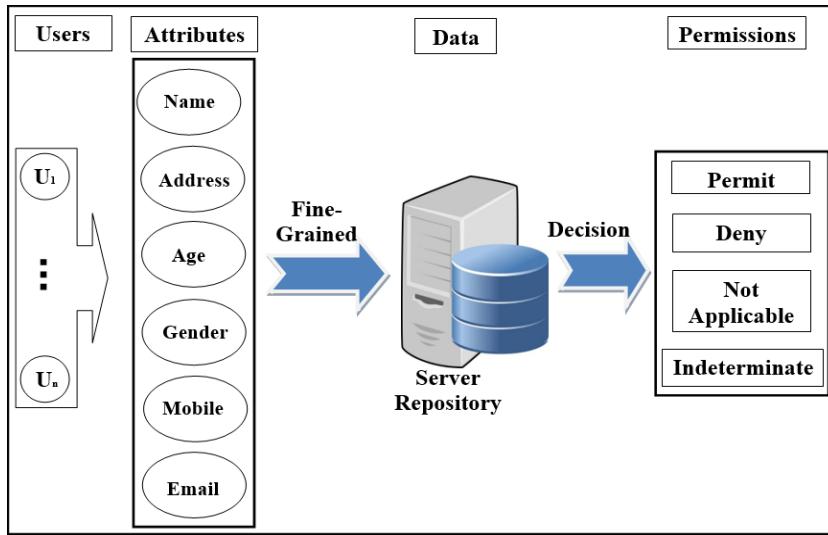


Figure 3.6: Scheme of ABAC model.

3.1.1.2.4 Distributed AC Implementation Technology

The most important component in the proposed EHR system is the EHR repository. Access to data is a major challenge in big data management systems (EHR) that use different techniques. In addition, the exchange of information over the Internet has become essential and needs achieve access authorisation, particularly in HC applications. Extensible access control markup language (XACML) standards include both access control (authorisation) and data management based on extensible markup language (XML) in the different systems ([Lu & Sinnott 2018](#)). Effectively, XACML offers features for data access and authorisation for the users at the fine-grained level.

Many techniques, such as an open authentication (OAuth), XML access control language (XACL), enterprise privacy authorisation language (EPAL), open digital rights language (ODRL), and security assertion markup language (SAML) have used in authorisation projects. However, OAuth suffers from password management; XACL suffers from few functions and non-extensible; EPAL does not support multiple subjects, error handling and hierarchical role; ODRL suffers from common vocabulary, conflict between serialization and does not support combining algorithms; SAML is extremely expensive, difficult to use and use single sign-on (SSO), namely, it uses one password for all applications that may be reason for penetration. XACML is the most flexible and effective ([Grace & Surridge 2017](#), [Beltran et al. 2017](#), [Turkmen et al. 2017](#)). This technology is presented by the organisation for the advancement of structured information standards (OASIS). This standard has many of the features that qualify it for use on the Internet, such as combining policy, combining algorithm, attribute, multiple subjects, policy distribution, implementation independency and obligations ([Zhang & Zhang 2017](#),

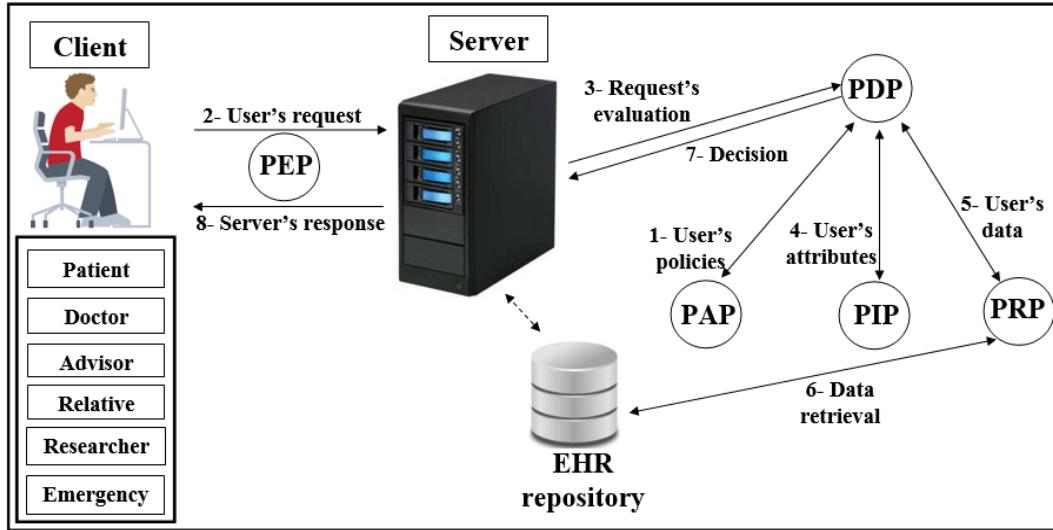


Figure 3.7: Scheme of XACML

Turkmen et al. 2017, Deng et al. 2018).

This technique is based on the specific policies first and then on many modules, such as policy enforcement point (PEP), policy decision point (PDP), policy administration point (PAP), policy information point (PIP), and policy retrieval point (PRP) to evaluate the request for access (Calvillo-Arbizu et al. 2014). As shown in Figure 3.7, PEP sends and receive requests and access responses to the repository; PDP evaluates the decision; PAP creates policies based on users' attributes; PIP retrieves users' attributes; and PRP retrieves the users' data from the repository. The result of the decision (permit, deny, not applicable, indeterminate) is sent to the subject via PEP (Zhang & Zhang 2017).

3.1.1.2.5 Shamir Scheme

The secret sharing or the Shamir scheme depends on a set of keys/secrets sharing (SS_s) and threshold (TH) to produce a master key/secret (MS). The master secret can be created from some or all of the SS_s (Liu, Yang, Wang, Zhu & Ji 2018). In this scheme, TH specifies the minimum number of keys/secrets that allow reconfiguring MS (Ahmadian & Jamshidpour 2018, Stinson & Wei 2018). This scheme consists of two phases: Generation and reconstruction. In the generation phase, the server divides MS into a set of secrets sharing (SS_1, SS_2, \dots, SS_n), and each Client (C_i) securely receives one secret sharing (SS) that is part of MS . In the reconstruction phase, C_i needs to achieve any set of secrets (SS_s) required by relying on the value of TH to construct MS (correctness and homomorphism properties). If C_i has $TH-1$ from SS_s , C_i fails to obtain information from server (secrecy property).

Calculating the MS is an immensely difficult operation for the attacker. In addition, the secrets that are configured for the MS are anonymous users; the attacker does not know if these secrets belong to any of the users (Huang et al. 2016). The Shamir scheme provides an anonymity solution to generate a MS with several features. It provides full security in hiding C_i s' SS_s , a MS size equal to C_i s' SS_s sizes, easy creation of a MS from a set of keys/secrets, and creation of a new key/secret for one-time use (Dikshit & Singh 2017). In our authorisation scheme, we used the Shamir scheme ($TH = 3$) with ECDSA. This security procedure is to prevent attackers from accessing or modifying patients' data during the implementation of security objectives (authorisation, authentication, authenticity, and integrity).

3.1.1.3 Proposed Techniques for our Storage Scheme

HWSN offers distinctive services in monitoring patients' condition. In particular, these networks are more acceptable in the health sector when providing security requirements in protecting medical records. However, these security procedures consume energy, processor and memory capabilities in the sensor nodes. Therefore, the application of lightweight cryptography mechanisms is utmost important for the continuity of HWSN use. This Section describes the threat model for HWSN and light data collection techniques.

3.1.1.3.1 Threat Model of Storage Scheme

Building a threat model in HWSN is important to identify serious attacks in patients' data disclosure. HWSN provides important services to the health sector compared to traditional networks, such as local area network (LAN) and metropolitan area network (MAN), but they are more vulnerable than the latter. These networks rely on self-organisation and synchronization to increase the flexible communication of sensor nodes, but in time HWSN suffers from a security vulnerability. Due to wireless radio signals in WSN, it is easy for an attacker to access data transmitted among sensors, cluster heads (CHs) and local server (LS). These networks are targeted from many attacks that exploit resource-constrained, untrustworthy communication and unattended processes. HWSN threats are as follows:

- The attacker performs a MITM attack to modify or replay attack to resend the data to CH/LS . The attacker aim is to use his/her device as legitimate sensors in the network.
- The attacker can execute a DoS attack on CH/LS . This attack exploits a heavy transmission of duplicate or counterfeit data to destroy the HWSN.

- The attacker can apply several types of localisation attacks such as
 - The attacker uses several IDs of legitimate sensors with incorrect data (such as wrong and duplicate ID) and sends them to the network (Sybil attack).
 - The attacker uses more than a fake node to transfer data between different locations via a tunnel that connects counterfeit sensors. This attack leads to a disguise of communication between the legitimate sensors (Wormhole attack).
 - The attacker uses a malicious sensor node to attract all data sent from the sensors. Then, he/she prevents the correct data access to the *LS* (Sinkhole attack).
- The attacker performs an attack to penetrate the EMR repository in the *LS*, to access the patient's data and reveal their identities.
- The attacker can launch an eavesdropping attack to obtain patients' data, and then perform an analysis of these data to detect the linkability between data, information, and pseudonyms.
- The attacker can copy a legitimate sensor ID in more than one counterfeit sensor. These counterfeit nodes send modified data to the network (node replication attack).
- Collision, preimage and second preimage attacks can implement to change signatures and data transferred among network's devices.

3.1.1.3.2 SHA Hash Function

Secure hash algorithm (SHA) is one of the traditional hash algorithms that provide integrity and authentication when used with digital signatures (Guesmi et al. 2016). For example, SHA1 was used in the ECDSA algorithm to perform the signature process in public key cryptography. SHA consists of several varieties SHA0, SHA1, SHA2 and SHA3. The National Security Agency (NSA) replaced SHA0 with SHA1 shortly to improve security by adding rotation in the compression function. Both SHA2 and SHA3 consist of SHA-224, SHA-256, SHA-384 and SHA-512, but SHA3 uses a different structure than the SHA family. SHA0, SHA1 and SHA2 are built on the basis of the Merkle-Damgard structure as shown in Figure 3.8 (Shi et al. 2012) and are designed by NSA. SHA3 is also known as KECCAK and is built on sponge construction as shown in Figure 3.3 and uses two-stage absorbing and squeezing. Since 2007, NIST has adopted KECCAK because of the practical attacks on SHA1 and SHA2, KECCAK has become the rival standard in 2015 (Shi et al. 2012).

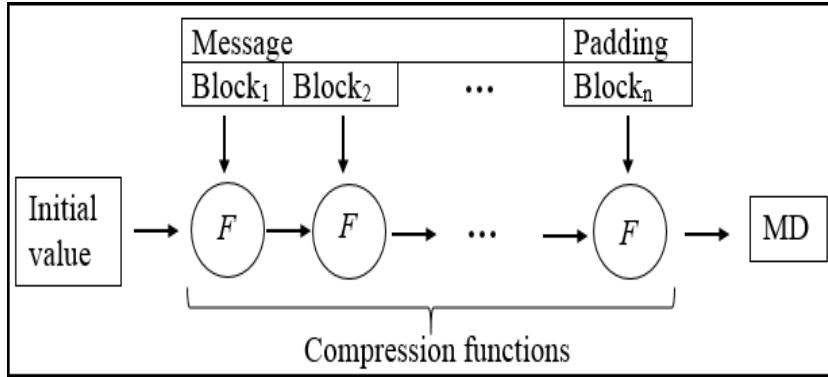


Figure 3.8: The Merkle-Damgård construction of SHA (0, 1 and 2) hash functions

Table 3.2: Comparison of SHA family

Algorithm	SHA1	SHA2				SHA3			
MD	160	224	256	384	512	224	256	384	512
Word size	32	32	32	64	64	64	64	64	64
Block size	512	512	512	1024	1024	1152	1088	832	576
Message size	<2 ⁶⁴	<2 ⁶⁴	<2 ⁶⁴	<2 ¹²⁸	<2 ¹²⁸	-	-	-	-
Iterations	80	64	64	80	80	24	24	24	24
Security	80	112	128	192	256	112	128	192	256
Weak security	Yes, practical such as Collision and preimage	Yes, practical such as preimage and length extension				Yes, theoretical such as fault injection			
Performance	Fast	Less				Lowest			
Year	1995	2004				2015			
Designer	NSA					Guido Bertoni and et al.			
Construction	Merkle–Damgård					Sponge			

However, some research (Amy et al. 2016, Luo et al. 2016, 2017) have indicated that SHA3 can suffer from fault injection threats.

SHA is a one-way function consisting of two phases that divide the message into blocks of the same size (such as 512 or 1024). A set of zeros is added and followed by one at the end of the last block of the message (Kodali 2013). This phase is called preprocessing or padding. The second stage is the MD computation. At this stage, all message blocks are entered into the iterations (SHA1 (80), SHA2 (64) and SHA3 (256)) one by one that containing constants and logic operations (OR, AND, XOR) in compression function (F) to produce MD. Each hash algorithm produces a fixed length of MD, such as 160 for SHA1, 224, 256, 384 and 512 For SHA2 and SHA3 (Boubiche et al. 2016, Chaves et al. 2016). Table 3.2 shows comparison among SHA1, SHA2 and SHA3 (Guesmi et al. 2016, Dobraunig et al. 2015). Many existing schemes to collect data in WSN (Kodali 2013, Boubiche et al. 2016, Al Maashri et al. 2016, Lu et al. 2016, Saha et al. 2016, Elhoseny et al. 2016) have used SHA algorithm to support integrity and authentication. However, these schemes did not address collision and preimage problems in the SHA algorithm (Xia et al. 2016, Rasjid et al. 2017, Chiriaco et al. 2017, Merrill 2017, Yang et al. 2017, Giechaskiel et al. 2018, Brockmann 2018, Park & Kim 2018).

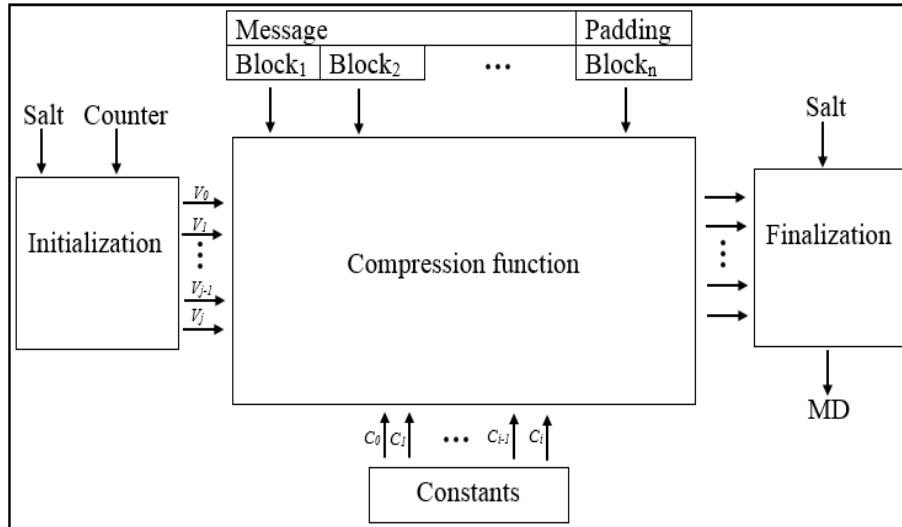


Figure 3.9: Architecture of BLAKE hash function

3.1.1.3.3 BLAKE Hash Function

Aumasson et al. (2008) proposed a BLAKE hash algorithm to overcome efficiency problems in previous hash algorithms. This algorithm offers several features, such as simplicity, speed and parallel operations in hardware and software implementations. It is immune to second preimage, side-channel and length-extension attacks. BLAKE implements HAIFA construction which is an enhanced version of Merkle-Damgård. This development of construction is accomplished by adding a salt and a counter to the algorithm stages to prevent security vulnerability for second preimage attacks in Merkle-Damgård. Also, BLAKE's local wide-pipe structure makes collision attacks impossible (Shi et al. 2012). BLAKE uses the LAKE hash algorithm and compresses the message blocks in hash-tree constructions by Bernstein's stream cipher ChaCha which is a variation of Salsa20-256 (Mozaffari-Kermani & Azarderakhsh 2015). NIST was considered a BLAKE of competing algorithms in the final round of hash algorithms, such as KECCAK, Skein and Grøstl (Cho 2018). BLAKE supports several versions that are 244, 256, 384 and 512. Then, (Aumasson, Neves, Wilcox-O'Hearn & Winnerlein 2013) developed BLAKE2 to improve the speed in software implementation and reduce memory, BLAKE2 is 32% less memory than BLAKE. In addition, BLAKE2 contains two versions BLAKE2s and BLAKE2b to be used with 32 bit and 64 bit platform respectively, Table 3.3 shows the BLAKE family (Chaves et al. 2016).

Figure 3.9 shows the architecture of the BLAKE hash function. In BLAKE, the message is divided into blocks, and the last block is padded with 1 followed by zeros to complete the last block size to 512 or 1024 bits. BLAKE consists of two parts: compression function and iteration mode. Compression function consists of

Table 3.3: Versions of BLAKE hash function

BLAKE version	Word	Message	Block	MD	Salt	Round
BLAKE-28	32 bits	$<2^{64}$	512	224	128	14
BLAKE-32	32 bits	$<2^{64}$	512	256	128	14
BLAKE-48	64 bits	$<2^{128}$	1024	384	256	16
BLAKE-64	64 bits	$<2^{128}$	1024	512	256	16
BLAKE2s	32 bits	-	256	128-256	64	10
BLAKE2b	64 bits	-	512	160-512	128	12

chain value, message blocks, salt value and counter value. The BLAKE compression function uses three phases initialization, round functions and finalization. The initialization phase uses the chain value, salt and counter to create a matrix $4 * 4$ and produces a 16-word value for different initializing states (V). These states are entered into the round function (r) with parallel rounds in the round functions phase. The output of this phase is a new V that is used to generate the chain value for the finalization phase. In the finalization phase of the chain, salt and new state values are applied with \oplus operations to produce a new chain value. BLAKE is one of the fastest hash algorithms and has strong security (Chaves et al. 2016, Körber et al. 2018). Many research pointed out that BLAKE is a conspicuously suitable algorithm for source restricted devices (Mozaffari-Kermani & Azarderakhsh 2015, Homsirikamol et al. 2011, Sugier 2017, Mozaffari-Kermani et al. 2017, Yang et al. 2018, Prakasha et al. 2018).

3.1.1.3.4 De-identification Mechanism

Encryption and k-anonymity mechanisms are applied to hide patients' data. But, these mechanisms suffer from serious drawbacks. For instance, encryption of collected data (Neubauer & Heurix 2011) has the following drawbacks:

1. Temporary HC provider, such as a researcher doctor will not get benefit from the encrypted data, and if he/she is able to get the collected data by the decryption process, this is a security weakness in the HWSN system.
2. Huge datasets encryption is dramatically burdening for the LS system, which causes complexity operations and processor power consumption (Zhou et al. 2017).
3. The datasets of collected data perform the intensive and continuing operations on medical records, such as add, delete and edit, and if the records are encrypted, this will multiply the burden on the LS (Vatsalan et al. 2017).
4. Encryption can contain implicitly direct information about the HC patients. The breach of this encryption will expose the patients' information to the intruders(Bogos et al. 2018).

The k-anonymity of collected data suffers from the following:

1. The removal process of all the patients' information obstructs the HC provider from dealing with the linked patients' data ([Neubauer & Heurix 2011](#)).
2. Inserting a large set of false medical records, namely, greatly reduplication the dataset size. Consequently, this process consumes *LS* resources, particularly with the intensive and continuous access of the datasets by HC providers.

To address these disadvantages, we use random pseudonyms in REISCH's requests to hide the correlation of patients' information with data. The medical records transmitted/stored among the sensors, *CHs* and *LS* do not contain any patients' real information. This mechanism prevents the intruders from identifying patients' IDs. In addition, this mechanism is fast and does not need complex operations. When the EMR system wants to add a new HC provider/patient, the REISCH sends a request to the remote servers (*CS* and *AS*) which provides *LS* with the required information about updating random pseudonyms. These random pseudonyms are linked with the users' IDs. This mechanism enables sensors to access and store a specific patients' data without exceeding granted privileges.

3.1.1.3.5 Efficient HWSN Data Management Using XML

The other important part of the proposed EMR system is the repository. The repositories contain data in various contexts since these systems have difficulties dealing with these different coordinates for data. The extensible access control (XML) considers convenient for the exchange of various data via different environments. XML is the symbolic, simple and flexible language designed to manage, describe and exchange data across the Internet. It divides the data in the form of useful information through data organisation, the purpose of sharing data across different systems and stored in the dataset. Also, XML has several features that make it suitable for data management, such as support for unicode, the representation of computer data structures (trees, records and lists), use a formula read by both human and computer. However, XML should support the security mechanisms to provide different levels of protection of sensitive data in the whole or part of the XML document ([Jo & Chung 2015](#)).

But this information needs mechanisms to identify the arrival of unauthorised users to protect patients' data. Patient data transmitted between sensors (nodes and *CHs*) and network devices (such as a nurse and a *LS* device) need data management algorithms to maintain both performance and security at the same time. EMR including patients' confidential data and private information needs to be accessed by HC professionals. Thus, sharing such EMR without breaching a patient's privacy requires EMR management in an efficient and secure manner. XML technology

has begun showing its superiority in the exchanging of complex data over different systems.

3.1.1.3.6 Homomorphic Scheme

Homomorphic is a mechanism for merging all messages and signatures together to improve both performance efficiency and security. This mechanism consists of many types, such as linearly, polynomial, fully and aggregate signature (Emmanuel et al. 2018). In this study, we focus on the aggregate signature because it deals with multi-sensors signatures, messages and different private keys depending on different devices, such as sensors. Furthermore, this process is extremely suitable for multihop-based networks during the integration of signatures in a single signature. We assume that we have a range of messages $M = \{m_1, \dots, m_n\}$ and a range signatures $S = \{s_1, \dots, s_n\}$, M contains all group's messages together, S is one signature for all signatures, A is an aggregate function and V is a verification function. The process of homomorphic signatures is as follows:

- Each device generates K_{pr} and K_{pu} keys and broadcasts the K_{pu} keys to network members.
- Each device signs the m by the signature algorithm, which includes the device's ID, message and private key $s(K_{pr}, m_i, ID)$.
- The aggregation procedure in the intermediate nodes, such as CH relies on A to collect all public keys, messages and signatures $A(K_{pu_1}, \dots, K_{pu_n}; m_1, \dots, m_n; s_1, \dots, s_n)$.
- The verification procedure will be in the final entity, such as LS , which uses V to validate the signatures $V(K_{pu_1}, \dots, K_{pu_n}; m_1, \dots, m_n; s_1, \dots, s_n)$. If the verification process fails, it means that the data integrity operation is incorrect.

The homomorphic aggregate signature scheme is important to support the performance of network devices by making the intermediate nodes, such as CH performs a single signature process for all members' signatures of the group rather than the signature verification process (the ECDSA verification process consumes more time and energy than the signature process) (Luo et al. 2019). In addition, homomorphic increases security measures in preventing the tracking of patients' information and data or changing signatures of legitimate network devices (Kapusta et al. 2019).

3.1.2 To Get Familiar with the HC Domain and the Development of EMR/EHR System

- **Patient's Confidence in HC Services**

HC services include different environments and are not limited to the range of hospital building. This expansion in HC environments increases threats and risks. Therefore, security and privacy issues should be addressed carefully by developers of the health applications. Information privacy in HC applications is of interest to HC providers on the one hand. Because of the information is privacy issues affecting the legal and operational environments; on the other hand, privacy issues affect the patient's confidence in the use of HC applications (Rathert et al. 2017). Therefore, earning the trust of patients in health applications depends on two factors. Those are the understanding of providers for security weaknesses and how to develop health applications facing these threats.

- **HC and EMR/EHR Users**

Security and confidentiality requirements address where, when and why the data are available and who can access the patients' data (Consultants to Government and Industries 2015). Patients in the HC institutions need services that are efficient, fast and continuous, and at the same time disallow disclosure of their information. Namely, these services require restrict access to only authorised persons (Ganiga et al. 2018). Access to HC networks has several challenges in security and privacy issues, such as validation of medical devices to prevent the health systems members the use of unauthorised devices, restrict the access of guests and visitors to the HC applications (such as researchers doctors and specialists) and access of control to medical records for patients by identifying the role of each of the medical staff members. For instance, the nurse can access only data of mental health to apply doctor's directives, the doctor can access identity data and information of mental health, the pharmacist can access only health data to specify prescription as well as the method of taking medication and so on. In addition, it is important compliance with medical standards for HC organisations (such as HIPAA standards to ensure the data confidentiality) (Bradford Networks 2012). All of these challenges require a great effort and can be a burden on IT staff.

Figure 3.10 shows the taxonomy of HC users. This Figure divided into users (such as patient, nurse and doctor) and datasets or medical records (information and data). Also, information includes personal (such as name, age and address) and network (such as password, OTP, MAC and signature). While data includes specific disease data (such as sexual, mental and dermatology).

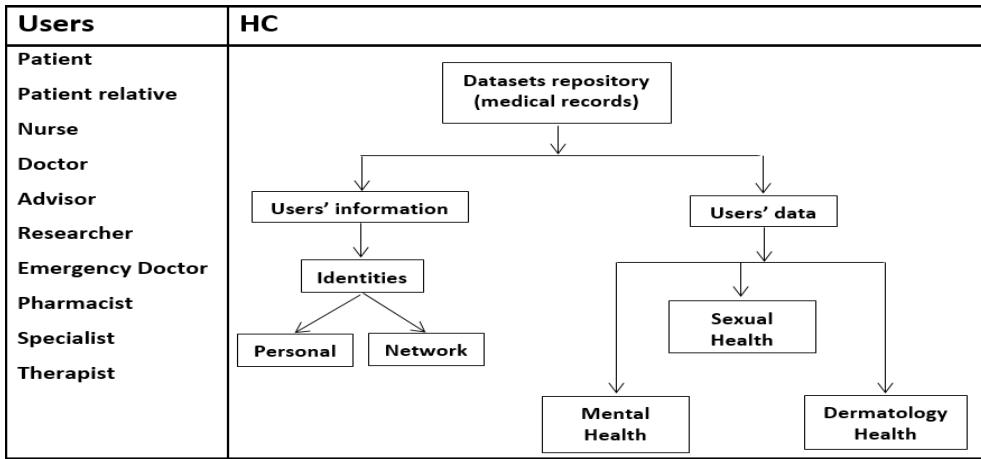


Figure 3.10: Taxonomy of HC users

- **Administration/Management of Health Organisations**

Health organisations should prepare a detailed study on security and data management issues, and address the protection of confidential patient data carefully. Because of the increasing challenges to health organisations, these organisations require another feature, such as data management in addition to the privacy and security issues (Consultants to Government and Industries 2015, Lokshina & Lanting 2019). The different data contexts in network exchanges cause a heavy burden on authorisation systems. Also, the network security in the HC systems requires the integration of all the different network units in the security system. In addition, the connection with the proper adoption of the security context of each device in the network (such as a computer, sensor and phone). Furthermore, providing the vision of information with access control in real-time helps to build a security efficient system for HC (Bradford Networks 2012).

3.1.3 To Propose a Model/Framework of Integrating WSN with HC Application

In this Section, we will explain the proposed project model for the protection of users' medical records (information and data). This model includes the establishment of the HC scheme has security and efficiency. This proposal includes medical records protection in three areas: transferring authentication and authorisation information, accessing server datasets (EMR/EHR repository) and data collection (WSN) as shown in Figure 3.11. The components used in the proposed scheme are communication devices (laptop and desktop), a remote server (central server (*CS*)), attribute server (*AS*) and data server (*DS*)), a local server (*LS*) and sensors nodes. *CS* considers as a portal to authenticate and authorise users' requests, *AS* con-

tains users' real identities (IDs), DS contains patients' data store and LS contains data collections by WSN. Communication devices used to send and receive medical records, such as medical reports. These devices used by patients or providers (medical staff) and that are authenticated and authorised access to confidential data for patients. Servers are used to store patients' medical records and control access to a datasets.

For example, a provider, such as a doctor in a hospital can send authentication and authorisation request by his/her communication device to earn access to a specific patient's data. Also, the patient can obtain his/her medical record history via sending a request directly to the remote server (CS) over the Internet. This situation obtains if the patient is authenticated and authorised to grant access to his/her information and data. Sensor nodes used to gather patients' data in an environment (hospital or clinic) and stored in LS (EMR repository). Collecting patients' data through sensor nodes requires protection from the risks and threats (such as internal and external attacks). Also, the transfer of patient's data from and to the local or remote server datasets requires applying critical security policies to prevent the various attacks. Our framework offers the following capabilities to ensure security and privacy requirements in the HC application:

- Use of lightweight algorithms, such as ECC and PHOTON (signencrypion) to address the performance and security in authentication protocols.
- Controlled access for authorised users and the datasets management via the Internet by authorisation protocols.
- WSN data management and use of the proper context (XML) for the exchange of data on different devices, as well as, protection of WSN's data through signature (ECDSA) with the fast hash function and MD anonymity.

3.1.4 To Design Protocols to Improve the Security of Users' Authentication in EHR

In this Section, we will briefly explain the design of the authentication scheme. This scheme will be more detailed in Chapter 4 to explain authentication protocols among network entities.

1. HC Security Using Signencrypion to Information Confidentiality in EHR

Users' information is a sensitive part of the definition of users in the HC application. This information proves their legitimacy in accessing the network services. The authentication process is the first security procedure when

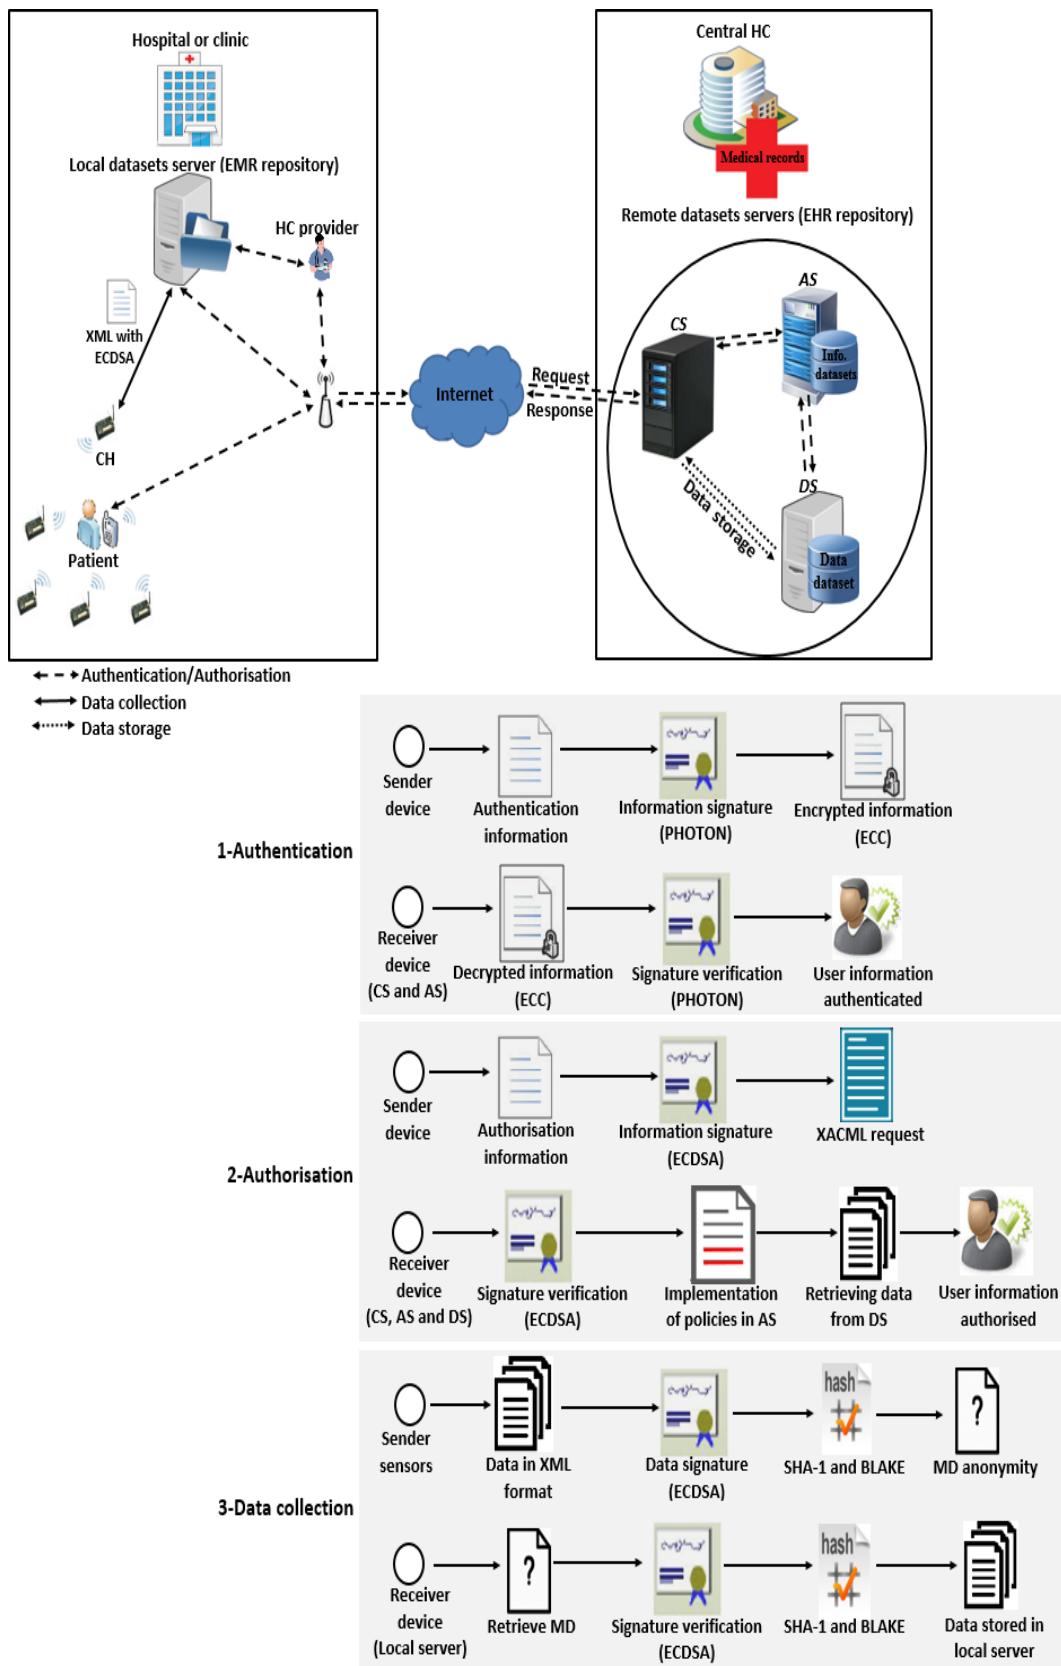


Figure 3.11: The proposed project model in HC environment

connecting to a HC application network. Therefore, user authentication information needs mechanisms that apply the requirements of confidentiality and integrity to prevent disclosure or change of information. Signcryption (encryption and signature) for users' small information is critical to repressing attacks, especially, external. However, EHR systems require efficient security protocols because of the large volume of communications exchange between users and EHR repository. We propose using ECIES-256 bit for encryption and PHOTON-256 bit for signature. These algorithms perform efficient operations as specified in the Sections 3.1.1.1.2 and 3.1.1.1.3. Although, encryption is extremely expensive for server resources when used with large data in HC environments. But it is suitable when used with small authentication information. Therefore, we use efficient ECIES to encrypt only users' information in our authentication scheme. In this scheme, we rely on three entities (communication devices, *CS* and *AS*) to complete the authentication process. Communication device sends the authentication request after signing and encrypting user information to *CS* and *AS*. These servers validate the authentication request by decrypting authentication request, verifying signatures, and checking user security parameters, such as pseudonym, password and timestamp. Failure of the authentication request prevents the user from network services, such as the authorisation process of data access is not allowed when the authentication process fails.

2. Using Robust Techniques to Ensure User and Device Authenticity

The design of authentication protocols in the HC application requires robust mechanisms to demonstrate legitimate users and their devices. Several reasons are to penetrate the authentication process in health applications. For instance, the theft or loss of the legitimate user's device, the analysis of requests for login, registration and authentication transferred among network entities, the use of real information for a legitimate user (internal attack) or disguising as legitimate user (external attack) are serious risks of penetration of the authentication process. The process of separating real information from authentication protocols and security parameters (such as password and private key) from user communication devices greatly limits the penetration of the authentication process. Therefore, we propose using techniques, such as OTP, mutual authentication and MAC with encryption and signing to prevent attacks aforementioned on the authentication process. OTP is used to establish the user's legitimacy in the HC network registration process. Mutual authentication is used to prevent imitation attacks either from the communication device or server. MAC is used to prove the legitimacy of the device.

Additionally, we propose hiding the private key of the ECIES algorithm in a computation process that includes the signature and password, while preventing the password from being stored explicitly on the user's device. Consequently, the use of these techniques within authentication protocols provides authenticity to the legitimate user and the device.

3.1.5 To Design Protocols to Improve the Privacy of Users' Authorisation in EHR

In this Section, we will briefly explain the design of the authorisation scheme. This scheme will be more detailed in Chapter 5 to explain authorisation protocols among network entities.

1. Access Control with EHR Datasets to Improve the Authorisation of HC Users

The other important part of HC applications is to protect patient's data stored in the server datasets (*DS*). These data need protection mechanisms of internal and external attackers. Therefore, patients' dataset in the server requires defining the access privileges of each user (patient, patient relative, nurse, doctor, advisor, researcher, emergency doctor, pharmacist) wants access to this data. The access control (AC) property only allows authorised users access to certain data. AC provides confidentiality in the EHR by restricting access rights for authorised users (Rezaeibagha et al. 2015).

AC models are the cornerstone for building robust privacy in authorisation systems. We propose to merge two models role-based (RBAC) and attribute-based access control (ABAC) to specify the role of each user with a specific task and attributes that grant more privileges. In addition, we propose the use of features XACML to protect patient's data from illegal and unauthorised access. Initially, users (providers or patients) should be authenticated to the HC network. Our authentication scheme is to prevent external attackers through the use of signencrytption (ECC/PHOTON). The next stage is the use of XACML to determine the medical records that the user can access. At this stage, our application involves identifying the capabilities of each user, to identify access each user to certain data and define the tasks of each user. In our scheme, we propose signing of the attributes and information in XACML request. XACML defines the policies and the semantic to apply those policies. XACML formats are used for request and response between the entities PEP and PDP to determine AC of the source (Sartoli & Namin 2019). Furthermore, XACML is composed of policies and rules. Policies define the applied of request, while the rules governing limitations for the applied of XACML. The

request consists of attributes associated with the request sender and the response contains the decision (permit, deny, not applicable and indeterminate).

2. Using Pseudonym and Anonymity with EHR to Hide the Medical Records

Pseudonym and anonymity are privacy properties in unlinking, hiding and disguising the medical records of patients. Pseudonym property is applied to the patients' data by unlinking real information with data about a users who are not required to know data identity. For example, the nurse is not required to know the information about patient identities (IDs). But it is possible to know some issues, such as the medical name (pseudonym), the range of age and medical reports. The doctor can know some of the personal information of the patient. But it is not important to know the criminal status of the patient information. In addition, if a doctor asked to consult another doctor, the latter is allowed to access only health data and medical reports. Suppose the patient's information and data are stored in the datasets and only the central HC administrator has the authority to access all medical records. We assume the use of four datasets (users' attributes (patients and HC providers), pseudonyms, policies (on *AS*) and patients' data (on *DS*)). Each patient has a number and pseudonym in the central database in addition to the use of the concept of multiple pseudonyms between communication device and servers (*CS*, *AS* and *DS*). For instance, if the patient or provider sends an authorisation request to the network, user's pseudonym will be different when the request is transferred between the communication device and network entities (*CS*, *AS* and *DS*). The use of a multi pseudonyms mechanism prevents an attacker from tracking requests and responses when they are transferred among network entities.

Users' information requires the anonymity property to disguise and prevent disclosure of their IDs. We propose the use of information anonymity with XACML to protect patients' data from illegitimate and unauthorised access. Anonymity property is applied to the users' information by concealing signatures (ECDSA) and Shamir scheme. The addition of anonymity property with XACML leads to increase the privacy of data through the hide data and limit access for authorised users. Authorisation protocols become more robust when implementing a Shamir scheme with signatures because a set of secrets is created to produce the master signature. These secrets provide anonymity (depending on the number of secrets or threshold) in each authorisation request. We use anonymity property with information rather than data for two

reasons: first to disguise and protect the users' information, and second to maintain network efficiency. Because the use of anonymity with large patient data is extremely expensive for network resources compared to the size of users' small information during the authorisation process for users. In addition, we use multiple pseudonyms with both information and data to prevent the association of real information with data.

3.1.6 To Design Protocols to Improve the Security of WSN and EMR

In this Section, we propose a set of efficient security mechanisms to use in HC application based on WSN. This scheme will be more detailed in Chapter 6 to explain our security protocols in HWSN among sensors, *CH* and *LS*.

1. HC Data Management and Homomorphic Signatures to Improve the EMR's Storing/Exchanging

Different systems that use a variety of devices require data management to be efficient. In our scheme, we use different devices, such as sensors, communications devices and computers (servers). Therefore, we need a technology that allows for compatibility and data exchange among different devices. We propose the use of XML to manage the wireless local area network (WLAN) data. This descriptive language enables all devices to read data in a simple and meaningful way. In addition, we propose using the mechanism of signature (ECDSA) with XML file for the management and protection of patient data at the same time.

The process of verifying collected signatures from sensors consumes *CH* energy and time quickly. ECDSA algorithm accomplishes operations of the public key, signature generation and signature verification. The operation of signature verification in the ECDSA algorithm consumes more time and energy than a signature generation ([Jariwala & Jinwala 2012](#), [Othman et al. 2013](#)). We assume that we have a clinic or a hospital care scheme as shown in Figure [3.12](#). We propose using homomorphic property with the signature in all sensor nodes. Homomorphic property means the direct computation on signed data. Each sensor node signs the message, and then sends it to the *CH*. Thereafter, *CH* combines all signed messages without verifies the messages. Afterwards, *CH* sends signed messages to a *LS* (unrestricted resources). Due to the transport operations consume more energy from the computation operations. The collection of signed messages without verify in the *CH* reduces the transport operations and thus save time and energy.

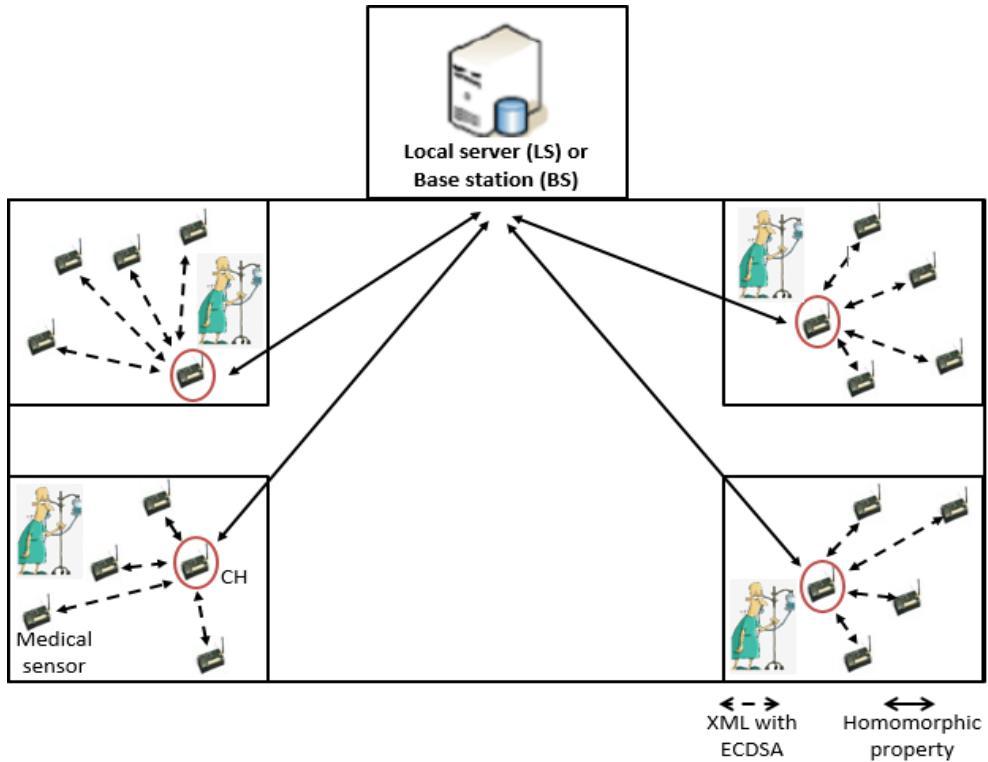


Figure 3.12: Homomorphic and 1 scalar multiplication with signatures

2. BLAKE and Anonymity with ECDSA to Improve the Integrity and Authentication of EMR

The hash algorithm is one of the important processes used by the ECDSA algorithm to complete the signing. ECDSA algorithm uses a secure hash algorithm (SHA1) provided by NIST in 1995 to preserve the message integrity. This algorithm produces a digest 160-bit size with 6122 gate-equivalent (GE). It needs the complex operations to accomplish digesting message. In digital signatures, the hash algorithm should be collisions (Wang et al. 2005), preimage and second preimage resistance (Knellwolf & Khovratovich 2012). Authors in (Rijmen & Oswald 2005, Wang et al. 2005, Knellwolf & Khovratovich 2012, Stevens 2013) pointed out that this algorithm can suffer from practical attacks, such as collision and preimage. But SHA1 is still used in many signature algorithms, such as ECDSA. We propose using the BLAKE2 hash algorithm for signature in ECDSA rather than the SHA1. BLAKE2 algorithm produces digest 256-bit size with 1058 GE. This algorithm was developed 2013 in order to reduce the memory, energy, speed requirements and resistance to attacks. BLAKE2 is faster and lighter than the SHA family algorithms and even message digest (MD5) as shown in Figure 3.13 (Aumasson, Neves, Wilcox-O'Hearn & Winnerlein 2013). Also, this algorithm is resistant to attacks, such as collisions, multicollision, distinguishers, preimage and second preimage.

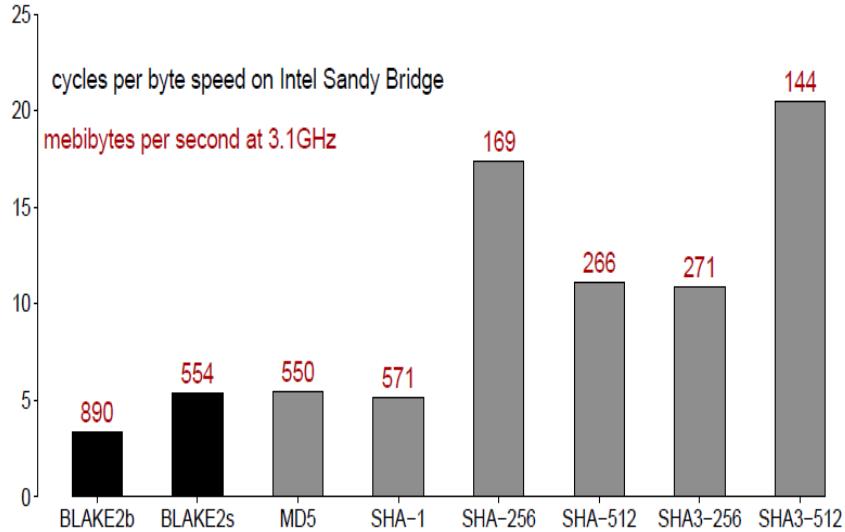


Figure 3.13: Comparison of hash functions speed

The ECDSA algorithm is used to perform the integrity of the messages. This algorithm prevents the attacker from changing the message data, since any change in the message will be discovered by the receiver. ECDSA produce the signing of the message (r, s) . The r parameter is the value used to calculate the signature in the process of signature verification and s is the signature. The sender signs the message (m) by ECDSA and gets (r, s) . The sender sends the message m , r and s to the receiver, who checks the message. Some of the attacks carried out on the r and s to get the private key K_{pr} . If the attacker is able to get K_{pr} , this attacker can produce the same original signatures. Side channel attack (SCA) can penetrate ECDSA signatures and thus get K_{pr} . Where K_{pr} is the security in this algorithm, if the attacker discovered the private key, data is easily penetrated. These attacks rely on information leaked to the ephemeral key (k) and the value of r is available publicly.

We propose adding anonymity property to ECDSA's signature to hide information of a signature's parameters r and s (each of r and s have the same number of bits) from the attackers. We accomplish this property in the original signature (r, s) depending on the value sent from the server (LS). If the value is odd, we divide the signature into three parts. While if the value is even, we divide the signature into four parts and exchange parts. In both odd and even cases, a counterfeit signature and padding are added to the original signature to support signature anonymity. After the completion of this operation, the value is sent with the message to specify the odd or even division in the receiver. Afterwards, the receiver can verify that the message returns the same

parts of the signature to its original place. This mechanism prevents attacks from penetrating ECDSA signatures because the attacker when he/she gets on the value of r and s , he/she has not the original value for r and s . Then, this attacker cannot derive the private key and thereby protect the patient's data from the change.

3.2 Summary of the Chapter

In this Chapter, we have described the general methodology of our proposed project. In addition, a detailed explanation of cryptography techniques has provided in the authentication, authorisation and data storage schemes proposed. The general framework of the proposed project has described the general network model in linking the three schemes in one system. Next Chapters 4,5 and 6, we will explain in detail our authentication, authorisation, and data collection schemes in HC application.

Chapter 4: Authentication Scheme

In this chapter, our authentication scheme (protocols) is explained to protect users'/network's information. A lack of security and confidentiality of information used by HC applications remains the main problem that limits widespread of these applications (e.g., e-healthcare systems). These systems require a robust security mechanism to authenticate HC users for achieving the confidentiality, integrity, and availability (CIA) triangle (He & Zeadally 2015) in the compliance with the Health Insurance Portability and Accountability Act (HIPPA) and Health Level Seven (HL7) standards (Tipton et al. 2016). The mechanism of achieving security requirement should be in place when exchanging information between a client (patient or provider) application and a server application, as any modification to this information affects both medical decisions and the patient's condition (Arshad et al. 2015). This chapter includes the following topics:

- Information security and our contribution for authentication scheme in HC application.
- Network model and goals to authenticate users in HC application.
- Methodology to apply our authentication in HC application.

4.1 Information Security in EHR Systems

Users' information (personal such as name and network such as password) define and prove their legitimacy in EHR systems. This information requires a procedure to prevent disclosure of users' secrets while at the same time proving their legitimacy in the network. Authentication is the most critical security requirement that plays a key role in building correct security before the exchange of patients' data in EHR (Arshad et al. 2015, Das et al. 2017, Li et al. 2016, Rajput, Abbas, Wang, Eun & Oh 2016). First, it reduces malicious or fatal errors caused by penetration attacks on the authentication information. Second, it alleviates errors in specifying drug, dose, timing, or procedure (Yuehong et al. 2016). Therefore, access to these data should be controlled to prevent unauthenticated access. As a

result, authentication protocols are a critical requirement to repel various attacks. Typically, the server application should prevent all fake and illegal authentication requests. It should protect personal information, health records, and physiological parameters (such as sugar, and heart rate) (Arshad et al. 2015, Wazid et al. 2016). However, authentication information may be easier to compromise if EHR data and information are stored on a single server. Furthermore, the transfer of authentication information in an insecure environment (WLAN or Internet), may expose patients' data for detection or modification (Li et al. 2016, Shrestha et al. 2016).

The traditional cryptography (such as RSA) and signature (such as SHA1) schemes require complex computations that consume server resources, such as processing power and memory when used with EHR systems that may deal with large amounts of health data and thus, render them unusable. The electronic signature is an important way to check the integrity of the users' information in the authentication request (Giri et al. 2015). Many algorithms, especially lightweight algorithms, such as PHOTON, QUARK, and SPONGENT, are used to implement signature algorithms that perform lightweight operations to reduce high overheads on the server. HC applications require cryptographic and signature high-speed, and secure algorithms (Liu & Chung 2017). There is a misconception about using a symmetric encryption algorithm instead of public encryption algorithms. Recent research has proved the opposite (Farash et al. 2016). In addition, symmetric encryption algorithms have problems with scalability and single secret key detection. To implement an authentication scheme, many algorithms, such as ECC, RSA, hash function, bilinear pairing, fuzzy extractor, and XOR operation (Chandrakar & Om 2017), are used to design HC projects. Many recent HC applications are based on ECC and RSA, both of which provide the same security level, although ECC is more efficient than RSA. The design of an authentication scheme in HC applications should provide mutual authentication, resistance to known attacks, such as MITM, eavesdropping, tracing, replay, impersonation, guessing, DoS, protection of information and reduced cost and high-efficiency (Yeh 2016, Shankar et al. 2015).

4.1.1 Our Contributions

We propose a **R**obust **A**uthentication **M**odel for **H**ealthcare **U**sers (RAMHU) that uses lightweight algorithms and security techniques for HC applications that perform massive and continuous authentication processes while simultaneously protecting against various attacks. Our contributions include provide robust authentication for legitimate users in the HC applications and access the server repository. They

are summarized as follows:

- RAMHU uses lightweight algorithms for encryption (ECIES) and signature (PHOTON). These algorithms provide efficient and secure authentication for users in HC applications compared to other algorithms;
- RAMHU applies an OTP mechanism to authenticate users in their first registration in the HC network with timestamp verification and random nonce generation to repel different types of external attacks;
- RAMHU uses a multi pseudonyms mechanism to prevent any association between the real information, pseudonyms, and user's data. This mechanism prevents attackers from identifying HC users (providers and patients);
- RAMHU integrates login request with MAC address in addition to verifying that this address is original and not fake for authentication of legitimate devices. This prevents attackers from using different devices to compromise the network information;
- RAMHU improves the mutual authentication between server and clients to prevent spoofing and impersonation attacks by either fake server or client. This prevents external attacks intended to deceive trusted parties;
- We simulate RAMHU with an automated validation of Internet security protocols and applications (AVISPA) tool that is generally acknowledged as an effective way to represent the threat model. We have used AVISPA to prove that our model is secure against both passive and active attacks. Additionally, Burrows, Abadi and Needham (BAN) logic has been used to ensure request source, freshness and entity legitimacy.

4.2 The Proposed Authentication Scheme

In this Section, we will detail about our authentication scheme that provides security and efficiency features in HC applications. This Section will be divided into the network model, model goals, and proposed authentication scheme protocols.

4.2.1 Network Model

The RAMHU model consists of four entities as shown in Figure 4.1:

1. Client (C_i) or user: This entity includes patients, relatives of patients, and HC providers, such as doctors, researchers, emergency practitioners, advisors, and nurses.

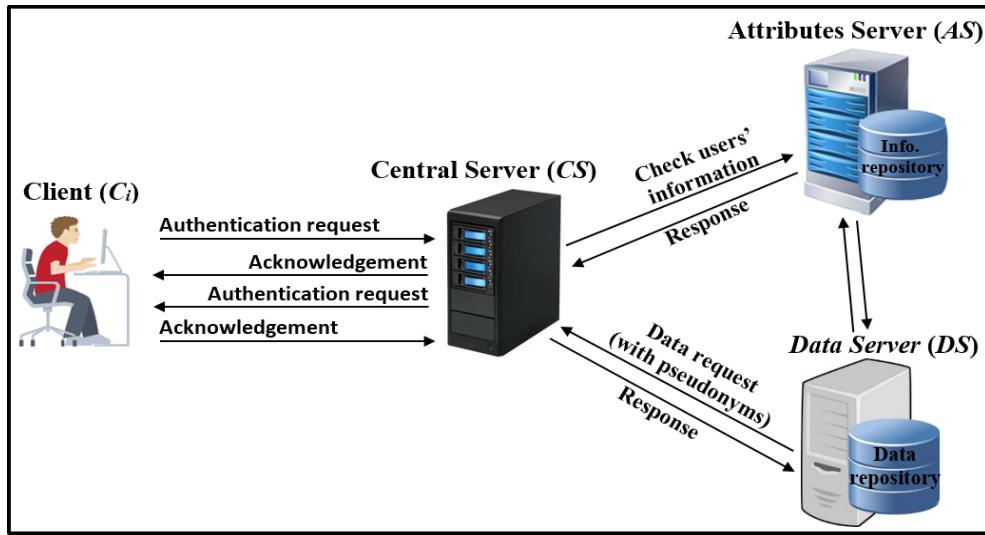


Figure 4.1: General network model

2. Central server (CS): This entity is a gateway to authenticate users with the attributes server and to authorise the data server.
3. Attributes server (AS): This entity contains users' real information as well as multi pseudonyms. The authentication process requires verifying the association of the actual information with the multi pseudonyms in this entity.
4. Data server (DS): This entity contains users' data as well as multi pseudonyms. This entity is not implemented in our authentication scheme. Our scheme focuses only on the process of users' authentication in the HC network.

Generally, C_i creates an authentication request mainly based on ECIES and PHOTON. C_i sends a request to CS to verify encryption, signature, and security parameters (such as MAC address, pseudonyms, and OTP_i). Then, the CS sends a request to the AS to verify the link between the pseudonyms, the real information, the signatures, and PW_i . After that, the AS sends the response to the CS that verifies the signature and the parameters and then the CS sends the response (authenticated or not) to the C_i . If the user is authenticated, the user can then send an authorisation request to access the data in the repository (DS) and obtain the authorisation response from the CS , AS , and DS . Our authorisation protocols will detail in Chapter 5.

4.2.2 Security Goals

To build a robust authentication scheme, RAMHU must meet the following security requirements:

- **Confidentiality:** This requirement is performed to hide authentication information and to preserve user secrecy from detection by intruders. To implement this requirement, a high-security cryptographic algorithm ([Al-Janabi et al. 2017](#)) should be used. RAMHU executes ECIES to hide authentication information about intruders.
- **Integrity:** This is to protect the authentication request information from modification by intruders. The authentication request should reach the intended destination without modification to provide a reliable communication channel for legitimate users ([Rajput, Abbas & Oh 2016](#)). RAMHU performs a PHOTON to prevent any process of altering or modifying the user authentication information in HC applications.
- **Non-repudiation:** This requirement prevents both clients and server from denying their authentication requests. This is a way to prove that the message is sent by a particular sender in the HC applications network. If a legitimate user in the network performs internal attacks, he/she cannot deny his/her activities while exploiting the privileges granted to him/her. Our scheme uses PHOTON signatures and a MAC address to meet this requirement and detect malicious attacks.
- **Anonymity:** This requirement is extremely important in supporting the confidentiality of the authentication request. The purpose of this requirement is to disguise the source and destination of the authentication request. If the authentication scheme applies anonymity with encryption, the attacker finds it exceedingly difficult to analyse authentication requests for a particular user at different times because the authentication request is different each time the user is connected to the network ([Rajput, Abbas, Wang, Eun & Oh 2016](#)). RAMHU applies this requirement through the use of random nonces among entities.
- **Pseudonym:** This requirement denotes the provision of a mechanism to connect non-real attributes (such as terms and symbols) with the real attributes of the user (such as name, address, and phone number). The use of this mechanism in HC applications is an extremely important way to protect the personal information of users and prevent the detection of their identities. RAMHU uses a multi pseudonyms mechanism to prevent and separate the association with real information.
- **Forward secrecy:** This requirement is accomplished when network users use new keys and parameters temporarily without relying on old ones. This

requirement prevents attackers from exploiting users' keys and passwords in decrypting authentication requests. Using the temporary random password, private key, and MAC, RAMHU prevents users from accessing previous authentication information.

- **Mutual authentication:** This requirement is used in healthcare applications to mitigate the risks of external fraud. With this feature, each party ensures that it deals with a legitimate party. The server authenticates the client by checking encryptions and signatures and vice versa in order to establish a secure communication channel. In RAMHU, CS and C_i authenticate each other to prevent masquerading and impersonating attacks.
- **Scalability:** HC applications operate in a scalable environment in terms of data and users. Therefore, these applications require authentication schemes capable of handling and adapting to the ever-increasing number of users of HC applications. This requirement refers to the ability of the authentication scheme to appropriately handle large HC systems. Public key encryption schemes are efficient in supporting this requirement ([Kumar et al. 2016](#)).
- **Freshness:** This requirement indicates that the authentication request is new and updated to ensure that the attacker cannot replay the authentication request at a later time. This requirement is achieved through the provision of time checking, a random nonce, and change of signatures in each authentication process to counteract counterfeit attacks, such as MITM, replay, and impersonation ([Al-Janabi et al. 2017](#)), which ensures that the authentication request is unaltered or not tampered with.

4.2.3 Proposed Authentication Scheme Protocols

Our RAMHU scheme consists of 5 protocols: initial setup, registration/login, authentication, password update, and revocation. During these protocols, RAMHU provides reliable authentication processes to protect users' information.

4.2.3.1 Initial Setup Protocol

In this protocol, all entities are ready to start communicating with each other while configuring all security parameters and ECIES's keys as in the following steps:

- Each legitimate user receives a client application from the authorised system provider.
- Each legitimate user receives a password (that can be changed later) and a random OTP_i to be used in the first registration.

- All entities (C_i , CS , and AS) should create public and private keys (C_i (CK_{pu_i} , CK_{pri_i}), CS (CSK_{pu_i} , CSK_{pri_i}), and AS (ASK_{pu_i} , ASK_{pri_i})) to be used to validate the authentication request. All entities choose an elliptic curve $Ep(a, b)$ over a prime field F_P (where, $P = 256$) and base point G on curve. Each entity selects a private key K_{pri_i} randomly and generates the public key K_{pu_i} during the implementation of scalar multiplication ($K_{pu_i} = K_{pri_i} * G$).
- All entities broadcast public key (CK_{pu_i} , CSK_{pu_i} , and ASK_{pu_i}) to use in ECIES's encryption operations.

4.2.3.2 Registration and Login Protocol

Patients and healthcare providers (C_i) should complete the registration and login protocol with CS to become legitimate users of HC applications. Without this protocol, the user cannot complete the authentication process in RAMHU. User registration is performed once, namely, the user does not need to complete the registration protocol the next times (only the login protocol), the registration information has been kept in the servers until the revocation protocol and deletion the user security parameters, such as pseudonyms, MAC address and PW_i , this protocol accomplishes the following steps (Figure 4.2 shows registration, and login protocol and Figure 4.3 shows login protocol):

C_i side:

- The user enters UID_i (such as his/her name), MID_i (such as medical centre name), PW_i and OTP_i for registration and login while only entering UID_i , MID_i , and PW_i for the login protocol the next times to the client (C_i) application. C_i replaces UID_i with user's pseudonym ($UP_{C_i}^{CS}$), and MID_i with medical centre pseudonym ($MP_{C_i}^{CS}$) to protect the authentication information when moving from C_i to CS . C_i generates timestamp (TS_{C_i}) to be used to verify the sending time of the authentication request in CS .
- C_i gets a MAC address (GM) by entering its IP (Internet protocol) address. The process of checking MAC (CM) is performed by C_i to test the credibility of the MAC address. In Linux system, we used the command "ethtool -P interface name" (such as "ethtool -P wlo1") in the C_i application. If the result is identical to GM , it means that the MAC address is native ($CM = "Real_MAC"$). In Windows system, C_i searches for string value "NetworkAddress" in the path of the system registry " $HKEY_LOCAL_MACHINE \ SYSTEM \ CurrentControlSet \ Control \ Class \ \{4D36E972 - E325 - 11CE - BFC1 - 08002BE10318\}$ " (as shown in Figure 4.4). If NetworkAddress = null, $CM = "Real_MAC"$; otherwise $CM = "Fake_MAC"$. The

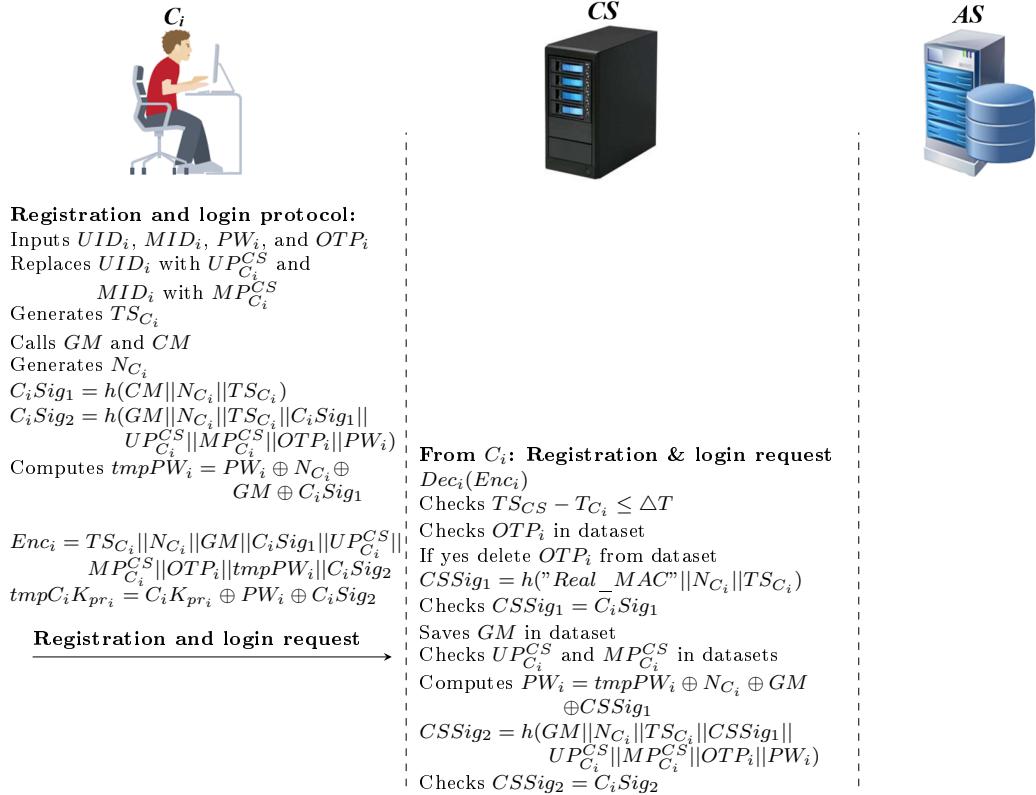


Figure 4.2: Registration and login protocol

GM send is encrypted with an authentication request while CM is implicitly sent with the signature value (C_iSig_1). If only login protocol, C_i needs to extract private key from temporary key, MAC address, password, and random nonce through $tmpC_iK_{pri} \oplus GM \oplus PW_i \oplus N_{C_i}$. C_i generates a random nonce (N_{C_i}) to change signature and encryption data and add anonymity to the authentication request.

- C_i performs two signatures using the PHOTON-256 algorithm to protect information from modification. The first signature includes the parameters check MAC, nonce, and timestamp ($C_iSig_1 = h(CM\|N_{C_i}\|TS_{C_i})$). The second signature includes all the authentication parameters of the get MAC, nonce, timestamp, first signature, pseudonyms, one time password, and password ($C_iSig_2 = h(GM\|N_{C_i}\|TS_{C_i}\|C_iSig_1\|UP_{C_i}^{CS}\|MP_{C_i}^{CS}\|OTP_i\|PW_i)$). In the login protocol, OTP is not added to the signature.
- C_i computes a temporary value ($tmpPW_i = PW_i \oplus N_{C_i} \oplus GM \oplus C_iSig_1$) of PW_i when moving from C_i to CS .
- C_i uses ECIES to encrypt and hide all the data of this request ($Enc_i = TS_{C_i}\|N_{C_i}\|GM\|C_iSig_1\|UP_{C_i}^{CS}\|MP_{C_i}^{CS}\|OTP_i\|tmpPW_i\|C_iSig_2$). In the login protocol, OTP_i and GM are not added to the encryption as in Figure 4.3. After that, C_i sends the registration and login request or login to CS .

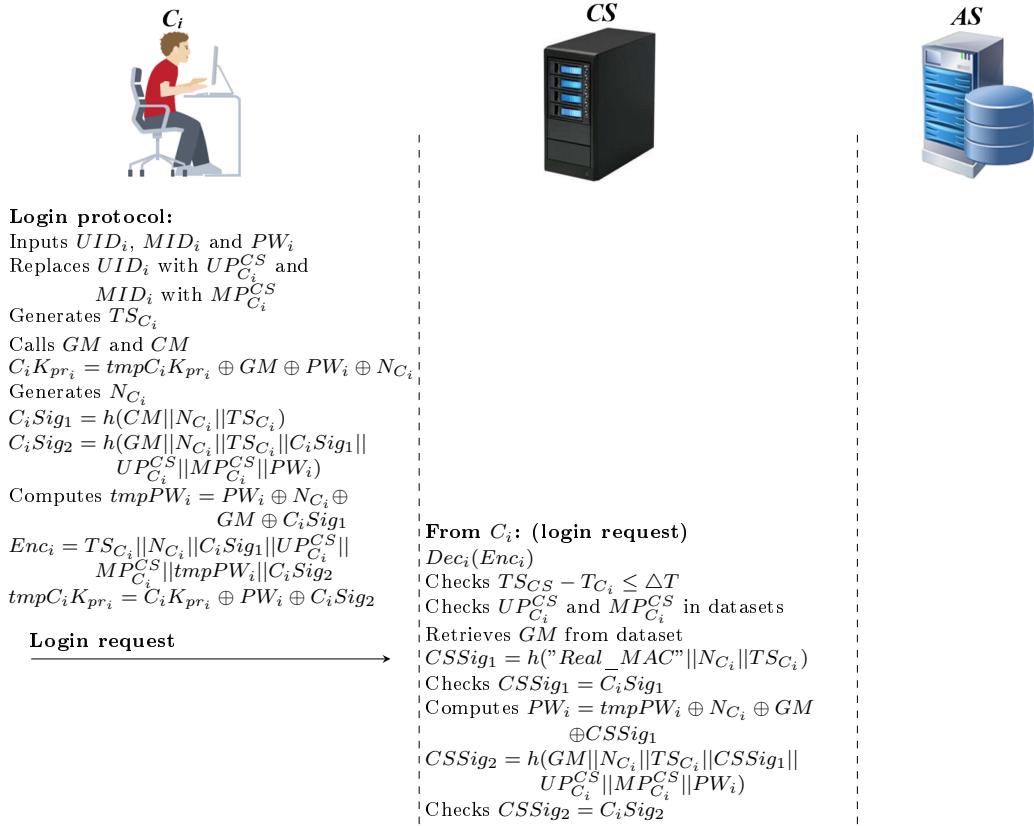


Figure 4.3: Login protocol

to complete the authentication protocol. Then C_i hides the private key by $tmpC_iK_{pri} = C_iK_{pri} \oplus PW_i \oplus C_iSig_2$.

CS side:

- Upon receiving a registration and login request or login request, CS decrypts (Enc_i) this request using ECIES's $C_iK_{pu_i}$ and CSK_{pri_i} . It checks timestamp ($TSC_S - TSC_i \leq \Delta T$) to make sure that this request arrived at an appropriate time and without delay.
- In the registration and login protocol, CS examines the random OTP_i in the dataset. If OTP_i exists, then the user is legitimate for the registration process. After that, CS deletes OTP_i from the dataset to prevent it from being used the next times. If OTP_i is not found, It discards the connection. If the login protocol, CS examines the $UP_{C_i}^{CS}$ and $MP_{C_i}^{CS}$ and then tests their association with the MAC address in the dataset. If GM is found, CS completes the steps of this protocol; otherwise, it cancels the connection.
- CS needs to ensure that the user's device is legitimate within the network. CS computes the signature value to make sure that the MAC address is native and non-modified ($CSSig_1 = h("Real_MAC" || N_{C_i} || TSC_i)$). It examines the result of the computed signature ($CSSig_1$) with the C_i (C_iSig_1) signature. If

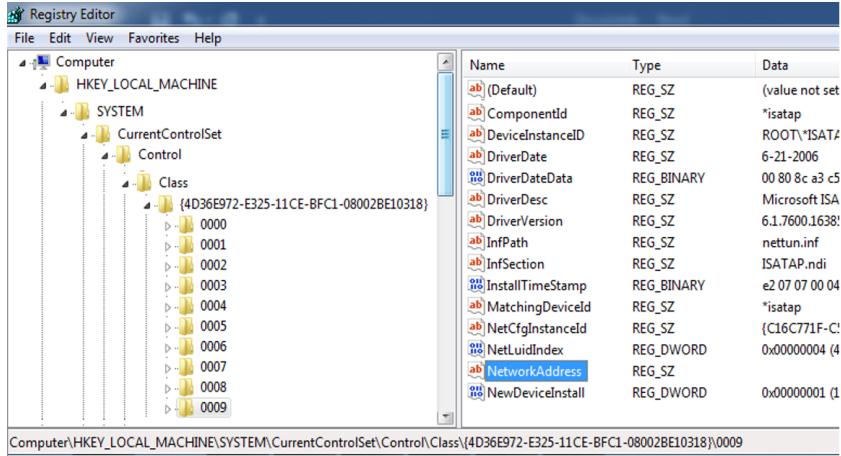


Figure 4.4: NetworkAddress path in system registry

the result signatures are identical, then the device is legitimate and the MAC address did not change. In the registration and login protocol, CS stores this address in dataset for use and check the next times in the login protocol.

- CS performs the computation operation the $tmpPW_i \oplus N_{C_i} \oplus GM \oplus CSSig_1$ to extract the PW_i value and then uses this value to produce a second signature ($CSSig_2$).
- CS computes a second signature operation ($CSSig_2 = h(GM \parallel N_{C_i} \parallel TSC_i \parallel CSSig_1 \parallel UPC_i^{CS} \parallel MP_{C_i}^{CS} \parallel OTP_i \parallel PW_i)$) to guarantee that all the encrypted information is not changed. Then, it compares the computed signature ($CSSig_2$) with the received signature in the request ($CiSig_2$). If the signatures are identical, then the information for this request is unchanged or not tampered. In the login protocol, OTP_i and GM are not added to the signature. At this point, CS prepares to send the user's authentication request to AS .

4.2.3.3 Authentication Protocol

In this protocol, RAMHU needs to link pseudonyms and passwords with real information for users in AS 's datasets. Note that, the users' information (such as name, age, address, mobile number, and passwords) are stored in a separate server (AS) and multi pseudonyms used to prevent detection and tracking of users' information. This protocol is illustrated in the following steps (Figure 4.5 shows authentication protocol in RAMHU):

CS side:

- CS computes a new timestamp ($TSCS$) to ensure the fresh authentication request.

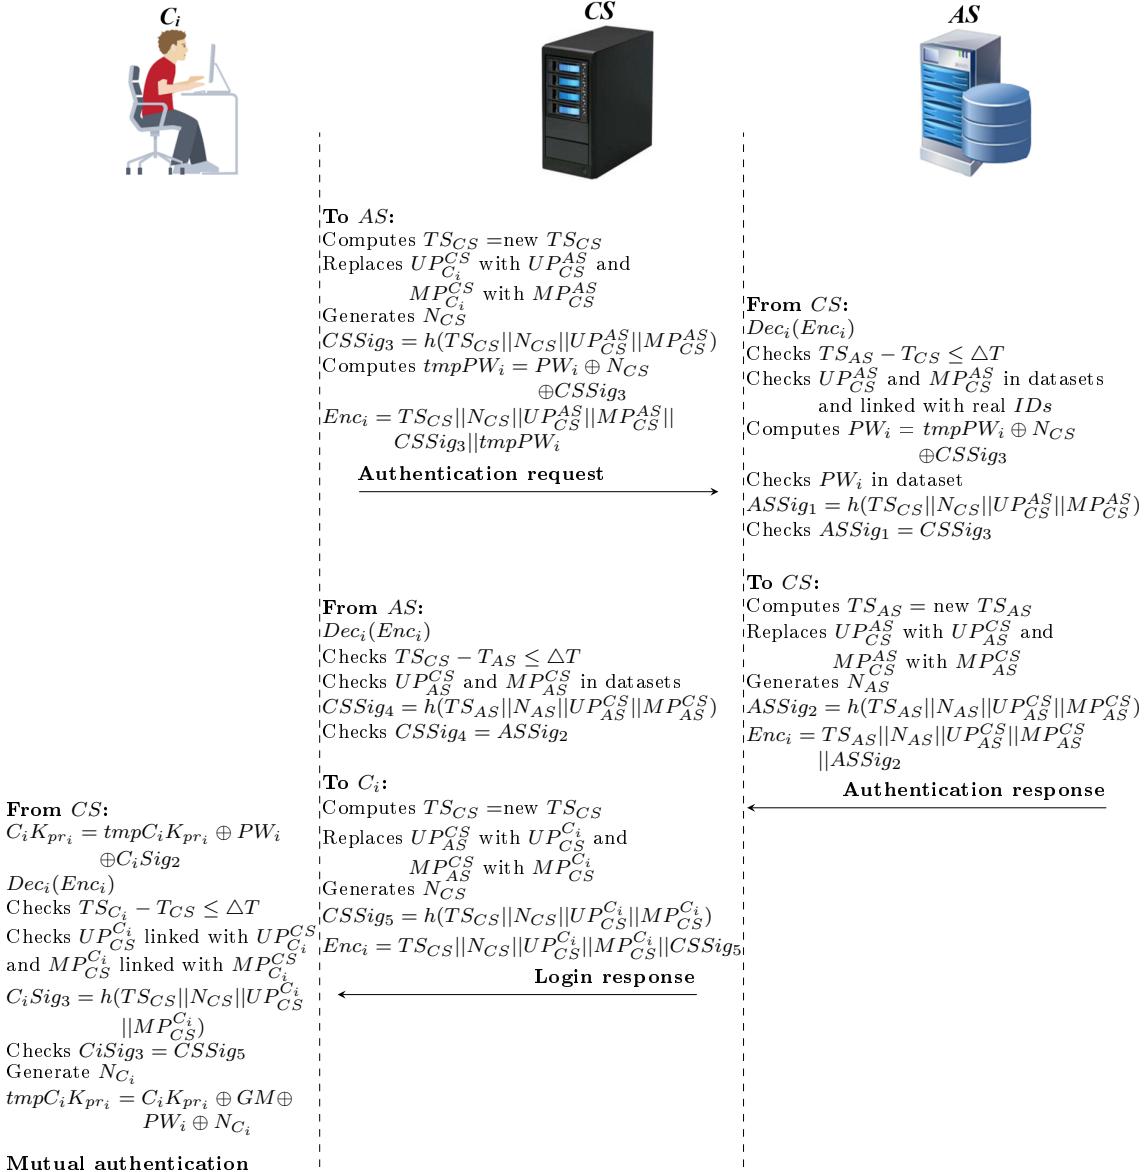


Figure 4.5: Authentication protocol

- CS replaces C_i 's pseudonyms ($UP_{C_i}^{CS}$ and $MP_{C_i}^{CS}$) with CS 's pseudonyms (UP_{CS}^{AS} and MP_{CS}^{AS}) to prevent attackers from tracking the authentication request. It generates random nonce (N_{CS}) to ensure an anonymous authentication request.
- CS signs security parameters by PHOTON-256 ($CSSig_3 = h(TS_{CS} || N_{CS} || UP_{CS}^{AS} || MP_{CS}^{AS})$) to prevent modification of authentication request data.
- CS computes temporary PW_i by the computation of $PW_i \oplus N_{CS} \oplus CSSig_3$.
- CS encrypts information of authentication request ($Enc_i = TS_{CS} || N_{CS} || UP_{CS}^{AS} || MP_{CS}^{AS} || CSSig_3 || \text{tmpPW}_i$). It sends an authentication request to verify user's information in AS .

AS side:

- Upon receiving the authentication request, *AS* decrypts that request (Enc_i) using ECIES's ASK_{pr_i} and CSK_{pu_i} to obtain the authentication information clearly.
- It checks timestamp by ($TS_{AS} - TS_{CS} \leq \Delta T$) to ensure that the authentication request is not delayed. *AS* checks the pseudonyms (UP_{CS}^{AS} and MP_{CS}^{AS}) sent from *CS* and correlates it with the user's real identifier (UID_i and MID_i) in the datasets. *AS* extracts user's password from the equation $PW_i = tmpPW_i \oplus N_{CS} \oplus CSSig_3$. After that, It checks matching PW_i in the dataset. *AS* computes the value of the signature based on authentication information ($ASSig_1 = h(TS_{CS}\|N_{CS}\|UP_{CS}^{AS}\|MP_{CS}^{AS})$) by PHOTON-256. *AS* compares the computed value of the signature ($ASSig_1$) with the value of the received signature ($CSSig_3$). If the signature values are identical, the user's information in the request for the signature is unmodified. At this point, *AS* considers this user to be legitimate and reliable.
- *AS* prepares a response to authenticate the request of that user. It computes new timestamp ($TS_{AS} = \text{new } TS_{AS}$) to prevent delayed or replayed requests at later times. *AS* replaces *CS*'s pseudonyms (UP_{CS}^{AS} and UP_{CS}^{AS}) received with *AS*'s pseudonyms (UP_{AS}^{CS} and MP_{AS}^{CS}) to hide users' information. It generates a new random nonce (N_{AS}) to add anonymity and prevent attacks from encryption and signature analysis.
- *AS* computes a signature ($ASSig_2 = h(TS_{AS}\|N_{AS}\|UP_{AS}^{CS}\|MP_{AS}^{CS})$) to prevent modifications of authentication response information.
- *AS* encrypts the authentication information ($Enc_i = TS_{AS}\|N_{AS}\|UP_{AS}^{CS}\|MP_{AS}^{CS} \| ASSig_2$) and sends the authentication response to *CS* to complete the authentication process.

CS side:

- *CS* decrypts the authentication response (Enc_i) received from *AS*. It checks the timestamp value ($TS_{CS} - TS_{AS} \leq \Delta T$) to prevent late authentication responses. It examines that UP_{CS}^{AS} and MP_{CS}^{AS} in datasets to complete the process of linking multi pseudonyms to the user.
- *CS* computes the signature $CSSig_4 = h(TS_{AS}\|N_{AS}\|UP_{AS}^{CS}\|MP_{AS}^{CS})$ for authentication response information. It compares the computed result of the signature ($CSSig_4$) with the value of the received signature ($ASSig_2$). If the signature values match, then the authentication response information is unchanged.

- After this point, CS initiates a login response request. It computes the value of new timestamp ($TS_{CS} = newTS_{CS}$). It replaces AS 's pseudonyms (UP_{AS}^{CS} and MP_{AS}^{CS}) received with $UP_{CS}^{C_i}$ and $MP_{CS}^{C_i}$. It generates a new random nonce (N_{CS}) to hide encryption and signature information.
- CS computes a new signature value ($CSSig_5 = h(TS_{CS}\|N_{CS}\|UP_{CS}^{C_i}\|MP_{CS}^{C_i})$) to protect login response information from modification.
- CS encrypts login response information ($Enc_i = TS_{CS}\|N_{CS}\|UP_{CS}^{C_i}\|MP_{CS}^{C_i}\|CSSig_5$) and sends this response to C_i .

C_i side:

- C_i extracts his private key (C_iK_{pri}) from the $tmpC_iK_{pri} \oplus PW_i \oplus C_iSig_2$, and decrypts the login request (Enc_i) received from CS .
- C_i checks timestamp ($TS_{C_i} - TS_{CS} \leq \Delta T$) to ensure that the login response is not late or replayed.
- C_i checks that CS 's pseudonyms ($UP_{CS}^{C_i}$ and $MP_{CS}^{C_i}$) are received in the dataset and associated with $UP_{C_i}^{CS}$ and $MP_{C_i}^{CS}$. At this point, RAMHU applied multi pseudonyms among model entities (C_i , CS , and AS) to prevent traceability in linking the real information of the user with pseudonyms.
- C_i calculates the value of the signature $CiSig_3 = h(TS_{CS}\|N_{CS}\|UP_{CS}^{C_i}\|MP_{CS}^{C_i})$ for login response information. It compares the result of the computed signature ($CiSig_3$) and the value of the received signature ($CSSig_5$). If the signature values are identical, namely, the login response information is unmodified or not tampered, C_i accepts the login response; otherwise C_i discards the login response. Then, C_i hides its private key by $C_iK_{pri} \oplus GM \oplus PW_i \oplus N_{C_i}$ after generating a random nonce to prevent the detection of the private key if the device is hacked. At this point, if all processes are achieved correctly, then all requests are considered legitimate and reliable through the implementation of mutual authentication.

4.2.3.4 Password Update Protocol

The protocol of changing PW_i is important in any HC system for two reasons. First, preventing the use of PW_i fixed for a long time and which reduces the guessing attacks. Second, changing PW_i gives users more flexibility in choosing the appropriate PW_i . This process requires strict security measures to protect new PW_i . RAMHU provides the legitimate user with a mechanism to change his/her password at any time. If the user wants to change his/her PW_i , the following illustration describes

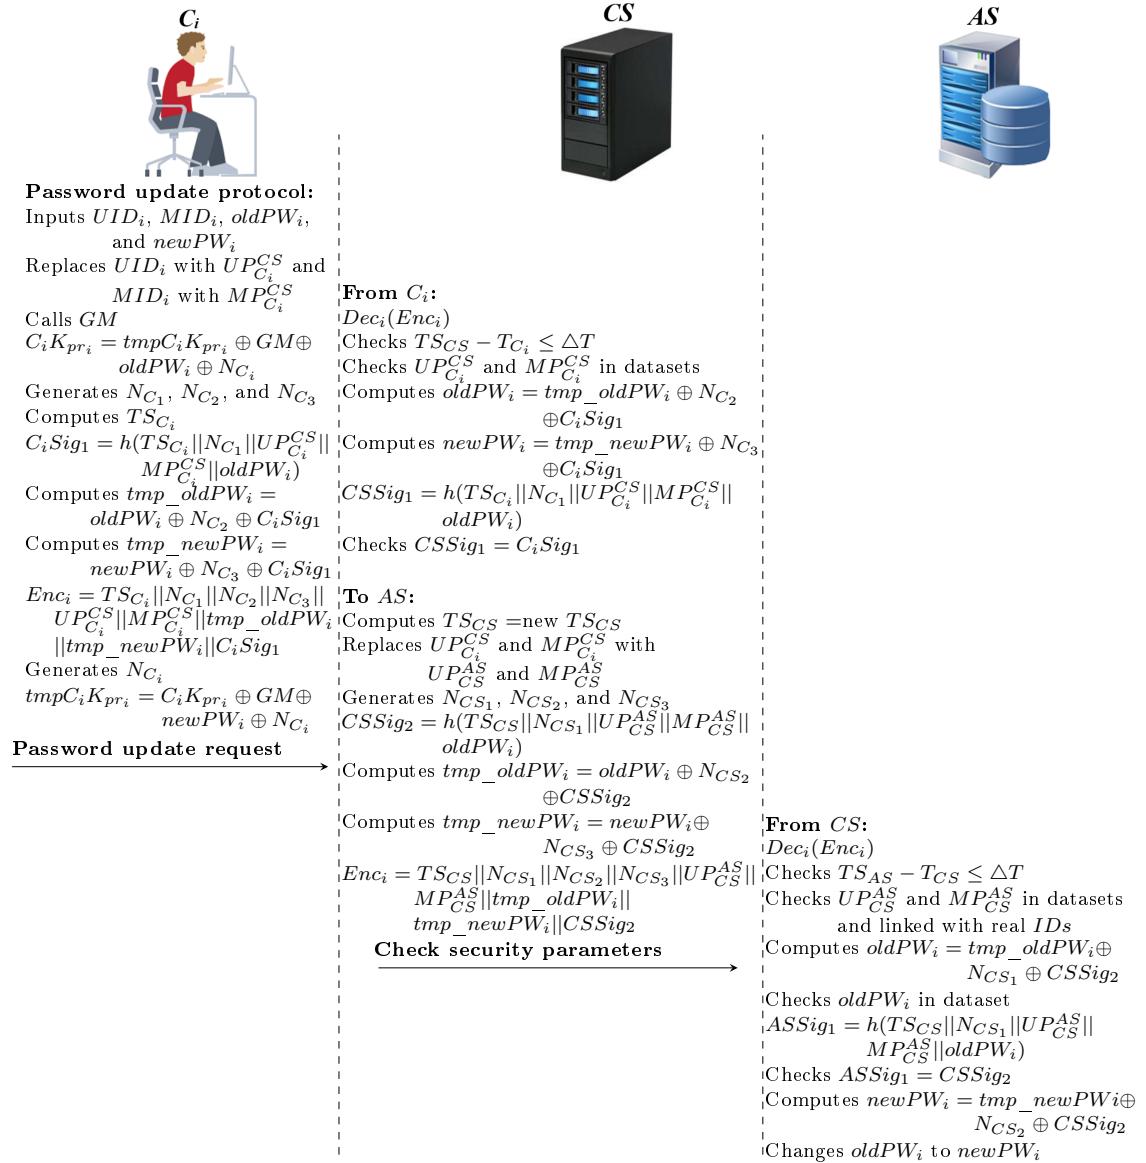


Figure 4.6: Password update protocol

the new PW_i protect procedures in a secure manner (Figure 4.6 shows password update protocol in RAMHU).

- C_i side: C_i enters UID_i , MID_i , old PW_i , and new PW_i . It replaces UID_i and MID_i with a pseudonyms to hide the user's real information. C_i calls MAC address, then extracts the private key from the $tmpC_iK_{pri} \oplus GM \oplus oldPW_i \oplus N_{C_i}$ to use in the encryption process of the password update request. C_i generates three random nonces (N_{C_1} , N_{C_2} , and N_{C_3}) and computes a new timestamp (TSC_{C_i}). C_i computes the signature value ($C_iSig_1 = h(TSC_{C_i} || N_{C_1} || UPC_{C_i}^{CS} || MP_{C_i}^{CS} || oldPW_i)$) by PHOTON-256 based on the parameters of the password change request. It applies an anonymity mechanism to old PW_i and new PW_i ($tmp_oldPW_i = oldPW_i \oplus N_{C_2} \oplus C_iSig_1$

and $tmp_newPW_i = newPW_i \oplus N_{C_3} \oplus CiSig_1$) to hide passwords and not explicitly send it in the PW_i change request. It encrypts the PW_i change request ($Enc_i = TS_{C_i} \| N_{C_1} \| N_{C_2} \| N_{C_3} \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| tmp_oldPW_i \| tmp_newPW_i \| CiSig_1$) and sends it to CS , C_i then hides its private key by $C_i K_{pri} \oplus GM \oplus newPW_i \oplus N_{C_i}$.

- CS side: CS receives and decrypts a password update request (Enc_i). It examines timestamp to prevent delayed requests, and examines $UP_{C_i}^{CS}$ and $MP_{C_i}^{CS}$ in datasets. CS extracts old PW_i and new PW_i from $tmp_oldPW_i \oplus N_{C_2} \oplus CiSig_1$ and $tmp_newPW_i \oplus N_{C_3} \oplus CiSig_1$. Then, it computes signature value ($CSSig_1$) depending on TS_{C_i} , N_{C_1} , $UP_{C_i}^{CS}$, $MP_{C_i}^{CS}$, and $oldPW_i$ to check the matching between $CSSig_1$ and $CiSig_1$. Similarly, in authentication protocol, CS computes TS_{CS} and replaces pseudonyms. CS generates three nonces N_{CS_1} , N_{CS_2} , and N_{CS_3} and then CS computes signature value ($h(TS_{C_i} \| N_{C_1} \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| oldPW_i)$ and hides old PW_i and new PW_i by $oldPW_i \oplus N_{CS_2} \oplus CSSig_2$ and $newPW_i \oplus N_{CS_3} \oplus CSSig_2$. It encrypts password update request with security parameters (TS_{CS} , N_{CS_1} , N_{CS_2} , N_{CS_3} , UP_{CS}^{AS} , MP_{CS}^{AS} , tmp_oldPW_i , tmp_newPW_i , and $CSSig_2$) and sends to AS .
- AS side: AS receives password update request, and decrypts (Enc_i) this request with ASK_{pri} , and CSK_{pu} . It checks time delay and then, it checks link pseudonyms with real information for users. It extracts old PW_i from $tmp_oldPW_i \oplus N_{CS_2} \oplus CSSig_2$ and then, it checks old PW_i in dataset. It computes the signature value $ASSig_1 = h(TS_{CS} \| N_{CS_1} \| UP_{CS}^{AS} \| MP_{CS}^{AS} \| oldPW_i)$, and then, it compares the calculated result ($ASSig_1$) with the result of the received signature ($CSSig_2$). If identical, the signature is true; otherwise, AS rejects the PW_i change request. AS performs the calculation $tmp_newPW_i \oplus N_{CS_3} \oplus CSSig_2$ to obtain the new PW_i value. If all previous checks are validated, AS changes old PW_i to new PW_i .

4.2.3.5 Revocation Protocol

This protocol can be completed by C_i , or AS . If C_i wants to revoke his account from the HC system after completing his/her duties, such as a research doctor who uses the system for a limited period and then cancel his account after the completion of his duties. Additionally, AS can revoke the account of any user who performs suspicious activities (internal attacks) that are not within his/her privileges, such as a nurse who wants to access the personal information of a particular doctor, or patient. Furthermore, the user can request from authorities provider (AS) to cancel his/her account information that is associated with his/her data (note that the patients' data history remains stored in DS even after the completion of the revocation

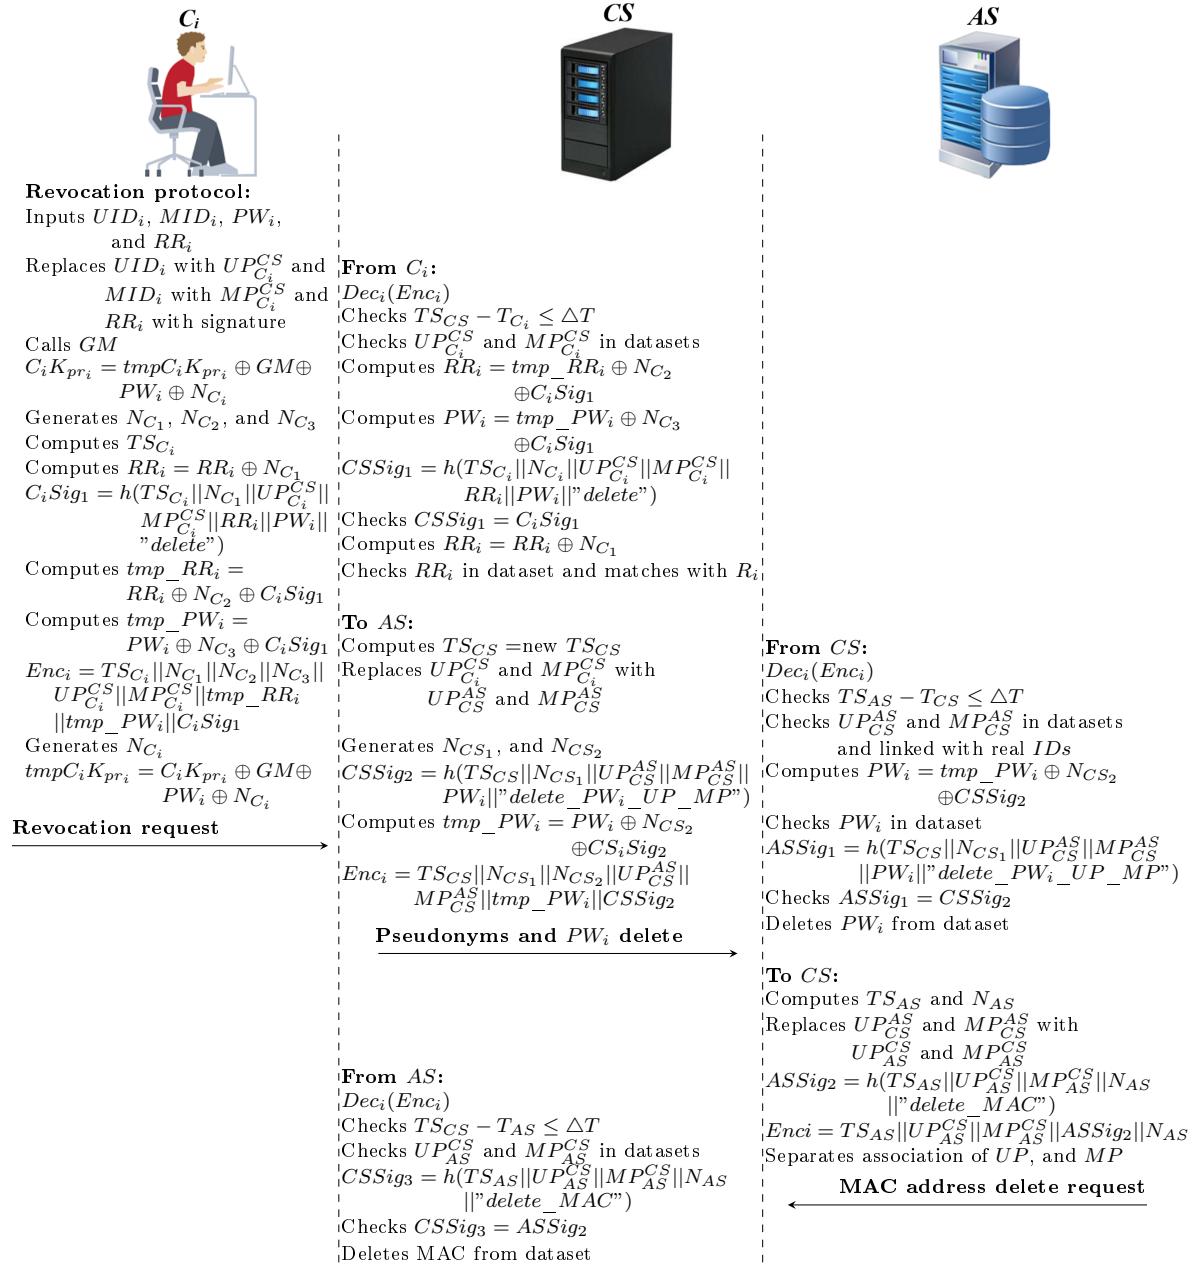


Figure 4.7: Revocation protocol

protocol). The protocol of revocation is extremely important in restricting the malicious activities of any healthcare system. RAMHU includes a revocation protocol to provide strict security procedures in protecting users' authentication information (Figure 4.7 shows revocation protocol in C_i side in RAMHU):

Revocation from C_i side:

- C_i enters UID_i , MID_i , and PW_i and then replaces UID_i with $UP_{C_i}^{CS}$ and MID_i with $MP_{C_i}^{CS}$. It chooses the revocation reason (RR_i) from the drop-down list (such as ending the researcher's study, ending a satisfactory condition, resigning a professional, changing a health institution, and the un-

willingness of a patient to use the system). These reasons have converted to signatures using PHOTON to get MDs with a 256-bits in the dataset. C_i computes new TS_{C_i} , N_{C_1} , N_{C_2} , and N_{C_3} . Then, C_i performs the process of $RR_i \oplus N_{C_1}$ to add randomness for RR_i . Using this procedure is tremendously useful in tightening security and distinguishing the roles of users (patients or professionals) in CS . It computes the signature $C_iSig_1 = h(TS_{C_i} \| N_{C_1} \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| RR_i \| PW_i \| "delete")$. C_i performs a computation to hide the RR_i ($tmpRR_i = RR_i \oplus N_{C_2} \oplus C_iSig_1$). C_i computes the temporary PW_i value of $PW_i \oplus N_{C_3} \oplus C_iSig_1$ to hide the PW_i value. Additionally, It computes encryption ($Enc_i = TS_{C_i} \| N_{C_1} \| N_{C_2} \| N_{C_3} \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| tmpRR_i \| tmpPW_i \| C_iSig_1$) and sends a revocation request to CS . Then, It hides a private key, in the same way, in the password update protocol.

- CS decrypts (Enc_i) and computes timestamp and examines $UP_{C_i}^{CS}$ and $MP_{C_i}^{CS}$ in the datasets. It obtains the RR_i from the computation equation $RR_i = tmpRR_i \oplus N_{C_2} \oplus CSSig_1$. It extracts PW_i from $tmpPW_i \oplus N_{C_3} \oplus C_iSig_1$ and checks PW_i matching in the dataset. CS computes the signature ($CSSig_1 = h(TS_{C_i} \| N_{C_1} \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| RR_i \| PW_i \| "delete")$ and then compares the result of the signatures. CS computes operation $RR_i \oplus N_{C_1}$ to use RR_i 's signature in order to compare the RR_i with the user's R_i . If all operations are achieved and validated correctly, CS sends a request to AS to check the pseudonym's association with real information and check PW_i . AS deletes association between pseudonyms and information, and delete user's PW_i from dataset. AS sends MAC delete request to CS . Upon receiving MAC delete request, CS decrypts this request, then checks security parameters and signature. If all operations are achieved and validated correctly, CS deletes MAC address from dataset. At this point, this user cannot perform an authentication process in RAMHU.

Revocation from AS side:

- AS deletes the association between user's information and pseudonyms and PW_i in datasets. It sends an encrypted request (Enc_i) to CS to delete device's MAC address for this user. After the completion of this protocol, the user is considered illegal and cannot access healthcare services.

4.3 Summary of the Chapter

In this chapter, we have provided details about the security of authentication information and our contributions that explain the main points to create a new authentication scheme. Next, we have described our network model in HC application.

This model specifies exchanging authentication requests among network entities (C_i , CS and AS). Additionally, RAMHU's goals to provide authentication requirements have detailed. Finally, RAMHU scheme methodology has been explained in detail.

Chapter 5: Authorisation Scheme

In this chapter, our authorisation scheme (protocols) is explained to protect patients' data and repository. Data privacy is a prerequisite for any system but especially for those systems, such as HC systems, that transmit user-sensitive data (Anjum et al. 2018). The HC system uses authorisation policies to enable HC providers to access required patients' data. Ensuring patients' privacy means preventing unauthorised users from accessing this data. Unfortunately, many HC systems transmit user requests or store policies with explicit plaintext, thus exposing patients' data to public. The personally controlled electronic health record (PCEHR) system provided by the National E-health Transition Authority (NEHTA) in Australia argues that privacy should be properly addressed in HC systems (Gajanayake et al. 2014). This chapter includes the following topics:

- Data security and our contribution for authorisation scheme in HC application.
- Network model to authorise users in HC application.
- Methodology to apply our authorisation in HC application.

5.1 Data Security in EHR Systems

The security of medical records in the electronic health record (EHR) system has been a major focus of health and academic institutions, since the efficiency and quality of patients' data management (Chen et al. 2012, Anjum et al. 2018) by using the World Wide Web. EHR systems include identifications and patients' data that require authorisation privileges to determine access control for authorised users (Calvillo-Arbizu et al. 2014). Accurate medical data is essential for diagnosing diseases and determining the condition of patients during their online transfer from patient to HC provider (Alhaqbani & Fidge 2008, Riedl et al. 2008). Any change to this data causes health problems for patients. In addition, penetration of medical records of patients with diseases such as HIV infection or dermatological conditions can lead to discrimination, harassment, or even death of the patient if the diagnostic data changes during the transition from client to server (Neubauer

& Heurix 2011, Riedl et al. 2008). In a broad sense, terrorist may cause national instability by disclosing patients' data, changing the data, destroying the data, or impersonating some patients (Quantin et al. 2011). HC systems, in particular EHR systems should provide end-to-end privacy for patients' data. Also, data storage and authorisation policies for patients in a central server yield data management gains but are an attractive target for hackers (Quantin et al. 2011). Therefore, there should be security mechanisms to protect the privacy of the patient as well as to prevent the penetration of policies on the server.

The use of patients' data for various purposes, such as consultations, access by a relative or caregiver, research, and emergency (secondary or indirect use) are a major challenge for authorisation systems; for example, the researcher should not exceed the limits of privacy granted to him/her (Calvillo-Arbizu et al. 2014). In an emergency, when the patients' doctor is unavailable or the patient does not have the capacity to give consent to another doctor, the patient's privacy is seriously compromised (Sun et al. 2011). Also, if the patient is incapacitated, a relative is responsible for receiving the patient's data (Riedl et al. 2007). Sometimes, the doctor also needs to consult another doctor to treat a patient's condition. All these cases can result in the intrusion and penetration of data. The sharing of medical records among users of the EHR system allows patients' data to be misused or abused by malicious breaches (Rezaeibagha et al. 2015). Many examples of penetration of the medical records for patients have applied by intruders, as mentioned in Section 2.3.2 (Koczkodaj et al. 2018, U.S. Department of Health and Human Services 2018). These penetrations show that the HC system requires a high level of security. Furthermore, an internal attack penetrates medical records more easily than external attacks because each practitioner has a privilege that allows him/her to access the server system.

Many access control models have been used in the EHR, such as mandatory access control (MAC), discretionary access control (DAC), role based access control (RBAC), and attribute based access control (ABAC), and each model has specific authorisation mechanisms for data access (Gajanayake et al. 2014). In our project, we adopted the integration of the RBAC and ABAC to support a security level based on both role and user attributes. Therefore, EHR systems require mechanisms to ensure the privacy of patients' data while protecting authorisation policies and HC provider requests (Fernández-Alemán et al. 2013). In order to develop a successful project, privacy must be provided to the patient via the following measures:

1. Preventing attackers from accessing patient data and making data anonymous in case attackers do gain access to the data (i.e., external attacks).

2. Preventing legitimate users from exceeding their privileges (i.e., internal attacks).
3. Securing all requests, policies, and data of the change on the server or during the transfer between the clients and server to ensure the accuracy and reliability of patient data.
4. Applying anonymity to requests and policies to hide users' identities.
5. Applying random pseudonym to requests, policies, and data to separate data associated with the real attributes of patients.

5.1.1 Our Contributions

we develop a **Pseudonymization and Anonymization** with the XACML (PAX) modular system, which depends on client and server applications. Our contributions to providing full privacy and security of patients' records can be summarised as follows:

- Combining ABAC and RBAC

In this scheme, we integrate two existing models (ABAC and RBAC) to develop a system that provides handling of patients' information at the coarse-grained and fine-grained levels. Our model fits the privacy and security requirements for medical records in the EHR by merging a user's ID with the role as a single attribute entered in signature to identify subjects and objects.

- Separating users into two sets

We have proposed separating users into direct and indirect sets for patients' records to allow the server to distinguish between users' requests. This significantly reduces the penetration rate of internal attacks.

- Using ECDSA's signatures with XACML

The anonymity property has been applied to the requests and policies of subjects. This feature was used during the implementation of the ECDSA signature algorithm with XACML to prevent attackers from determining the identity of HC providers (to prevent knowledge of the relation between a physician with a particular patient).

- Using Shamir scheme with signatures

We used the Shamir scheme with the ECDSA signatures in the third protocol of authorising indirect users. This procedure is necessary to verify unauthorised users of patients' data who could be conducting serious attacks on the EHR system.

- Using random pseudonym with patients' data

The pseudonym property has been applied to the requests and policies of subjects and resources. This feature prevents hackers from knowing that the data belongs to a particular patient (separating data from real attributes).

- Validating PAX scheme

PAX scheme has simulated with an automated validation of Internet security protocols and applications (AVISPA) tool that is an efficient and flexible tool for testing and analysis attacks in modern research. AVISPA has used to validate that PAX is secure against both passive and active attacks. Additionally, Burrows, Abadi and Needham (BAN) logic has used to ensure request source, freshness and entity legitimacy.

5.2 Our Proposed Authorisation Model

In this Section, we will provide details about our new authorisation scheme that support security and privacy mechanisms to ensure legitimate users' authorisation in HC applications. This Section will be divided into the network model, applying privacy concepts and PAX authorisation protocols for users.

5.2.1 Network Model

As shown in Figure 5.1, Pseudonymization and Anonymization with the XACML (PAX) is an authorisation system that works with EHR. Network model consists of four entities: client (C_i), central server (CS), attributes server (AS) and data server (DS). These entities communicate with each other in the PAX framework to accomplish authorisation and privacy preservation of users in access to the patients' datasets. CS is the portal that prevents users from accessing directly to both AS and DS . Patients' data are stored on the data server (DS) and are fully separated from the attributes of the users (patients and HC providers) that stored on the attributes server (AS). Each C_i creates an access request and sends it to the CS . Then, CS verifies the authorisation information for the user's request, if this request is valid, CS sends the authorisation request to AS for an evaluation; otherwise, CS sends the "deny" response to C_i . When AS receives the authorisation request from CS , AS evaluates the access request by PDPs modules, verifies signatures, pseudonyms, and other security parameters. If all evaluates and tests are valid, AS sends a request to DS to retrieve patient data; otherwise, AS sends the "deny" response to CS . After that, DS checks for signatures (Sigs) and privacy parameters (PP), if all operations are correctly performed, DS sends the required data with pseudonyms and Sigs to AS which in turn sends the "permit" response to

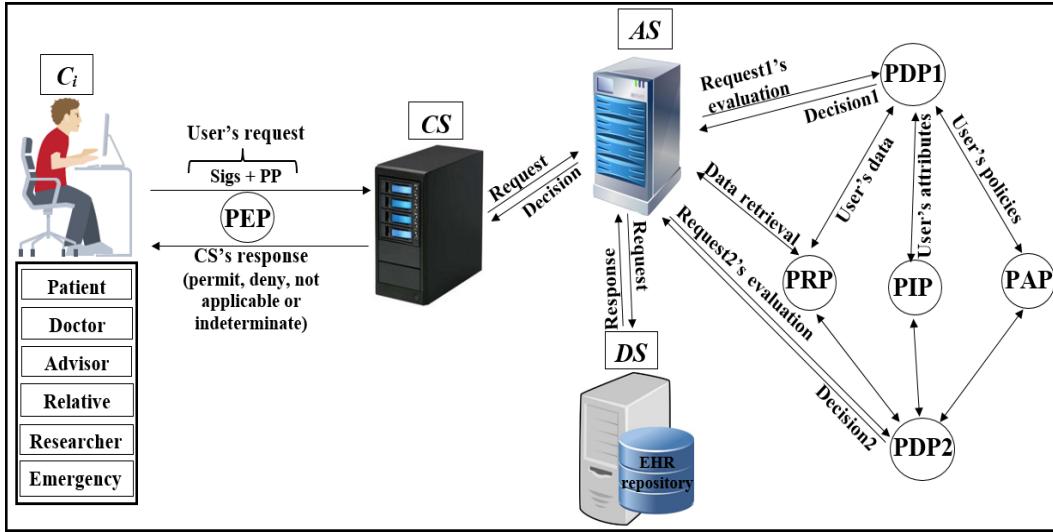


Figure 5.1: PAX model

C_i by CS to allow access the dataset. The authorised user will receive the "permit" response and the copy of the required data.

The PAX system uses two PDPs (PDP1 and PDP2) to implement the user authorisation process, as shown in Figure 5.1. In this scheme, we focus on securing requests and policies to provide a high level of user privacy. PAX depends on the Balana Project, which is the only open source project that implements XACML v3.0. Privacy and security are essential requirements of EHR. In PAX, we were careful to provide high-level privacy and security mechanisms to authorise users.

5.2.2 Security Goals

There is a set of security features included in PAX.

1. Integrity and non-repudiation of requests

User requests and policies need protection from change or repudiation. We used the ECDSA algorithm to sign user attributes. Any change in the signatures will be detected in the server because the server checks the users' requests before authorising access to the data. In addition, the signatory party cannot deny its signature. These features make the system immune against internal changing attacks.

2. Authentication and authorisation of requests

Each EHR requires authentication and authorisation properties to protect medical records from unauthorised access. We applied ECDSA to the XACML v3.0 to support these properties in PAX. The use of signatures in XACML between the C_i and the CS , AS and DS support user authentication in addition

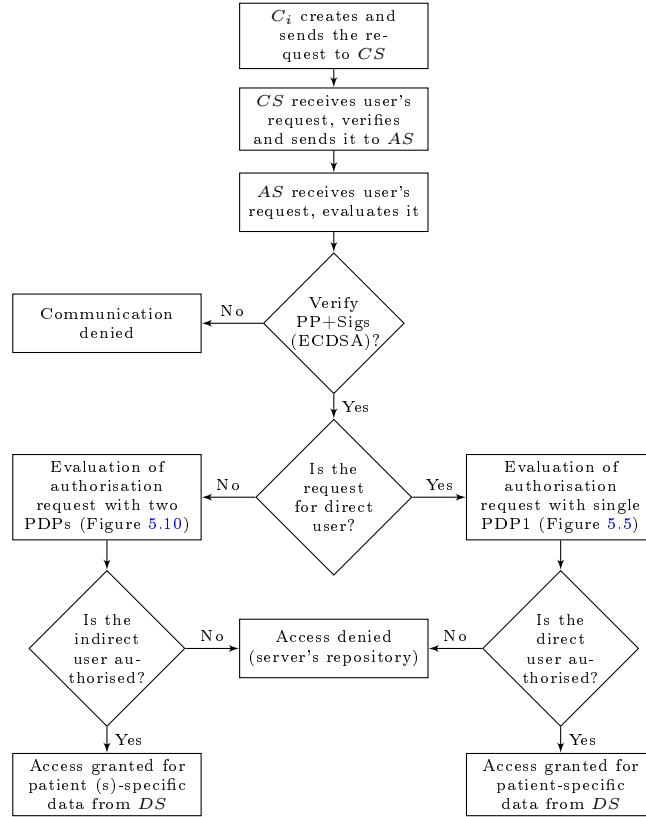


Figure 5.2: Authorisation of direct and indirect users

to the use of policies and rules to identify authorised users and the level of access granted to them.

3. Confidentiality and anonymization

One of the security features of hiding information is confidentiality. We applied ECDSA to add confidential requests to subjects and objects, and we added a Shamir scheme (backup or fail-open mechanism) to provide anonymity of SS_s to users of the EHR system. This process prevents the attacker from seeing explicit attributes and does not allow hacker to know the user-configured SS for any healthcare provider. A Shamir scheme ensures the anonymity of the signature. This backup mechanism enables indirect users to access protected health information (PHI) with privacy and security.

4. Pseudonymization

A patient's privacy requires the separation of personal information from the patient's data. Pseudonym prevents the intruder from knowing the data of any of the patients. PAX supports pseudonym in both subjects' and objects' attributes using pseudonyms for real attributes. This feature supports the privacy of a patient's data.

5. Audit and activities

PAX records all user activities (requests and responses) to access medical records. It monitors user activities, including the number of access times, the result of the decision, and the amount of data required. The audit process is important for any healthcare system in determining users' activities. PAX stores and organizes requests and responses for each user (patient, doctor, advisor, relative, researcher, and emergency doctor) separately to facilitate the management of these activities.

5.2.3 Implementation of PAX

In this Section, we will introduce the privacy concepts in PAX.

5.2.3.1 EHR's Users in PAX

Security and privacy address where, when, and why data is available and who can access the data repository. Patients and HC providers require services that are efficient, fast, and continuous and at the same time incorporate strict restrictions to determine data access. Therefore, AC to medical records has several challenges in terms of security and privacy:

1. Legitimate users should not exceed their privileges.
2. Users' roles in the EHR system should be defined. For example, a doctor can have several roles, such as an emergency doctor and a researcher doctor.
3. Data should be anonymous when it reaches the wrong user due to misuse or attacks.
4. Compliance with medical standards for EHR (such as HIPAA) is essential.

In PAX, we divide users into two categories:

- Direct users: These users include those who are directly associated with the data, such as the patient and the doctor.
- Indirect users: These users include those who are not directly and continuously associated with the data, such as advisors, patients' relatives, researchers, and emergency doctors.

Although PAX includes both categories of users, this project focuses on indirect users (Figure 5.2 shows a flow chart for authorisation of direct and indirect users in PAX). Any HC system can be exposed to an internal attack by indirect users if there are no security and privacy mechanisms to prevent them.

Table 5.1: Internal and external pseudonyms of users

Users	<i>UR</i>	<i>CN</i>	Internal pseudonym	<i>RN</i>	<i>UN</i>	External pseudonym
patient	<i>p</i>		$p_1 \dots p_n$			
doctor	<i>d</i>		$d_1 \dots d_n$			
advisor	<i>a</i>		$a_1 \dots a_n$			
relative	<i>pr</i>	$1 \dots n$	$pr_1 \dots pr_n$	$1 \dots n$	$1 \dots n$	$1 \dots n$
researcher	<i>r</i>		$r_1 \dots r_n$			
emergency	<i>e</i>		$e_1 \dots e_n$			
Shamir	-		-			

Table 5.2: Parts of *SP* and *OP*

<i>SP</i>				<i>OP</i>							
<i>RN_{sp}</i>		<i>UN_{sp}</i>		<i>RN_{op}</i>		<i>UN_{op}</i>					
<i>RN_{sp_l}</i>	<i>RN_{sp_m}</i>	<i>RN_{sp_h}</i>	<i>UN_{sp_l}</i>	<i>UN_{sp_m}</i>	<i>UN_{sp_h}</i>	<i>RN_{op_l}</i>	<i>RN_{op_m}</i>	<i>RN_{op_h}</i>	<i>UN_{op_l}</i>	<i>UN_{op_m}</i>	<i>UN_{op_h}</i>

5.2.3.2 Users' Pseudonym in PAX

Authorisation systems require a lightweight mechanism to prevent intruders from distinguishing specific patients' data without the complications of encryption and anonymous mechanisms. To address this problem, we apply random pseudonyms with PAX to separate the association between patients' attributes and data. The medical records transmitted between the client and server do not contain any patients' attributes. This prevents the attackers from identifying patients.

In PAX, we propose to use four datasets: the first was for users' attributes (patients and HC providers); the second was for applying pseudonyms to users; the third was for users' policies (on *AS*); and the fourth was for patients' data (on *DS*). When the EHR system wants to add a new HC provider or patient, the PAX randomly generates a pseudonym for that user and adds it to the second dataset. Suppose that we have a dataset for random pseudonyms, as in Table 5.1. PAX generates pseudonyms (such as *p429* or *d761*) for patients or HC providers during the addition of a letter representing the user's role (*UR*) such as *p* or *d* plus a random client's number (*CN*). Each subject's pseudonym (*SP*) and object's pseudonym (*OP*) consists of *UR* and *CN* (internal pseudonym), which are not transferred between entities and are used for policy verification at *AS*. XACML's request in PAX depends on the *SP* and *OP* (external pseudonym), and both *SP* and *OP* are divided into role's number (*RN*) and user's number (*UN*) (after replacing *UR* with *RN* and *CN* with *RN*) and the latter are segmented into three parts (low (l), medium (m), and high (h)) with length 8 bits per part as in Table 5.2. These pseudonyms are associated with the users' IDs. It enables users to access a specific patient's data without exceeding granted privileges and rights.

5.2.3.3 Using ECDSA's Signatures

PAX uses ECDSA (NIST prime-256) with requests and policies to ensure that security requirements apply to the privacy of patients' data. We have applied ECDSA signatures with subjects' and objects' attributes to ensure integrity property to prevent changing attributes in requests and policies, authentication property to prevent external attackers and non-repudiation property to prevent authorised users from denying their requests to receive medical records. The application of security requirements is very important in systems that use sensitive data, such as HC systems. In PAX, the C_i signs the request with pseudonyms (RN and UN), and the servers (CS and AS) verifies the request's Sigs. If valid, the AS assigns the request to the PDPs engines (after replacing Sigs(external pseudonym) with Sigs(internal pseudonym)) in XACML v3.0; otherwise, the request is rejected. PAX uses ECDSA's Sigs to hide parts of SP and OP when exchanging XACML's requests between PAX entities. The high performance and security level makes this algorithm suitable for application in large systems (such as EHR).

5.2.3.4 Policies Administration in PAX

System Administrator is responsible for creating policies for HC providers and patients in AS by PAP. Policy in PAX consists of the policy ID, subject, object, and rules for policy implementation. The first process in the PAX system is to create datasets for pseudonyms and attributes for all users. The process of creating policies depends on previous datasets. PAX uses ECDSA to generate a signature of SP (S_{sp}) and a signature of OP (S_{op}) based on the pseudonyms (UR and CN) for both SP and OP . Creating signature-based policies and pseudonyms protects policies on the server in a way that is immune to internal and external attacks (policies do not depend on users' real attributes). For example, the system administrator creates a user policy by entering the doctor's name and UR and patient's name, PAX creates this policy as shown in Figure 5.3. The policy parameters are highlighted in green: d20 represents the SP and uses as policy's ID; the first long 128-bit hexadecimal number represents the S_{op} ; and the second long 128-bit hexadecimal number represents the S_{sp} . This policy can include a set of rules such as determining the date of data access, the time specified on a given day, or the number of access times.

5.2.3.5 Clients' Requests and Server's Responses

PAX's users must create an authorisation request access medical records. This request consists of subjects' and objects' attributes. The C_i application in PAX uses the parts of RN and UN as a single attribute to generate the ECDSA's

```

<Policy xmlns="urn:oasis:names:tc:xacml:3.0:core:schema:wd-17" PolicyId="permitPolicyForJ20"
RuleCombiningAlgId="urn:oasis:names:tc:xacml:3.0:rule-combining-algorithm:first-applicable" Version="1.0">
  <Target>
    <AnyOf>
      <AllOf>
        <Match MatchId="urn:oasis:names:tc:xacml:1.0:function:string-equal">
          <AttributeValue DataType="http://www.w3.org/2001/XMLSchema#string">36b6e95b598c43eae10c6e2369d29a3df8263e6a75336e20bf8cac2a791ab269bc2664e625636e70389546de67135074e851b6d15751cd29b0a76df47ec2887
          </AttributeValue>
          <AttributeDesignator AttributeId="urn:oasis:names:tc:xacml:1.0:resource:resource-id"
Category="urn:oasis:names:tc:xacml:3.0:
attribute-category:resource" DataType="http://www.w3.org/2001/XMLSchema#string" MustBePresent="true"/>
        </Match>
        <Match MatchId="urn:oasis:names:tc:xacml:1.0:function:string-equal">
          <AttributeValue DataType="http://www.w3.org/2001/XMLSchema#string">0284894f6327dcda8ebd16a2e8a783ad719119d4b8a86b826048eb9c88846075a37b87654ac0ec1f58c35dbc06587d0b6a77d4303de6e19d1b1f1d715ab07
          </AttributeValue>
          <AttributeDesignator AttributeId="urn:oasis:names:tc:xacml:1.0:subject:subject-id" Category="urn:oasis:names:tc:xacml:1.0:
subject-category:access-subject" DataType="http://www.w3.org/2001/XMLSchema#string" MustBePresent="true"/>
        </Match>
      </AllOf>
    </AnyOf>
  </Target>
  <Rule Effect="Permit" RuleId="permit1"/>
</Policy>

```

Figure 5.3: PAX policy

```

<Request xmlns="urn:oasis:names:tc:xacml:3.0:core:schema:wd-17" CombinedDecision="false" ReturnPolicyIdList="false">
  <Attributes Category="urn:oasis:names:tc:xacml:3.0:attribute-category:action">
    <Attribute AttributeId="urn:oasis:names:tc:xacml:1.0:action:action-id" IncludeInResult="false">
      <AttributeValue DataType="http://www.w3.org/2001/XMLSchema#string">access</AttributeValue>
    </Attribute>
  </Attributes>
  <Attributes Category="urn:oasis:names:tc:xacml:1.0:subject-category:access-subject">
    <Attribute AttributeId="urn:oasis:names:tc:xacml:1.0:subject:subject-id" IncludeInResult="false">
      <AttributeValue DataType="http://www.w3.org/2001/XMLSchema#string">CiS1tm||RNsp tm||UNsp tm||Nc||TS Ctm||SN Ctm
      </AttributeValue>
    </Attribute>
  </Attributes>
  <Attributes Category="urn:oasis:names:tc:xacml:3.0:attribute-category:resource">
    <Attribute AttributeId="urn:oasis:names:tc:xacml:1.0:resource:resource-id" IncludeInResult="false">
      <AttributeValue DataType="http://www.w3.org/2001/XMLSchema#string">CiS2tm||RNopt tm||UNopt tm||Nc||CiS4tm
      </AttributeValue>
    </Attribute>
  </Attributes>
</Request>

```

Figure 5.4: C_i 's request

Sig for the subjects and the objects. Figure 5.4 shows the client's request to access patient data (where the request parameters are highlighted in green; $C_iS_{2tm}||RN_{optm}||UN_{optm}||N_C||C_iS_{4tm}$ in resource segment represents the object's attributes; and the $C_iS_{1tm}||RN_{sp tm}||UN_{sp tm}||N_C||TS_{Ctm}||SN_{Ctm}$ in access-subject segment represents the subject's attributes). Also, the C_i application uses a part of RN_{sp} to explain to the AS the user's role to determine the desired policy after verifying the Sigs. Then, the C_i sends the request to the AS by CS for evaluation. The AS evaluates the request in the PDP engines, and the response (permit or deny) returns to the C_i by CS.

5.2.3.6 Using Shamir Scheme

In PAX, we implemented the Shamir scheme to increase the level of security for indirect users (advisors, patients' relatives, researchers, and emergency). Indirect users are legitimate users who can perform an internal attack because of the rights granted to them. PAX uses ECDSA to sign all signatures of HC users to create master signature (MS). Then, PAX uses the Shamir scheme to generate secrets sharing (SS_s) from a MS. Each indirect user receives SS via a secure communication channel. C_i needs a set of SS_s to reproduce MS. PAX uses $TH = 3$, which means that the randomly selected SS_s require at least 3 SS_s to generate MS . Also, depending on RN_{sp} , AS specifies that the user's role is indirect and use the Shamir scheme with ECDSA's Sig to verify the original MS and then evaluate the request by PDP2. Using Shamir's scheme with XACML adds the property of authenticity, as an indirect user cannot access data with the same SS_s . This operation enables PAX to secure the privacy of patients' data and protect patients' data from internal and external attacks. When an indirect user wants access to medical records, he/she does not know whether the SS_s used to generate the MS belong to any specific HC providers.

5.2.4 PAX Authorisation Protocols

In this Section, we will provide in detail PAX's protocols framework in authorising direct and indirect users.

5.2.4.1 Authorisation Protocols for Direct Subjects and Objects

To run through the authorisation process for direct users of PAX, the security techniques mentioned in the Section 3.1.1.2 will be the basis for building the PAX authorisation system. In this Section, we will explain the protocols of authorising direct users such as doctors and patients to access medical records (EHR).

- **Prerequisite procedures**

There are a set of steps that must be taken before authorisation can begin.

1. Create two datasets (attributes, pseudonym) on AS. If datasets are established, the processes are to add new users or delete direct users.
2. Create policies (dataset 3) for all direct users based on anonymity and pseudonym.
3. Storage of medical records (dataset 4) for patients in the DS's repository (after collecting them from patients using wireless medical devices, this process requires security mechanisms, but the process of storing medical

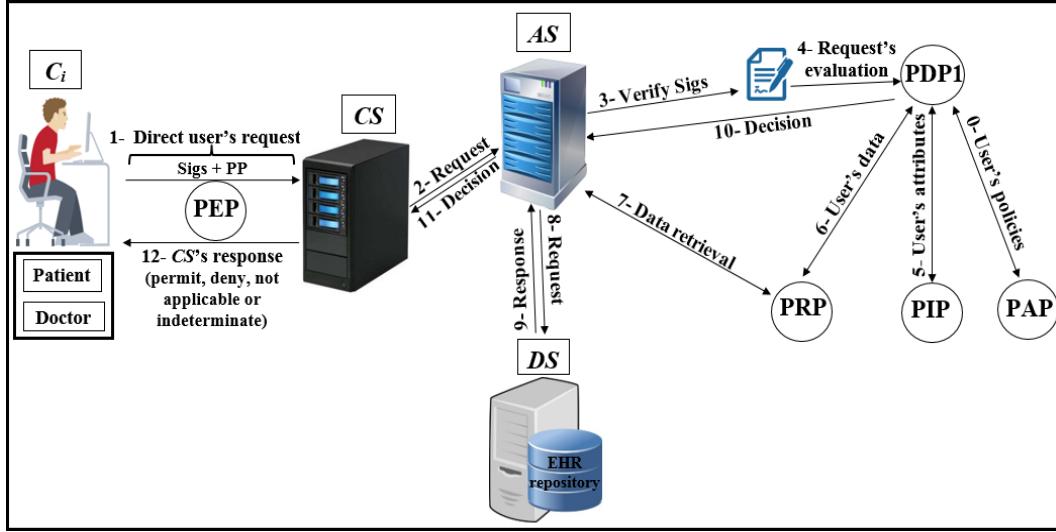


Figure 5.5: Authorisation of direct users

records safely will detail in Chapter 6). We assume that patients' data is located on the DS .

• Authorisation protocols

The following protocols detail how the direct user is associated with the EHR in DS . Figure 5.5 depicts generally the authorisation process, while Figures 5.6, 5.7, 5.8, and 5.9 show the authorisation protocols of direct users with PAX entities.

1. First protocol as shown in Figure 5.6:

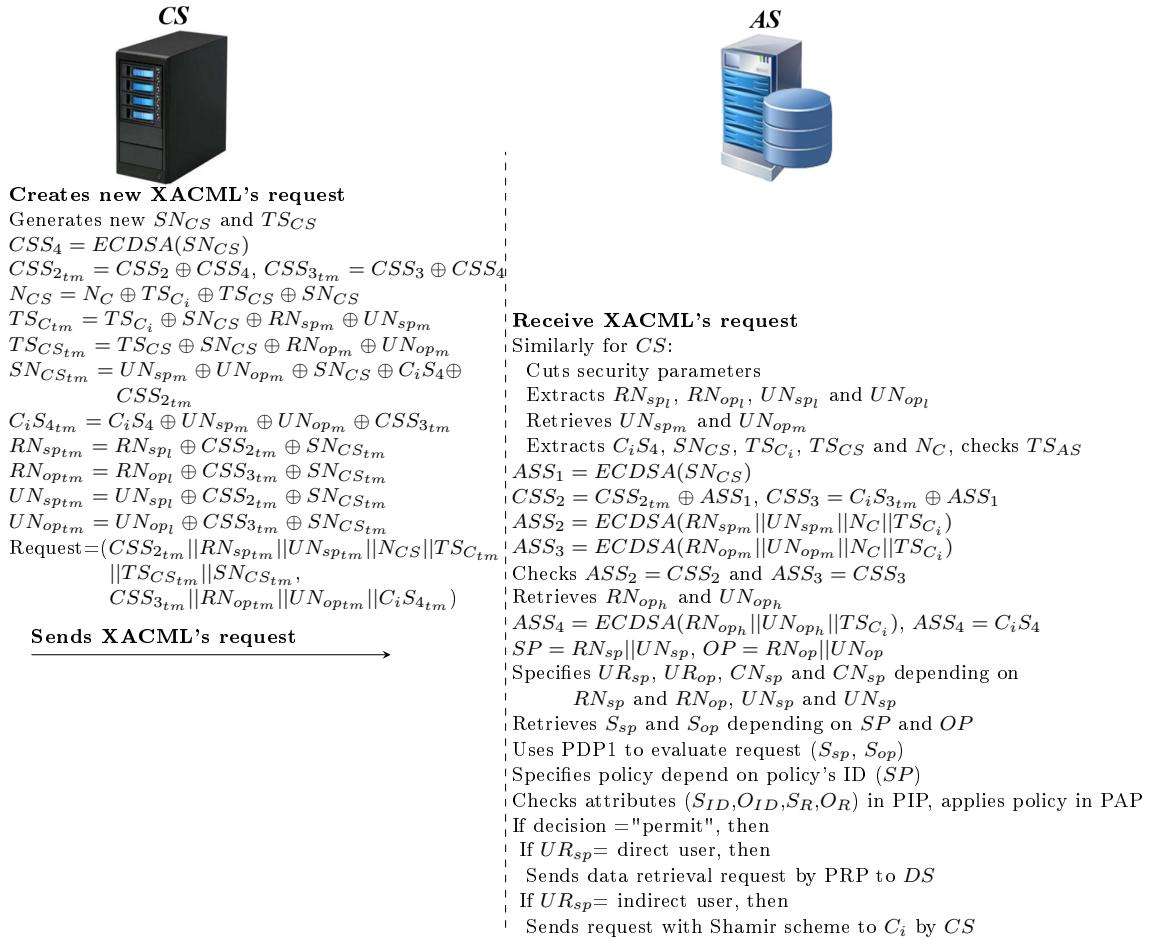
- PAX's user enters the subject ID (S_{ID}), object ID (O_{ID}), subject role (S_R) and object role (O_R) to the C_i application. C_i replaces S_{ID} , O_{ID} , S_R and O_R with CN_{sp} , CN_{op} , UR_{sp} and UR_{op} respectively. After that, internal pseudonyms are replaced with UN_{sp} , UN_{op} , RN_{sp} RN_{op} respectively. Then, C_i generates random nonces (N_C and SN_C) and new timestamp (TS_{C_i}). SN_C is a random secret between C_i and CS . C_i computes 4 Sigs (C_iS_1 , C_iS_2 , C_iS_3 and C_iS_4). C_iS_1 and C_iS_2 is used to ensure the legitimacy of C_i in CS . C_iS_3 is used to protect SN_C between C_i and CS . C_iS_4 is used to validate C_i in both AS and DS (depending on RN_{op_h} and UN_{op_h}). C_i hides all Sigs such as C_iS_1 temporary (C_iS_{1tm}) and PP such as $TS_{C_{tm}}$ and $SN_{C_{tm}}$. At this point, C_i sends XACML's request to CS that including subject's information ($C_iS_{1tm}||RN_{sp_{tm}}||UN_{sp_{tm}}||N_C||TS_{C_{tm}}||SN_{C_{tm}}$) and object's information ($C_iS_{2tm}||RN_{op_{tm}}||UN_{op_{tm}}||N_C||C_iS_{4tm}$).
- CS receives XACML's request from C_i , cuts Sigs and PP from access-subject (C_iS_{1tm} , $RN_{sp_{tm}}$, $UN_{sp_{tm}}$, N_C , $TS_{C_{tm}}$ and $SN_{C_{tm}}$) and re-

Figure 5.6: Protocol of PAX model between C_i and CS

source (C_iS_{2tm} , RN_{optm} , UN_{optm} , N_C and C_iS_{4tm}). Then, CS extracts RN_{sp1} , UN_{sp1} , RN_{op1} and UN_{op1} from receiving parameters (such as RN_{sptm}). UN_{sp1} and UN_{op1} is used to retrieve UN_{spm} and UN_{opm} from datasets. CS extracts C_iS_4 , SN_C , TS_{C_i} and checks timestamp. Then, CS computes Sigs (CSS_1 , CSS_2 and CSS_3), and uses CSS_1 to extract original C_iS_1 and C_iS_2 . After that, CS checks $CSS_2=C_iS_1$ and $CSS_3=C_iS_2$. If the Sigs are not identical, CS cancels the connection; otherwise, it moves to the next protocol.

2. Second protocol as shown in Figure 5.7:

- CS generates random secret (SN_{CS}) and new timestamp (TS_{CS}) between CS and AS . Then, CS computes the secret signature (CSS_4) to protect SN_{CS} . Also, CS hides C_i 's parameters such as N_C and TS_{C_i} to use them with validation operations in AS and DS . In addition, all Sigs (such as CSS_{2tm}) and PP (such as N_{CS} and $TS_{CS_{tm}}$) are anonymously hidden by CS . At this point, CS sends XACML's request to AS .
- AS receives the request, cuts Sigs and PP. After that, AS extracts

Figure 5.7: Protocol of PAX model between *CS* and *AS*

original parameters (such as C_iS_4 and TS_{CS}) and checks timestamp. *AS* computes ASS_1 (to extract CSS_2 and CSS_3) and computes ASS_2 and ASS_3 (to check $ASS_2=CSS_2$ and $ASS_3=CSS_3$). *AS* retrieves RN_{op_h} and UN_{op_h} from dataset (depending on RN_{op_m} and UN_{op_m}) and computes ASS_4 to ensure C_i request is legitimate after checks $ASS_4 = C_iS_4$. *AS* uses the parts of external pseudonyms to specify UR_{sp} , UR_{op} , CN_{sp} and CN_{op} . *AS* retrieves Sigs of SP and OP (S_{sp} and S_{op}) depending on the internal SP and OP . *AS* uses PDP1 engine to evaluate XACML's request after adding S_{sp} and S_{op} to that request. *AS* specifies user's policy in PAP and checks user's attributes in PIP. PDP1 applies policy to get a decision (permit, deny, not applicable and indeterminate). If decision="permit", *AS* uses UR_{sp} to specify user's role (direct/indirect). If UR_{sp} =direct, *AS* sends the data retrieval request by PRP to *DS*; if UR_{sp} =indirect, *AS* sends the Shamir request that contain at least 2 SS_s to insure legitimate indirect users. Otherwise *AS* sends reject response to C_i by *CS*.

3. Third protocol as shown in Figure 5.8:

- Similarly, AS generates random secret (SN_{AS}) and timestamp (TS_{AS}) between AS and DS . AS computes ASS_5 to protect secret (SN_{AS}) between AS and DS . Additionally, AS computes ASS_6 to ensure legitimate PP (RN_{op_m} and UN_{op_m}) in DS . All Sigs (such as $ASS_{6_{tm}}$) and PP (such as $TS_{AS_{tm}}$ and $SN_{AS_{tm}}$) are anonymously hidden by AS . Then, AS sends XACML's request to DS .
- DS receives the request, cuts Sigs and PP. After that, DS extracts original parameters (such as C_iS_4 and SN_{AS}) and checks timestamp. DS computes DSS_1 (to extract ASS_6) and retrieves RN_{op_h} and RN_{op_m} depending on RN_{op_l} . Then, DS computes DSS_2 and DSS_3 to check $DSS_2 = ASS_6$ and $DSS_3 = C_iS_4$. If AS 's parameters validated in DS correctly, DS computes timestamp (TS_{DS}) and signs patient's data (DSS_4). All Sigs (such as $DSS_{4_{tm}}$) and PP (such as $TS_{DS_{tm}}$) are anonymously hidden by DS . At this point, DS sends the response to AS .
- AS receives the response, extracts PP (such as TS_{DS}) and checks timestamp. AS tests the Sigs checking (such as $ASS_6 = DSS_2$). Then, AS computes data signature (ASS_7) to check data integrity by $ASS_7 = DSS_4$.

4. Fourth protocol as shown in Figure 5.9:

- AS prepares the response to CS by generating a new timestamp (TS_{AS}), hides data signature (ASS_7) with ASS_2 , ASS_3 , C_iS_4 and secret signature (ASS_1). AS hides PP and sends the response that contains decision and patient's data to CS .
- CS receives the response and extracts Sigs and PP. CS computes data signature (DSS_5) to check data integrity ($CSS_5 = ASS_7$). Then, CS checks other Sigs (CSS_2 , CSS_3 and CSS_4) with received Sigs (ASS_2 , ASS_3 and C_iS_4) to ensure legitimacy of AS . CS prepares the response to C_i by generating a new timestamp and hides data signature (CSS_5) with CSS_2 , CSS_3 , C_iS_4 and secret signature (CSS_1). CS sends the response to C_i .
- C_i receives the response, extracts PP and checks timestamp. C_i computes data signature (C_iS_5) to check data integrity by $C_iS_5 = CSS_5$. Then, C_i extracts signatures (CSS_2 , CSS_3 , CSS_1 and C_iS_4) and checks them with original signatures (C_iS_1 , C_iS_2 , C_iS_3 and C_iS_4) respectively. C_i uses CSS_2 , CSS_3 and CSS_1 (secret signature between C_i and CS) to check legitimacy of CS while uses C_iS_4 to check le-

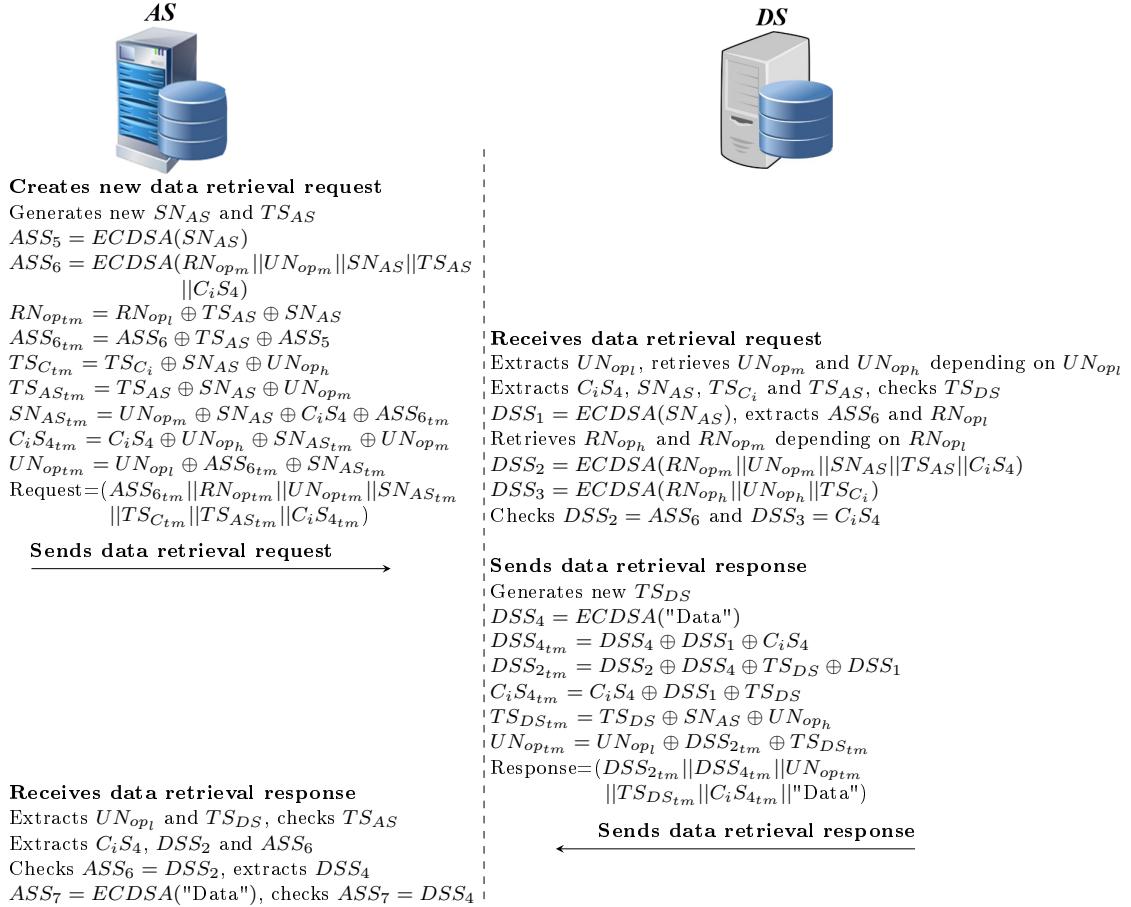


Figure 5.8: Protocol of PAX model between AS and DS

gitimacy of AS and DS. If all Sigs are validated, namely, authorised C_i received securely correct data.

5.2.4.2 Authorisation Protocols for Indirect Subjects and Objects

Indirect user authorisation is an important process to secure sensitive patients' data in the EHR stored in DS. PAX offers additional procedures to prevent the abuse of indirect user privileges.

- **Prerequisite procedures**

There are a set of steps that must be performed before authorisations are applied.

1. Steps from 1 to 3 are similar to those for direct users.
2. The Shamir scheme is used to generate the SS_s from MS for the number of users, each C_i has unique SS same length as MS, and authorised with two policies for each indirect user on AS. The policy evaluation process is also done with two, PDP1 and PDP2, evaluation engines. The use of

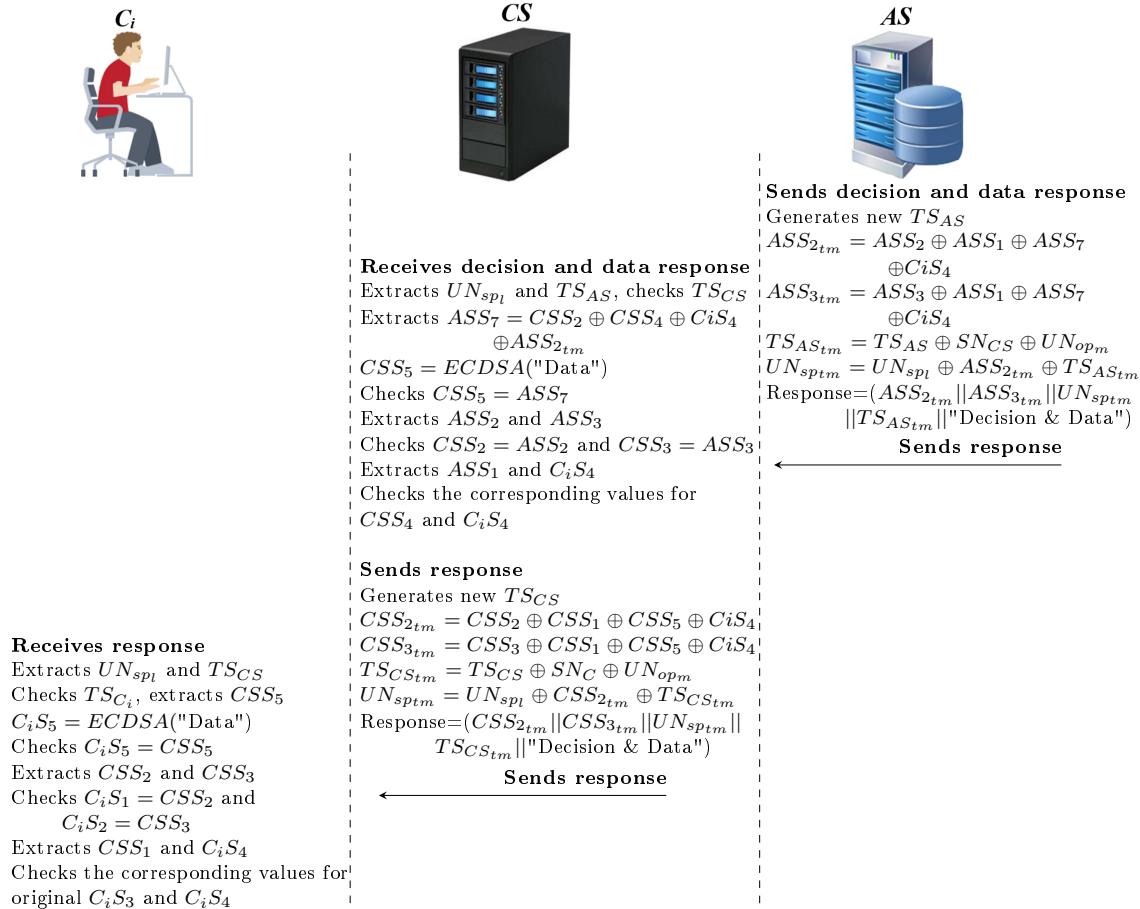


Figure 5.9: Protocol of PAX model between AS , CS and C_i

two evaluation engines is very important in separating direct and indirect users and increasing security in the privacy of medical records.

3. The PAX authorisation system identifies certain medical records (the patients' history at a given time such as a year or more ago) for indirect users who can access them, as shown in Figure 7.13 (researcher case).

- Authorisation protocols

The following protocols detail how the indirect user obtains medical records in PAX. Figure 5.10 illustrates generally the authorisation of indirect users, while Figures 5.6, 5.7, 5.11, 5.8, and 5.9 show the authorisation protocols of indirect users in PAX.

1. The steps of the first and second protocols are similar to the ones of the direct users authorisation.
 2. Third protocol as shown in Figure 5.11:
 - AS computed MS previously by signing all users' signatures. Then, AS computes Shamir scheme to generate SS_s with the same number of users (each C_i has one unique SS). In PAX, C_i needs at least

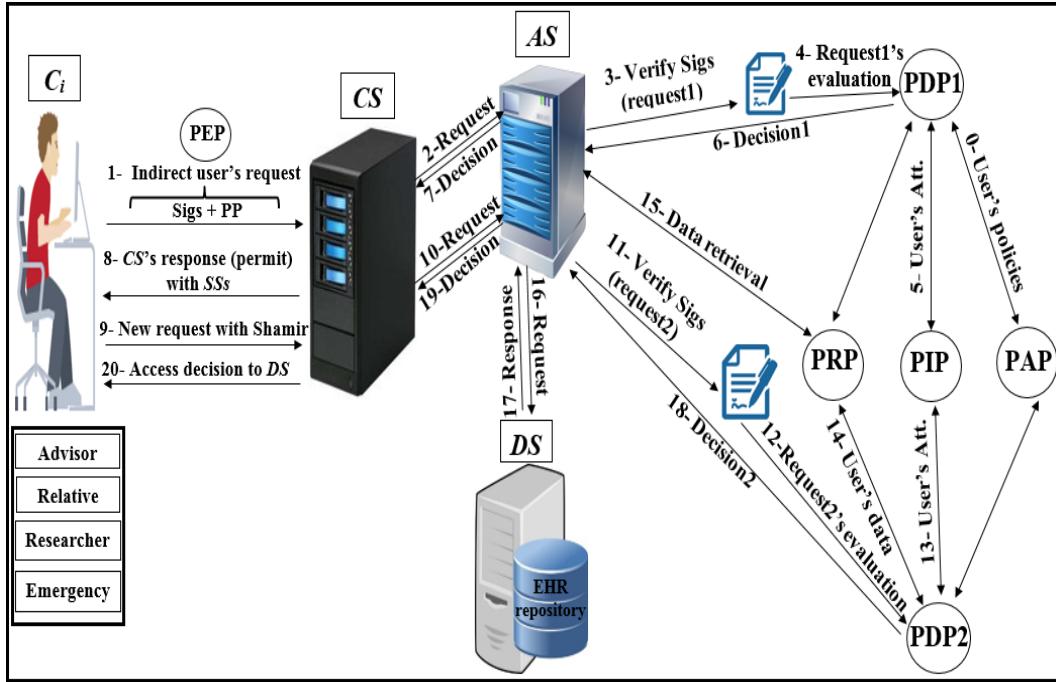


Figure 5.10: Authorisation of indirect users

3 SS_s to generate original MS . In this protocol, AS generates a new timestamp and retrieves at least 2 SS_s . After that, AS hides SS_s with ASS_2 , C_iS_4 , S_{sp} and secret signature (ASS_1) as well as parameters (such as $TS_{As_{tm}}$ and UN_{sptm}) are anonymously hidden. At this point, AS sends request to CS .

- CS receives the request, extracts PP and checks timestamp. Then, CS removes the secret signature (CSS_4) and adds the secret signature (CSS_1) in $CSS_{2_{tm}}$. CS generates a new timestamp (TS_{CS}), hides PP and sends the request to C_i .
- C_i receives Shamir's request, extracts PP and checks timestamp. Then, C_i computes C_iS_6 to extract SS_s and retrieves his SS . At the moment, C_i can generate MS from Shamir (C_i 's $SS||SS_s$), hides MS with C_iS_6 and C_iS_3 , generates timestamp and hides PP. At this point, C_i sends the response to CS .
- CS receives the response, extracts PP and checks timestamp. Also, CS removes CSS_1 and adds CSS_4 in $C_iS_{6_{tm}}$. CS generates a new timestamp, hides PP and sends the response to AS .
- AS receives Shamir response, extracts PP and checks timestamp. Then, AS extracts the received MS and checks it with the saved original MS . After that, AS retrieves C_i 's SS depending on $S_{sp}(UR_{sp}||CN_{sp})$ and assigns request (SS, S_{op}) to $PDP2$. AS specifies policy depending on policy's ID (Shamir||SP), checks attributes in PIP and

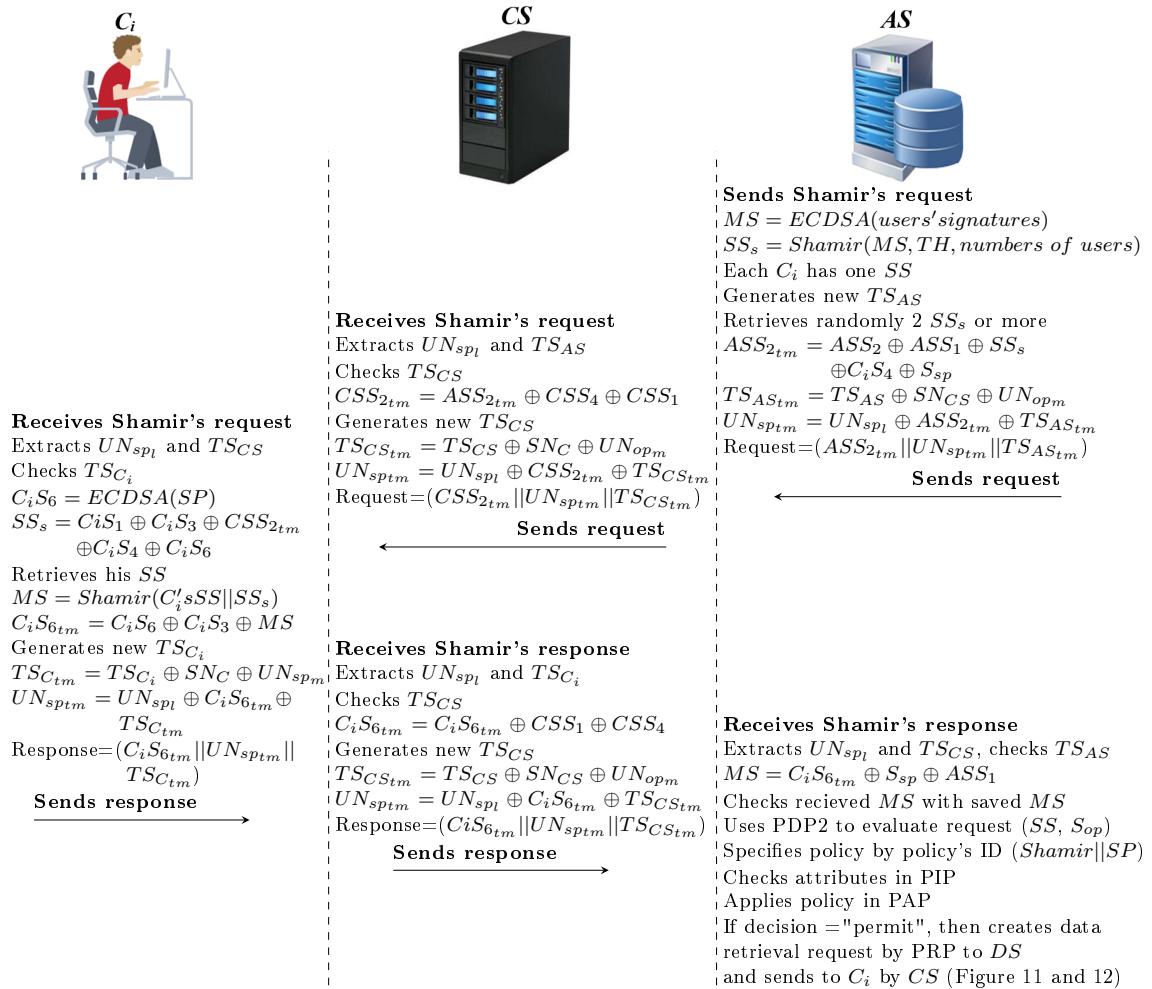


Figure 5.11: Protocol of PAX model for indirect users

PDP2 applies policy in PAP to produce the decision. If the decision is "permit", AS creates a data retrieval request by PRP to DS ; otherwise AS sends reject response to C_i by CS .

3. The fourth and fifth protocols are similar to the third and fourth ones respectively in direct user authorisation. DS sends the response to the C_i by AS and CS . If C_i is advisor, relative, or emergency doctor, C_i will receive specific patient's data; otherwise if C_i is researcher doctor, C_i will receive a set of medical records.

5.3 Summary of the Chapter

In this chapter, we have provided details about data security and our contributions to build a new authorisation scheme. After that, the network model for authorisation scheme explains the general structure to exchange requests and responses between users' devices and network servers. Finally, the authorisation scheme methodology

has been explained in detail to authorise users in HC application.

Chapter 6: Data Storage Scheme

In this chapter, our data collection scheme (protocols) is explained to protect the collected sensors' data. Health institutions need advanced technology such as a healthcare wireless sensor network (HWSN) to collect patients' data accurately and continuously. This technology still suffers from two basic problems: performance and security efficiency. Also, existing research has serious drawbacks when using public-key mechanisms such as digital signature algorithms, as we mentioned in subsection 2.4.3. Therefore, it is significantly important to design a patient data collection scheme that addresses efficiency issues in existing research. This chapter includes the following topics:

- Security of data collection and our contribution for data collection scheme in HC application.
- Network model to collect data in HC application.
- Methodology to apply our storage scheme in HC application.

6.1 Security of Data Collection in EMR Systems

Users' medical records require accurate and efficient electronic systems to implement the management and organisation processes. EMR systems enormously are effective in managing patients' data. EMRs vastly are applied in the health sector ([Sarkar 2017](#)). Moreover, EMR needs patients' data collection technology such as HWSN. Data security in EMR systems is affected by the operations performed in the sensor devices and EMR server. Lack of performance due to the use of excessive security measures and useless cause network failure.

In terms of sensor devices, HWSN consumes its resources through computations, communications and transportation. Because these networks have limited memory, energy and bandwidth, sensors suffer from many issues to accomplish data security. For instance, routing protocols are important to reduce energy consumption during sending authentication requests. Also, heavy computations of complex signatures

are a serious problem of energy consumption of sensors. In addition, remote sensors consume considerable energy when connected to a network cluster. Another important issue, signatures verification in each CH_i (per round) is a huge burden on the energy consumption and time of CHs . In addition, joining malicious sensors to wirelessly clusters causes the destruction of CHs quickly. Therefore, protecting information sensors in addition to location security is essential for data security.

In terms of EMR server, unauthenticated communications and transfers cause complex computations that waste the time of the EMR server. In each round, the EMR server requires verification of signatures for both CHs and SNs in addition to the complex operations of storing the collected data. Furthermore, privacy breach issues in access to the repository are crucial in the reliance of EMR systems. Then, the loss of data/information due to repository penetrations takes a long time to retrieve accurately. Additionally, continuous and systematic updating of medical records and the difficulty of classifying data can be a reason for hacking the EMR server. Therefore, preventing attackers from breakthrough EMR server is important to provide data security. As a result, data security issues in both sensors and the EMR server should be addressed to build a reliable data collection scheme.

6.1.1 Our Contributions

We propose a new **R**eliable and **E**fficient **I**ntegrity **S**cheme of Data **C**ollection in **H**WSN (REISCH) to ensure that patients' data transferred/stored to the *LS/BS* securely and efficiently. Our contributions involve providing reliable/lightweight data collection scheme in the HWSN, that are outlined as follows:

- REISCH applies Elliptic Curve Digital Signature Algorithm (ECDSA) with BLAK2bp instead of ECDSA with Secure Hash Algorithm 1 (SHA1) to improve HWSN lifetime and to prevent the intruders alter/change patients' data.
- REISCH uses the homomorphic mechanism with CHs to reduce energy consumption when they aggregate patients' data from sensors.
- REISCH hides the sensor's identification (SID) and location (SL) by using random pseudonyms. This mechanism prevents intruders from detecting sensors information transmitted between network terminals.
- Formal security analysis in REISCH has simulated by an automated validation of Internet security protocols and applications (AVISPA). This tool is dramatically accepted as an effective way to validate threat models in HWSN. AVISPA is used to check that our scheme is secure against both passive and

active attacks. Additionally, Burrows, Abadi and Needham (BAN) logic has been used to ensure request source, freshness and entity legitimacy.

6.2 Our Proposed Data Storage Model

In this Section, we will provide details about our new data storage scheme that support security and privacy mechanisms to ensure data collection accurately in HC applications. This Section will be divided into the network model, applying privacy concepts and data collection protocols.

6.2.1 Network Model

The REISCH scheme includes a set of entities, as shown in Figure 6.1:

1. Sensor (*SN*): This entity collects raw data related to a specific patient. It sends this data to *CH*.
2. Cluster head (*CH*): This entity aggregates data from sensors that followed it. Then, it sends this data to *LS*.
3. Local server (*LS*): This entity receives data from all *CHs* in each round and stores it in EMR's repository. Subsequently, it sends these data periodically to the central server (*CS*).
4. Central server (*CS*): This entity is gateway access remote servers such as the attributes server (*AS*) and the data server (*DS*). It receives data from *LS* and sends data to *DS* after being authenticated by *AS*. Security procedures in *AS* and *DS* are left for future directions.

Our network model works with low-energy adaptive clustering hierarchy (LEACH) protocol for WSN. LEACH uses clustering architecture to improve WSN lifetime, more details about this protocol is available in (Awaad & Jebbar 2015). Each group of *SNs* collects raw data for a specific patient. These *SNs* sign data before sending them to *CHs*. Each *CH* aggregates data and signatures from his followers. Then, each *CH* uses homomorphic property with all data and signatures without verifying the signatures to reduce energy consumption on *CH* and send them to *LS*. Due to *LS* is unlimited resources, it verifies and validates collected data from *SNs*. *LS* sends stored data on EMR's repository to the central repository to allow HC users (patients and providers) access them by sending authentication/authorisation requests to the central server (*CS*), attributes server (*AS*) and data server (*DS*). This paper focuses on performance and security issues in *SNs*, *CHs*, *LS* and *CS*.

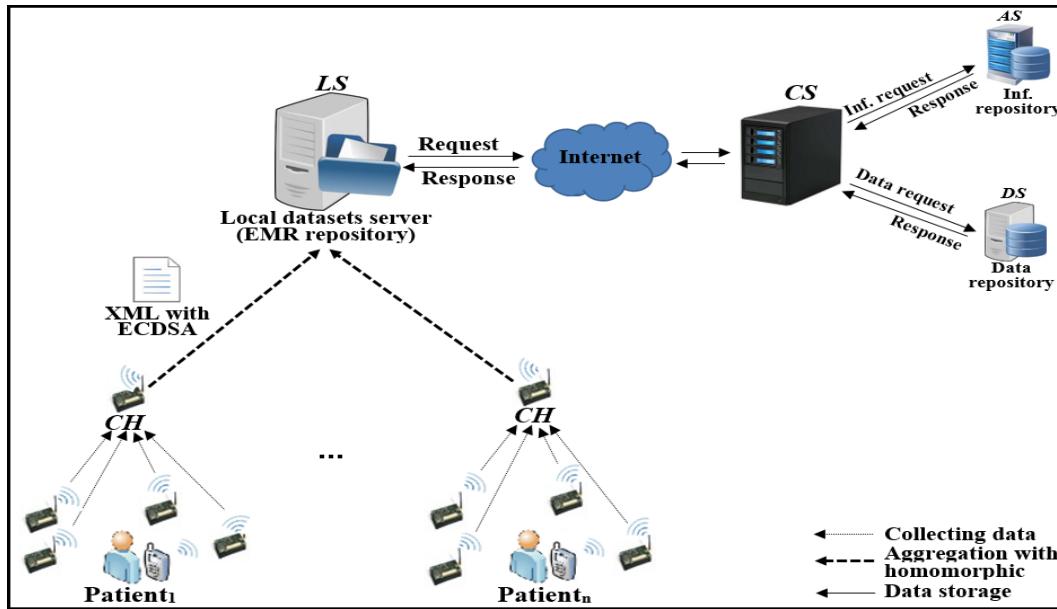


Figure 6.1: General REISCH model

Security issues for datasets and transferred data in CS , AS and DS are beyond this paper and left for future works.

6.2.2 Security Goals

To develop a reliable data collection scheme, REISCH adopts the following security requirements:

- **Information confidentiality:** This requirement is achieved to hide SNs /patients' identities and to protect patients secrecy from disclosure by intruders. To fulfil this requirement, a high-security cryptographic algorithm should be applied.
- **Data integrity:** This is to protect the patients' data from intruders tampering. The collected data should arrive the intended target without alteration to provide a reliable communication channel among SNs , CHs , LS and CS Al-Zubaidie et al. (2019c).
- **Non-repudiation:** This requirement prevents all legitimate entities from denying their signatures. This is a feature to prove that the m is sent by a particular SN in the HWSN. If a legitimate entity in HWSN performs internal attacks, he/she cannot deny his/her messages while availing the privileges granted to him/her.
- **Forward secrecy/Backward secrecy:** This requirement is performed when network entities use new keys and parameters temporarily without depending

on old ones in the future. While backward secrecy prevents the newly joined sensors from accessing previous messages before entering the HWSN.

- **Freshness:** It indicates that the data collection message is new and updated to guarantee that the intruder cannot replay the previous message at a later time. This goal is accomplished by checking of time, a random passcode, and random signatures within each data collection round to counteract spoofing risks such as replay, MITM, and impersonation.
- **Security of Localisation:** This feature ensures that the patient/sensor's real location is protected from detection, or sends error messages to LS by an intruder.
- **Scalability:** HWSN applications elaborate in a scalable environment in both data and devices. Thus, these applications need data collection schemes capable of processing and adapting to the ever-increasing number of devices of HWSN. This feature indicates the ability of the data collection scheme to properly handle huge HWSN devices. Public key signature schemes are convenient to provide this requirement Kumar et al. (2016).
- **Survivability:** It provides a certain level of services in patients' data collection or network capability to withstand failure/threats in an appropriate manner and continue to provide services between SNs and LS for as long as possible.
- **Accountability:** This property means tracking the behaviour of malicious threats/suspicious activities by legitimate users/counterfeiting attacks in accessing EMRs' repository.
- **Efficiency:** HWSN sources such as energy, storage, and processor should be within the design objectives of security protocols in HWSN.

6.2.3 REISCH's Scheme

In this subsection, we will explain details about REISCH in terms of entities preparation, using ECDSA-BLAKE2bp, applying camouflage signature, implementing homomorphic and REISCH protocols.

6.2.3.1 Entities Preparation

To start collection and storage processes, it should prepare HWSN network with the following points:

- Each sensor (SN_i) and LS server provided SN_i pseudonym (SN_{Pseud}), SN_i pseudonym signature ($SigLS_i(SN_{Pseud})$) and SN_i location (SN_{SL}).
- All entities (SN_i , CH_i , LS and CS) generates K_{pu_i} and K_{pr_i} to apply asymmetric cryptographic.
- Each entity broadcasts K_{pu_i} to network members.
- Each SN_i uses ECDSA signatures ($SigSN$ and $SigCH$) to achieve collected data integrity.
- Each server (LS and CS) uses ECDSA signatures ($SigLS$ and $SigCS$) to achieve storage data integrity.

6.2.3.2 Using ECDSA-BLAKE2bp

REISCH implements ECDSA-BLAKE2bp (NIST prime 256bit) to sign all messages(m) among HWSN entities (SN_i , CH_i , LS and CS). The collected data is formatted as XML-enabled files to allow different devices in the HWSN network to deal easily and flexibly with these records. We replaced BLAKE2bp algorithm instead of SHA1 to perform the hash function on collected and stored data (subsection 3.1.1.2.2, the second point in both signature generation and signature verification, we replaced $BLAKE2bp(m)$ instead of $SHA1(m)$). In REISCH, we used ECDSA-BLAKE2bp to ensure data integrity as well as add SN_{Pseud} within $SigSN$ to prevent changing data. LS and CS accept only valid signature after verification. The high performance and security of the ECDSA-BLAKE2bp algorithm makes it an appropriate choice to protect EMR health records. Also, using ECDSA-BLAKE2bp with XML adds the feature of managing medical records in HWSN.

6.2.3.3 Applying Camouflage Signature

REISCH uses the camouflage process to add hidden data signature completely and prevent traceability, analysis or alteration of data. The camouflage process starts by signing the data to obtain a 64-bit MD and then adding a 64-bit counterfeit signature to a total length of 64-bit + 64-bit = 128-bit. In addition, each SN_i adds padding (0000) to become the total length of the signature 132-bit as shown in Figure 6.2. SN_i performs the process of exchanging data signature segments based on Parity (even / odd) value. It receives this value invisibly from LS because this value is included in the ephemeral random value ($SigLsE_i$). SN_i tests $SigLsE_i$, if "even" it divides 132-bit into four segments (each segment to 33-bit) and exchanges the segments. Then, SN_i truncates 32-bit from the first segment and divide it into four segments (each segment to 8-bit). If $SigLsE_i$ is "odd", it divides 132-bit into

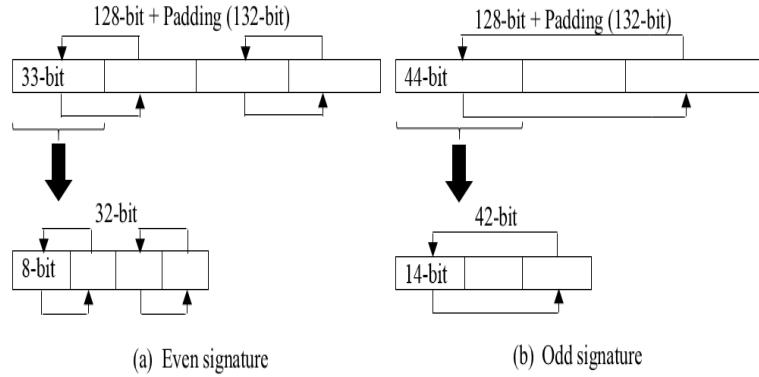


Figure 6.2: Camouflage signature

three segments (each segment to 44-bit) and then exchanges the segments. It then truncates 42-bit and divides the first segment into three segments (each segment to 14-bit). Because the exchanging operation is based on Parity sent from LS , this process prevents the detection of the original signature of the data and prevents it from being changed. Thus, this process protects patients' data from tampering or alteration.

6.2.3.4 Implementing Homomorphic

REISCH uses the homomorphic property with the ECDSA-BLAKE2bp algorithm to increase network performance. Because the verification process in ECDSA consumes more time and processing than the signature process, it is very convenient to use the homomorphic property in HWSN to support both performance and security. LEACH protocol is based on the principle of clustering to reduce energy consumption, thus REISCH uses the aggregate signature to allow CH_i to aggregate signatures and data without using verification. To double security in REISCH, CH_i performs the process of aggregating temporary signatures such as $SigSnT_{3s}$ and $SigSnT_{4s}$ in addition to random numbers (SN_{RNs}) and data. Temporary signatures contain unclearly original signatures that prevent an intruder from penetrating patients' data. The homomorphic procedure reduces energy consumption and thus increases the possibility of using the ECDSA algorithm with HWSN for as long as possible.

6.2.3.5 REISCH's Protocols

REISCH scheme consists of three protocols. During these protocols, REISCH provides reliable data collection processes to protect collected patients' data.

6.2.3.5.1 Protocol1 between SN_i and CH_i

This protocol performs the data collection process (Figure 6.3 shows the first protocol processes between SN_i and CH_i in the data collection). At the beginning of each round, each SN_i receives one-time passcode (LS_{OTP_i}) and a random number (SN_{RN_i}). This LS_{OTP_i} contains an ephemeral random value ($SigLsE_i$) of the same length as the signature. SN_i extracts $SigLsE_i(SN_{Pseud})$ from dataset and executes \oplus to extract the secret value $SigLsE_i$. Then, SN_i executes the *Parity* (as shown in Section 6.2.3.3) process based on $SigLsE_i$ to get the temporary signature ($SigSnT_1$). After that, SN_i generates an ephemeral random value ($SigSnE_i$) with the same signature length and uses it with $SigSnT_1$ to compute the $SigSnT_2$ value. Next, SN_i computes the *Dif* value that represents the subtraction value of the distance between CH_i and SN_i (SNC_{HD}) and the distance between LS and SN_i (SNL_{SD}). *Dif* specifies that SN_i is within the HWSN framework (1000m * 1000m). Additionally, SN_i computes a new timestamp (SN_{TS}) and one time passcode (SN_{OTP}). Thereafter, SN_i performs hidden process for SN_{TS} and SN_{OTP} at a temporary value (SN_{TS_t}) with the addition of a value of only seconds (SS) at the end of the SN_{TS_t} . Furthermore, SN_i uses SN_P to concatenate secret parameters such as SN_{TS_t} , SN_{OTP} , SN_{RN_i} , SN_{Pseud} and SN_{SL} to match them at LS . To protect both SN_P and $SigSnE_i$, SN_i uses the \oplus operation to hide them by calculating the temporary values of $SigSnT_3$ and $SigSnT_4$. At this point, SN_i computes the message (SN_m) and sends it to CH_i which is a sequence of $SigSnT_3$, $SigSnT_4$, SN_{RN_i} , Dif , SN_{TS_t} and data collection.

In the CH_i side, it also receives LS_{OTP_i} of LS and SN_m of SN_i . Afterwards, CH_i truncates Dif_i and tests its value within the HWSN framework by computation $Dif_i \leq$ Maximum value, where the Maximum value should be less than or equal to 707.1068. Then, CH_i computes the timestamp (CH_{TS_1}) to prevent late messages. CH_i truncates SS from SN_{TS_t} to obtain SN_{TS_i} . If the difference between CH_{TS_1} and SN_{TS_i} is less than the ΔT delay rate (we assumed that $\Delta T = 3$), namely, that the message is fresh.

6.2.3.5.2 Protocol2 between CH_i and LS

This protocol performs the data aggregation process (Figure 6.4 shows the second protocol processes between CH_i and LS in the data aggregation). Each CH_i receives temporary signatures, random numbers and collected data from its SN_i followers. Then, CH_i executes the signature process $SigCH$ for the temporary signatures received ($SigSnT_{3_s}$) of its SN_i followers. Thereafter, CH_i extracts the $SigLsE_i$ unique value from LS_{OTP_i} similar to the first protocol based on $SigLsE_i(CH_{Pseud})$ stored. Next, CH_i performs CH_{Parity} process based on $SigLsE_i$.

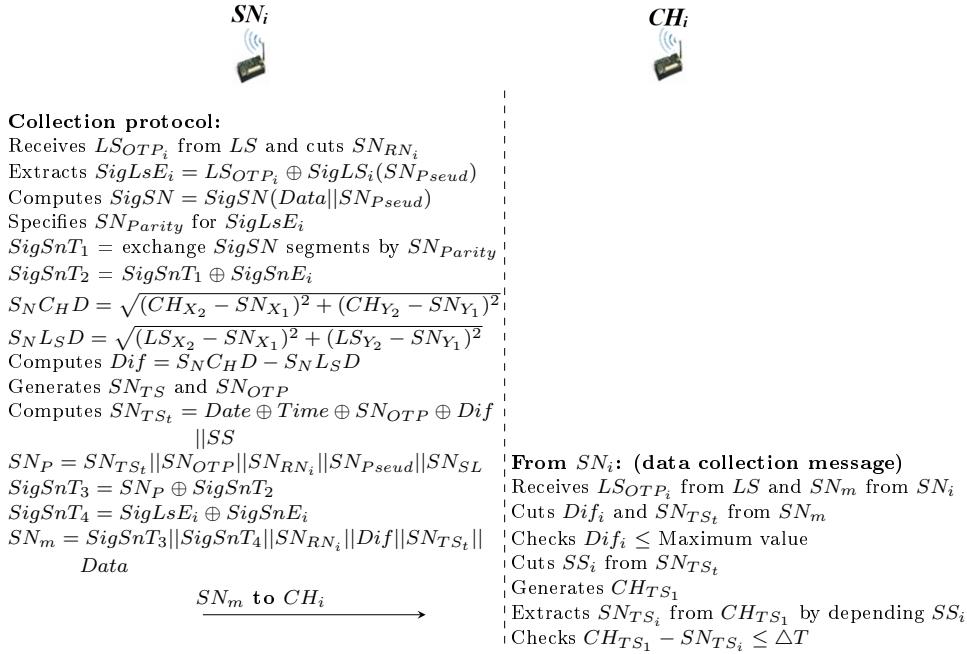


Figure 6.3: Data collection protocol

extracted (as described in Section 6.2.3.3) to compute $SigChT_1$. Moreover, CH_i computes $SigChT_2$ depending on the $SigChT_1 \oplus SigLsE_i$ operation. After that, CH_i generates CH_{TS_2} and CH_{OTP} to prevent the problem of replay messages later. CH_i calculates CH_P which represents the sequence of secret parameters. Also, CH_i computes CH_A to complete the process of aggregating temporary signatures ($SigSnT_{3s}$ and $SigSnT_{4s}$), random numbers (SN_{RNs}) and collected data ($Data_s$). Finally, CH_i computes CH_m and sends it to LS .

In the LS side, after LS sends $LSOTP_i$ for all SN_i , it waits to receive CH_m of all CH_i per round. LS truncates CH_{RN_i} , SS_i and CH_A from each CH_m received. It uses SS_i to reconfigure CH_{TS_2} , also LS generates a timestamp (LS_{TS_1}) and tests ΔT between LS_{TS_1} and CH_{TS_2} to confirm the freshness of the message. Then, it tests whether CH_{RN_i} matches the value previously sent. If CH_{RN_i} is correct, it is used to determine CH_{Pseudi} and the latter is used to determine CH_i location (CH_{SL_i}). Afterwards, LS retrieves temporary signatures and random numbers ($SigSnT_{3s}$, $SigSnT_{4s}$ and SN_{RNs}) from CH_A . LS uses the $SigLsE_i$ value to specify a *Parity* (even/odd) value for all SN_i and CH_i . It computes a signature ($SigLS_{1i}$) for all SN_i signatures that followed a specific CH_i ($SigSnT_{3s}$) and exchange the $SigLS_{1i}$ segments based on CH_{Parity} . After that, LS calculates $SigLS_{1i}$ which equals $SigChT_2$ in CH_i based on $SigLS_{1i} \oplus SigLsE_i$. To ensure the legitimacy of CH_i , LS extracts the secret parameters at CH_{Pi} and tests the match CH_{Pseudi} and CH_{SL_i} in the datasets. At this point, LS checks for data integrity collected by

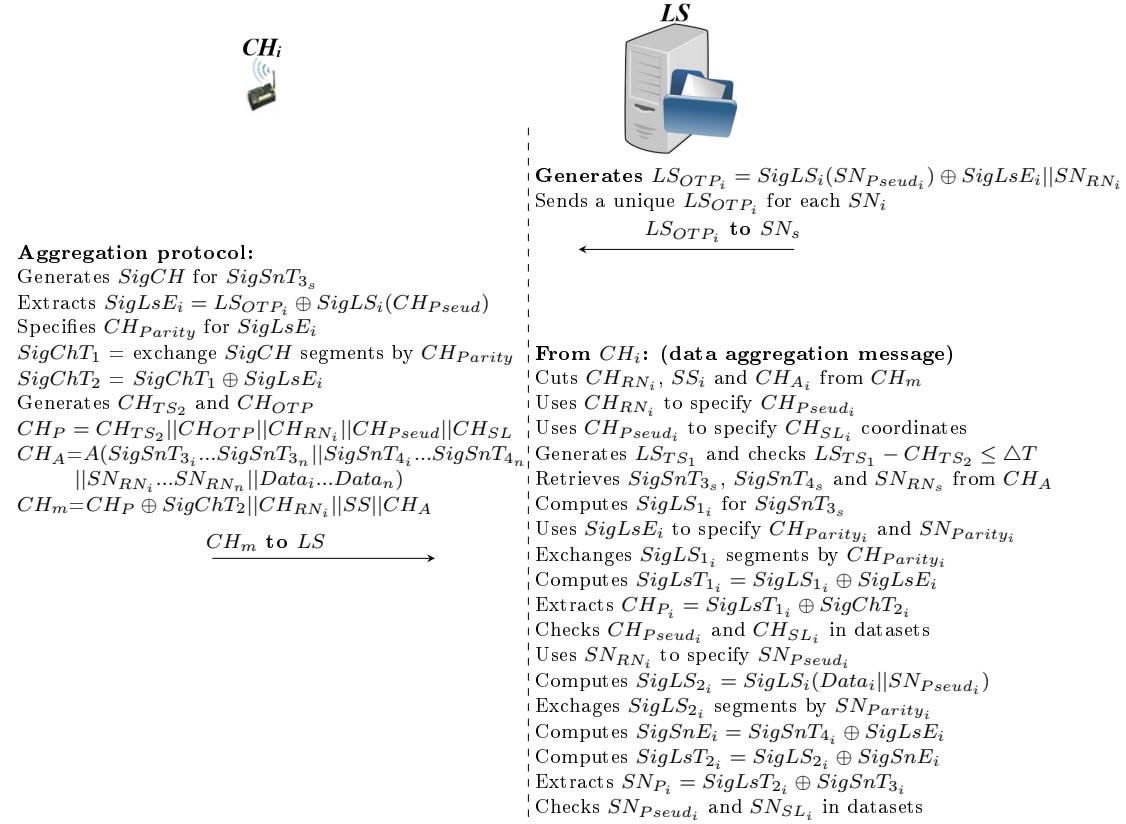


Figure 6.4: Data aggregation protocol

SN_i . Similarly, LS uses SN_{RN_i} to determine SN_{Pseud_i} , and performs data signature ($SigLS_{2_i}$) that equals the $SigSN$ in SN_i and exchanges the $SigLS_{2_i}$ segments based on SN_{Parity_i} . Next, LS uses $SigSnT_{4_i}$ and $SigLsE_i$ to extract $SigSnE_i$. Thereafter, LS uses $SigSnT_{3_i}$ and $SigSnE_i$ to compute $SigLsT_{2_i}$. Finally, LS extracts the secret parameters for SN_i from SN_{P_i} and tests matching SN_{Pseud_i} and SN_{SL_i} in datasets. If all signatures and parameters are validated correctly, namely that the data collected by SN_i is legitimate and correct and has not been tampered with by the intruder.

6.2.3.5.3 Protocol3 between LS and CS

This protocol performs the data storage process (Figure 6.5 shows the third protocol processes between LS and CS in the data storage). Initially, LS generates a new pseudonym (LS_{Pseud_n}) and timestamp (LS_{TS_2}) to prepare for the process of sending data to CS . Then, LS computes the $SigLS$ signature based on CS 's old pseudonym (CS_{Pseud_o}). After that, LS generates and sends LS_{OTP} to CS , which is based on the $SigLS$, LS_{Pseud_n} , LS_{TS_2} as well as append SS at the end of LS_{OTP} . On the CS side, it generates CS_{TS_1} , CS_{Pseud_n} , CS_{OTP} and CS_{RN} . CS uses CS_{TS_1} to test the message arrival time of LS . Also, CS computes CsT_1 and CsT_2 temporary and are based on secret parameters such as CS_{OTP} and CS_{Pseud_n} . In addition, the

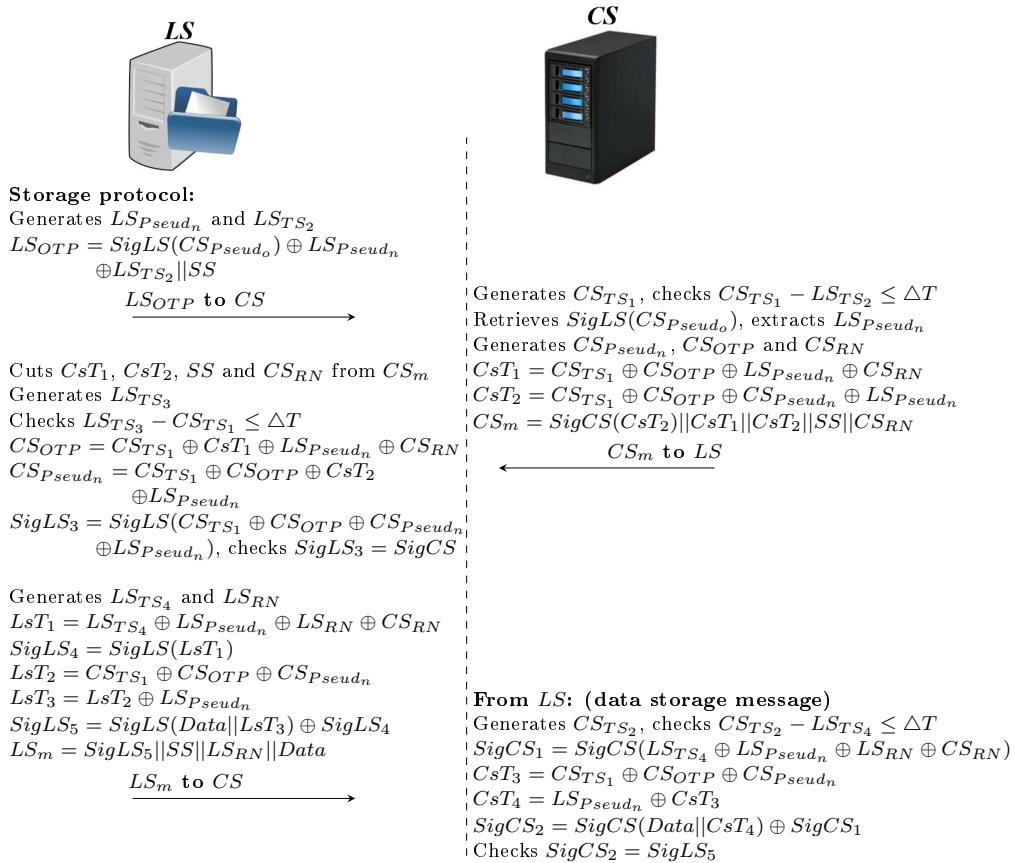


Figure 6.5: Data storage protocol

CS generates a $SigCS$ signature that includes the temporary value (CsT_2). At this point, CS computes and sends CS_m to LS containing the sequence of parameters such as $SigCS$, CsT_1 , CsT_2 , SS and CS_{RN} .

On the LS side, it truncates parameters embedded within CS_m . Thereafter, LS generates LS_{TS_3} to check the arrival time of CS_m . Furthermore, LS computes CS_{OTP} that relying mainly on LS_{Pseud_n} . Afterwards, LS extracts CS_{Pseud_n} to calculate $SigLS_3$. LS tests matching $SigLS_3$ and $SigCS$, if the result is identical, this means that mutual authentication process between the LS and CS is performed correctly and legitimately. After this stage, LS prepares the data storage request to CS . First, LS generates LS_{TS_4} and LS_{RN} to ensure randomness and freshness. After that, LS computes the $SigLS_4$ signature that depends on the LsT_1 temporary parameters. Then, LS computes the $SigLS_5$ data signature that depends on temporary parameters such as LsT_2 , LsT_3 , and $SigLS_4$ as well as the $Data$. Finally, LS sends LS_m which includes $SigLS_5$, SS , LS_{RN} and $Data$ to CS .

On the CS side, it receives LS_m of LS . CS generates CS_{TS_2} new to test access time LS_m . CS calculates $SigCS_1$ and $SigCS_2$ similarly to $SigLS_4$ and $SigLS_5$ respectively. At this point, CS checks matching $SigCS_2$ and $SigLS_5$, if the result is identical, it means that CS received patients' data from LS correctly and integrated

without any changes by malicious attacks.

6.3 Summary of the Chapter

In this chapter, we have provided details about security of data collection and our contributions to build new data collection scheme. After that, network model for data collection scheme explains general structure to store patients' data in EMR repository securely. Finally, data collection scheme methodology has been explained in detail to collect patients' data in HC application.

Chapter 7: Discussion and Analysis

In this chapter, we will discuss the analysis of our schemes. After designing schemes to support security and performance in authentication, authorisation and data collection, we need to analyse our schemes from a theoretical and experimental perspective to ensure that our project provides a high efficiency of security and performance in healthcare applications. This chapter includes the following topics:

- Explanation the security testing tools to analyse protocols security.
- Discussion and results of security and performance analysis in authentication scheme (RAMHU).
- Discussion and results of security and performance analysis in authorisation scheme (PAX).
- Discussion and results of security and performance analysis in data collection scheme (REISCH).

7.1 Security Testing Tools

In this Section, we will provide details about security testing tools such as Burrows, Abadi and Needham (BAN) logic and the automated validation of Internet security protocols and applications (AVISPA) have used in our project as follows.

7.1.1 BAN

Security protocols are the basis for authentication, authorisation and data collection schemes, and are used for protection in sensitive information/data systems. However, the design of such systems requires careful attention to weakness in the design, error-prone problems and security issues. The use of mathematical logic rules can be significantly useful to support security schemes in healthcare applications. Burrows, Abadi and Needham (BAN) ([Burrows et al. 1989](#)) proposed logical rules to analyse trust in security protocols and to infer the analysis of cryptography protocols. BAN is widely used to perform validation processes in

distributed healthcare systems. It provides formal mathematical proofs to support both correctness and completeness properties. BAN tests the ability to accomplish the objectives of security protocols, security efficiency of protocols, clarify, descriptions and hypothesis. To verify request source, freshness and legitimacy of the entity in security schemes, we have used the BAN logic that depends on a set of basic and inference rules (details about BAN's notations and rules is available in (Burrows et al. 1989, Mahmood et al. 2018, Amin, Islam, Biswas, Khan & Kumar 2018)). With BAN, we prove that each entity in our schemes deals with the other legitimate entity when transferring the message (M) from the user's device to the servers and vice versa. BAN structures consist of goals(G), idealized form, hypotheses (H) and proofs of goals by applying rules and hypotheses.

A BAN relies on a set of basic rules or notations to demonstrate scheme objectives and to build derivatives correctness. It uses a set of terms in basic rules such as principals (entities: C_i , CS , AS , DS , SN_i , CH and LS), statements (nonces: SN_C , SN_{CS} , SN_{AS} and SN_{DS}) and private/public keys (KC_{pu}/KC_{pr} , KCS_{pu}/KCS_{pr} , KAS_{pu}/KAS_{pr} and KDS_{pu}/KDS_{pr} for encryption/signature). These logical rules are based on beliefs and actions. Let C_i indicates sender, CS indicates receiver, KC_{pu} is a public key, KC_{pr} is a private key, SN_C and SN_{CS} indicate nonces, the basic rules are as follows:

- $C_i \equiv SN_C$: C_i believes SN_C .
- $C_i \lhd SN_C$: C_i sees SN_C .
- $C_i \mid\sim SN_C$: C_i once said SN_C .
- $\#(SN_C)$: Fresh (SN_C).
- $\xrightarrow{KC_{pu}} C_i$: C_i has KC_{pu} as a public key.
- $C_i \xrightleftharpoons{SN_C} CS$: SN_C is a secret known only to C_i and CS .
- $\{SN_C\}_{KC_{pu}}$: SN_C is encrypted by KC_{pu} .
- $\langle SN_C \rangle_{SN_{CS}}$: SN_C combined with SN_{CS} .
- $C_i \implies SN_C$: C_i has jurisdiction over SN_C .
- C_i/CS : If C_i is true then CS is true.
- (SN_C, SN_{CS}) : SN_C or SN_{CS} is part of the statement (SN_C, SN_{CS}).
- $(SN_C)_K$: SN_C is hash with the K key.

The use of BAN logic required to solve many problems, such as knowing the legitimate sender, protecting messages from modification and preventing interception of messages. BAN describes knowledge and beliefs in each step for security protocols and in a formal manner as well as provides trust between network entities. It allows assumptions, comparisons, removes unnecessary actions in security protocols and exposes messages sent in cleartext. BAN proves trust for principals by applying the following inference rules, such as nonce verification (NVR), jurisdiction (JR), message meaning (MMR), belief concatenation (BCR), freshness concatenation (FCR), shared secret (SSR), seeing (SR), decryption (DR), encryption (ER) and utterance (UR) (Liu, Zhang & Zhao 2019, Sowjanya et al. 2019)):

- NVR: It describes that the sender still believes a recent message.

$$\frac{C_i \equiv \#(SN_C), C_i \equiv CS \mid\sim SN_C}{C_i \equiv CS \mid\equiv SN_C}$$

- JR: It indicates that the sender uses the nonce to trust the receiver.

$$\frac{C_i \equiv CS \implies SN_C, C_i \equiv CS \mid\equiv SN_C}{C_i \equiv SN_C}$$

- MMR: This rule derives that the message origin by interpretation of the message.

$$\frac{C_i \equiv C_i \xrightarrow{KC_{pu}} CS, C_i \triangleleft \{SN_C\}_{KC_{pr}}}{C_i \equiv CS \mid\sim SN_C} \quad \frac{C_i \equiv C_i \xrightleftharpoons{KC_{pu}} CS, C_i \triangleleft \langle SN_C \rangle_{KC_{pu}}}{C_i \equiv CS \mid\sim SN_C}$$

- BCR: It denotes that the sender believes combination nonces SN_C and SN_{CS} if the sender believes SN_C and the sender believes SN_{CS} .

$$\frac{C_i \equiv SN_C, C_i \equiv SN_{CS}}{C_i \equiv (SN_C, SN_{CS})} \quad \frac{C_i \equiv (SN_C, SN_{CS})}{C_i \equiv SN_C} \quad \frac{C_i \equiv CS \mid\equiv (SN_C, SN_{CS})}{C_i \equiv CS \mid\equiv SN_C}$$

- FCR: It indicates if SN_C is fresh, namely, all nonces are fresh.

$$\frac{C_i \equiv \#(SN_C)}{C_i \equiv \#(SN_C, SN_{CS})}$$

- SSR: It describes that the sender believes SN_{CS} is a shared secret with the receiver, then the sender believes that the receiver once said SN_C .

$$\frac{C_i \equiv CS \xrightleftharpoons{SN_{CS}} C_i, C_i \triangleleft \langle SN_C \rangle_{SN_{CS}}}{C_i \equiv CS \mid\sim SN_C} \quad \frac{C_i \equiv \#(SN_C), C_i \equiv CS \mid\equiv SN_C}{C_i \equiv C_i \xrightleftharpoons{SN_{CS}} CS}$$

- SR: It indicates that principal (C_i) sees SN_C and SN_{CS} , then C_i sees SN_C .

$$\frac{C_i \triangleleft (SN_C, SN_{CS})}{C_i \triangleleft SN_C} \quad \frac{C_i \triangleleft \langle SN_C \rangle_{SN_{CS}}}{C_i \triangleleft SN_C}$$

- DR: It indicates that public key (KC_{pu}) is good between the sender and the receiver, then the receiver can decrypt message using his/her private key and sees SN_C nonce.

$$\frac{C_i \xrightarrow{KC_{pu}} CS, C_i \triangleleft \{SN_C\}_{KC_{pr}}}{C_i \triangleleft SN_C}$$

- ER: It denotes that the sender encrypts a message, then he/she can see an encrypted message.

$$\frac{C_i \xrightarrow{KC_{pu}} C_i, C_i \triangleleft \{SN_C\}_{KC_{pu}}}{C_i \triangleleft SN_C}$$

- UR: It describes that the sender believes the receiver once said SN_C .

$$\frac{C_i \equiv CS \mid \sim (SN_C, SN_{CS})}{C_i \equiv CS \mid \sim SN_C}$$

During the implementation of the aforementioned inference rules, BAN ensures the properties of authenticity, freshness and trustworthy. BAN assumes that principals do not broadcast secrets and perform perfect cryptography. It accomplishes four phases of protocol testing: 1- Goals phase required to accomplish the security analysis of protocols 2- Converting message formats between network entities from normal messages to an idealized form 3- Build a set of hypotheses for the security scheme 4- Proofs through the use of logical rules on the hypotheses built and messages exchanged in the steps of security protocols. BAN logic converts messages into the idealized format and then uses hypotheses and assertions to extract conclusions in proof principals trust.

7.1.2 AVISPA

After designing any authentication, authorisation or data collection scheme, this scheme includes a set of protocols and each protocol should be checked and its accuracy verified under a test model such as the Dolev-Yao to analyse, trace and detect the possibility of attack theoretically. However, this analysis needs to be simulated in a practical manner to detect errors and hidden traces of the protocols designer, threats tracking, statistics analysing and accurate results, checking several techniques on the same protocol (Al-Zubaidie et al. 2019b,c, Bojjagani & Sastry

2019, Iqbal & Shafi 2019, Ostad-Sharif et al. 2019). The AVISPA tool provides the features listed above as well as the ease, simplicity, robustness, and applicability of this tool to implement security protocols such as authentication, authorisation and data collection (Bojjagani & Sastry 2017). AVISPA is a formal tool for analysing security schemes and applied by researchers to evaluate recent security protocols (Gupta et al. 2018, Babu & Padmanabhan 2018, Xu et al. 2018, Dong et al. 2018).

The AVISPA tool is a push-button (as shown in Figure 7.1), testing/proofing model and is based on high-level protocol specification language (HPLSL). This language uses directives and expressive terms to represent security procedures. It is integrated with four backends that are the On-the-Fly Model-Checker (OFMC), the Constraint-Logic-based Attack Searcher (CL-AtSe), the SAT-based Model-Checker (SATMC), and Tree Automata based on Automatic Approximations for the Analysis of Security Protocols (TA4SP) to perform the simulation in AVISPA. Each backend gives the result of simulation analysis statistics that is different from the other; more details are available in (The AVISPA Team 2006). SATMC and TA4SP backends do not work with a security protocols that implement the XoR gateway; therefore, we relied on OFMC and CL-AtSe backends to simulate the proposed project's schemes (authentication (RAMHU), authorisation (PAX) and data collection (REISCH)).

- OFMC: It analyses protocols problems and builds infinite tree in demand-driven manner. Also, state-space in this backend has formatted by symbolic techniques. It provides detection of falsification and verification for protocols.
- CL-AtSe: It translates a security protocol specification to a set of constraints. This process allows for this backend to detect attacks effectively on schemes. It provides internally checking and translation.

To implement the security protocols in AVISPA, these protocols should be first written in HPLSL and then converted to the low-level language that is read directly by the backends, which is an intermediate format (IF) by the hplsl2if compiler and then converted to an output format (OF) to extract and describe the result of analysis by one of four backends. The Figure 7.2 shows AVISPA's architecture. The result of the analysis accurately describes that the protocol is safe or not safe with some statistical numbers.

HPLSL is modular, and role-oriented. This language allows the completion of security protocols procedures as well as intruder actions. To represent security/privacy scenarios and build simulation structures, HPLSL uses roles, including basic roles such as clients and servers (clienti, centralServer, attributesServer, dataServer, localServer, sensori and clusterHeadi), and composition (session and environment) roles that control the sequence of sending and receiving actions between clients and

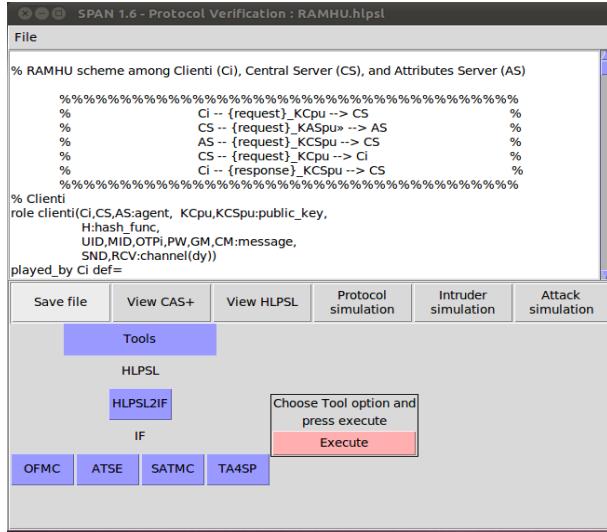


Figure 7.1: AVISPA's interface

Table 7.1: Some HLSPL's symbols and statements

Symbol	Description
<i>init</i>	Initial value for the state
<i>def</i>	Role definition
<i>state</i>	Sequential value for transition
<i>new</i>	Fresh value
<i>start</i>	Beginning signal for role
<i>:=</i>	Assign Mark
<i>xor</i>	Exclusive or operation
<i>.</i>	Concatenation
{ } _ <i>Kp</i>	Asymmetric encryption with public key
{ } _ <i>invKp</i>	Asymmetric signature with public key
<i>played_by</i>	Used to link the role with the intended entity
<i>= ></i>	Reaction transitions to relate event with act
<i>\wedge</i>	Conjunction
<i>protocol_id</i>	Goal identifier
<i>secrecy_of</i>	The goal of protecting the secret between entities permanently
<i>authentication_on</i>	The goal of strong authentication between entities
<i>intruder_knowledge</i>	What intruder knows about network

servers. In addition, communication channels between network entities are governed by the Dolev-Yao (dy) model. Many basic types used in HLPSL to represent variables, constants, and algorithms (symmetric/asymmetric/hash) such as agent, public_key, message, text, nat, const, and hash_func; in addition to some symbols and terms that have shown in Table 7.1, more details are provided in (The AVISPA Team 2006). The security schemes (authentication, authorisation and data collection) in AVISPA depend on security features in the goal specification. Each protocol contains a set of goals (authentication and secret) in authenticating each party with the other. The goals in secrecy_of demonstrate that secrets are not exposed or hacked to non-intended entities, while the goals in authentication_on demonstrate that strong authentication has been applied between entities based on witness and request. Our simulations are based on the AVISPA tool with the current version v.1.1 (13/02/2006) available on the website in (The AVISPA Team 2006).

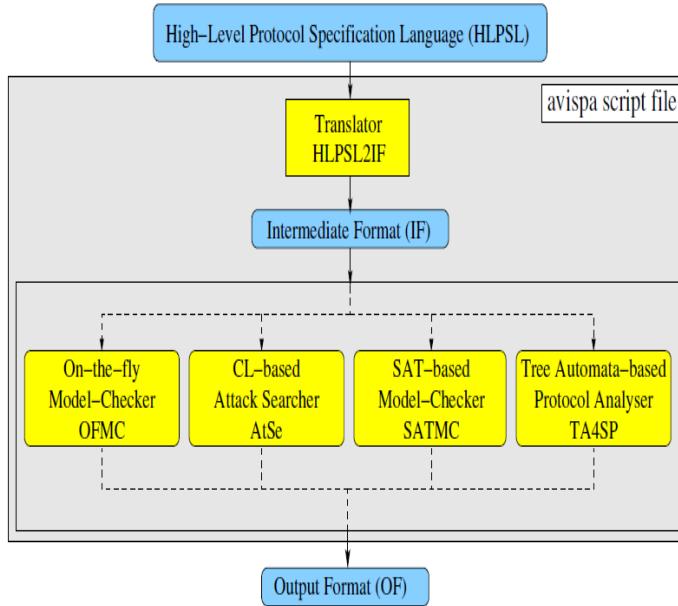


Figure 7.2: AVISPA's architecture (The AVISPA Team 2006)

7.2 Discussion and Analysis of RAMHU Scheme

In this Section, we will analyse RAMHU’s security and performance in both theoretical and experiential aspects.

7.2.1 Security Analysis

In this Section, theoretical and experimental security analyses have been presented. We will describe how our scheme (RAMHU) applies security requirements in protecting users’ authentication information in the healthcare system.

7.2.1.1 Theoretical Security Analysis

In this Section, we will provide theoretical attacks analysis and mathematical proof of the RAMHU scheme in repealing known penetrations.

7.2.1.1.1 Attacks Analysis on RAMHU Scheme

The theoretical security analysis shows that RAMHU is secure against the various known attacks. In this Section, we will show how RAMHU provides a high-security level against these attacks meanwhile providing propositions and proofs.

- **Proposition 1**

The internal intruder (*II*) cannot detect the private key or password (privileged-insider attack) for another legitimate user in the healthcare network.

Proof

II needs to eavesdrop authentication requests between C_i and CS . After that, he/she tries to perform an analysis of these requests based on his/her access privileges to the network. First, the analysis of these requests to obtain the private key or password is infeasible because the authentication request is encrypted by the ECIES-256 bits algorithm; II cannot decrypt these requests with his private key. Second, if II broke the encryption (which is impossible), he/she is unable to extract the PW_i value ($tmpPW_i = PW_i \oplus N_{C_i} \oplus GM \oplus C_iSig_1$) in the login phase because it is hidden and depends on the values of GM , C_iSig_1 , and N_{C_i} where II does not know the GM value of the legitimate user's device, and the C_iSig_1 value depends on the CM value that is also not known to II . Therefore, RAMHU prevents a privileged insider attack.

- **Proposition 2**

The intruder (I) will not gain any benefit from device or client application theft (stolen device/application attack) for use in authentication as a legitimate user.

Proof

In the first case, I stole a legitimate user device (such as a laptop) that contains a client application. In our scheme, user's PW_i , and IDs are not stored on the user's device, or in the client application. In addition, the private key is hidden and random for each authentication process by $C_iK_{pr_i} \oplus GM \oplus PW_i \oplus N_{C_i}$. Additionally, the proof in Proposition 1 shows that the PW_i value cannot be extracted from the $tmpPW_i$. If I is II , he/she also cannot use his/her IDs and PW_i to access information or other user data because both CS and AS perform matching IDs , and PW_i to determine user-related information and data. In the second case, the attacker stole only client application. I cannot use the application on another device because it does not have OTP_i or original MAC, which prevents the application from being used on another device even if I knows the IDs and PW_i . The original MAC mechanism ($C_iSig_1 = h(CM \| N_{C_i} \| TS_{C_i})$) prevents the fake authentication request from being verified in the server because I cannot generate an original MAC address (CM) in C_iSig_1 . Thus, RAMHU is resistant to stolen attacks.

- **Proposition 3**

I cannot use the login/registration/authentication request later (replay attack).

Proof

I tries to get a login/registration/authentication request for a legitimate user to send it later and thus, gains access to the network. This case is infeasible

in our scheme because all entities (C_i , CS , and AS) use timestamp (such as $TS_{CS} - TS_{C_i} \leq \Delta T$, where ΔT is the maximum transfer delay rate) that prevents the attacker from sending the authentication request at a later time. Furthermore, signatures and random nonces are not usable the next times. Hence, RAMHU successfully resists replay attacks.

- **Proposition 4**

I does not have the ability to intercept, modify, and replace authentication request (man-in-the-middle (MITM) attack) among RAMHU's entities.

Proof

Assume that an I attempts to intercept encrypted login/authentication requests (such as $Enc_i = TS_{C_i} \| N_{C_i} \| CiSig_1 \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| tmpPW_i \| CiSig_2$) among network entities, and then modifies or replaces these requests with his/her messages to send to network entities. However, the attacker cannot replace exchanged requests among C_i , CS , and AS because, first, he/she does not know the private keys (C_iK_{pri} , CSK_{pri} , ASK_{pri}) and therefore, the decryption process is computationally infeasible with 256 bits key length and difficulty in solving ECDLP. Second, mutual authentication with PHOTON-256 signatures prevents the modification of requests between RAMHU's entities. As a result, RAMHU gracefully overcomes the MITM attack.

- **Proposition 5**

External intruder (EI) cannot guess ID_s and PW_i (guessing attack) for legitimate users of the RAMHU protocol.

Proof

Assume that an EI was able to penetrate the encryption (Enc_i) between C_i and CS (from Proposition 4, this assumption is infeasible). This EI tries to guess PW_i in a login request to use it to access the network as a legitimate user. EI cannot detect PW_i for any authorised user (either on-line or off-line) because he/she does not know the configured process to protect PW_i ($tmpPW_i = PW_i \oplus N_{C_i} \oplus GM \oplus C_iSig_1$) and does not know the MAC address for that user and thus, the process of deriving PW_i is infeasible (Proposition 1). It is an extremely difficult process to guess PW_i from the $tmpPW_i$, which is 64 hex (256 bit). In addition, EI cannot detect UID_i and MID_i for any legitimate user because of the use of multi pseudonyms mechanism for users and medical centres instead of sending real information to legitimate users. As a result, RAMHU is safe against guessing attacks.

- **Proposition 6**

I cannot impersonate a legitimate user or device in the network (client impersonation attack).

Proof

Assume that an attacker tries to impersonate a login request (such as $Enc_i = TS_{C_i} \| N_{C_i} \| CiSig_1 \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| tmpPW_i \| CiSig_2$) for a legitimate user. This I can create TS_{C_i} and N_{C_i} but does not know PW_i and C_iK_{pri} (Proposition 1, and 4) for the legitimate user, namely, I cannot impersonate the user identity. I also tries to impersonate the legitimate user's device by programmatically changing the MAC address to a legitimate one to gain access to the network. This case is infeasible because the original MAC check (CM) in $CiSig_1 = h(CM \| N_{C_i} \| TS_{C_i})$ detects the attacker's attempt to mimic the legitimate user's device (as proved in Proposition 2). Therefore, RAMHU withstands against instances of impersonating the user's identity and device.

- **Proposition 7**

I cannot impersonate (server impersonation attack) the central server (CS) and cheat the client (C_i).

Proof

Assume that an I traps login requests from C_i to CS . The attacker tries to deceive C_i by sending fake requests to C_i in order to inform them that he is a legitimate server. I needs the private key for CS to decrypt and to accomplish the attack. Mutual authentication prevents I from impersonating CS 's requests (such as $Enc_i = TS_{CS} \| N_{CS} \| UP_{CS}^{C_i} \| MP_{CS}^{C_i} \| CSSig_5$) and sending them to C_i . This mechanism ensures that C_i deals with legitimate CS . Consequently, our protocol effectively resists server impersonation attack.

- **Proposition 8**

I cannot effectively perform a DoS attack against our scheme.

Proof

In order for I to execute a DoS attack against CS and AS , he/she needs to decrypt the login request and change its data or send the same request multiple times for destroying servers. However, in the first case, decryption and change of signatures are infeasible as proved in Propositions 2 and 4. CS checks signature validity and rejects login requests containing fake signatures, and I cannot execute a collision or preimage attack because PHOTON-256 supplies PR, SPR, and CR. In the second case, the attacker sends the same request multiple times. This status is infeasible because CS or AS checks timestamp ($TS_{C_i}, TS_{CS}, TS_{AS}$) for each login/authentication request and eliminates all late requests (Proposition 3) without checking the other security parameters such as PW_i , CM , and multi pseudonyms. In case I can break the encryption, he/she can change timestamp and nonce but cannot tamper with the signatures. RAMHU prevents this condition during $CiSig_1$ and does not need

to check the remaining security parameters. Therefore, RAMHU successfully resists DoS attacks.

- **Proposition 9**

I cannot detect new PW_i or change old PW_i (password change attack) to prevent legitimate users from accessing the network.

Proof

Assume that an I intercepts a request to change PW_i between C_i and CS . I obtains an encrypted request (such as $Enc_i = TS_{C_i} \| NC_1 \| NC_2 \| NC_3 \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| tmp_oldPW_i \| tmp_newPW_i \| C_iSig_1$). If I can decrypt (this process is infeasible as proved in Propositions 1, and 4), he/she will find a temporary passwords and cannot derive new PW_i because it depends on the $C_iSig_1 = h(TS_{C_i} \| NC_1 \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| oldPW_i)$. The signature operation (C_iSig_1) is based on the old PW_i which is not explicitly sent to CS in this phase. I does not know old PW_i and therefore, he/she cannot create a signature to complete the PW_i change process. Thereupon, RAMHU provides a reliable solution against password change attacks.

- **Proposition 10**

I does not gain plaintext and useful information when an eavesdropping attack has applied to our scheme.

Proof

Assume that an I eavesdrops login/authentication requests to gain information about user authentication and access to the network. However, in our scheme, I will not benefit from requests that are intercepted because RAMHU uses ECIES algorithm with key 256 bits to encrypt authentication information. The attacker can only decrypt requests by deriving private keys and this operation is infeasible (as proved in Propositions 1, and 2) due to key length, and random encryption with nonces (anonymity). Therefore, our protocol is resistant to eavesdropping attack.

- **Proposition 11**

I cannot track exchanged login/authentication requests (traceability attack) between all entities in the RAMHU scheme.

Proof

I attempts to collect as many login/authentication requests as possible and then performs an analysis of those requests that helps him/her to perform user identity tracing. When an I succeeds in tracking user requests, he/she can detect and distinguish patients' data. All exchanged requests among RAMHU's entities do not contain direct users' information (such as username). RAMHU

replaces the real user ID_s (UID_i and MID_i) with pseudonyms. Our protocol uses multi pseudonyms ($UP_{C_i}^{CS}$, UP_{CS}^{AS} , UP_{AS}^{CS} , and $UP_{CS}^{C_i}$ for users and $MP_{C_i}^{CS}$, MP_{CS}^{AS} , MP_{AS}^{CS} , and $MP_{CS}^{C_i}$ for medical centres) to prevent attackers from tracking user requests and revealing their identities when transferred between RAMHU entities (C_i , CS , and AS). Hence, RAMHU resists traceability attacks.

- **Proposition 12**

I cannot penetrate or send a revocation request to delete or remove users' accounts information (revocation attack) in the RAMHU protocol.

Proof

Assume that an I tries to penetrate a revocation request. The attacker tries to analyse the request and use it to prevent users from accessing the network's services. Depending on Propositions 1, 5, and 11, the attacker cannot extract or distinguish UID_i , MID_i and PW_i from the revocation request. The attacker does not know and cannot extract a reason from the $tmpRR_i$, which is based on the values of RR_i , N_{C_2} , and C_iSig_1 . In Propositions 2 and 8, I cannot perform collision, preimage, and second preimage attacks against the PHOTON-256 algorithm. Thus, our protocol prevents penetration of revocation request.

- **Proposition 13**

I cannot extract users' passwords from datasets in CS (verifier attack).

Proof

Assume that I tries to penetrate the datasets in CS . If the attacker is EI , he/she cannot penetrate datasets because he/she does not have a K_{pr} , UID , MID , OTP , and PW_i . If the attacker is II , when he penetrates datasets in CS and wants to impersonate another user's identity, first, he/she cannot distinguish this information for a particular user because the real information for users is stored in AS . Second, since CS does not contain passwords' dataset, II will not benefit from hacking datasets such as pseudonyms and cannot create a request and send it to AS because it does not know users' passwords. Therefore, RAMHU resists verifier attacks meritoriously.

- **Proposition 14**

The attacker does not get any information leaked from requests and responses exchanged (leakage attack) between RAMHU entities.

Proof

Suppose that I listens to some exchanged requests among C_i , CS , and AS and tries to find any information that helps him/her to penetrate network authentication such as sending an ID explicitly, or sending a password with weak

encryption. Exchanged requests between RAMHU entities such as a password update request ($Enc_i = TS_{C_i} \| N_{C_1} \| N_{C_2} \| N_{C_3} \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| tmp_oldPW_i \| tmp_newPW_i \| C_i Sig_1$) show that I does not receive any leaked real information for users during transmission, such as IDs and PW_i (all information is anonymous and hidden) that could be useful in penetrating the healthcare network. Therefore, RAMHU resists leakage attacks.

7.2.1.1.2 RAMHU Scheme with BAN

In this Section, we will prove RAMHU security by BAN logic.

- **Goals:** RAMHU must provide the following goals to securely exchange messages among RAMHU entities.

$$\begin{array}{ll}
 - \textbf{G1: } CS \equiv C_i \equiv N_{C_i} & - \textbf{G5: } CS \equiv AS \equiv N_{AS} \\
 - \textbf{G2: } CS \equiv C_i \xrightarrow{\substack{C_i Sig_1, C_i Sig_2}} CS & - \textbf{G6: } CS \equiv CS \xrightarrow{CSSig_1} AS \\
 - \textbf{G3: } AS \equiv CS \equiv N_{CS} & - \textbf{G7: } C_i \equiv CS \equiv N_{CS} \\
 - \textbf{G4: } AS \equiv CS \xleftarrow{\substack{CSSig_3}} AS & - \textbf{G8: } C_i \equiv C_i \xleftarrow{\substack{CSSig_5}} CS
 \end{array}$$

- **Idealized form:** The messages (M) are represented in a BAN formula. The normal RAMHU messages are shown as follows:

$$\begin{array}{ll}
 - \textbf{M1: } C_i \rightarrow CS: TS_{C_i} \| N_{C_i} \| GM \| C_i Sig_1 \| UP_{C_i}^{CS} \| MP_{C_i}^{CS} \| OTP_i \| tmpPW_i \| C_i Sig_2: \\
 \langle N_{C_i}, CM, GM \rangle_{C_i Sig_1, C_i Sig_2} \\
 - \textbf{M2: } CS \rightarrow AS: TS_{CS} \| N_{CS} \| UP_{CS}^{AS} \| MP_{CS}^{AS} \| CSSig_3 \| tmpPW_i: \langle N_{CS} \rangle_{CSSig_3} \\
 - \textbf{M3: } AS \rightarrow CS: TS_{AS} \| N_{AS} \| UP_{AS}^{CS} \| MP_{AS}^{CS} \| ASSig_2: \langle N_{AS} \rangle_{ASSig_1} \\
 - \textbf{M4: } CS \rightarrow C_i: TS_{CS} \| N_{CS} \| UP_{CS}^{C_i} \| MP_{CS}^{C_i} \| CSSig_5: \langle N_{CS} \rangle_{CSSig_5}
 \end{array}$$

The idealized form messages for RAMHU are shown as follows:

$$\begin{array}{ll}
 - \textbf{M1: } C_i \rightarrow CS: \{TS_{C_i}, N_{C_i}, GM, h(C_i Sig_1), UP_{C_i}^{CS}, MP_{C_i}^{CS}, OTP_i, tmpPW_i, h(C_i Sig_2)\}_{KCS_{pu}}: \\
 \langle N_{C_i}, CM, GM \rangle_{C_i Sig_1, C_i Sig_2} \\
 - \textbf{M2: } CS \rightarrow AS: \{TS_{CS}, N_{CS}, UP_{CS}^{AS}, MP_{CS}^{AS}, h(CSSig_3), tmpPW_i\}_{KAS_{pu}}: \langle N_{CS} \rangle_{CSSig_3} \\
 - \textbf{M3: } AS \rightarrow CS: \{TS_{AS}, N_{AS}, UP_{AS}^{CS}, MP_{AS}^{CS}, h(ASSig_2)\}_{KCS_{pu}}: \langle N_{AS} \rangle_{ASSig_1} \\
 - \textbf{M4: } CS \rightarrow C_i: \{TS_{CS}, N_{CS}, UP_{CS}^{C_i}, MP_{CS}^{C_i}, h(CSSig_5)\}_{KC_{pu}}: \langle N_{CS} \rangle_{CSSig_5}
 \end{array}$$

- **Hypotheses:** Sets of hypotheses to analyse RAMHU's security.

$$\begin{array}{ll}
 - \textbf{H1: } C_i \equiv \#(N_{C_i}, TS_{C_i}). & - \textbf{H6: } CS \equiv CS \xrightarrow{KAS_{pu}} AS. \\
 - \textbf{H2: } CS \equiv \#(N_{CS}, TS_{CS}). & - \textbf{H7: } AS \equiv AS \xrightarrow{KCS_{pu}} CS. \\
 - \textbf{H3: } AS \equiv \#(N_{AS}, TS_{AS}) & - \textbf{H8: } C_i \triangleleft \{N_{CS}\}_{KC_{pr}}. \\
 - \textbf{H4: } C_i \equiv C_i \xrightarrow{KCS_{pu}} CS. & - \textbf{H9: } CS \triangleleft \{N_{C_i} / N_{AS}\}_{KCS_{pr}}. \\
 - \textbf{H5: } CS \equiv CS \xrightarrow{KC_{pu}} C_i. & - \textbf{H10: } AS \triangleleft \{N_{CS}\}_{KAS_{pr}}.
 \end{array}$$

- **Proofs:** We have used BAN logic to prove goals based on rules and hypotheses.

– **M1:** $C_i \rightarrow CS$:

* **ER:**

Using ER and H4, S1: $C_i \triangleleft N_{C_i}$

* **MMR and UR:**

Using MMR, UR, H8 and S1, S2: $CS \models C_i \sim N_{C_i}$

* **DR:**

Using DR and H9, S3: $CS \triangleleft N_{C_i}$

* **NVR:**

Using NVR, H1 and S2, S4: $CS \models C_i \equiv N_{C_i}$ (**G1**)

* **SR:**

Using SR, S5: $C_i \triangleleft M1$

* **MMR:**

Using MMR, H8 and S5, S6: $CS \models C_i \sim N_{C_i}$

* **FCR and NVR:**

Using FCR, NVR, H1 and S6, S7: $CS \models C_i \equiv N_{C_i}$

* **BR and SSR:**

Using BR, SSR, H1 and S7, S8: $CS \models C_i \xrightarrow{C_i Sig_1, C_i Sig_2} CS$ (**G2**)

– **M2:** $CS \rightarrow AS$:

* **ER:**

Using ER and H6, S9: $CS \triangleleft N_{CS}$

* **MMR and UR:**

Using MMR, UR, H9 and S9, S10: $AS \models CS \sim N_{CS}$

* **DR:**

Using DR and H10, S11: $AS \triangleleft N_{CS}$

* **NVR:**

Using NVR, H2 and S10, S12: $AS \models CS \equiv N_{CS}$ (**G3**)

* **SR:**

Using SR, S13: $AS \triangleleft M2$

* **MMR:**

Using MMR, H9 and S13, S14: $AS \models CS \sim N_{CS}$

* **FCR and NVR:**

Using FCR, NVR, H2 and S14, S15: $AS \models CS \equiv N_{CS}$

* **BR and SSR:**

Using BR, SSR, H2 and S15, S16: $AS \models CS \xrightarrow{CSSig_3} AS$ (**G4**)

– **M3:** $AS \rightarrow CS$:

* **ER:**

Using ER and H7, S17: $AS \triangleleft N_{AS}$

* **MMR and UR:**

Using MMR, UR, H10 and S17, S18: $CS \models AS \sim N_{AS}$

* **DR:**

Using DR and H9, S19: $CS \triangleleft N_{AS}$

* **NVR:**

Using NVR, H3 and S18, S20: $CS \models AS \equiv N_{AS}$ (**G5**)

* **SR:**

Using SR, S21: $CS \triangleleft M3$

* **MMR:**

Using MMR, H10 and S21, S22: $CS \models AS \sim N_{AS}$

* **FCR and NVR:**

Using FCR, NVR, H3 and S22, S23: $CS \models AS \equiv N_{AS}$

* **BR and SSR:**

Using BR, SSR, H3 and S23, S24: $CS \models CS \xrightarrow{ASSig_1} AS$ (**G6**)

– **M4:** $CS \rightarrow C_i$:

– **ER:**

Using ER and H5, S25: $CS \triangleleft N_{CS}$

– **MMR and UR:**

Using MMR, UR, H9 and S25, S26: $C_i \models CS \sim N_{CS}$

- **DR:**
Using DR and H8, S27: $C_i \triangleleft N_{CS}$
- **NVR:**
Using NVR, H2 and S26, S28: $C_i \equiv CS \equiv N_{CS}$ (**G7**)
- **SR:**
Using SR, S29: $C_i \triangleleft M4$
- **MMR:**
Using MMR, H9 and S29, S30: $C_i \equiv CS \sim N_{CS}$
- **FCR and NVR:**
Using FCR, NVR, H2 and S30, S31: $C_i \equiv CS \equiv N_{CS}$
- **BR and SSR:**
Using BR, SSR, H2 and S31, S32: $C_i \overset{CSSig_5}{\equiv} CS$ (**G8**)

7.2.1.2 Experimental Security Analysis

To ensure that our authentication scheme work correctly and is authenticated, this scheme requires a formal tool to detect the robustness of users' authentication in the network. We provide the proposed scheme simulation using the AVISPA tool to verify our scheme, whether safe or unsafe. This tool has been widely used and accepted by researchers in recent years ([Amin, Kumar, Biswas, Iqbal & Chang 2018](#), [Amin, Islam, Biswas, Khan & Kumar 2018](#)). It has been used to check security problems in authentication procedures and ensure that known attacks are not able to penetrate user authentication information.

7.2.1.2.1 RAMHU Scheme with AVISPA

In this Section, we will illustrate the implementation and simulation of RAMHU in the AVISPA tool using HLPSL language. Our scheme depends on three core roles: clienti, centralServer, and attributesServer played by C_i , CS and AS respectively, in addition to the supporting roles such as session, and environment, goal specification section. Each role contains parameters, variables, and local constants. Each basic role contains a transition section that indicates the sequence of communication between entities. Each supporting role contains a composition section that indicates the binding of roles and sessions. Asymmetric encryption has been implemented between scheme entities (C_i , CS , and AS) during public key exchange (KC_{pu} , KCS_{pu} , and KAS_{pu}) to perform confidentiality as well as mutual authentication to ensure the legitimacy of related parties in the phases of the proposed scheme (initial setup, registration, login, and authentication). Moreover, it uses nonces (N_c , N_{cs} , and N_{as}) and timestamp (TS_c , TS_{cs} , TS_{as}) to support the features of anonymity and freshness. Our scheme accomplishes 10 secrecy goals and 6 authentication goals as noted in the goal section in Figure 7.7. Figure 7.3 shows RAMHU's framework in AVISPA.

C_i receives the start signal and changes the state flag (State variable) from 0 to 1. It replaces UID and MID with UP_c and MP_c and calculates the timestamp (TS'_c)

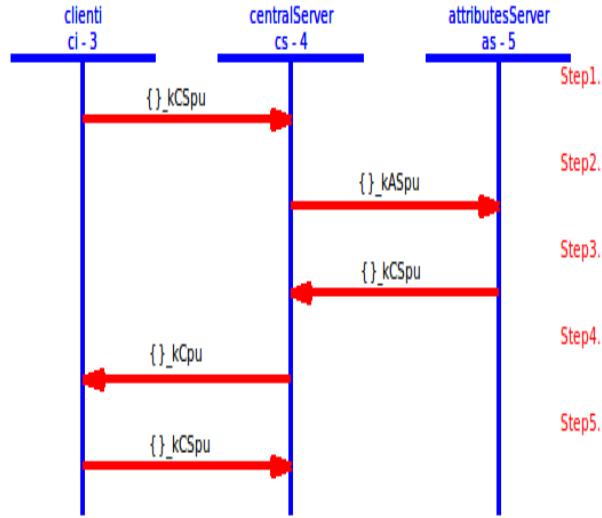


Figure 7.3: RAMHU's framework in AVISPA

and new nonce (N'_c) by the new() operation, and computes the signatures (C_iSig_1 and C_iSig_2), as well as the password hiding process as calculated in the calculation operation of the $TmpPW$ parameter. It encrypts the registration and login request (TS'_c , N'_c , GM' , $C_iSig'_1$, UP'_c , MP'_c , OTP_i , $Temporary_PW'$, and $C_iSig'_2$) by the public key (KCS_{pu}) to establish a reliable communication with CS . C_i sends the request to CS where the transmission process is performed by the SND() operation. It achieves a set of secret goals ($sec1$ to $sec6$) with both CS and AS ; these secrets have been only known and kept by the intended parties. For example in $sec1$, UID , MID , and PW have been known and kept only to C_i , and AS , while in $sec3$ GM , and CM have been known and kept only to C_i and CS , since these parameters are not transmitted directly during the transition of information between network parties such as PW implicitly is in the calculation of $TmpPW$ and CM is implicitly in C_iSig_1 . C_i also achieves the goal of authentication using statement (witness) with parameters (C_i , CS , ci_cs_auth2 , N_{cs} , TS_c), which means that C_i is a witness that the security parameters (N_{cs} , TS_c) are fresh and correct, and CS uses a statement (request) to validate parameters with the strong authentication goal (ci_cs_auth2) specified in the goal section (Figure 12). C_i receives the authentication response by the RCV () operation and sent from AS by CS . Then, C_i decrypts the response using its private key to verify the security parameters. If all security parameters are verified correctly, C_i performs the mutual authentication process securely. The authentication process begins by sending requests from clients to the server. Therefore, the $client_i$ role includes the start signal as shown in Figure 7.4.

```

role clienti(Ci,CS,AS:agent, KCpu,KCSpu:public_key, H:hash_func, UID,MID,OTPi,PW,GM,CM:message
          , SND,RCV:channel(dy))
played_by Ci def=
local
  State:nat,
  TSc,TScs,Nc,Ncs:text, CiSig1,CiSig2:text, UPc,MPc,UPcs,MPcs,TmpPW:message
const
  sec1,sec2,sec3,sec4,sec5,sec6, cs_ci_auth1,ci_cs_auth2:protocol_id
init
  State := 0
transition
1. State = 0
  /\RCV(start) => State' := 1 /\UPc':=UID /\MPc':=MID /\GM':=Ci /\Nc':=new() /\TSc':=new()
  /\CiSig1':= H(CM.Nc'.TSc') /\CiSig2':= H(GM'.Nc'.TSc'.CiSig1'.UPc'.MPc'.OTPi.PW)
  /\TmpPW':=xor(PW,xor(Nc',xor(GM',CiSig1')))

% Registration and login phase
% Ci sends security parameters to CS
  /\SND({TSc'.Nc'.GM'.CiSig1'.UPc'.MPc'.OTPi.TmpPW'.CiSig2'}_KCSpu)
  /\secret({UID,MID,PW},sec1,{Ci,AS}) /\secret(PW,sec2,{Ci,CS}) /\secret({GM,CM},sec3,{Ci,CS})
  /\secret({CiSig1',CiSig2'},sec4,{Ci,CS}) /\secret({TmpPW',OTPi},sec5,{Ci,CS})
  /\secret({UPc,MPc,UPcs,MPcs},sec6,{Ci,CS})

2. State = 1
% Ci receives authentication response from CS
  /\RCV({TScs'.Ncs'.Nc.UPcs'.MPcs'. H(TScs'.Ncs'.UPcs'.MPcs')}_KCpu)=>
  State' := 2 /\SND({Ncs'}_KCSpu)

% Clienti checks that the received security parameters
  /\request(Ci,CS,cs_ci_auth1,{Nc,TScs}) /\request(Ci,CS,cs_ci_auth5,{TmpPW,OTPi})
% Clienti sends Ncs to prove her identity
  /\witness(Ci,CS,ci_cs_auth2,{Ncs,TSc})
end role

```

Figure 7.4: C_i role of RAMHU in HLPSL

As shown in Figure 7.5, CS receives a registration and login request by RCV () operation in state 0 and decrypts it with its private key and then checks the parameters and signatures to accomplish secret and authentication goals. CS changes the state signal from 0 to 1 and constructs an authentication request based on the security parameters (TS'_{cs} , N'_{cs} , UP_{cs} , MP_{cs} , $CSSig_3$, and $TmpPW$) and encrypts it by the public key of AS . CS performs strong authentication with AS during witness (CS , AS , as_cs_auth4 , TS'_{cs} , N'_{cs}) to accomplish the authentication goal (as_cs_auth4) based on timestamp and fresh nonce and validated in AS by statement (request). In state 1, CS receives an authentication response from AS and checks the security parameters after decryption with its private key. It changes the state signal to 2 and then constructs and sends the authentication response to C_i with two strong authentication goals (cs_ci_auth1 and cs_ci_auth5) based on the security parameters (N_c , TS_{cs} , $TmpPW$, and OTP_i).

AS receives the authentication request and decrypts it with the private key as shown in Figure 7.6. It accomplishes 5 secret goals, and accomplishes two authentication goals (as_cs_auth4 and as_cs_auth6) based on TS'_{cs} , N'_{cs} , and PW' . It constructs the authentication response and establishes strong authentication when validating parameters (TS_{as} , N'_{cs} , and PW') in CS .

Figure 7.7 displays the roles of session, environment, and goal section. In the

session role, a composition process has been performed for the three roles (*clienti*, *centralServer*, and *attributeServer*) and specifies the transmit and receive channels in the Dolev Yao model. In the environment role, the security parameters, the goals specified in the goal section, and the known information for the intruder (*intruder_knowledge*) have been defined. In this role, one or more sessions are composed, and we tested our scheme with sessions for replay, MITM, and impersonating attacks. We assumed that an intruder (I) creates a public key (ki) and has knowledge of the public keys ($kCpu$, $kCSpu$, and $kASpu$) of legitimate entities in the network. Intruder attempts to resend registration/login or authentication requests later, intercepts/modifies these requests, or impersonates the participating entities using i_ci , i_cs , and i_as constants rather than ci , cs , and as . The results section shows that these attacks cannot penetrate the security goals in our scheme.

7.2.1.2.2 Simulation Results

In this Section, the simulation results in the AVISPA tool are based on two backends (OFMC, and CL-AtSe). Figure 7.8 shows the simulation result with the OFMC backend and Figure 7.9 displays the simulation result with the CL-AtSe backend. From the results shown in Figure 7.8 and Figure 7.9, our scheme clearly and accurately shows the SAFE result in the SUMMARY section, bounded number of sessions in the DETAILS section, the goals of the scheme achieved (as_specified) in the GOAL section as well as statistical numbers such as time, number of nodes, and analysed states in the STATISTICS section for both figures. Based on these results, we note that our scheme is capable of preventing passive and active attacks such as replay, MITM, and impersonating, and that the goals of the scheme in Figure 7.7 achieved to prevent the violation of legitimate user information in the network authentication.

```

role centralServer(Ci,CS,AS:agent, KCpu,KCSpu,KASpu:public_key, H:hash_func, SND,RCV:channel(dy))
played_by CS def=
local
    State:nat,
    UPc,MPc,UPcs,MPcs,UPas,MPas,TmpPW:message, CSSig1,CSSig2,CSSig3:text,
    TSc,TScs,TSas,Nc,Ncs,Nas:text, PW,OTPi:message, GM,CM:message
const
    sec1,sec2,sec3,sec4,sec5,sec6,sec7,sec8,sec9,sec10,
    ci_cs_auth2,cs_ci_auth1,cs_ci_auth5,cs_as_auth3,as_cs_auth4,as_cs_auth6:protocol_id
init
    State := 0
transition
% Registration and login request from Ci
1. State = 0
    /\RCV({TSc'.Nc'.GM'.H(CM'.Nc'.TSc')}.UPc'.MPc'.OTPi'.TmpPW').
        H(GM'.Nc'.TSc'.H(CM'.Nc'.TSc')).UPc'.MPc'.OTPi'.PW')}_KCSpu =|>
    CSSig1':= H(CM'.Nc'.TSc') /\CSSig2':= H(GM'.Nc'.TSc'.CSSig1'.UPc'.MPc'.OTPi.PW)
    /\PW':=xor(TmpPW,xor(Nc',xor(GM',CSSig1))) /\secret(PW,sec2,{CS,Ci})
    /\secret({GM,CM},sec3,{CS,Ci}) /\secret({CSSig1,CSSig2},sec4,{CS,Ci})
    /\secret({TmpPW',OTPi},sec5,{CS,Ci}) /\secret({UPc,MPc,UPcs,MPcs},sec6,{CS,Ci})

% Authentication request from CS to AS
2. State := 1 /\Ncs':=new() /\TScs':=new() /\CSSig3':= H(TScs'.Ncs'.UPcs.MPcs)
    /\TmpPW':=xor(PW,xor(Ncs',CSSig3')) /\SND({TScs'.Ncs'.UPcs.MPcs.CSSig3'.TmpPW'}_KASpu)
    /\secret(PW,sec7,{CS,AS}) /\secret({CSSig3},sec8,{CS,AS})
    /\secret({TmpPW'},sec9,{CS,AS}) /\secret({UPcs,MPcs,UPas,MPas},sec10,{CS,AS})

% Authentication response from AS to CS
3. State = 1
    /\RCV({TSas'.Nas'.Ncs.UPas'.MPas'.H(TSas'.Nas'.UPas'.MPas')})_KCSpu =|>
% Authentication response to Ci
    State':= 2 /\Ncs':=new() /\TScs':=new()
    /\SND({TScs'.Ncs'.Nc.UPcs.MPcs.H(TScs'.Ncs'.UPcs.MPcs)}_KCpu)
    % CS prove his identity
    /\witness(CS,Ci,cs_ci_auth1,{Nc,TSc'}) /\witness(CS,Ci,cs_ci_auth5,{TmpPW,OTPi})
    /\witness(CS,AS,cs_as_auth3,{Nas',TSc'}) /\request(CS,AS,as_cs_auth4,{Ncs',TSas'}) /\request(CS,AS,as_cs_auth6,{PW})

4. State = 2
    /\RCV({Ncs}_KCSpu) =|>
% CS checks that the received nonce and timestamp correct
    State':= 3 /\request(CS,Ci,ci_cs_auth2,{Ncs,TSc})
end role

```

Figure 7.5: *CS* role of RAMHU in HLPSL

```

role attributesServer(AS,Ci,CS:agent, KASpu,KCSpu:public_key, H:hash_func, SND,RCV:channel(dy))
played_by AS def=
local
    State:nat,
    UID,MID,PW:message, TmpPW:message, ASSig1,ASSig2:text,TScs,Ncs,TSas,Nas:text,
    UPcs,MPcs,UPas,MPas:message, GM,CM:message
const
    sec1,sec7,sec8,sec9,sec10,cs_as_auth3,as_cs_auth4,as_cs_auth6:protocol_id
init
    State:= 0
transition
1. State = 0
    /\RCV({TScs'.Ncs'.UPcs'.MPcs'.H(TScs'.Ncs'.UPcs'.MPcs')}.
        TmpPW')_KCSpu =|>ASSig1':= H(TScs'.Ncs'.UPcs.MPcs)
    /\PW':=xor(TmpPW,xor(Ncs',ASSig1))/\secret({UID,MID,PW},sec1,{AS,Ci}) /\secret(PW,sec7,{AS,CS})
    /\secret({ASSig1},sec8,{AS,CS}) /\secret({TmpPW'},sec9,{AS,CS})
    /\secret({UPcs,MPcs,UPas,MPas},sec10,{AS,CS}) /\State':= 1 /\Nas':=new() /\TSas':=new()
    /\ASSig2':=H(TSas'.Nas'.UPas.MPas) /\SND({TSas'.Nas'.UPas.MPas.ASSig2'}_KCSpu)
    /\witness(AS,CS,as_cs_auth4,{Ncs',TSas'}) /\witness(AS,CS,as_cs_auth6,{PW})
    /\request(AS,CS,cs_as_auth3,{Nas',TSc'})
end role

```

Figure 7.6: *AS* role of RAMHU in HLPSL

```

role session(Ci,CS,AS:agent, KCpu,KCSpu,KASpu:public_key, H:hash_func, UID,MID,OTPi,PW,GM,
            CM:message)
def=
local
    SndC,RcvC,SndCS,RcvCS,SndAS,RcvAS:channel(dy)
composition
    clienti(Ci,CS,AS,KCpu,KCSpu,H,UID,MID,OTPi,PW,GM,CM,SndC,RcvC)
    /\centralServer(Ci,CS,AS,KCpu,KCSpu,H,SndCS,RcvCS)
    /\attributesServer(AS,Ci,CS,KASpu,KCSpu,H,SndAS,RcvAS)
end role

role environment()
def=
const
    ci,cs,as,i_ci,i_cs,i_as:agent, kCpu,kCSpu,kASpu,ki:public_key, uid,mid,otp,pw,gm,cm:message,
    h:hash_func, sec1,sec2,sec3,sec4,sec5,sec6,sec7,sec8,sec9,sec10,
    ci_cs_auth2,cs_ci_auth1,cs_ci_auth5,cs_as_auth3,as_cs_auth4,as_cs_auth6:protocol_id
    intruder_knowledge={ci,cs,as,i_ci,i_cs,i_as,kCpu,kCSpu,kASpu,ki}
composition
    session(ci,cs,as,kCpu,kCSpu,kASpu,h,uid,mid,otp,pw,gm,cm)
    % Check replay attack
    /\session(ci,cs,as,kCpu,kCSpu,kASpu,h,uid,mid,otp,pw,gm,cm)
    % Check MITM attack
    /\session(cs,ci,as,kCpu,kCSpu,kASpu,h,uid,mid,otp,pw,gm,cm)
    % Check impersonate Ci
    /\session(i,cs,as,ki,kCpu,kCSpu,kASpu,h,uid,mid,otp,pw,gm,cm)
    % Chekc impersonate CS
    /\session(ci,i,as,kCpu,ki,kASpu,h,uid,mid,otp,pw,gm,cm)
    % Check impersonate AS
    /\session(ci,cs,i,kCpu,kCSpu,ki,h,uid,mid,otp,pw,gm,cm)
end role

goal
    secrecy_of sec1,sec2,sec3,sec4,sec5,sec6,sec7,sec8,sec9,sec10
    authentication_on cs_ci_auth1,ci_cs_auth2,cs_as_auth3,as_cs_auth4,cs_ci_auth5,as_cs_auth6
end goal

environment()

```

Figure 7.7: Session, environment, and goal roles of RAMHU in HLPSL

<pre>% OFMC % Version of 2006/02/13 SUMMARY SAFE DETAILS BOUNDED_NUMBER_OF_SESSIONS PROTOCOL /home/span/span/testsuite/results/RAMHU.if GOAL as_specified BACKEND OFMC COMMENTS STATISTICS parseTime: 0.00s searchTime: 54.60s visitedNodes: 3636 nodes depth: 11 plies</pre>	<p>SUMMARY SAFE</p> <p>DETAILS BOUNDED_NUMBER_OF_SESSIONS TYPED_MODEL</p> <p>PROTOCOL /home/span/span/testsuite/results/RAMHU.if</p> <p>GOAL As Specified</p> <p>BACKEND CL-AtSe</p> <p>STATISTICS</p> <table border="0"> <tr><td>Analysed :</td><td>324 states</td></tr> <tr><td>Reachable :</td><td>64 states</td></tr> <tr><td>Translation:</td><td>0.52 seconds</td></tr> <tr><td>Computation:</td><td>0.42 seconds</td></tr> </table>	Analysed :	324 states	Reachable :	64 states	Translation:	0.52 seconds	Computation:	0.42 seconds
Analysed :	324 states								
Reachable :	64 states								
Translation:	0.52 seconds								
Computation:	0.42 seconds								

Figure 7.8: Simulation result of RAMHU using OFMC backend

Figure 7.9: Simulation result of RAMHU using CL-AtSe backend

7.2.1.3 Security Comparison

In this Section, we will compare RAMHU with existing authentication schemes in terms of security. We will explain RAMHU superiority to solve the drawbacks in existing authentication schemes (He & Zeadally 2015, Giri et al. 2015, Li et al. 2016, Farash et al. 2016, Kumar et al. 2016, Jiang et al. 2016, Rajput, Abbas, Wang, Eun & Oh 2016, Das et al. 2017, Chandrakar & Om 2017, Nizzi et al. 2019, El-Tawab et al. 2019).

The authentication schemes in (He & Zeadally 2015, Giri et al. 2015) suffer from a leak of authentication information when transferring users' requests between network entities. Compared with RAMHU, all real users' information is not transmitted through the network exchanges and therefore does not leak information. Farash et al. (2016) and Jiang et al. (2016) designed an authentication schemes but lacked management and protection of users' information/data on the server. In RAMHU, it stores information on the *AS* and uses signatures and multi-pseudonyms to disguise users' information on the *AS*. It also uses *CS* as a gateway to check requests before sending them to *AS*. In (Kumar et al. 2016), their authentication scheme suffers from internal attacks. If intruder uses a sniffing program to steal users' information such as MAC addresses. Then he/she becomes authenticated in the network as a legitimate user. Compared to RAMHU, we use *CM* and *GM* to prevent internal attacks. Li et al. (2016) and Das et al. (2017) used a symmetric algorithm that relies on a single key and therefore has the risk of detecting that key. While RAMHU relies on an asymmetric algorithm that supports scalability. Rajput, Abbas, Wang, Eun & Oh (2016) proposed an authentication scheme that suffered greatly from impersonation attacks. An intruder can use his/her device as a server and deceive users. RAMHU uses robust mutual authentication to prevent impersonation attacks. In (Chandrakar & Om 2017), the authentication scheme suffers from collision and preimage attacks, and it handles real users' information when requests are transferred to the network. Compared to RAMHU, it uses PHOTON to prevent collision and preimage attacks as well as using multi-pseudonyms to prevent the exchange of real information among network entities.

The schemes in (Nizzi et al. 2019) and (El-Tawab et al. 2019) suffered from several problems, such as spoofing the coordinator/server by shuffle (AShA)/randomisation of fake addresses sent from intruders, key detection, breaking the integration process/vulnerability to preimage/second preimage attacks, and a single technique that does not provide security for online devices. RAMHU does not suffer from these problems because it uses *CM* to prevent MACs change, the public key algorithm

to prevent key breaking, PHOTON to provide signature principles, and use a set of techniques to protect authentication processes. Table 7.2 shows a comparison between RAMHU and existing authentication schemes in various attacks resistance.

7.2.2 Performance Analysis

In this Section, the theoretical and experimental performance analysis and performance comparison with existing related works are presented to examine the computation and communication processes of RAMHU in improving the performance of authentication processes.

7.2.2.1 Theoretical Performance Analysis

The authentication scheme should perform lightweight processes to support the reliable communication of users in healthcare applications. The authentication is the first processing that allows users to be legitimate in using network services. If the authentication process is weak for attacks, network performance will be greatly affected by the fact that the servers will perform additional complex computations.

RAMHU uses algorithms and techniques to support performance-efficient authentication. RAMHU uses the ECIES algorithm to encrypt users' information only. This algorithm performs lightweight operations and produces small keys compared to public key cryptographic algorithms as described in Chapter 2, Table 2.2. In addition, RAMHU uses the hash function (PHOTON) that performs hash operations compared to lightweight hash functions as described in Chapter 3, Table 3.1. The use of robust security algorithms against attacks such as ECIES and PHOTON is a major cause of performance stability. In RAMHU, new users use OTP only once at the registration phase. They do not need to use this technique frequently in the next times. This technique reduces the burden on the server processor to perform complex computations. If the attacker tries to connect to the network with a fake or previously used OTP, the server would reject this request early without having to test other authentication techniques. This contributes significantly to reducing the depletion of server capabilities. Furthermore, RAMHU relies on multi-pseudonyms that perform lightweight operations in protecting users' information rather than using k-anonymity, which consumes the server's time and power to search and explore real information for legitimate users. Moreover, RAMHU supports the authentication process by the MAC address technique. This technique is extremely efficient in verifying legitimate devices connected to the network. The other solutions also rely on IP to authenticate users' devices. IP does not prove the identity of the legitimate

Table 7.2: Comparison of resistance in repelling the various threats between RAMHU and other authentication schemes

Attack	He & Giri (2015)	Li et al. (2016)	Farash Kumar Jiang et al. (2016)	Rajput, Das et al. (2016)	Chandrakar & Wang (2017)	Nizzi et al. (2017)	El-Tawab et al. (2019)
Privileged-insider	✓	✓	✓	✓	✓	✓	✓
Stolen device/ application	✓	✓	✓	✓	✓	✓	✓
Replay	✓	✓	✓	✓	✓	✓	✓
MITM	✓	✓	✓	✓	✓	✓	✓
Guessing	✓	✓	✓	✓	✓	✓	✓
Client impersonation	✓	✓	✓	✓	✓	✓	✓
Server impersonation	✓	✓	✓	✓	✓	✓	✓
DoS	✓	✓	✓	✓	✓	✓	✓
Change password	✓	✓	✓	✓	✓	✓	✓
Eavesdropping	✓	✓	✓	✓	✓	✓	✓
Traceability	✓	✓	✓	✓	✓	✓	✓
Revocation	✓	✓	✓	✓	✓	✓	✓
Verifier	✓	✓	✓	✓	✓	✓	✓
Leakage	✓	✓	✓	✓	✓	✓	✓

device when connected to the network because it is the address of software and not hardware. Also, if the attacker uses a legitimate IP, he/she can perform malicious threats on the EHR repository that will significantly affect network performance. RAMHU uses lightweight operations (GM and CM) as part of the authentication processes in the examination of legitimate devices. Therefore, the aforementioned RAMHU features enable it to perform lightweight and efficient authentication.

7.2.2.2 Experimental Performance Analysis

In this Section, we will show RAMHU's performance in healthcare applications. We will provide tests on the hash function (PHOTON-256bit) and encryption algorithm (ECIES-256bit). In addition, communication costs (storage overheads) and computation (execution time) are calculated to extract RAMHU's performance. Applications codes (C_i , CS and AS) have written in Java Programming Language. Also, RAMHU's results have implemented on Ubuntu 16.04 LTS, processor Intel Core i5 2.6GHz, OS type 32-bit, Memory 4 GiB and disk 32.0 GB.

To compute the cost of communication, we compute the bits of all security parameters. Hash's MD (PHOTON) is 256 bit and the ECIES encryption key is 256 bit. The number of messages transmitted through the authentication and login protocol is 4, password update protocol is 2 and revocation protocol is 3. On the C_i side, it produces a file of 6 lines ($TS_{C_i} = 8$, $GM = 16$, $C_iSig_1 = 72$, $UP_{C_i}^{CS}||MP_{C_i}^{CS} = 6$, $N_{C_i} = 8$ and $C_iSig_1 = 64$). The total size of the parameters is 174 bytes. Then C_i converts the plaintext file to an encrypt file with a size from 199 bytes to 205 bytes (the minimum value is 1592 bit) and the number of bits inside the encryption file is 302 bit. When C_i receives the authentication response from CS , the size of the decryption file is from 93 bytes to 99 bytes (the minimum value is 744 bit). The total size of encryption and decryption files in C_i is 2336 bit.

On the CS side, it produces a 3-line file ($TS_{CS} = 8$, $UP_{CS}^{AS}||MP_{CS}^{AS} = 6$, $N_{CS} = 8$ and $CSSig_3 = 64$). The total size of the parameters is 86 bytes. Then CS converts the plaintext file to an encrypt file with a size of 113 bytes to 119 bytes (the minimum value is 904 bit) and the number of bits within the encryption file is 307 bit. When CS receives the authentication response from AS , the size of the decryption file is from 170 bytes to 199 bytes (the minimum value is 1360 bit). The total size of encryption and decryption files in CS is 2264 bit.

On the AS side, it produces a 3-line file ($TS_{AS} = 8$, $UP_{AS}^{CS}||MP_{AS}^{CS} = 6$, $N_{AS} = 8$ and $ASSig_2 = 64$). The total size of the parameters is 86 bytes. Then AS converts the plaintext file to an encrypted file with a size of 113 bytes to 119 bytes (the minimum value is 904 bit) and the number of bits within the encryption file is 307 bit. When AS receives the authentication response from CS , the decryption file size is from 93

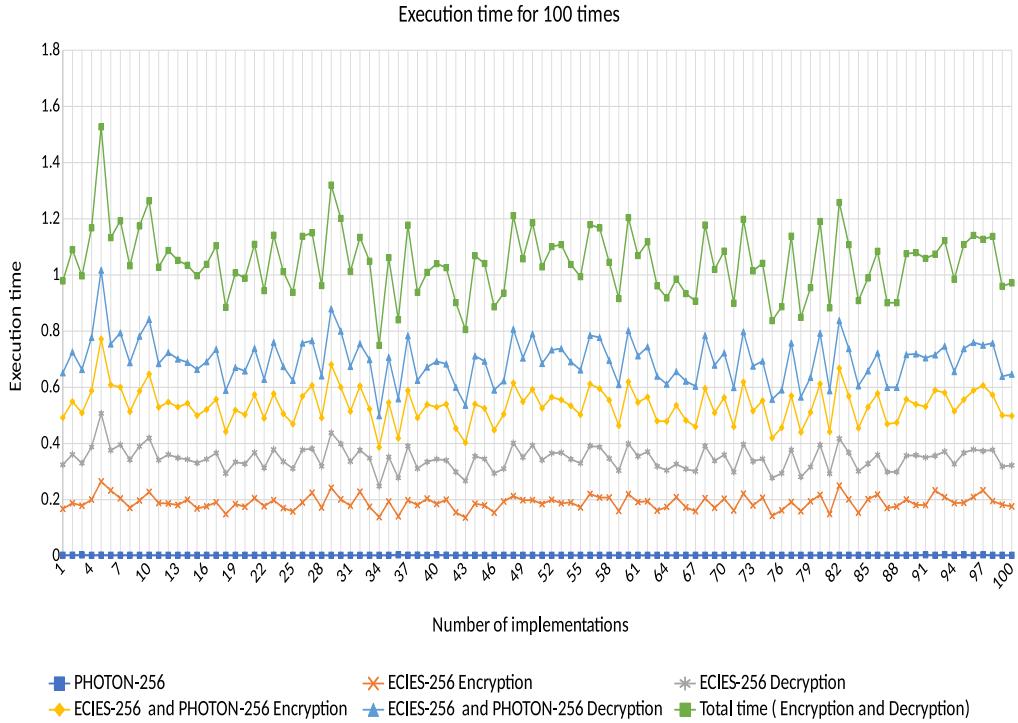


Figure 7.10: Implementations of PHOTON 256-bit and ECIES 256-bit

bytes to 99 bytes (the minimum value is 744 bit). The total size of encryption and decryption files in *AS* is 1648 bit. Also, storage complexity in RAMHU is 170671 bit

To compute the cost of computation, we had obtained preliminary results about running time for PHOTON-256, ECIES-256 encryption and ECIES-256 decryption (100 times, information size of 93 bytes) as shown in Figure 7.10. We noted execution time of PHOTON is faster than hash algorithms such as SHA-1 and SHA-256 depending results in (Latinov 2018). The minimum execution time for PHOTON-256 bit hash function is 0.002358 ms, ECIES-256 bit encryption is 0.133672 ms, ECIES-256 bit decryption is 0.110136 ms, ECIES-256 bit encryption and PHOTON-256 bit is 0.136186 ms and ECIES-256 bit decryption and PHOTON-256 bit is 0.112521 ms. Also, time complexity in RAMHU is 0.460189 ms.

7.2.2.3 Performance Comparison

In this Section, we will compare the superiority of RAMHU over the authentication schemes in the performance side. Although the implementation environment for authentication schemes varies, we have made some comparisons that demonstrate the superiority of RAMHU's performance over existing schemes.

The authentication scheme in (He & Zeadally 2015) relies on ECC-512bit plus

AES to generate session key while RAMHU relies on ECC-256bit which is NIST certified and sufficient to encrypt and secure the authentication request. As a result, RAMHU uses ECC with the best performance as well as no need to use symmetric encryption that increases computation expenses. Schemes in (Farash et al. 2016) and (Jiang et al. 2016) are based on a single server to perform all complex operations with users' devices, these processes consume server resources while RAMHU divides computations on servers *CS* and *AS* which contributes to the improvement performance dramatically. In addition, RAMHU performs the lowest number of hashes compared to the schemes as shown in Table 7.3 (T_h is the time complexity for hash function, T_s is the time complexity for symmetric encryption and T_H is the time complexity for bio-hash function). This makes RAMHU's performance suitable for the healthcare application environment. Compared to RAMHU, both schemes in Jiang et al. (2016) and Das et al. (2017) uses a fuzzy extractor that requires additional operations to consume execution time of 0.442s while RAMHU does not need these additional operations. Furthermore, the scheme in (Giri et al. 2015) is based on RSA-1024bit which is expensive in encryption and decryption while RAMHU relies on ECIES-256bit which use small keys and is suitable for high-performance security. The CACPPA scheme in (Rajput, Abbas, Wang, Eun & Oh 2016) suffers from storage overheads. It requires 76 bytes per pseudonym as well as other storage requirements such as keys, encryption by ECIES-256bit and signature by ECDSA-256bit. This scheme will be extremely costly for server memory (communication and computations overheads) with increasing numbers of users. RAMHU uses only 6 bytes per pseudonym that immeasurably saves memory storage. Moreover, the scheme in (Chandrakar & Om 2017) stores the same users' information on multiple servers that consume storage sources as well as the computation cost to store this information. RAMHU does not dissipate storage sources in repeating the same information on servers.

The scheme in (El-Tawab et al. 2019) suffered from heavy-cost processes due to the use of SHA-256 while RAMHU uses PHOTON which has lightweight processes. Additionally, impersonation attacks of legitimate MACs on schemes in Nizzi et al. (2019) and El-Tawab et al. (2019) cause network low performance due to increased network-connected fake devices. RAMHU prevents the use of legitimate MACs addresses in more than one device by using the *CM* technique and thus maintains network performance.

Table 7.3: Comparison of computation cost between RAMHU and existing authentication schemes

Scheme	Hashes number on user side	Hashes number on server side	Total	Hash type	Running time in ms	No. of messages	No. of bits
He & Zeadally (2015)	$2T_h + 2T_s$	$1T_h + 4T_s$	$3T_h + 6T_s$	Standard	0.4 + 0.4	6	-
Giri et al. (2015)	$5T_h$	$4T_h$	$9T_h$	Standard	-	4	1600
Jiang et al. (2016)	$7T_h$	$7T_h$	$14T_h$	Standard	-	4	-
Kumar et al. (2016)	$5T_h$	$5T_h$	$10T_h$	Standard	-	3	-
Li et al. (2016)	$6T_h + 2T_s$	$7T_h + 6T_s$	$13T_h + 8T_s$	Standard	0.0001+0.442	4	768
Das et al. (2017)	$3T_h$	$7T_h$	$10T_h$	Standard	0.0001+0.442	4	768
Chandrakar & Om (2017)	$12T_h + 1T_H$	$7T_h$	$19T_h + 1T_H$	Standard	0.0005+0.02102	9	2240
RAMHU	$3T_h$	$5T_h$	$8T_h$	Lightweight	0.002386	4	307

7.3 Discussion and Analysis of PAX Scheme

In this Section, we will discuss users scenarios, security and performance analysis and compare PAX with existing search schemes. We will demonstrate PAX’s ability to protect patients’ data during security and privacy implementation.

7.3.1 Direct and Indirect Users Scenarios in PAX

This Section illustrates 4 case scenarios in PAX that involve obtaining access to medical records in the EHR. We present our perspective of securing the privacy of patients’ data through the integration of anonymity, pseudonym, and XACML in our project. To provide user scenarios, we impose a number of EHR users with the PAX system, as shown in Figure 7.11. The patient may suffer from many diseases such as diabetes, dementia, cancer, addiction, blood pressure, and heart disease, which means that the patient is associated with more than one doctor. The patient does not want other healthcare providers to access his/her personal information because of embarrassment or his/her psychological state. Also, the doctor has treated a set of patients. Therefore, ensuring privacy in non-disclosure of personal information to patients requires each indirect user to apply HIPAA standards.

Assume we have three patients, Sara, John, and Rose, who suffer from diseases such as cancer, dementia, and diabetes respectively. Each disease requires a different level of care. For instance, a patient suffering from dementia needs a family member who assists with all of the patient’s tasks and is able to access all of the patient’s data. We assume that Julia is one of John’s relatives. Also, there a group of healthcare providers, including Simon, Adam, Hawa, and Abraham, who want access to patients’ medical records. These users can have different roles; for example, Adam may have the roles of advisor and doctor, and Abraham may be a doctor and an emergency doctor. Different user roles can be a major reason for breaching the

privacy of medical records. Users such as patients (Sara and Rose) and the physician (Simon) need direct authorisation to EHR data because of persistent and regular requests to access the repository. For example, Simon is the general practitioner (GP) for Sara and needs to access her data every day or even more than once a day (under the PAX system, Sara's data is private in data access requests by both Sara and Simon, as shown in Figure 7.12).

1. The first scenario (advisor): Simon needs a consultant (such as Adam) to diagnose Sara's disease or to submit treatment suggestions (after taking Sara's consent to seek specialist advice). Adam is not associated with Sara permanently and continuously and does not need Sara's personal information; he only needs certain details of the patient's data and medical reports. Therefore, in PAX, Adam needs to enter his name (Adam), the name of the doctor (Simon), and Sara's pseudonym to access Sara's data; he does not need to know Sara's real attributes. Figure 7.12 shows Sara's data, which can be obtained by Simon and Adam. We note from Figure 7.12 that the data received does not contain any of Sara's attributes, and Adam does not use any real attributes for Sara, which means that PAX provides a high level of security and privacy that can prevent external and internal attacks.
2. The second scenario (relative of a patient): Because the patient (John) suffers from dementia, he is unable to perform his duties. John needs a family helper (such as Julia) to access his medical data without misuse or to bypass these privileges to other medical records. Julia needs a request that contains her Sigs and John's pseudonym to be considered a legitimate user in the system but is not authorised to access John's data until the *CS* and *AS* complete the third authorisation protocol with the Shamir scheme.
3. The third scenario (researcher): Hawa is a researcher and tries to access the server's repository to use EHR in evaluating a medical study to develop a disease treatment. The researcher needs access to medical records sporadically and not permanently. The researcher is not associated with a particular patient and needs access to a set of the patients' data. Also, this indirect user does not need access to the patients' attributes. Figure 7.13 shows a set of medical records obtained by Hawa in the case of authorisation without using any of the patients' real attributes.
4. The fourth scenario (emergency doctor): When Rose's health has deteriorated significantly and suddenly, her doctor is not available for some reason. Rose needs an emergency doctor to treat and assess her condition quickly (e.g., Abraham). The emergency doctor needs to access Rose's data without access-

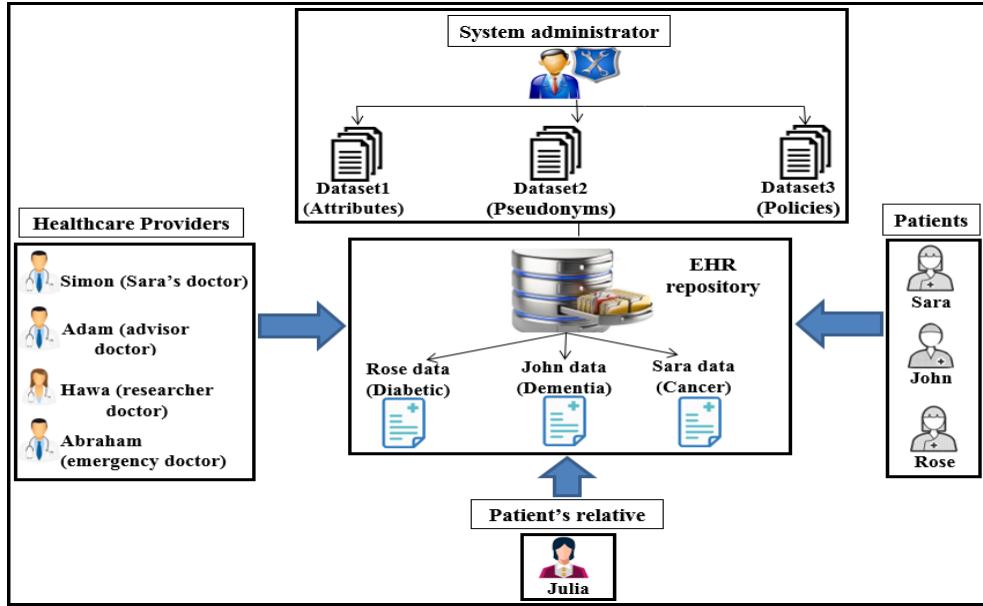


Figure 7.11: Users' scenarios in PAX

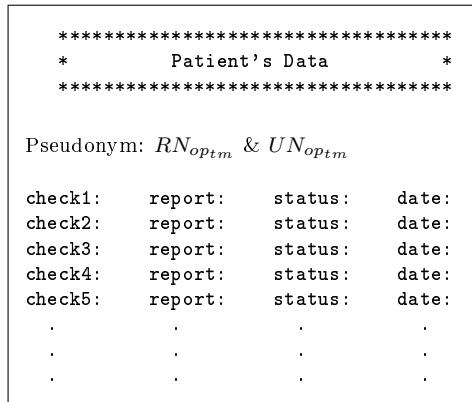


Figure 7.12: Part of Sarah's data

ing personal information. In an emergency, access to a patient's data does not require the patient's consent. Abraham should not know any secrets healthcare providers have used to authorise access to Rose's data.

PAX provides security and privacy for all previous scenarios; indirect users cannot access the patient's personal information because it is separate and completely hidden from the data. As a result, the user can retrieve this data to improve healthcare without penetrating the repository in *DS*.

7.3.2 Security Analysis

Security and privacy mechanisms in PAX has evaluated under theoretical analysis, BAN logic and AVISPA tool.

***** * Patients' DataSet * *****					
No	Check	Report	Status	time	date
1	check3	Report3	still	23:21:33	2017-09-05
2	check1	Report1	ok	14:36:45	2017-09-08
3	check2	Report2	normal	17:09:57	2017-09-08
5	check3	Report3	still	17:10:09	2017-09-10
6	check2	Report2	normal	12:28:20	2017-09-11
.
.
.

Figure 7.13: Part of a group of medical records for patients

7.3.2.1 Theoretical Security Analysis

In this Section, we will provide theoretical attacks analysis and mathematical proof of the PAX scheme in repealing known penetrations.

7.3.2.1.1 Attacks Analysis on PAX Scheme

Organizational and managerial features are important in healthcare systems, but the key player in applying these systems is the use of security and privacy mechanisms for patient records (Rezaeibagha et al. 2015). Medical records in the EHR are sensitive data and require security mechanisms to protect their privacy from attackers. Also, the different levels and privileges of healthcare providers make the development of security mechanisms and authorisation models very difficult (Calvillo-Arbizu et al. 2014).

Moreover, applying privacy to medical records (EHR) requires the use of access models in the authorisation of users. Integrating RBAC and ABAC gives more powerful features to PAX users. The result is an access control model based on roles and attributes that handle users' requests at the coarse-grained and fine-grained levels. To increase security and privacy in the authorisation model, we have added a set of mechanisms to hide and separate personal information about data. The PAX system ensures that legitimate users access their specific data and, on the other hand, the privacy of medical records is maintained. Any healthcare system should support the basic security features of confidentiality, integrity, and availability (C.I.A.) (Neubauer & Heurix 2011). There are a range of attacks that pose a serious risk to any healthcare system. PAX's security mechanisms act as countermeasures against known attacks.

- **Proposition 1**

I cannot efficiently destroy PAX scheme by availability attacks.

Proof

The server is vulnerable to denial of service (DOS) attacks that are intended to disable the service. In PAX, the indirect user creates a random Sig based on SS_s provided by healthcare providers. The attacker cannot use the same SS_s because the CS and AS will ignore the request. The abundance of medical records is critical to healthcare providers' flexible access. Therefore, supporting robustness in any healthcare system depends on preventing DOS attacks. Although the PAX system limits the risk of DOS attacks, it does not do so fully because the attacker can still send requests without penetrating the patient's personal information and data.

- **Proposition 2**

II or EI cannot penetrate data and policies datasets in EHR repository.

Proof

The data in the single server is considered an attractive treasure for attackers. Also, policies contain the attributes and roles of users, which can assist attackers in carrying out an attack to recognise and access patients' data. In PAX, even if the attacker obtained a patient's data, the data would not be useful because both the stored and movable data would have pseudonym. In addition, the data is stored (on DS) separately from policies (on AS) as well as PAX policies are associated with pseudonym and anonymity (both CS and DS do not have real attributes datasets for users), which prevent attackers from revealing subjects' and objects' attributes.

- **Proposition 3**

I cannot apply modification attacks to change authorisation requests for users.

Proof

Users' requests from clients to server in PAX are fully protected from modification. PAX uses random nonces and Sigs to detect changing operation (MITM) by intruders.

- **Proposition 4**

I cannot resend authorisation requests later (replay attacks) to gain access to the network.

Proof

The intruder can not resend authorisation request to the network later because PAX produces a new timestamp (TS_C , TS_{CS} , TS_{AS} , and TS_{DS}) between PAX's entities.

- **Proposition 5**

I cannot perform unauthorised access attacks against PAX scheme.

Proof

User access to a repository depends on authorisation policies. We use XACML v3.0 to create user policies. Integrating RBAC and ABAC into XACML prevents unauthorised users from accessing patients' data.

- **Proposition 6**

EI cannot use traffic analysis attacks to detect users' information.

Proof

To perform this attack, the hacker must analyse either the requests or the data moving between the source and the target. In PAX, if we assume that the attacker has some attributes (such as the name) and expects a specific patient, the attacker cannot use a keyword (name) and analyse it with multiple requests or medical records, even if it is the same user, to reveal its real attributes; the attacker cannot identify this data for a particular patient. Using pseudonym and anonymity prevents attackers from tracking traffic. For example, if advisor1 and advisor2 want patient1 data, the generated requests will be different. This prevents the parsing of requests.

- **Proposition 7**

I cannot impersonate PAX's entities (impersonation attacks).

Proof

The intruder can not impersonate PAX's entities (C_i , CS , AS and DS) because PAX uses secret nonces (SN_C , SN_{CS} and SN_{AS}) and secret Sigs among entities to support mutual authentication and prevent impersonation attacks.

- **Proposition 8**

EI cannot use timing attacks to penetrate security parameters in signatures.

Proof

This attack exploits the security procedure while calculating the time period for security operations (such as encryption and signing). PAX prevents these attacks because when the attacker gets multiple requests for the same user, the attacker will find that these requests contain different Sigs, and the attacker does not have the parameters to generate the Sig. In addition, ECDSA's Sigs with 256-bit is resistant to timing attacks.

7.3.2.1.2 PAX Scheme with BAN

In this Section, we will prove PAX security by BAN logic.

- **Goals:** PAX must provide the following goals to securely exchange messages among PAX entities.

- **G1:** $C_i \equiv C_i \xrightarrow{C_i S_3} CS$
- **G4:** $AS \equiv CS \xrightarrow{ASS_1} AS$
- **G2:** $CS \equiv C_i \xrightarrow{CSS_1} CS$
- **G5:** $AS \equiv DS \xrightarrow{ASS_5} AS$
- **G3:** $CS \equiv CS \xrightarrow{CSS_4} AS$
- **G6:** $DS \equiv AS \xrightarrow{DSS_1} DS$

- **Idealized form:** The messages (M) are represented in a BAN formula. The normal PAX messages are shown as follows:

- **M1:** $C_i \rightarrow CS: C_i S_{1_{tm}} || RN_{sp_{tm}} || UN_{sp_{tm}} || N_C || TS_{C_{tm}} || SN_{C_{tm}}, C_i S_{2_{tm}} || RN_{op_{tm}} || UN_{op_{tm}} || N_C || C_i S_{4_{tm}}: \langle SN_C \rangle_{C_i S_3}$
- **M2:** $CS \rightarrow AS: CSS_{2_{tm}} || RN_{sp_{tm}} || UN_{sp_{tm}} || N_C || TS_{C_{tm}} || TS_{CS_{tm}} || SN_{CS_{tm}}, CSS_{3_{tm}} || RN_{op_{tm}} || UN_{op_{tm}} || C_i S_{4_{tm}}: \langle SN_{CS} \rangle_{CSS_4}$
- **M3:** $AS \rightarrow CS: ASS_{2_{tm}} || UN_{sp_{tm}} || TS_{AS_{tm}}: \langle SN_{CS} \rangle_{ASS_1}$
- **M4:** $CS \rightarrow C_i: CSS_{2_{tm}} || UN_{sp_{tm}} || TS_{CS_{tm}}: \langle SN_C \rangle_{CSS_1}$
- **M5:** $C_i \rightarrow CS: C_i S_{6_{tm}} || UN_{sp_{tm}} || TS_{C_{tm}}: \langle SN_C \rangle_{C_i S_3}$
- **M6:** $CS \rightarrow AS: C_i S_{6_{tm}} || UN_{sp_{tm}} || TS_{CS_{tm}}: \langle SN_{CS} \rangle_{CSS_4}$
- **M7:** $AS \rightarrow DS: ASS_{6_{tm}} || RN_{op_{tm}} || UN_{op_{tm}} || SN_{AS_{tm}} || TS_{C_{tm}} || TS_{AS_{tm}} || C_i S_{4_{tm}}: \langle SN_{AS} \rangle_{ASS_5}$
- **M8:** $DS \rightarrow AS: DSS_{2_{tm}} || DSS_{4_{tm}} || UN_{op_{tm}} || TS_{DS_{tm}} || C_i S_{4_{tm}} || "Data": \langle SN_{AS} \rangle_{DSS_1}$
- **M9:** $AS \rightarrow CS: ASS_{2_{tm}} || ASS_{3_{tm}} || UN_{sp_{tm}} || TS_{AS_{tm}} || "Decision & Data": \langle SN_{CS} \rangle_{ASS_1}$
- **M10:** $CS \rightarrow C_i: CSS_{2_{tm}} || CSS_{3_{tm}} || UN_{sp_{tm}} || TS_{CS_{tm}} || "Decision & Data": \langle SN_C \rangle_{CSS_1}$

The idealized form messages for PAX are shown as follows:

- **M1:** $C_i \rightarrow CS: \langle C_i S_{1_{tm}}, RN_{sp_{tm}}, UN_{sp_{tm}}, N_C, TS_{C_{tm}}, SN_{C_{tm}}, C_i S_{2_{tm}}, RN_{op_{tm}}, UN_{op_{tm}}, N_C, C_i S_{4_{tm}} \rangle: \langle SN_C \rangle_{C_i S_3}$
- **M2:** $CS \rightarrow AS: \langle CSS_{2_{tm}}, RN_{sp_{tm}}, UN_{sp_{tm}}, N_C, TS_{C_{tm}}, TS_{CS_{tm}}, SN_{CS_{tm}}, CSS_{3_{tm}}, RN_{op_{tm}}, UN_{op_{tm}}, C_i S_{4_{tm}} \rangle: \langle SN_{CS} \rangle_{CSS_4}$
- **M3:** $AS \rightarrow CS: \langle ASS_{2_{tm}}, UN_{sp_{tm}}, TS_{AS_{tm}} \rangle: \langle SN_{CS} \rangle_{ASS_1}$
- **M4:** $CS \rightarrow C_i: \langle CSS_{2_{tm}}, UN_{sp_{tm}}, TS_{CS_{tm}} \rangle: \langle SN_C \rangle_{CSS_1}$
- **M5:** $C_i \rightarrow CS: \langle C_i S_{6_{tm}}, UN_{sp_{tm}}, TS_{C_{tm}} \rangle: \langle SN_C \rangle_{C_i S_3}$
- **M6:** $CS \rightarrow AS: \langle C_i S_{6_{tm}}, UN_{sp_{tm}}, TS_{CS_{tm}} \rangle: \langle SN_{CS} \rangle_{CSS_4}$
- **M7:** $AS \rightarrow DS: \langle ASS_{6_{tm}}, RN_{op_{tm}}, UN_{op_{tm}}, SN_{AS_{tm}}, TS_{C_{tm}}, TS_{AS_{tm}}, C_i S_{4_{tm}} \rangle: \langle SN_{AS} \rangle_{ASS_5}$
- **M8:** $DS \rightarrow AS: \langle DSS_{2_{tm}}, DSS_{4_{tm}}, UN_{op_{tm}}, TS_{DS_{tm}}, C_i S_{4_{tm}}, "Data" \rangle: \langle SN_{AS} \rangle_{DSS_1}$
- **M9:** $AS \rightarrow CS: \langle ASS_{2_{tm}}, ASS_{3_{tm}}, UN_{sp_{tm}}, TS_{AS_{tm}}, "Decision & Data" \rangle: \langle SN_{CS} \rangle_{ASS_1}$
- **M10:** $CS \rightarrow C_i: \langle CSS_{2_{tm}}, CSS_{3_{tm}}, UN_{sp_{tm}}, TS_{CS_{tm}}, "Decision & Data" \rangle: \langle SN_C \rangle_{CSS_1}$

- **Hypotheses:** Sets of hypotheses to analyse PAX's security.

- **H1:** $C_i \models \#(SN_C)$.
- **H2:** $C_i \models \#(TS_{C_i})$.
- **H3:** $CS \models \#(SN_C)$.
- **H4:** $CS \models \#(TS_{CS})$.
- **H5:** $CS \models \#(SN_{CS})$.
- **H6:** $AS \models \#(SN_{CS})$.
- **H7:** $AS \models \#(TS_{AS})$.
- **H8:** $AS \models \#(SN_{AS})$.
- **H9:** $DS \models \#(SN_{AS})$.
- **H10:** $DS \models \#(TS_{DS})$.
- **H11:** $CS \models C_i \implies SN_C$.
- **H12:** $AS \models CS \implies SN_{CS}$.
- **H13:** $DS \models AS \implies SN_{AS}$.
- **H14:** $C_i \models C_i \xrightarrow{KCS_{pu}} CS$.
- **H15:** $CS \models CS \xrightarrow{KC_{pu}} C_i$.
- **H16:** $CS \models CS \xrightarrow{KAS_{pu}} AS$.
- **H17:** $AS \models AS \xrightarrow{KCS_{pu}} CS$.
- **H18:** $AS \models AS \xrightarrow{KDS_{pu}} DS$.
- **H19:** $DS \models DS \xrightarrow{KAS_{pu}} AS$.

• **Proofs:** We have used BAN logic to prove goals based on rules and hypotheses.

- **M1:** $C_i \rightarrow CS$:
 - * **SR:**
S1: $CS \triangleleft M1$
 - * **MMR:**
Using MMR, S1 and H14, S2: $CS \models C_i \sim SN_C$
 - * **NVR and FCR:**
Using NVR, FCR, S2, H1 and H2, S3: $CS \models C_i \models SN_C$
 - * **JR:**
Using JR, S3 and H11, S4: $CS \models SN_C$
 - * **SSR:**
Using SSR, S3, H1 and H2, S5: $CS \models C_i \xrightarrow{CSS_1} CS$ (**G2**)
- **M2:** $CS \rightarrow AS$:
 - * **SR:**
S6: $AS \triangleleft M2$
 - * **MMR:**
Using MMR, S6 and H16, S7: $AS \models CS \sim SN_{CS}$
 - * **NVR and FCR:**
Using NVR, FCR, S7, H4 and H5, S8: $AS \models CS \models SN_{CS}$
 - * **JR:**
Using JR, S8 and H12, S9: $AS \models SN_{CS}$
 - * **SSR:**
Using SSR, S8, H4 and H5, S10: $AS \models CS \xrightarrow{ASS_1} AS$ (**G4**)
- **M3:** $AS \rightarrow CS$:
 - * **SR:**
S11: $CS \triangleleft M3$
 - * **MMR:**
Using MMR, S11 and H17, S12: $CS \models AS \sim SN_{CS}$
 - * **NVR and FCR:**
Using NVR, FCR, S12, H6 and H7, S13: $CS \models AS \models SN_{CS}$
 - * **JR:**
Using JR, S13 and H12, S14: $CS \models SN_{CS}$
 - * **SSR:**
Using SSR, S13, H6 and H7, S15: $CS \models CS \xrightarrow{CSS_4} AS$ (**G3**)
- **M4:** $CS \rightarrow C_i$:
 - * **SR:**
S16: $C_i \triangleleft M4$
 - * **MMR:**
Using MMR, S16 and H15, S17: $C_i \models CS \sim SN_C$

- * **NVR and FCR:**
Using NVR, FCR, S17, H3 and H4, S18: $C_i \equiv CS \equiv SN_C$
- * **JR:**
Using JR, S18 and H11, S19: $C_i \equiv SN_C$
- * **SSR:**
Using SSR, S18, H3 and H4, S20: $C_i \equiv C_i \xrightarrow{C_i S_3} CS \text{ (G1)}$
- **M5:** $C_i \rightarrow CS$: Similar to the M1 (**G2**)
- **M6:** $CS \rightarrow AS$: Similar to the M2 (**G4**)
- **M7:** $AS \rightarrow DS$:
 - * **SR:**
S21: $DS \triangleleft M7$
 - * **MMR:**
Using MMR, S21 and H18, S22: $DS \equiv AS \sim SN_{AS}$
 - * **NVR and FCR:**
Using NVR, FCR, S22, H7 and H8, S23: $DS \equiv AS \equiv SN_{AS}$
 - * **JR:**
Using JR, S23 and H13, S24: $DS \equiv SN_{AS}$
 - * **SSR:**
Using SSR, S23, H7 and H8, S25: $DS \equiv DS \xrightarrow{DSS_1} AS \text{ (G6)}$
- **M8:** $DS \rightarrow AS$:
 - * **SR:**
S26: $AS \triangleleft M8$
 - * **MMR:**
Using MMR, S26 and H19, S27: $AS \equiv DS \sim SN_{AS}$
 - * **NVR and FCR:**
Using NVR, FCR, S27, H9 and H10, S28: $AS \equiv DS \equiv SN_{AS}$
 - * **JR:**
Using JR, S28 and H13, S29: $AS \equiv SN_{AS}$
 - * **SSR:**
Using SSR, S28, H9 and H10, S30: $AS \equiv AS \xrightarrow{ASS_5} DS \text{ (G5)}$
- **M9:** $AS \rightarrow CS$: Similar to the M3 (**G3**)
- **M10:** $CS \rightarrow C_i$: Similar to the M4 (**G1**)

7.3.2.2 Experimental Security Analysis

In this Section, we will use the AVISPA tool to analyse PAX authorisation procedures. Then we will present the results of PAX analysis in repelling known attacks.

7.3.2.2.1 PAX Scheme with AVISPA

In terms of HLSPL with AVISPA, PAX consists of four core (essential) roles: client (C_i), centralServer (CS), attributesServer (AS) and dataServer (DS). Also, there are the supporting roles such as session, and environment, goal specification section. Essential roles include a transition section (to specify the sequence of communication operations in network framework). Supporting roles include a composition section (to specify the linking of sessions and roles).

PAX depends on asymmetric cryptography by using ECDSA with public keys (KC_{pu} , KCS_{pu} , KAS_{pu} and KDS_{pu}) to perform security requirements (integrity, authentication and non-repudiation). Moreover, PAX applies nonces (SN_C , SN_{CS} , SN_{AS} and SN_{DS}) to support anonymity and timestamps (TS_C , TS_{CS} , TS_{AS} and

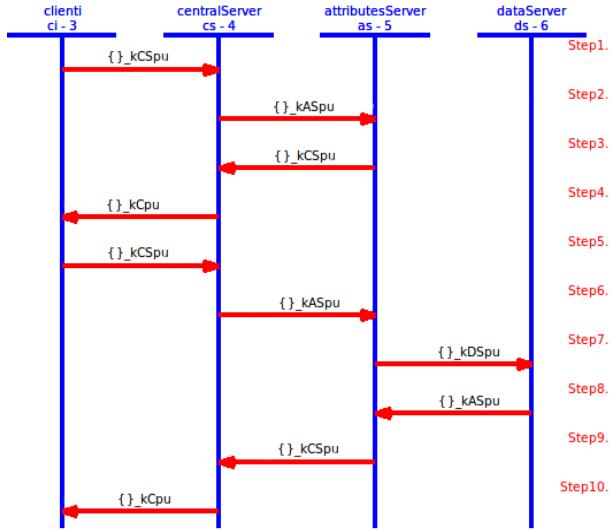


Figure 7.14: PAX’s framework in AVISPA

TS_{DS}) to support freshness. Authorisation process for indirect users is illustrated by the HPLSL scripts in Figures 7.15, 7.16, 7.17 and 7.18. Each role consists of the number of transitions, the receiving process (RCV), the sending process (SND), the sender’s claim process of fresh value and correct (witness), the validation process in receiver for the sender’s claim (request), the process of creating a fresh value for the nonce and timestamp (new) and the use of the private key ($_inv$) in PAX’s entities. At first, C_i receives the start signal as in Figure 7.15, then the SND and RCV operations continue until the authorisation process is completed as in Figure 7.14.

Figure 7.19 shows the roles of session, environment, and goal section. In the session role, a composition process has been performed for the four roles (*clienti*, *centralServer*, *attributeServer* and *dataServer*) and specifies the send and receive channels in the Dolev-Yao model. In the environment role, the PP, the goals specified in the goal section, and the known information for the intruder (*intruder_knowledge*) have been defined. In this role, one or more sessions are composed, and we tested our scheme with sessions for replay, MITM, and impersonating entity attacks. We assumed that an intruder (I) creates a public key (ki) and has knowledge of the public keys ($kCpu$, $kCSpu$, and $kASpu$) of PAX’s entities in the network. Intruder attempts to resend legitimate user requests later, intercepts/modifies these requests, or impersonates the connecting entities using i constant rather than ci , cs , as and ds . The results displays that these attacks cannot penetrate the security goals in our scheme. Goal section describes verified goals in PAX, and provides 10 goals of secrecy (such as S_ID , O_ID , S_R and O_R represent the first secret (sec1) and known only for both ci and cs) and 8 goals of authentication (such as $UNspm$, $UNopm$ and $TScs$ represent the first authentication between ci and cs).

```

role clienti(Ci,CS:agent, KCpu,KCSpu:public_key,H:hash_func, S_ID,O_ID,S_R,O_R:message,SND,
RCV:channel(dy))
played_by Ci def=
local
    State:nat,
    TSc,TScs,TSctm,TSctm,Nc,SNc,SNctm:text,
    CiS1,CiS2,CiS3,CiS4,CiS5,CiS6,CiS1tm,CiS2tm,CiS4tm,CiS6tm,CSS2tm,CSS3tm,CSS5:text,
    SP,OP,UNspl,UNspm,UNsph,UNopl,UNopm,RNopm,RNspm,RNsph,RNopl,RNopm
    ,RNoph:text, RNspn,RNopn,UNspn,UNopn:text,AS,DS:agent, MS,SS,SSs,Decision,Data:text
const
    sec1,sec2,sec3,sec4,sec5,sec6,auth1,auth2:protocol_id
init
    State := 0
transition
1.State=0
    /\RCV(start) =|> State':=1 /\Nc':=new() /\SNc':=new() /\TSc':=new()
    /\CiS1':={H(RNopm.UNspm.Nc'.TSc')}_inv(KCpu) /\CiS2':={H(RNopm.UNopm.Nc'.TSc')}_inv(KCpu)
    /\CiS3':={H(SNc')}_inv(KCpu)/\ CiS4':={H(RNoph.UNoph.TSc')}_inv(KCpu)
    /\CiS1tm':=xor(CiS1',CiS3')/\CiS2tm':=xor(CiS2',CiS3')
    /\TSctm':=xor(TSc',xor(SNc',xor(RNspm,UNspm)))
    /\SNctm':=xor(UNspm,xor(UNopm,xor(SNc',xor(CiS4',CiS1tm'))))
    /\CiS4tm':=xor(CiS4',xor(UNspm,xor(UNopm,CiS2tm')))
    /\RNspn':=xor(RNopl,xor(CiS1tm',SNctm')) /\RNopn':=xor(RNopl,xor(CiS2tm',SNctm'))
    /\UNspn':=xor(UNspl,xor(CiS1tm',SNctm')) /\UNopn':=xor(UNopl,xor(CiS2tm',SNctm'))
% Ci sends XACML's request to CS
    /\SND(CS.CiS1tm'.RNspn'.Nc'.TSctm'.SNctm'
    .CiS2tm'.RNopn'.UNopn'.Nc'.CiS4tm') /\secret({S_ID,O_ID,S_R,O_R},sec1,{Ci,AS})
    /\secret({SNc',CiS3',TSc'},sec2,{Ci,CS}) /\secret({CiS1',CiS2'},sec3,{Ci,CS,AS})
    /\secret({RNopm,UNspm,RNopm},sec4,{Ci,CS})

% Ci receives first authorisation response from CS
2. State = 1
    /\RCV(Ci.CSS2tm'.UNspn'.TScstm')=|> State':= 2 /\UNspl':=xor(UNspn',xor(CSS2tm',TScstm'))
    /\TScs':=xor(TSctm',xor(SNc,UNopm)) /\CiS6':={H(SP)}_inv(KCpu)
    /\SSs':=xor(CiS1,xor(CiS3,xor(CSS2tm',xor(CiS4,CiS6'))))
    /\MS':= {({SS,SSs'})} /\CiS6tm':=xor(CiS6',xor(CiS3,MS'))
    /\secret({OP,CiS4},sec5,{Ci,AS,DS}) /\secret({SP,CiS6,MS',SS},sec6,{Ci,AS})
    /\TSc':=new() /\TSctm':=xor(TSc',xor(SNc,UNspm)) /\UNspn':=xor(UNspl',xor(CiS6tm',TSctm'))
% Ci sends Shamir's response to CS
    /\SND(CS.CiS6tm'.UNspn'.TSctm') /\witness(Ci,CS,auth1,{UNspm,UNopm,TScs})

% Ci receives decision & data from CS
3.State=2
    /\RCV(Ci.CSS2tm'.CSS3tm'.UNspn'.TSctm'.Decision.Data)=|> State':=3
    /\UNspl':=xor(UNspn',xor(CSS2tm',TSctm')) /\TScs':=xor(TSctm',xor(SNc,UNopm))
    /\CSS5':=xor(CiS1',xor(CiS3',xor(CSS2tm',CiS4')))) /\CiS5':={H(Data)}_inv(KCpu)
    /\CiS1':=xor(CSS2tm',xor(CiS3,xor(CiS5',CiS4))) /\CiS2':=xor(CSS3tm',xor(CiS3,xor(CiS5',CiS4)))
    /\CiS3':=xor(CiS2',xor(CSS2tm',xor(CiS5',CiS4)))
    /\CiS4':=xor(CiS1',xor(CiS3',xor(CiS5',CSS2tm')))) /\request(Ci,CS,auth2,{SNc,CiS3,CiS4,TSc})
end role

```

Figure 7.15: C_i role of PAX in HLPSL

7.3.2.2.2 Simulation Result

In this Section, the simulation result is based on CL-AtSe backend in the AVISPA. Figure 7.20 displays the simulation result with the CL-AtSe backend, PAX clearly and accurately achieves the SAFE result in the SUMMARY section, bounded number of sessions in the DETAILS section, the goals of the scheme achieved (as_specified) in the GOAL section as well as statistical numbers such as time, number of nodes, and analysed states in the STATISTICS section. Based on this result, we note that our scheme is capable of preventing passive and active attacks such as replay, MITM, and impersonating, and that the goals of the scheme in Figure 7.19 achieved to prevent the violation of legitimate users information in the

network authorisation.

```

role centralServer(CS,Ci,AS:agent, KCSpu,KCpu,KASpu:public_key, H:hash_func, SND,RCV:channel(dy))
played_by CS def=
local
    State:nat, TSc, TScs, TSas, TSctm, TSctm, TSastm, Nc, Ncs, SNC, SNcs, SNctm, SNcstm:text, CSS1,CSS2,
    CSS3,CSS4,CSS5,CSS2tm,CSS3tm,CiS1,CiS2,CiS4,CiS1tm,CiS2tm,CiS4tm,CiS6tm:text,
    ASS2,ASS3,ASS7,ASS2tm,ASS3tm:text, Decision,Data:text,
    UNspl,UNspm,UNopl,UNopm,RNspl,RNspm,RNopl,RNopm, RNspn,RNopn,UNspn,UNopl:text
const
    sec2,sec3,sec4,sec7,auth1,auth2,auth3,auth4:protocol_id
init
    State := 0
transition
% CS receives XACML's request from Ci
1.State=0
    /\RCV(CS.CiS1tm'.RNspn'.UNspn'.Nc'.TSctm'.SNctm'.CiS2tm'.RNopn'.UNopn'.Nc'.CiS4tm')=>
    State':=1/\RNspl':=xor(RNspn',xor(CiS1tm',SNctm'))
    /\RNopl':=xor(RNopn',xor(CiS2tm',SNctm')) /\UNspl':=xor(UNspn',xor(CiS1tm',SNctm'))
    /\UNopl':=xor(UNopn',xor(CiS2tm',SNctm')) /\CiS4':=xor(CiS4tm',xor(UNspm,xor(UNopm,CiS2tm')))
    /\SNc':=xor(UNspm,xor(UNopm,xor(SNctm',xor(CiS4',CiS1tm'))))
    /\TSc':=xor(TSctm',xor(SNc',xor(RNspm,UNspm))) /\CSS1':={H(SNc')}_inv(KCpu)
    /\CiS1':=xor(CiS1tm',CSS1')/\CiS2':= xor(CiS2tm',CSS1')
    /\CSS2':={H(RNspm.UNspm.Nc'.TSc')}_inv(KCpu)
    /\CSS3':={H(RNopm.UNopm.Nc'.TSc')}_inv(KCpu)
    /\secret({SNc',CSS1',TSc'},sec2,{CS,Ci}) /\secret({CSS2',CSS3'},sec3,{CS,Ci,AS})
% CS creates authorisation request to AS
    /\$Ncs':=new() /\TScs':=new() /\CSS4':={H(SNcs')}_inv(KCSpu)
    /\CSS2tm':=xor(CSS2',CSS4') /\CSS3tm':=xor(CSS3',CSS4')
    /\Ncs':=xor(Nc',xor(TSc',xor(TScs',SNcs')))/\TSctm':=xor(TSc',xor(SNcs',xor(RNspm,UNspm)))
    /\TSctm':=xor(TScs',xor(SNcs',xor(RNopm,UNopm)))
    /\SNcstm':=xor(UNspm,xor(UNopm,xor(SNcs',xor(CiS4',CSS2tm'))))
    /\CiS4tm':=xor(CiS4',xor(UNspm,xor(UNopm,CSS3tm')))
    /\RNspn':=xor(RNspl,xor(CSS2tm',SNcstm')) /\RNopn':=xor(RNopl,xor(CSS3tm',SNcstm'))
    /\UNspn':=xor(UNspl,xor(CSS2tm',SNcstm')) /\UNopn':=xor(UNopl,xor(CSS3tm',SNcstm'))
% CS sends request to AS
    /\SND(AS.CSS2tm'.RNspn'.UNspn'.Ncs'.TSctm'.TSctm'.SNcstm'.CSS3tm'.RNopn'.UNopn'.CiS4tm')
    /\secret({RNspm,UNspm,RNopm,UNopm},sec4,{CS,AS}) /\secret({SNcs',CSS4',TSc',Nc'},sec7,{CS,AS})

% CS receives authorisation response from AS
2.State=1
    /\RCV(CS.ASS2tm'.UNspn'.TSastm')=>State':=2 /\CSS2tm':=xor(ASS2tm',xor(CSS4,CSS1))
    /\TScs':=new() /\TSctm':=xor(TSctm',xor(SNc,UNopm)) /\UNspn':=xor(UNspl,xor(CSS2tm',TSctm'))
    /\witness(CS,AS,auth3,{UNspm,UNopm,Nc,TSc,TSas})
% CS sends authorisation response to Ci
    /\SND(Ci.CSS2tm'.UNspn'.TSctm')

% CS receives Shamir's response from Ci
3. State = 2
    /\RCV(CS.CiS6tm'.UNspn'.TSctm')=>State':=3
    /\UNspl':=xor(UNspn',xor(CiS6tm',TSctm')) /\TSc':=xor(TSctm',xor(SNc,UNspm))
    /\CiS6tm':=xor(CiS6tm',xor(CSS1,CSS4)) /\request(CS,Ci,auth1,{UNspm,UNopm,TScs})
    /\TScs':=new() /\TSctm':=xor(TSctm',xor(SNcs,UNopm)) /\UNspn':=xor(UNspl,xor(CiS6tm',TSctm'))
% CS sends Shamir's response to AS
    /\SND(AS.CiS6tm'.UNspn'.TSctm')

% CS receives decision & data response from AS
4.State=3
    /\RCV(CS.ASS2tm'.ASS3tm'.UNspn'.TSastm'.Decision.Data)=>State':=4
    /\UNspl':=xor(UNspn',xor(ASS2tm',TSastm')) /\TSas':=xor(TSastm',xor(SNcs,UNopm))
    /\ASS7':=xor(CSS2,xor(CSS4,xor(CiS4,ASS2tm'))) /\CSS5':={H(Data)}_inv(KASpu)
    /\ASS2':=xor(ASS2tm',xor(CSS4,xor(ASS7,CiS4))) /\ASS3':=xor(ASS3tm,xor(CSS4,xor(ASS7,CiS4)))
    /\CiS4':=xor(ASS2tm',xor(CSS4,xor(ASS7,ASS2'))) /\request(CS,AS,auth4,{SNcs,CSS1,CiS4,TScs})
    /\TScs':=new() /\CSS2tm':=xor(CSS2,xor(CSS1,xor(CSS5,CiS4)))
    /\CSS3tm':=xor(CSS3,xor(CSS1,xor(CSS5,CiS4)))
    /\TSctm':=xor(TSctm',xor(SNc,UNopm)) /\UNspn':=xor(UNspl,xor(CSS2tm',TSctm'))
% CS sends decision & data response to Ci
    /\SND(Ci.CSS2tm'.CSS3tm'.UNspn'.TSctm'.Decision.Data)
    /\witness(CS,Ci,auth2,{SNc,CSS1,CiS4,TSc})
end role

```

Figure 7.16: *CS* role of PAX in HPLSL

```

role attributesServer(AS,CS,DS:agent, KASpu,KCSpu,KDSpu:public_key, Ssp,Sop:text,H:hash_func, SND
                    RCV:channel(dy))
played_by AS def=
local
    State:nat, TSc,TScs,TSas,TSds,TSctm,TSastm,TSdstm,Nc,Ncs,SNcs,SNastm:text,
    ASS1,ASS2,ASS3,ASS4,ASS5,ASS6,ASS7,ASS2tm,ASS3tm,ASS6tm:text, CiS4,CiS4tm,CiS6tm,CSS2,
    CSS3,CSS2tm,CSS3tm,DSS2tm,DSS4tm,DSS4:text, SP,OP,URsp,UNsp,URop,UNop,RNsp,RNop:text,
    UNsp1,UNspm,UNspn,UNopn,UNoph:text, RNsp1,RNspm,RNph,RNopn,RNopm,RNoph:text,
    RNspn,RNopn,UNspn,UNopn:text, S_ID,O_ID,S_R,O_R:message,Ci:agent,SSs,MS,Data,Decision:text
const
    sec1,sec3,sec4,sec5,sec6,sec7,sec8,sec9,sec10,auth3,auth4,auth5,auth6:protocol_id
init State := 0
transition
% AS receives from CS
1.State = 0
    /\RCV(AS.CSS2tm'.RNspn'.UNspn'.Ncs'.TSc'.TSctm'.SNcstm'.CSS3tm'.RNopn'.UNopn'.CiS4tm')=>
    State':= 1/\RNspl':=xor(RNspn',xor(CSS2tm',SNcstm')) /\RNopl':=xor(RNopn',xor(CSS3tm',SNcstm'))
    /\UNsp1':=xor(UNspn',xor(CSS2tm',SNcstm')) /\UNopl':=xor(UNopn',xor(CSS3tm',SNcstm'))
    /\CiS4':=xor(CiS4tm',xor(UNopn,xor(UNopm,CSS3tm'))))
    /\SNcs':=xor(UNspm,xor(UNopm,xor(SNcstm',xor(CiS4',CSS2tm'))))
    /\TSc':=xor(TSctm',xor(SNcs',xor(RNspm,UNspm))) /\TScs':=xor(TSctm',xor(SNcs',xor(RNopm,UNopm)))
    /\Nc':=xor(Ncs',xor(TSc',xor(TScs',SNcs')))) /\ASS1':={H(SNcs')}_inv(KCSpu)
    /\CSS2':=xor(CSS2tm',ASS1') /\CSS3':=xor(CSS3tm',ASS1')
    /\ASS2':={H(RNspm,UNspn,Nc'.TSc')}_inv(KCSpu) /\ASS3':={H(RNopm,UNopm,Nc'.TSc')}_inv(KCSpu)
    /\ASS4':={H(RNopn,UNoph,TSc')}_inv(KCSpu) /\SP':=URsp.UNsp /\OP':=URop.UNop
    /\secret({S_ID,O_ID,S_R,O_R},sec1,{AS,Ci}) /\secret({ASS2',ASS3'},sec3,{AS,CS,Ci})
    /\secret({RNspm,UNspm,RNopm,UNopm},sec4,{AS,CS}) /\secret({OP',CiS4'},sec5,{AS,DS,Ci})
    /\secret({SP',Ssp,MS,SSs},sec6,{AS,Ci}) /\secret({SNcs',ASS1',TScs',Nc},sec7,{AS,CS})
    /\secret(Sop,sec8,AS)
% AS creates Shamir's request
    /\TSas':=new() /\ASS2tm':=xor(ASS2,xor(SSs,xor(CiS4',Ssp)))
    /\TSastm':=xor(TSas',xor(SNcs',UNopm)) /\UNspn':=xor(UNsp1',xor(ASS2tm',TSastm'))
% AS sends Shamir's request to CS
    /\SND(CS.ASS2tm'.UNspn'.TSastm')

% AS receives Shamir's response from CS
2.State=1
    /\ RCV(AS.CiS6tm'.UNspn'.TScstm')=> State':= 2/\Unspl':=xor(UNspn',xor(CiS6tm',TScstm'))
    /\TScs':=xor(TSctm',xor(SNcs',UNopm)) /\MS':=xor(CiS6tm',xor(Ssp,ASS1))
    /\request(AS,CS,auth3,{UNspn,UNopm,Nc,TSc,TSas})
% AS creates data retrieval request
    /\SNas':=new() /\TSas':=new() /\ASS5':={H(SNas')}_inv(KASpu)
    /\ASS6':={H(RNopm,UNopm,SNas',TSas'.CiS4)}_inv(KASpu)
    /\RNopn':=xor(RNopn,xor(TSas',SNas')) /\ASS6tm':=xor(ASS6',xor(TSas',ASS5'))
    /\TSctm':=xor(TSc,xor(SNas',UNoph)) /\TSastm':=xor(TSas',xor(SNas',UNopm))
    /\SNastm':=xor(UNopm,xor(SNas',xor(CiS4',ASS6tm')))
    /\CiS4tm':=xor(CiS4,xor(UNopn,xor(SNastm',UNopm))) /\UNopn':=xor(UNopn,xor(ASS6tm',TSastm'))
    /\secret({SNas',ASS5',TSas'},sec9,{AS,DS}) /\secret({RNopn,UNopn,ASS6'},sec10,{AS,DS})
% AS sends data retrieval request to DS
    /\SND(DS.ASS6tm'.RNopn'.UNopn'.SNastm'.TScstm'.TSastm'.CiS4tm')
    /\ witness(AS,DS,auth5,{CiS4,ASS6})

% AS receives data retrieval response from DS
3.State=2
    /\ RCV(AS.DS.DSS2tm'.DSS4tm'.UNopn'.TSdstm'.CiS4tm'.Data) => State':=3
    /\UNopl':=xor(UNopn',xor(DSS2tm',TSdstm')) /\TSds':=xor(TSdstm',xor(SNas,UNopn))
    /\CiS4':=xor(CiS4tm',xor(ASS5,TSds')) /\DSS4':=xor(DSS4tm',xor(ASS5,CiS4'))
    /\ASS6':=xor(DSS2tm',xor(DSS4',xor(TSds',ASS5))) /\ASS7':={H(Data)}_inv(KDSpu)
    /\request(AS,DS,auth6,{SNas,ASS5,RNopn,UNoph})
% AS creates decision & data response
    /\TSas':=new() /\ASS2tm':=xor(ASS2,xor(ASS1,xor(ASS7,CiS4)))
    /\ASS3tm':=xor(ASS3,xor(ASS1,xor(ASS7,CiS4))) /\TSastm':=xor(TSas',xor(SNcs,UNopm))
    /\UNspn':=xor(UNsp1,xor(ASS2tm',TSastm'))
% AS sends data retrieval response (Data and Decision) to CS
    /\SND(CS.ASS2tm'.ASS3tm'.UNspn'.TSastm'.Decision.Data)
    /\witness(AS,CS,auth4,{SNcs,ASS1,CiS4,TScs})
end role

```

Figure 7.17: AS role of PAX in HLPSL

```

role dataServer(DS,AS:agent, KDSpu,KASpu:public_key, H:hash_func,SND,RCV:channel(dy))
played_by DS def=
local
    State:nat,
    TSc,TSctm,TSas,TSastm,TSds,TSdstm,SNas,SNastm:text,
    OP,UNopl,UNopm,UNoph:text, RNopl,RNopm,RNoph,RNopl,UNopn,UNopn:text,
    DSS1,DSS2,DSS3,DSS4:text, DSS2tm,DSS4tm,CiS4,CiS4tm,ASS6tm:text,
    Ci:agent,Data:text
const sec5,sec9,sec10,auth5,auth6:protocol_id
init State := 0
transition
1.State = 0
    /\ RCV(DS.ASS6tm'.RNopl'.UNopn'.SNastm'.TSctm'.TSastm'.CiS4tm')=>State':=1
    /\UNopl':=xor(UNopn',xor(ASS6tm',TSastm')) /\CiS4':=xor(CiS4tm',xor(UNoph,xor(SNastm',UNopm)))
    /\SNas':= xor(UNopm,xor(SNastm',xor(CiS4',ASS6tm'))) /\TSc':=xor(TSctm',xor(SNas',UNoph))
    /\TSas':=xor(TSastm',xor(SNas',UNopm)) /\RNopl':=xor(RNopn',xor(TSas',SNas'))
    /\DSS1':={H(SNas')}_inv(KASpu) /\DSS2':={H(RNopm.UNopm.SNas'.TSas'.CiS4')}_inv(KASpu)
    /\DSS3':={H(RNoph.UNoph.TSc')}_inv(KASpu)
    /\secret({OP,CiS4'},sec5,{DS,AS,Ci}) /\secret({SNas',DSS1',TSas'},sec9,{DS,AS})
    /\secret({RNoph,UNoph,DSS2'},sec10,{DS,AS}) /\request(DS,AS,auth5,{CiS4,DSS2})
% DS Creates data retrieval response
    /\TSds':=new() /\DSS4':={H(Data)}_inv(KDSpu) /\DSS4tm':=xor(DSS4',xor(DSS1',CiS4'))
    /\DSS2tm':=xor(DSS2',xor(DSS4',xor(TSds',DSS1')))) /\CiS4tm':=xor(CiS4',xor(DSS1',TSds'))
    /\TSdstm':=xor(TSds',xor(SNas',UNoph)) /\UNopn':=xor(UNopl',xor(DSS2tm',TSdstm'))
% DS sends data retrieval response to AS
    /\SND(AS.DSS2tm'.DSS4tm'.UNopn'.TSdstm'.CiS4tm'.Data)
    /\ witness(DS,AS,auth6,{SNas,DSS1,RNoph,UNoph})
end role

```

Figure 7.18: *DS* role of PAX in HLPSL

7.3.2.3 Security Comparison

In this Section, we explain how PAX addresses the gaps in related works (Gajanayake et al. 2014, Riedl et al. 2008, Quantin et al. 2011, Sun et al. 2011, Chadwick et al. 2006, Jo & Chung 2015, Seol et al. 2018, Wang et al. 2019, Shafeeq et al. 2019).

PAX has not suffered from PERMIS’s problems (Chadwick et al. 2006) because each request to the healthcare provider has been signed randomly with the ECDSA algorithm, which includes both the roles (RN_s) and the pseudonyms (UN_s). In PAX, the policies are stored on the attributes server as Sigs and pseudonym rather than as explicit attributes in XACML (each user in PAX has attributes separate from other users that prevent the inheritance of attributes). Compared with (Quantin et al. 2011), PAX has solved all requests standardization and structure problems by including XACML v3.0 and ECDSA. XACML v3.0 offers standardization, and generic and rich policy language and is unified with the context of subjects’ requests. It does not have problems converting requests from different sources. We also use ECDSA to generate very small keys relative to RSA to improve server performance. Furthermore, PAX does not need the keys complexity in PIPE (Riedl et al. 2008) because XACML has the flexibility to handle practitioners and patients’ requests as well as we use only one high-performance signature algorithm. In our project, all the attributes in the requests and policies are not clearly written as in (Gajanayake et al. 2014) . Moreover, data is anonymous

to the patient when the data transferred from the source to the target because it is linked with a random pseudonym.

```

role session(Ci,CS,AS,DS:agent, KCpu,KCSpu,KASpu,KDSpu:public_key, H:hash_func, S_ID,O_ID,S_R,
            O_R:message,Ssp,Sop:text)
def=
local SND1,RCV1,SND2,RCV2,SND3,RCV3,SND4,RCV4:channel(dy)
composition
    clienti(Ci,CS,KCpu,KCSpu,H,S_ID,O_ID,S_R,O_R,SND1,RCV1)
    /\centralServer(CS,Ci,AS,KCSpu,KCpu,KASpu,H,SND2,RCV2)
    /\attributesServer(AS,CS,DS,KASpu,KCSpu,KDSpu,Ssp,Sop,H,SND3,RCV3)
    /\dataServer(DS,AS,KDSpu,KASpu,H,SND4,RCV4)
end role

role environment()
def=
const
    ci,cs,as,ds,i:agent, kCpu,kCSpu,kASpu,kDSpu,ki:public_key,s_id,o_id,s_r,o_r:message, ssp,sop:text,
    h:hash_func, sec1,sec2,sec3,sec4,sec5,sec6,sec7,sec8,sec9,sec10,
    auth1,auth2,auth3,auth4,auth5,auth6,auth7,auth8:protocol_id

    intruder_knowledge={i,ci,cs,as,kCpu,kCSpu,kASpu,kDSpu,ki,inv(ki)}
composition
    session(ci,cs,as,ds,kCpu,kCSpu,kASpu,kDSpu,h,s_id,o_id,s_r,o_r,ssp,sop)
    % Check replay attack
    /\session(ci,cs,as,ds,kCpu,kCSpu,kASpu,kDSpu,h,s_id,o_id,s_r,o_r,ssp,sop)
    % Check MITM attack
    %/\session(cs,ci,as,ds,kCSpu,kCpu,kASpu,kDSpu,h,s_id,o_id,s_r,o_r,ssp,sop)
    % Check impersonate Ci
    %/\session(i,cs,as,ds,ki,kCSpu,kASpu,kDSpu,h,s_id,o_id,s_r,o_r,ssp,sop)
    % Check impersonate CS
    %/\session(ci,i,as,ds,kCpu,ki,kASpu,kDSpu,h,s_id,o_id,s_r,o_r,ssp,sop)
    % Check impersonate AS
    %/\session(ci,cs,i,ds,kCpu,kCSpu,ki,kDSpu,h,s_id,o_id,s_r,o_r,ssp,sop)
    % Check impersonate DS
    %/\session(ci,cs,as,i,kCpu,kCSpu,kASpu,ki,h,s_id,o_id,s_r,o_r,ssp,sop)
end role

goal
    secrecy_of sec1,sec2,sec3,sec4,sec5,sec6,sec7,sec8,sec9,sec10
    authentication_on auth1,auth2,auth3,auth4,auth5,auth6,auth7,auth8
end goal
environment()

```

Figure 7.19: Session, environment, and goal roles of PAX in HLPSL

Instead of one situation (emergency) as in HCPP, our project used several realistic situations such as doctor advisors, physician researchers, emergency doctors, and patients' relatives for healthcare users and used the XACML v3.0 policy language, which is effective for authorising users. Our project does not require continuous mining (Sun et al. 2011) of patient data, but relies on internal pseudonym to access medical records. XACS (Jo & Chung 2015) offers protection only against external attacks, whereas PAX offers protection against internal and external attacks by preventing attackers from identifying the personal information of legitimate users or patients' data. Finally, The access control model in (Seol et al. 2018) deals with real attributes, whereas PAX integrates signatures and pseudonyms within XACML's policies and requests to prevent the exchange of users' attributes clearly during the authorisation process in healthcare applications (Seol et al. 2018).

```

SUMMARY
SAFE

DETAILS
BOUNDED_NUMBER_OF_SESSIONS
TYPED_MODEL

PROTOCOL
/home/span/span/testsuite/results/PAX.if

GOAL
As Specified

BACKEND
CL-AtSe

STATISTICS

Analysed : 6912 states
Reachable : 6912 states
Translation: 2.12 seconds
Computation: 139.21 seconds

```

Figure 7.20: Simulation result of PAX using CL-AtSe backend

Table 7.4: Comparison of security features between PAX and other authorisation schemes

Security feature	Chadwick et al. (2006)	Quantin et al. (2011)	Riedl et al. (2008)	Gajanayake et al. (2014)	Sun et al. (2011)	Jo & Chung (2015)	Seol et al. (2018)	Wang et al. (2019)	Shafeeq et al. (2019)	PAX scheme
Mutual authentication								✓	✓	✓
Preserving anonymity		✓	✓		✓		✓	✓	✓	✓
Pseudonym		✓	✓		✓			✓	✓	✓
Anti DoS	✓		✓		✓		✓			✓
Anti dataset attack										✓
Anti MITM	✓	✓	✓		✓	✓	✓	✓	✓	✓
Anti replay	✓		✓	✓	✓	✓	✓	✓	✓	✓
Anti privileged insider					✓			✓		✓
Anti traceability			✓		✓					✓
Anti impersonation					✓				✓	✓
Anti timing					✓					✓
Anti leakage			✓		✓		✓	✓		✓
Authorisation policies	✓			✓		✓	✓	✓	✓	✓

The scheme in (Wang et al. 2019) suffers from impersonation and timing threats as well as the intruder can exploit cases of indirect users to trigger DoS attack. PAX uses mutual authentication to prevent impersonation attacks and it uses random signatures to prevent timing and DoS attacks. The scheme in (Shafeeq et al. 2019) focuses on protecting the authorisation policy without paying attention to secure trusted authority and the single key in symmetric encryption. Also, their scheme relies solely on the ABAC model to determine access to the repository. PAX integrates security advantages into both RBAC and ABAC and does not have datasets/keys protection problems. Table 7.4 compares the security features provided in PAX and related works.

7.3.3 Performance Analysis

In this Section, the theoretical and experimental performance analysis and performance comparison with existing studies are presented to examine the computation processes of PAX in improving the performance of authorisation processes.

7.3.3.1 Theoretical Performance Analysis

When the users become authenticated within the network it needs to send authorisation requests to the servers to access patients' data in the EHR repository. Authorisation requests should perform lightweight processes to maintain network performance, especially if the user performs many authorisation requests at frequent and convergent times. PAX relies mainly on a range of techniques, such as ECDSA, XACML, Shamir scheme and random pseudonyms that perform lightweight procedures compared to other technologies.

First, PAX uses the ECDSA algorithm to sign subjects and objects information in both requests and policies. This algorithm is ideal for authorisation schemes compared to public key signature algorithms as described in Chapter 2, Table 2.2. To maintain performance, we were careful to reduce the number of signatures to reduce the burden on users' devices and servers. For instance, full processing of sending an authorisation request to access patients' data requires $C_i = 6$ signatures, $CS = 5$ signatures, $AS = 7$ signatures and $DS = 4$ signatures (indirect users case). In short, reducing the number of signatures will improve the performance of the PAX scheme. In addition, PAX uses XACML technology to build robust policies in determining access to patient data. Overall, XACML excels on several technologies such as OAuth, XACL, EPAL, ODRL and SAML in terms of efficient management and authorisation of data access. XACML provides the best caching storage procedures (Ilhan et al. 2015), flexibility in defining multiple rules, simplicity in configuring policy combination (Duan et al. 2016), response times, the grouping of requests and making decisions (WSO2 Team 2017) of existing technologies.

Furthermore, PAX relies on the Shamir scheme to prevent tracking of user information in special cases such as advisor, relative, researcher and emergency rather than encryption mechanisms. The Shamir scheme provides PAX with robust security while performing light operations compared to encryption procedures. PAX uses the Shamir sheme only in cases of indirect users which are relatively lower from direct users such as nurses and doctors. As a result, authorisation requests with the Shamir scheme will be less, namely, the burden on the servers CS and AS will be lower. Moreover, the PAX scheme uses the Shamir scheme with $TH = 3 - 10$. The

dependency of TH with efficient range allows Shamir scheme to support both security and performance in PAX meritoriously (Al-Adhami et al. 2017). Finally, PAX uses random pseudonyms to prevent sending real information through the network instead of k-anonymity and encryption mechanisms that perform complex processes and increase overheads. Therefore, PAX is considered a performance efficient scheme because it supports lightweight and high-performance mechanisms.

7.3.3.2 Experimental Performance Analysis

In this Section, we will show PAX's performance in healthcare applications. We will provide tests on the signature algorithm (ECDSA-256bit). Furthermore, communication costs (storage overheads) and computation (execution time) are calculated to extract PAX's performance. Applications codes (C_i , CS , AS and DS) have written in Java Programming Language. The authorisation decision engine is supported on the Balana XACML 3.0 open source available at <https://github.com/wso2/balana>, it explained and managed by the WSO2 server. We used Maven to deal with Balana XACML as a library in Java. Also, PAX's results have implemented on Ubuntu 16.04 LTS, processor Intel Core i5 2.6GHz, OS type 32-bit, Memory 4 GiB and disk 32.0 GB.

To compute the cost of communication, we compute the bits of all security parameters. Signature's length (ECDSA) is 256 bit. The number of messages transmitted through the direct user authorisation is 6 and indirect user authorisation is 10. In addition, response size is 196 bytes to 205 bytes, request size is 1166 bytes to 1171 bytes, policy size is 1363 bytes to 1372 bytes, policy with Shamir size is 1363 bytes to 1369 bytes, users' information (attributes) is 549 bytes to 621 bytes, non-real patient's data is 354 bytes to 500 bytes and non-real all patients' data size for researchers is 910 bytes to 2780 bytes (25 patients).

On the C_i side, it produces a request of subject's attributes ($C_iSig_1 = 72$, $RN_{sp_{tm}} = 8$, $UN_{sp_{tm}} = 8$, $N_C = 8$, $TS_{C_{tm}} = 8$ and $SN_{C_{tm}} = 8$) and object's attributes ($C_iSig_2 = 64$, $RN_{op_{tm}} = 8$, $UN_{op_{tm}} = 8$, $N_C = 8$ and $C_iSig_4 = 64$). The total size of the parameters is 264 bytes and the number of bits (attributes) inside the XACML's request is 2112 bit. When C_i sends response to CS , this response includes security parameters ($C_iSig_{6_{tm}} = 72$, $UN_{sp_{tm}} = 8$, and $TS_{C_{tm}} = 8$). The total size of the parameters is 88 bytes and the number of bits inside the XACML's response is 704 bit. On the CS side, it produces a request subject's attributes ($CSSig_2 = 72$, $RN_{sp_{tm}} = 8$, $UN_{sp_{tm}} = 8$, $N_{CS} = 8$, $TS_{C_{tm}} = 8$, $TS_{CS_{tm}} = 8$ and $SN_{C_{tm}} = 8$) and object's attributes ($CSSig_3 = 64$, $RN_{op_{tm}} = 8$, $UN_{op_{tm}} = 8$, $N_C = 8$ and $C_iSig_4 = 64$). The total size of the parameters is 272 bytes and the number of bits inside the XACML's

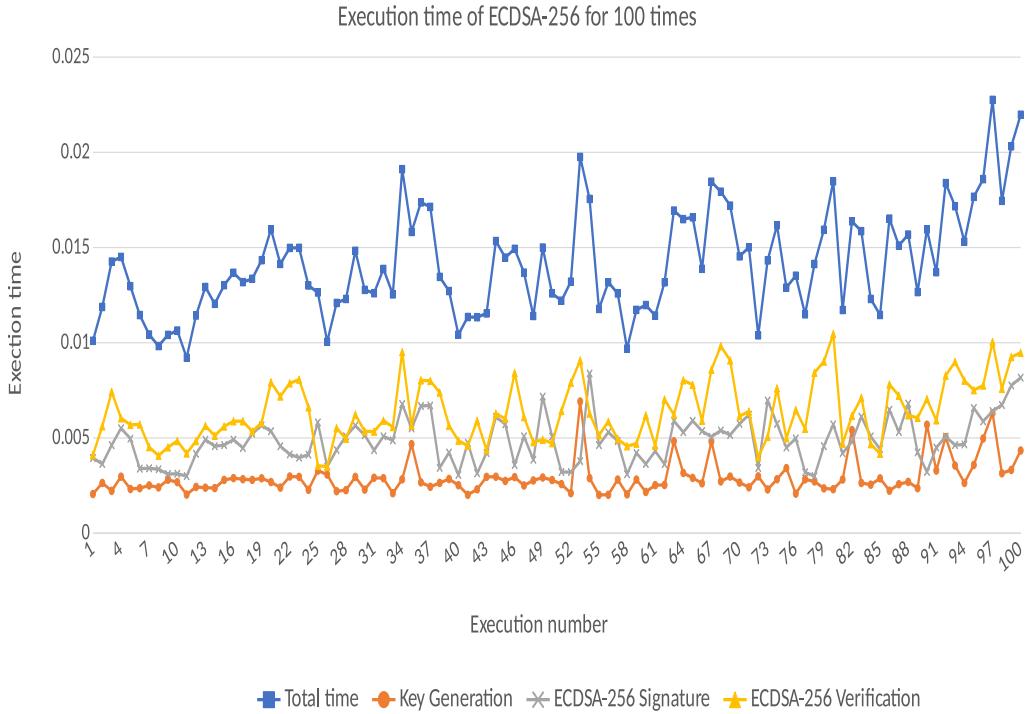


Figure 7.21: Implementations of ECDSA 256-bit

request is 2176 bit. When CS sends response to C_i , this response includes security parameters ($CSSig_{2_{tm}} = 64$, $CSSig_{3_{tm}} = 64$, $UN_{sp_{tm}} = 8$, and $TS_{CS_{tm}} = 8$). The total size of the parameters is 144 bytes and the number of bits inside the XACML's response is 1152 bit. On the AS side, it produces a XACML's request that include security parameters ($ASSig_{6_{tm}} = 64$, $RN_{op_{tm}} = 8$, $UN_{op_{tm}} = 8$, $SN_{C_{tm}} = 8$, $TS_{C_{tm}} = 8$, $TS_{AS_{tm}} = 8$ and $C_iS_{4_{tm}}$). The total size of the parameters is 168 bytes and the number of bits inside the XACML's request is 1344 bit. Also, it produces a response's attributes ($ASSig_2 = 72$, $ASSig_3 = 64$, $UN_{sp_{tm}} = 8$ and $TS_{AS_{tm}} = 8$). The total size of the parameters is 152 bytes and the number of bits inside the XACML's request is 1216 bit. On the DS side, it produces a response's attributes ($DSSig_2 = 72$, $DSSig_4 = 64$, $UN_{op_{tm}} = 8$, $TS_{DS_{tm}} = 8$ and $C_iSig_{4_{tm}} = 72$). The total size of the parameters is 224 bytes. The total size of the parameters is 86 bytes and the number of bits inside the XACML's request is 1792 bit.

To compute the cost of computation, we had obtained preliminary results about running time for ECDSA-256 key generation, signature and verification (100 times, information size of 1166 bytes) as shown in Figure 7.21. We noted execution time of ECDSA's procedures is faster than signature algorithms depending results in (Suárez-Albela et al. 2019). The minimum execution time for ECDSA-256 bit key generation is 0.002009 ms, signature is 0.002994 ms, verification is 0.003496 ms and full time for ECDSA-256 bit is 0.00921 ms.

7.3.3.3 Performance Comparison

In this Section, we will compare the superiority of PAX over the authorisation schemes in the performance side. Although the implementation environment for authorisation schemes varies, we have made some comparisons that demonstrate the superiority of PAX's performance over existing schemes.

The scheme in (Chadwick et al. 2006) is based on X.509 to manage certificates/security policies and Shibboleth authentication to provide single sign-on. Their scheme requires additional storage for certificates (PKCS#12) as well as policies. Also, the implementation of Shibboleth on servers performs complex operations affecting the performance of servers and it does not tune with the speed of the Internet. In addition, Shibboleth has a security vulnerability that may allow unauthorised users to access EHR repository frequently and that affects network performance. PAX relies on XACML for efficient policy management and ECDSA-256 bit and produces small keys for signing authorisation requests more efficiently and securely than Shibboleth. PAX also does not require additional storage to store certificates. The scheme in (Riedl et al. 2008) suffers from problems with multiple key complexity expenses, the complexity of encryption and the consumption of storage sources that adversely affect server performance. While PAX uses the ECDSA public key algorithm that does not require large storage (small keys) and the use of random public/private keys without complexity (Riedl et al. 2008). The scheme in (Quantin et al. 2011) has major problems with low performance: the diversity of authorisation requests contexts and the cost of encrypting data by RSA. Compared to PAX, it uses XACML which is efficient in standardising contexts of authorisation requests as well as ECDSA which provides better performance efficiency than RSA.

Moreover, instead of using four access control models (DAC, MAC, RBAC and PBAC) in the scheme (Gajanayake et al. 2014), these models further complicate authorisation processes and the difficulty of managing security policies and authorisation requests. PAX relies on RBAC and ABAC to determine users access to data with support for flexibility, ease of implementation and efficient management. The XACS scheme in (Sun et al. 2011) uses XML to design an authorisation system. XML fundamentally is used to structure data/information and not to specify access to the repository. Using XML authorisation policies reduces performance in responding to authorisation requests. PAX uses XACML which is essentially designed to manage efficiently authorisation policies and users' requests. The HCPP scheme in (Jo & Chung 2015) relies on encryption to protect the database and

prospecting/searching to access legitimate users' information. Both mechanisms consume storage and server time. PAX relies on signatures to protect users' information without the need for full encryption of the database. It also relies on multiple pseudonyms to efficiently access users' information. The scheme in (Seol et al. 2018) is based on XACML 2.0, which has problems with decision precedence between 'Not Applicable' and 'Indeterminate'. Also, their scheme performs the process of signing the encrypted information in the authorisation request partly or fully. PAX relies on XACML 3.0 which is more functionality, faster and better logical results in decision precedence. Also, PAX performs the signing process directly on users' attributes only without overheads of encryption.

The scheme in (Wang et al. 2019) suffers from many shortcomings affecting performance such as data/policy decryption costs, use of RSA for encryption and signing, costing and management of secret key, management of users' attributes by a single authority, updating of keywords list when adding new keyword and operations search by keywords consumes server time. Compared to PAX, it does not require costly decryption operations and uses XACML and pseudonyms techniques to access patients' data safely and with high performance. The scheme in (Shafeeq et al. 2019) has heavy storage and computation costs. Their scheme requires a large size for key storage. In addition, using multi-signature is extremely expensive on network performance as the size of the signature increases with the number of signatures. Moreover, their scheme requires the size of 2500 character to store policy and 5 seconds to fetch the policy. While PAX requires 256 bits for key storage, size 1180 character for policy storage without Shamir, size 1186 character for policy storage with Shamir and less than a second to fetch policy. Ultimately, PAX does not require encryption costs used in schemes (Riedl et al. 2008, Quantin et al. 2011, Jo & Chung 2015, Seol et al. 2018, Wang et al. 2019) but relies on signatures performed efficiently by ECDSA.

Table 7.5 shows performance comparison between PAX and existing authorisation schemes (H_E is high efficiency, M_E is medium efficiency, L_E is Low efficiency, F is flexibility, S is scalability, G is granularity, Enc is encryption and Sig is signature).

7.4 Discussion and Analysis of Storage Scheme

In this Section, we will discuss security and performance analyses for REISCH scheme as well as comparison with existing schemes. Analyses demonstrate that REISCH is efficient for use in patients' data collection within the HWSN environment in terms of security and performance.

Table 7.5: Comparison of performance between PAX and existing authorisation schemes

Scheme	Storage	Management	Communication	Computation
Chadwick et al. (2006)	M_E	M_E (X.509)	S	H_E (Sig)
Riedl et al. (2008)	L_E	L_E	S	L_E ($Enc + Sig$)
Quantin et al. (2011)	M_E	L_E (MRSE)	S	L_E ($Enc + Sig$)
Gajanayake et al. (2014)	-	M_E (Models)	-	-
Sun et al. (2011)	M_E	L_E (SSE)	S	M_E ($Enc + Sig$)
Jo & Chung (2015)	L_E	M_E (XML)	$F + G$	M_E (Enc)
Seol et al. (2018)	H_E	H_E (XACML)	$F + S + G$	L_E ($Enc + Sig$)
Wang et al. (2019)	L_E	L_E (ABE)	$S + G$	L_E ($Enc + Sig$)
Shafeeq et al. (2019)	L_E	H_E (XACML)	$F + S + G$	M_E ($Enc + Sig$)
PAX	H_E	H_E (XACML)	$F + S + G$	H_E (Sig)

7.4.1 Security Analysis

In this Section, the theoretical, experimental security analyses and security comparison are provided to examine REISCH protocols in repelling known attacks.

7.4.1.1 Theoretical Security Analysis

In this Section, we will provide theoretical attacks analysis and mathematical proof of the REISCH scheme in repealing known threats.

7.4.1.1.1 Attacks Analysis on REISCH Scheme

In this Section, we will examine REISCH scheme theoretically on a set of threats mentioned in the threat model. We will provide a theoretical analysis of REISCH resistance to known attacks as in the following:

- **Proposition 1**

I cannot achieve MITM and replay attacks against REISCH scheme.

Proof

An intruder tries to change or delete part of data/information when transferred among network's entities. This situation is not possible because REISCH applies the ECDSA algorithm to sign data as well as some information such as SN_{Pseud} . Additionally, an intruder cannot replay message late due to all REISCH's entities use timestamps such as SN_{TS} and CH_{TS} . Consequently, REISCH resists MITM and replay attacks successfully.

- **Proposition 2**

I will not benefit from using DoS attacks against REISCH servers.

Proof

An intruder applies DoS attack to destroy availability service in servers such as LS and CS . The servers in REISCH initially check lightweight parameters

such as $SigLsE_i$ in LS and CS_{Pseud_o} in CS before completion of the authentication process. Moreover, these parameters change randomly in the communication process among entities. This procedure allows for servers to check small parameters and prevent DoS duplicate messages. Therefore, REISCH withstands against DoS threats.

- **Proposition 3**

I cannot implement localisation attacks to deceive sensors and servers.

Proof

An intruder tries to use the Sybil attack by using many legitimate SN's IDs with Fake data. Due to SN_i waits for random $SigLsE_i$ from LS per round, namely, that intruder cannot deceive LS with fake data. Also, an intruder uses Wormhole attack by using many SN_i to camouflage communications among network entities. Each SN_i sends implicitly SN_{SL_i} to LS and Dif to CH_i as well as a timestamp. These parameters prevent counterfeit communications. Furthermore, an intruder aims to apply Sinkhole attack by using node as a sink to attract all patients' data from SN_i . This threat cannot apply on REISCH because LS sends unique LS_{OTP_i} including $SigLS_i(SN_{Pseud_i})$ for all SN_i . That intruder fails to detect $SigLS_i$ and SN_{Pseud_i} . Hence, REISCH strongly overcomes on localisation attacks.

- **Proposition 4**

I does not have the ability to penetrate EMR repository.

Proof

Assume that an intruder can penetrate datasets in LS . Firstly, LS does not contain real patient information (real information such as the name is stored in AS). When the intruder gets this data, he/she cannot disclose that this data belongs to a particular patient. Secondly, the LS 'datasets are very difficult to penetrate. Furthermore, LS contains partial data for patients because the total data and patients' history are transferred to DS by CS periodically. Thereupon, REISCH resists EMR repository attack.

- **Proposition 5**

EI will not get any benefit from eavesdropping in the disclosure of personal information of collected data.

Proof

When an intruder eavesdrops and gets some messages transferred among SN_i , CH_i , LS and CS . This intruder will not benefit from these messages trapped because these messages contain no real information, as well as the secret parameters, are completely hidden. Thus, REISCH prevents eavesdropping attacks from revealing patients' information.

- **Proposition 6**

I cannot perform node replication attacks.

Proof

An intruder applies node replication attack by using more one SN_i with same legitimate ID. In REISCH, we suppose that all SN_i inside a specific area in the hospital or clinic. Therefore, any SN_i outside this area extremely difficult to send messages from fake SN_i with same legitimate ID. In addition, LS waits SN_m by CH_i at the same number of SN_i which LS remove replicated SN_m or $SigSnT_3$. Also, when SN_i dies, LS records this situation in the dataset to prevent replication risks. In a result, REISCH resists effectively replication attacks.

- **Proposition 7**

I does not have the ability to perform collision and preimage attacks against REISCH algorithms.

Proof

An intruder tries to implement collision (generation two different messages that produce the same MD = $h(m) = h(m')$), preimage (generation a message that produces the same existing MD value as $h(m) = MD$) and second preimage (generation a different message from the received message and produce the same existing MD value) attacks when messages and signatures transferred among REISCH's entities. These attacks cannot implement on REISCH protocols because our protocols use BLAKE2bp hash instead of SHA1 that resists these attacks. Consequently, REISCH successfully prevents collision and preimage attacks.

7.4.1.1.2 REISCH Scheme with BAN

In this Section, we will prove REISCH security by BAN logic.

- **Goals:** REISCH must provide the following goals to securely exchange messages among REISCH entities.

- **G1:** $SN_i \equiv LS \equiv (LS \xrightarrow{LSOTP_i} SN_i)$
- **G2:** $SN_i \equiv LS \sim SigLsE_i$
- **G3:** $CH_i \equiv LS \equiv (LS \xrightarrow{LSOTP_i} CH_i)$
- **G4:** $CH_i \equiv LS \sim SigLsE_i$
- **G5:** $SN_i \equiv CH_i \xrightarrow{Dif} SN_i$
- **G6:** $CH_i \equiv LS \xrightleftharpoons{CH_m} CH_i$
- **G7:** $CS \equiv LS \xrightleftharpoons{LSOTP} CS$
- **G8:** $CS \equiv LS \sim SigLS$
- **G9:** $LS \equiv CS \xrightleftharpoons{CS_m} LS$
- **G10:** $LS \equiv CS \sim SigCS$
- **G11:** $CS \equiv LS \xrightleftharpoons{LS_m} CS$

- **Idealized form:** The messages (M) are represented in a BAN formula. The normal REISCH messages are shown as follows:

- **M1:** $LS \rightarrow SN_i: LS_{OTP_i} = SigLS_i(SN_{Pseud_i}) \oplus SigLsE_i || SN_{RN_i}$
- **M2:** $LS \rightarrow CH_i: LS_{OTP_i} = SigLS_i(CH_{Pseud_i}) \oplus SigLsE_i || CH_{RN_i}$
- **M3:** $SN_i \rightarrow CH_i: SN_m = SigSnT_3 || SigSnT_4 || SN_{RN_i} || Dif || SN_{TS_t} || Data$
- **M4:** $CH_i \rightarrow LS: CH_m = CH_P \oplus SigChT_2 || CH_{RN_i} || SS || CH_A$
- **M5:** $LS \rightarrow CS: LS_{OTP} = SigLS(CS_{Pseud_o}) \oplus LS_{Pseud_n} \oplus LS_{TS_2} || SS$
- **M6:** $CS \rightarrow LS: CS_m = SigCS(CsT_2) || CsT_1 || CsT_2 || SS || CS_{RN}$
- **M7:** $LS \rightarrow CS: LS_m = SigLS_5 || SS || LS_{RN} || Data$

The idealized form messages for REISCH are shown as follows:

- **M1:** $LS \rightarrow SN_i: \langle \{SigLS_i(SN_{Pseud_i})\}_{KSN_{pu}}, SigLsE_i, SN_{RN_i} \rangle \xrightarrow[LS \xleftarrow{LS_{OTP_i}} SN_i]{} SN_i$
- **M2:** $LS \rightarrow CH_i: \langle \{SigLS_i(CH_{Pseud_i})\}_{KCH_{pu}}, SigLsE_i, CH_{RN_i} \rangle \xrightarrow[LS \xleftarrow{LS_{OTP_i}} CH_i]{} CH_i$
- **M3:** $SN_i \rightarrow CH_i: \langle SigSnT_3, SigSnT_4, SN_{RN_i}, Dif, SN_{TS_t}, Data \rangle \xrightarrow[SN_i \xleftarrow{SN_m} CH_i]{} CH_i$
- **M4:** $CH_i \rightarrow LS: \langle CH_P, SigChT_2, CH_{RN_i}, SS, CH_A \rangle \xrightarrow[CH_i \xleftarrow{CH_m} LS]{} LS$
- **M5:** $LS \rightarrow CS: \langle \{SigLS(CS_{Pseud_o})\}_{KCS_{pu}}, LS_{Pseud_n}, LS_{TS_2}, SS \rangle \xrightarrow[LS \xleftarrow{LS_{OTP}} CS]{} CS$
- **M6:** $CS \rightarrow LS: \langle \{SigCS(CsT_2)\}_{KLS_{pu}}, CsT_1, CsT_2, SS, CS_{RN} \rangle \xrightarrow[CS \xleftarrow{CS_m} LS]{} LS$
- **M7:** $LS \rightarrow CS: \langle SigLS_5, SS, LS_{RN}, Data \rangle \xrightarrow[LS \xleftarrow{LS_m} CS]{} CS$

- **Hypotheses:** Sets of hypotheses to analyse REISCH's security.

- **H1:** $SN_i \equiv \#(SN_{RN_i}, SN_{TS})$.
- **H2:** $CH_i \equiv \#(CH_{RN_i}, CH_{TS})$.
- **H3:** $LS \equiv \#(LS_{RN}, LS_{TS})$.
- **H4:** $CS \equiv \#(CS_{RN}, CS_{TS})$.
- **H5:** $LS \equiv LS \xrightarrow{KSN_{pu}} SN_i$.
- **H6:** $LS \equiv LS \xrightarrow{KCH_{pu}} CH_i$.
- **H7:** $SN_i \equiv SN_i \xrightarrow{KLS_{pu}} LS$.
- **H8:** $CH_i \equiv CH_i \xrightarrow{KLS_{pu}} LS$.
- **H9:** $LS \equiv LS \xrightarrow{KCS_{pu}} CS$.
- **H10:** $CS \equiv CS \xrightarrow{KLS_{pu}} LS$.
- **H11:** $LS \equiv CH_i \implies (LS \xrightarrow{SigChT_2} CH_i)$.
- **H12:** $CS \equiv LS \implies (CS \xrightarrow{LS_{Pseud_n}} LS)$.
- **H13:** $LS \equiv CS \implies (LS \xrightarrow{CS_{Pseud_n}} CS)$.
- **H14:** $SN_i \equiv LS \implies (LS \xrightarrow{SN_{RN_i}} SN_i)$.
- **H15:** $CH_i \equiv LS \implies (LS \xrightarrow{CH_{RN_i}} CH_i)$.
- **H16:** $CH_i \equiv SN_i \implies (SN_i \xrightarrow{SigSnT_2} CH_i)$.

- **Proofs:** We have used BAN logic to prove goals based on rules and hypotheses.

- **M1:** $LS \rightarrow SN_i:$

- * **SR:**
Using SR and S1: $SN_i \triangleleft SigLsE_i$
- * **MMR and BR:**
Using MMR, BR, H5 and S1, S2: $SN_i \equiv LS \sim SigLsE_i$ (**G2**)
- * **FCR and NVR:**
Using FCR, NVR, H3 and S2, S3: $SN_i \equiv LS \equiv LS_{OTP_i}$
- * **BR:**
Using BR, S4: $SN_i \equiv (LS \xrightarrow{SigLS_i, SN_{RN_i}} SN_i)$
- * **JR:**
Using JR, H14, S3 and S4, S5: $SN_i \equiv LS_{OTP_i}$
- * **SSR:**
Using SSR, S5 and S3, S6: $SN_i \equiv (LS \xrightarrow{LS_{OTP_i}} SN_i)$
- * **NVR:**
Using NVR, H3, S2 and S6, S7: $SN_i \equiv LS \equiv (LS \xrightarrow{LS_{OTP_i}} SN_i)$ (**G1**)
- **M2:** $LS \rightarrow CH_i$:
 - * **SR:**
Using SR and S8: $CH_i \triangleleft SigLsE_i$
 - * **MMR and BR:**
Using MMR, BR, H6 and S8, S9: $CH_i \equiv LS \sim SigLsE_i$ (**G4**)
 - * **FCR and NVR:**
Using FCR, NVR, H3 and S9, S10: $CH_i \equiv LS \equiv LS_{OTP_i}$
 - * **BR:**
Using BR, S11: $CH_i \equiv (LS \xrightarrow{SigLS_i, CH_{RN_i}} CH_i)$
 - * **JR:**
Using JR, H15, S10 and S11, S12: $CH_i \equiv LS_{OTP_i}$
 - * **SSR:**
Using SSR, S12 and S10, S13: $CH_i \equiv (LS \xrightarrow{LS_{OTP_i}} CH_i)$
 - * **NVR:**
Using NVR, H3, S9 and S13, S14: $CH_i \equiv LS \equiv (LS \xrightarrow{LS_{OTP_i}} CH_i)$ (**G3**)
- **M3:** $SN_i \rightarrow CH_i$:
 - * **SR:**
Using SR, S15: $CH_i \triangleleft M3$
 - * **MMR:**
Using MMR, H7 and S15, S16: $CH_i \equiv SN_i \sim Dif$
 - * **FCR and NVR:**
Using FCR, NVR, H1 and S16, S17: $CH_i \equiv SN_i \equiv Dif$
 - * **JR:**
Using JR, H16 and S17, S18: $CH_i \equiv Dif$
 - * **SSR:**
Using SSR, H1, S17 and S18, S19: $SN_i \equiv CH_i \xrightarrow{Dif} SN_i$ (**G5**)
- **M4:** $CH_i \rightarrow LS$:
 - * **SR:**
Using SR, S20: $LS \triangleleft M4$
 - * **MMR:**
Using MMR, H8 and S20, S21: $LS \equiv CH_i \sim CH_m$
 - * **FCR and NVR:**
Using FCR, NVR, H2 and S21, S22: $LS \equiv CH_i \equiv CH_m$
 - * **JR:**
Using JR, H11 and S22, S23: $LS \equiv CH_m$
 - * **SSR:**
Using SSR, H2, S22 and S23, S24: $CH_i \equiv LS \xrightarrow{CH_m} CH_i$ (**G6**)
- **M5:** $LS \rightarrow CS$:
 - * **SR:**
Using SR and S25: $CS \triangleleft M5$
 - * **MMR and BR:**
Using MMR, BR, H9 and S25, S26: $CS \equiv LS \sim LS_{OTP}$ (**G8**)

- * **FCR and NVR:**
Using FCR, NVR, H3 and S26, S27: $CS \equiv LS \equiv LS_{OTP}$
- * **JR:**
Using JR, H12 and S27, S28: $CS \equiv LS_{OTP}$
- * **SSR:**
Using SSR, H3, S27 and S28, S29: $CS \equiv LS \xrightarrow{LS_{OTP}} CS$ (**G7**)
- **M6:** $CS \rightarrow LS$:
 - * **SR:**
Using SR and S30: $LS \triangleleft M6$
 - * **MMR and BR:**
Using MMR, BR, H10 and S30, S31: $LS \equiv CS \sim CS_m$ (**G10**)
 - * **FCR and NVR:**
Using FCR, NVR, H4 and S31, S32: $LS \equiv CS \equiv CS_m$
 - * **JR:**
Using JR, H13 and S32, S33: $LS \equiv CS_m$
 - * **SSR:**
Using SSR, H4, S32 and S33, S34: $LS \equiv CS \xrightarrow{CS_m} LS$ (**G9**)
- **M7:** $LS \rightarrow CS$:
 - * **SR:**
Using SR, S35: $CS \triangleleft M7$
 - * **MMR:**
Using MMR, H9 and S35, S36: $CS \equiv LS \sim LS_m$
 - * **FCR and NVR:**
Using FCR, NVR, H3 and S36, S37: $CS \equiv LS \equiv LS_m$
 - * **JR:**
Using JR, H12 and S37, S38: $CS \equiv LS_m$
 - * **SSR:**
Using SSR, H3, S37 and S38, S39: $CS \equiv LS \xrightarrow{LS_m} CS$ (**G11**)

7.4.1.2 Experimental Security Analysis

In this Section, we use AVISPA tool to simulate the REISCH's protocols. This tool is extremely important to examine/check applicability passive and active attacks on security protocols. We have tested the exchanging of *SNs*' data/information with network entities (CH_i , LS and CS) and have analysed results as shown following subsections:

7.4.1.2.1 REISCH Scheme with AVISPA

In this subsection, we will explain REISCH scheme in AVISPA. REISCH includes four roles: localServer (LS)), sensori (SN_i), clusterHeadi (CH_i) and centralServer (CS) as well as supporting roles: session and environment. Also, there are three sections to complete communication properly and securely: transition, composition and goal specification. Transition section is used in the essential roles to keep correctly communication sequence. Composition section is used in the supporting roles to connect essential roles in specific sessions. Goal specification section includes security goals such as secrecy and authentication. Secrecy means known secrets only for specific entities while authentication depends on witness (freshness claim) and request (validation) processes to perform strong authentication. Also, our scheme uses

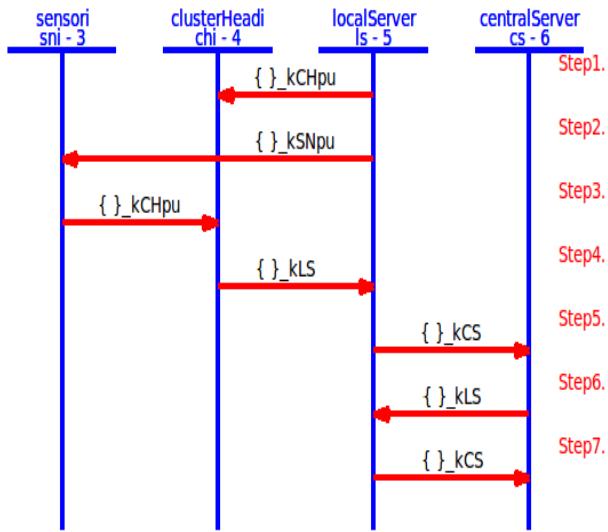


Figure 7.22: REISCH's framework in AVISPA

parameters such as RCV (receiving process), SND (sending process), $_inv$ (private key), dy (communication channel by Dolev-Yao model) and $intruder_knowledge$ (known information for an intruder). We assume intruder uses the public key (k_i) and knows public keys for REISCH's entities ($kSNpu$, $kCHpu$ and kLS). Figure 7.22 shows REISCH's framework in AVISPA.

As shown in Figure 7.25, LS receives the start signal. Then, LS generates and sends new LSotp for all sensors (SNi and CHi). LSotp includes new SigLsEi and pseudonym signature. Both Figure 7.23 and Figure 7.24 shows that SNi and CHi receive LSotp from LS. Furthermore, SNi and CHi use freshness nonces, timestamp and signature to support reliable security. For instance, SNi uses SigLsEi, SigSnEi, SNts and SigSN to achieve security processes with CHi and LS. SNi collects data and uses one ECDSA signature with XoR operations to protect collected data and sends it to CHi. At this stage, CHi aggregates data and add security parameters. CHi sends aggregation data to LS. After that, LS uses LSotp, SigLS5 and LSrn to connect with CS securely. Figure 7.26 shows CS with the storage process. CS receives LSotp and uses ECDSA(CsT2), CsT1, CsT2 and CSrn to secure communication with LS. Figure 7.27 shows session and environment roles as well as security goals (secrecy and authentication). REISCH applies 7 secrecy and 7 authentication goals. For instance, Sec1 represent secrets between SNi and LS such as SigSN, SigLsEi and SigSnEi. Also, authentication goal, such as auth4 proves freshness between CHi and LS such as CHts2, CHotp, CHrni and SNrni. Additionally, environment role includes many attacks (replay, MITM and impersonating) to test the security level in REISCH scheme.

```

role sensori(SNi,CHi,LS:agent, KSNpu,KCHpu,KLSpu:public_key, ECDSA:hash_func, SNpseud,SNs1,
             Data:text,SND,RCV:channel(dy))
played_by SNi def=
local
  State:nat,
  SNrni,SigLsEi,SigSnEi,SNparity:text,
  MAXv:message,SigSN,SigSnT1,SigSnT2,SigSnT3,SigSnT4,SigLSi:text,
  Dif,SNts,SNtst,SNotp,Date,Time,SS,SNp,LSotpi:text
const
  sec1,sec2,sec3,auth3:protocol_id
init
  State := 0
transition
% SNi receives(LSotpi) from LS
1.State=0
  /\RCV(SNi.LSotpi'.SNrni') =|> State':=1
  /\SigSnEi':=new() /\SigLSi':={ECDSA(SNpseud)}_inv(KSNpu)
  /\SigLsEi':=xor(LSotpi',SigLSi) /\SigSN':={ECDSA(Data.SNpseud)}_inv(KLSpu)
  /\SNparity':=SigSN' /\SigSnT1':=SNparity' /\SigSnT2':=xor(SigSnT1',SigSnEi')
  /\SNts':=new() /\SNotp':=new() /\SNtst':=xor(Date,xor(Time,xor(SNotp',xor(Dif))))
  /\SNp':={(SNtst'.SNotp'.SNrni'.SNpseud.SNs1)} /\SigSnT3':=xor(SNp',SigSnT2')
  /\SigSnT4':=xor(SigLsEi',SigSnEi')
  /\secret({SigSN',SigLsEi',SigSnEi'},sec1,{SNi,LS}) /\secret({SNpseud,SNs1},sec2,{SNi,LS})
  /\secret({MAXv,SNts'},sec3,{SNi,CHi})
% SNi sends(SNm) to CHi
/\SND(CHi.SigSnT3'.SigSnT4'.SNrni'.Dif.SNtst'.SS.Data) /\witness(SNi,CHi,auth3,{SNtst',SNrni',Dif})
end role

```

Figure 7.23: SN_i role of REISCH in HPLSL

```

role clusterHeadi(CHi,LS,SNi:agent, KCHpu,KLSpu,KSNpu:public_key, ECDSA:hash_func, CHpseud,CHsl:text
                  ,MAXv:message,SND,RCV:channel(dy))
played_by CHi def=
local
  State:nat,
  SNrns,SNrni,SigLsEi,SNparityi,SNts,LSotpi:text, SigCH,SigChT1,SigChT2,SigSnT3s,SigSnT4s,
  SigSnT3i,SigSnT4i,SigLSi,Difi,SNtst,CHts1,CHts2,SS,SSI,CHp,CHparity,CHotp,CHRni,Datai,
  Datas,CHA:text
const
  sec3,sec4,sec5,auth4:protocol_id
init
  State := 0
transition
% CHi receives(LSotpi) from LS
1.State=0
  /\RCV(CHi.LSotpi'.CHRni')=|> State':=1

% CHi receives from SNi
2.State=1/\RCV(CHi.SigSnT3i'.SigSnT4i'.SNrni'.Difi'.SNtst'.SSI'.Datai')=|>State':=2
  /\CHts1':=new() /\SigSnT3s':={(SigSnT3s'.SigSnT3i')} /\SigSnT4s':={(SigSnT4s.SigSnT4i')}
  /\SNrns':=SNrni'/Datas':=Datai' /\SigCH':={ECDSA(SigSnT3s')}_inv(KLSpu)
  /\CHparity':=SigCH' /\SigChT1':=xor(CHparity',CHts1')
  /\SigLSi':={ECDSA(CHpseud)}_inv(KCHpu) /\SigLsEi':=xor(LSotpi,SigLSi')
  /\SigChT2':=xor(SigChT1',SigLsEi') /\CHts2':=new() /\CHotp':=new()
  /\secret({MAXv,SNts},sec3,{CHi,SNi}) /\secret({SigCH,SigLsEi,CHpseud,CHsl},sec4,{CHi,LS})
  /\secret({CHotp',CHts2'},sec5,{CHi,LS})
% CHi sends(CHm) to LS
  /\SND(LS.(xor((CHts2'.CHotp'.CHRni.CHpseud.CHsl),SigChT2)).CHRni.SS.(SigSnT3s.SigSnT4s
  .SNrns'.Datas')) /\witness(CHi,LS,auth4,{CHts2',CHotp',CHRni,SNrns'})
end role

```

Figure 7.24: CH_i role of REISCH in HPLSL

7.4.1.2.2 Simulation Results

The simulation results described by AVISPA tool. We have applied AVISPA with OFMC and CL-AtSe backends. Both of OFMC (Figure 7.28) and CL-AtSe (Fig-

ure 7.29) results refer to that REISCH scheme is safe against passive and active attacks (as in the SUMMARY section). Furthermore, Figure 7.28 and Figure 7.29 shows analysis details about simulation reports such as number of sessions, goals and statistical numbers. Also, the goals of authentication and secrecy in Figure 7.27 are applied to prevent the penetration of sensors data/information in the network. These results prove that REISCH is reliable in repealing known attacks such as replay, MITM, and impersonating.

7.4.1.3 Security Comparison

In this Section, we will discuss the superiority REISCH on existing schemes in terms of security (Table 7.6 shows a comparison of security features between our scheme and existing schemes).

Compared with the scheme in (Fan & Gong 2012) that use small key ($F_{2^{163}}$) and is extremely vulnerable to attacks, REISCH uses a key with 256-bit that resists attacks (reputable organisation recommendations). REISCH also used BLAKE2bp to get rid of hash attacks (collision and preimage) while the scheme in (Kodali 2013) focused on SHA1 performance without attention to the collision/preimage threats. In addition, all security parameters in REISCH such as SN_i 's location are completely hidden, while the scheme in (Lavanya & Natarajan 2017b) transfer some information explicitly such as ID (the elliptic curve parameters) in the registration and authentication phases. This allows the intruders to distinguish a specific SN_i . Additionally, this scheme did not address the problem of hiding SN_i location. Although the authors in (Staudemeyer et al. 2018) addressed privacy in their scheme architecture to protect the SN_i parameters. However, their scheme did not use the signatures camouflage or SN_{OTP} that are used in REISCH to support the privacy of data signing. This makes the privacy parameters in their scheme vulnerable to analysis and easy tracking. Furthermore, REISCH outperforms the scheme in (Malathy et al. 2018) which did not use the signature aggregation scheme to support security and hide signatures. The scheme in (Sharavanan et al. 2018) uses ECDSA to secure heterogeneous network environments. But their scheme gives medical evaluators the privileges to modify the medical parameters in the monitoring environment, SN_i 's locations and even create keys that could be the cause of an internal attack. Moreover, some information sent from SN_i to the server clearly which can leak to intruders. Fortunately, REISCH does not suffer from these problems.

```

role localServer(LS,CHi,SNi,CS:agent, KLSpu,KCHpu,KSNpu,KCSpu:public_key, ECDSA:hash_func ,SNpseudi
    ,SNsli:text,SND,RCV:channel(dy))
played_by LS def=
local
    State:nat,
    SNrni,SNrns,SigLsEi,SigSnEi,SNparityi,SNp:text,
    SigChT2,SigSnT3i,SigSnT4i,SigSnT3s,SigSnT4s,SigLsT1i,SigLsT2i,SigLS1i,SigLS2i,SigLSi:text,
    CHrni,CHparityi,CHotpi,CHsli,CHts2,SS,Datai,Datas:text,LSpseudo,LSpseudn,CSpseudo,
    CSPseudn:text, LSts2,LSts3,LSts4,LsT1,LsT2,LsT3,LSotp,LSotpii:text,
    CHpseudi,LSotp,CSts1,CsT1,Cst2,CSrn,Lsrn,SigLS3,SigLS4,SigLS5:text
const
    sec1,sec2,sec4,sec5,sec6,sec7,auth1,auth2,auth4,auth5,auth6,auth7:protocol_id
init
    State := 0
transition
% Starting signal
1.State=0
    /\ RCV(start) =|>
% LS sends (LSotp,LSotpii) to SNi & CHi
    State':=1/\ SNrni':=new() /\SigLsEi':=new()
    /\LSotp':=xor({ECDSA(SNpseudi)}_inv(KSNpu),SigLsEi') /\witness(LS,SNi,auth1,{SigLsEi',SNrni'})
    /\SND(SNi.LSotp'.SNrni') /\SNrni':=new() /\SigLsEi':=new()
    /\LSotpii':=xor({ECDSA(SNpseudi)}_inv(KCHpu),SigLsEi') /\witness(LS,CHi,auth2,{SigLsEi',SNrni'})
    /\SND(CHi.LSotp'.SNrni')

2.State=1
% LS receives(CHm) from CHi
    /\RCV(LS.(xor((CHts2'.CHotpri'.CHrni'.CHpseudi'.CHsli'),SigChT2')).CHrni'.SS'.(SigSnT3s'.SigSnT4s',
    .SNrns'.Datas')) =|>State':=2
    /\SigLS1i':={ECDSA(SigSnT3s')}_inv(KLSpu) /\CHparityi':=SigLS1i'
    /\SigLsT1i':=xor(SigLs1i',SigLsEi)
    /\SigChT2':=xor((CHts2'.CHotpri'.CHrni'.CHpseudi'.CHsli'),SigLsT1i')
    /\SNrni':=SNpseudi'/Datai':=Datas' /\SigLs2i':={ECDSA(Datai.SNpseudi)}_inv(KLSpu)
    /\SNparityi':=SigLs2i' /\SigSnT3i':=SigSnT3s'/\SigSnT4i':=SigSnT4s'
    /\SigSnEi':=xor(SigSnT4i',SigLsEi) /\SigLsT2i':=xor(SNparityi',SigSnEi')
    /\SNp':=xor(SigLsT2i',SigSnT3i') /\request(LS,CHi,auth4,{CHts2,CHotpri',CHrni',SNrns'})
    /\secret({SigLs2i,SigLsEi,SigSnEi},sec1,[LS,SNi]) /\secret({SNpseudi,SNsli},sec2,[LS,SNi])
    /\secret({CHparityi',SigLsEi,CHpseudi,CHsli},sec4,[LS,CHi])
    /\secret({CHotpri',CHts2'},sec5,[LS,CHi]) /\LSpseudn':=new() /\LSts2':=new()
    /\LSotp':=xor(SigLs1i,xor(LSpseudn',LSts2'))
% LS sends(LSotp) to CS
    /\SND(CS.LSotp'.SS) /\secret({LSpseudn,CSpseudn},sec6,[LS,CS])
    /\witness(LS,CS,auth5,{CSpseudo,LSpseudn',LSts2'}) 

3.State=2
% LS receives(CSm) from CS
    /\ RCV(LS.{ECDSA(CsT2')}_inv(KLSpu).CsT1'.CsT2'.SS'.CSrn') =|>
    State':=3/\LSts3':=new() /\CSotp':=xor(CSts1,xor(CsT1',xor(LSpseudn,CSrn'))))
    /\CSpseudn':=xor(CSts1,xor(CSotp',xor(CsT2',LSpseudn)))
    /\SigLS3':={ECDSA(xor(CSts1,xor(CSotp',xor(CSpseudn',LSpseudn))))}_inv(KLSpu)
    /\secret({SigLs1i,CSotp'},sec7,[LS,CS]) /\request(LS,CS,auth6,{CSpseudn',LSpseudn,Csts1})
% Prepares message to send data with mutual authentication
    /\LSts4':=new() /\Lsrn':=new() /\LsT1':=xor(LSts4',xor(LSpseudn,xor(Lsrn',CSrn'))))
    /\SigLS4':={ECDSA(LsT1')}_inv(KCSpu) /\LsT2':=xor(CSts1,xor(CSotp',CSpseudn'))
    /\LsT3':=xor(LsT2',LSpseudn) /\SigLS5':=xor({ECDSA(Datas.LsT3')}_inv(KCSpu),SigLS4')
% LS sends(LSm) to CS
    /\SND(CS.SigLS5'.SS.Lsrn'.Datas) /\witness(LS,CS,auth7,{SigLS5,LSts4,Lsrn'}) 
end role

```

Figure 7.25: LS role of REISCH in HPLSL

```

role centralServer(CS,LS:agent, KCSpu,KLSpu:public_key, ECDSA:hash_func,SND,RCV:channel(dy))
played_by CS def=
local
    State:nat,
    SigCS1,SigCS2,LSts4:text, LSpseudo,LSpseudn,CSpseudo,CSpseudn:text,
    CsT1,CsT2,CsT3,CsT4,LSts2,CSts1,CSts2,Csotp,CSrn,LSrn,SS,Datas,LSotp,SigLSi,SigLS5:text
const
    sec6,sec7,auth5,auth6,auth7:protocol_id
init
    State := 0
transition
% CS receives from LS
1.State=0
    /\RCV(CS.LSotp'.SS)=|> State':=1 /\CSts1':=new() /\CSpseudn':=new()
    /\CSotp':=new() /\CSrn':=new() /\CsT1':=xor(CSts1',xor(CSotp',xor(LSpseudn,CSrn'))))
    /\CsT2':=xor(CSts1',xor(CSotp',xor(CSpseudn,LSpseudn)))
    /\request(CS,LS,auth5,{CSpseudo,LSpseudn,LSts2})
    /\secret({LSpseudn,CSpseudn},sec6,{CS,LS}) /\secret({SigLSi,CSotp'},sec7,{CS,LS})
% CS sends to LS
    /\SND(LS.{ECDSA(CsT2')}_inv(KLSpu).CsT1'.CsT2'.SS.CSrnr')
    /\witness(CS,LS,auth6,{CSpseudn,LSpseudn,CSts1'})
```

% CS receives from LS

```

2.State=1
    /\RCV(CS.SigLS5'.SS'.LSrn'.Datas')=|> State':=2 /\CSts2':=new()
    /\SigCS1':={ECDSA(xor(LSts4,xor(LSpseudn,xor(LSrnr,CSrn))))}_inv(KCSpu)
    /\CsT3':=xor(CSts1,xor(CSotp,CSpseudn)) /\CsT4':=xor(LSpseudn,CsT3')
    /\SigCS2':=xor({ECDSA(Datas.CsT4')}_inv(KCSpu),SigCS1')
    /\request(CS,LS,auth7,{SigLS5,LSts4,LSrn'})
```

end role

Figure 7.26: *CS* role of REISCH in HLP SL

REISCH adds sufficient randomization to hide security parameters, and patients' records are protected even after *LS* is penetrated while the scheme in (Sui & de Meer 2019) needs to support randomization and protect users' information when a demand-response management unit penetration by an intruder. Besides, an intruder can send messages from a forged unit and deceive users after penetrating this module and revealing information. REISCH is robust against information leakage, while the scheme in (Hathaliya et al. 2019) uses a 160-bit key that is vulnerable to attacks. It explicitly sends patients' identities within the encrypted message in the login and authentication phases. If an intruder can break the encryption, he/she uses this information in data disclosure. REISCH uses ECDSA-BLAKE2bp and random pseudonyms to secure data signing. The scheme in (Furtak et al. 2019) is based on SHA1 and HMAC, which are vulnerable to attacks in signing and authentication collected data. It also does not include a pseudonym mechanism to protect SN_i parameters from misbehaviour.

```

role session(SNi,CHi,LS,CS:agent, KSNpu,KCHpu,KLSpu,KCSpu:public_key, ECDSA:hash_func ,MAXv:
            message, SNpseudi,SNsli,Datai:text)
def=
local
    SND1,RCV1,SND2,RCV2,SND3,RCV3,SND4,RCV4:channel(dy)
composition
    sensori(SNi,CHi,LS, KSNpu,KCHpu,KLSpu,ECDSA,SNpseudi,SNsli,Datai,SND3,RCV3)
    /\clusterHeadi(CHi,LS,SNi,KCHpu,KLSpu, KSNpu,ECDSA,SNpseudi,SNsli,MAXv,SND2,RCV2)
    /\localServer(LS,CHi,SNi,CS,KLSpu,KCHpu, KSNpu,KCSpu,ECDSA,SNpseudi,SNsli,SND1,RCV1)
    /\centralServer(CS,LS,KCSpu,KLSpu,ECDSA,SND4,RCV4)
end role

role environment()
def=
const
    kSNpu,kCHpu,kLS,kCS,ki:public_key, ecdsa:hash_func,datai,snpseudi,snsli:text,
    sni,chi,ls,cs,i:agent,maxV:message,
    sec1,sec2,sec3,sec4,sec5,sec6,sec7,auth1,auth2,auth3,auth4,auth5,auth6,auth7:protocol_id
    intruder_knowledge = {sni,chi,ls,i,kSNpu,kCHpu,kLS,ki}
composition
    session(sni,chi,ls,cs,kSNpu,kCHpu,kLS,kCS,ecdsa,maxV,datai,snpseudi,snsli)
    % Check replay attack
    %/\ session(sni,chi,ls,cs,kSNpu,kCHpu,kLS,kCS,ecdsa,maxV,datai,snpseudi,snsli)
    % Check MITM attack
    %/\ session(chi,sni,ls,cs,kSNpu,kCHpu,kLS,kCS,ecdsa,maxV,datai,snpseudi,snsli)
    % Check impersonate SNi
    /\ session(i,chi,ls,cs,kSNpu,kCHpu,kLS,kCS,ecdsa,maxV,datai,snpseudi,snsli)
    % Chekc impersonate CHi
    %/\ session(sni,i,ls,cs,kSNpu,kCHpu,kLS,kCS,ecdsa,maxV,datai,snpseudi,snsli)
    % Check impersonate LS
    %/\ session(sni,chi,i,cs,kSNpu,kCHpu,kLS,kCS,ecdsa,maxV,datai,snpseudi,snsli)
end role

goal
    secrecy_of sec1,sec2,sec3,sec4,sec5,sec6,sec7
    authentication_on auth1,auth2,auth3,auth4,auth5,auth6,auth7
end goal
environment()

```

Figure 7.27: Session, environment, and goal roles of REISCH in HLPSL

<pre> % OFMC % Version of 2006/02/13 SUMMARY SAFE DETAILS BOUNDED_NUMBER_OF_SESSIONS PROTOCOL /home/span/span/testsuite/results/REIESCH.if GOAL as_specified BACKEND OFMC COMMENTS STATISTICS parseTime: 0.00s searchTime: 532.61s visitedNodes: 1899 nodes depth: 7 plies </pre>	<p>SUMMARY SAFE</p> <p>DETAILS</p> <p>BOUNDED_NUMBER_OF_SESSIONS TYPED_MODEL</p> <p>PROTOCOL</p> <p>/home/span/span/testsuite/results/REIESCH.if</p> <p>GOAL</p> <p>As Specified</p> <p>BACKEND</p> <p>CL-AtSe</p> <p>STATISTICS</p> <p>Analysed : 325 states Reachable : 325 states Translation: 0.12 seconds Computation: 0.01 seconds</p>
---	--

Figure 7.28: Simulation result of REISCH using OFMC backend

Figure 7.29: Simulation result of REISCH using CL-AtSe backend

Table 7.6: Comparison of security features between REISCH and other data collection schemes

Security feature	Fan & Gong (2012)	Lavanya & Nataraajan (2017 b)	Staudemeyer et al. (2018)	Malathy et al. (2018)	Sharavanan et al. (2018)	Sui & de Meer (2019)	Hathaliya et al. (2019)	Furtak et al. (2019)	REISCH scheme
Anti MITM		✓				✓	✓	✓	✓
Anti replay	✓	✓	✓			✓	✓	✓	✓
Availability	✓	✓				✓	✓	✓	✓
Anti Sybil	✓							✓	✓
Anti Wormhole								✓	✓
Anti fake sink								✓	✓
Anti repository attack					✓				✓
Anti eavesdropping		✓	✓	✓	✓	✓	✓	✓	✓
Anti node replication								✓	✓
Anti collision/preimage		✓							✓
Pseudonym						✓	✓		✓
Homomorphic						✓			✓
Mutual authentication		✓					✓		✓

7.4.2 Performance Analysis

In this Section, the performance analysis of theoretical, experimental and comparison with existing research is presented to examine the computation processes of REISCH in improving the performance of HWSN lifetime.

7.4.2.1 Theoretical Performance Analysis

REISCH uses several features that qualify it to be efficient in HWSN performance. First, it relies on the ECDSA algorithm that integrates data collected by small keys compared to public key cryptography algorithms (RSA, DSA and Elgamal). For instance, ECDSA produces 256-bit equivalent keys in security for 3072-bit keys produced by RSA, DSA, and Elgamal. Second, REISCH implicitly uses BLAKE2bp with ECDSA which is dramatically efficient in the operation of a hash function instead of SHA1. Third, REISCH uses the homomorphic property to combine signatures in *CHs* and significantly reduce energy dissipation. Fourth, REISCH relies on LEACH routing protocol, which is the most efficient energy-saving protocol in WSN. Fifth, REISCH relies on rapid random pseudonyms to protect medical records rather than complex and costly processes of data encryption and anonymity. Finally, REISCH uses XML to support patients' data management efficiently. Therefore, these features make REISCH maintain the energy of the *SNs* as long as possible.

7.4.2.2 Experimental Performance Analysis

In this Section, we will evaluate the performance of REISCH in the execution of security operations in conjunction with the saved data and collected. As noted in previous Sections, *SNs* requires performance-efficient signatures to perform services

Table 7.7: REISCH's simulation parameters

Parameter	Value
Area of WSN	1000m*1000m
<i>SN</i>	200
<i>LS</i> location	500*500
Initial energy	25J
Size of packet	1MB
Control packet size	50B
Rounds	1000
Routing protocol	LEACH
Propagation energy	10 nJ/bit/m ²
Multi-hop propagation energy	0.0013 pJ/bit/m ⁴
Aggregation energy	5 nJ/bit/signal

Table 7.8: REISCH's computational processes

Process type	Number of process			Running time	Storage	Energy
	<i>SN</i>	<i>CH</i>	<i>LS</i>			
SHA1 hash	1	1	Many	0.05529	160 bit	0.008464
BLAKE2bp hash	1	1	Many	0.040606	512 bit	0.006216
Keys generation	2	2	2	0.000859	256 bit	0.000132
Point multiplication	2	2	Many	0.000543	-	0.000083
ECDSA-SHA1 signature	1	1	-	0.072838	256 bit	0.011151
ECDSA-SHA1 verification	-	-	Many	0.073103	-	0.011191
ECDSA-BLAKE2bp signature	1	1	-	0.050046	256 bit	0.007662
ECDSA-BLAKE2bp verification	-	-	Many	0.052076	-	0.007972

for as long as possible in patients monitoring and care. We will provide tests on hash algorithms (SHA and BLAKE) and signature algorithm (ECDSA). Additionally, applying these algorithms to HWSN to analyse performance properties such as time, storage and energy. Table 7.7 shows all the simulation parameters used in HWSN while Table 7.8 shows computational operations in the REISCH scheme. All hash and signature algorithms are implemented by C language while WSN is designed in Octave under Ubuntu 16.04 LTS, processor Intel Core i5 2.6GHz, OS type 64-bit, Memory 4 GiB and disk 32.0 GB.

The computation of energy in our scheme was based on the Micaz sensor specification. This process uses parameters such as current (0.0567), voltage (2.7) and time to extract both power and energy using $power = current * voltage$ and $energy = time * power$. We relied on real data provided by the City of Melbourne that is licensed under CC 4.0 ([City of Melbourne Open Data Team October 19, 2018](#)). These data generated by sensors to monitor environmental parameters such as humidity, temperature and light, as well as include some information such as timestamp and ID. We divided this data into different sizes (200K, 400K, 800K and 1M) and then convert this data into an XML context. Furthermore, there are no communication channels between patients and *SNs*. To check performance, we have implemented the SHA1-160, SHA2-256, BLAKE2s-256, BLAKE2b-512, BLAKE2sp-256, and BLAKE2bp-512 algorithms with 1MB data size as shown in Figure 7.30. Also, Figures 7.32, 7.33 and 7.34 show execution time (minimum, maximum and average) for hash functions when using 1M data. We also notice

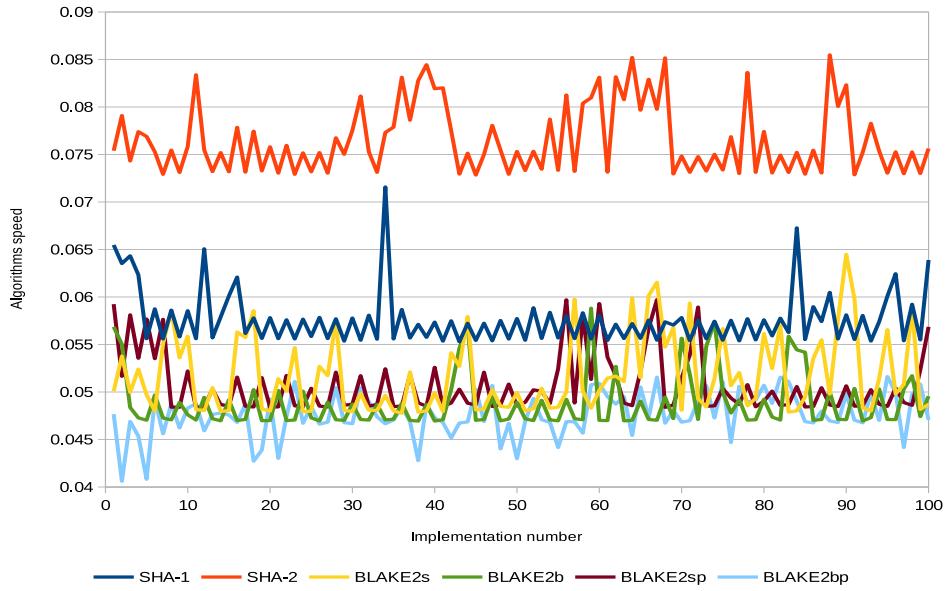


Figure 7.30: Comparison of SHA and BLAKE2 with 1MB data

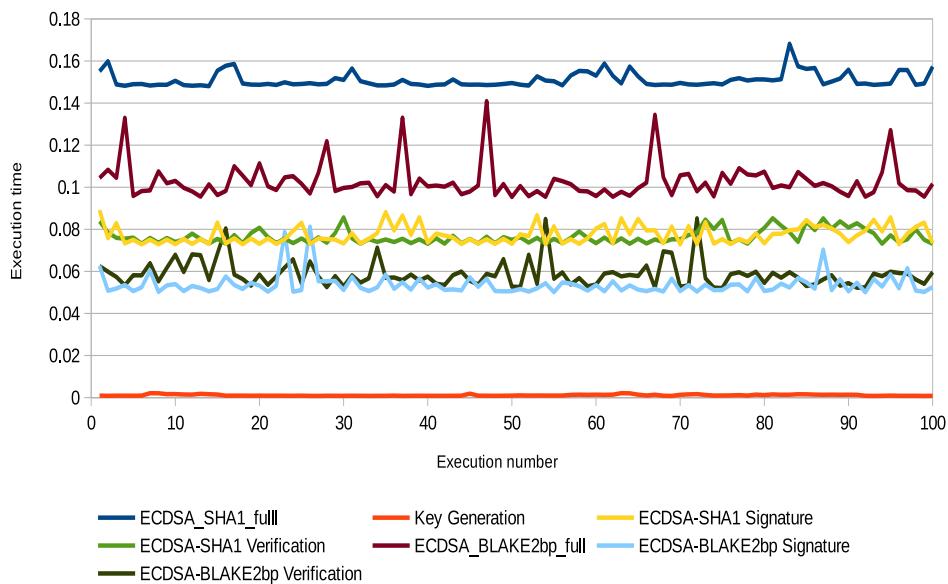


Figure 7.31: Execution time of ECDSA-SHA1 and ECDSA-BLAKE2bp with 1MB data

that BLAKE2bp is the best performance in terms of execution time in all figures. In addition, Figure 7.31 shows that ECDSA-BLAKE2bp is the best execution time of ECDSA-SHA1. Also, Figures 7.35, 7.36 and 7.37 show execution time (minimum, maximum and average) for ECDSA algorithms when using 1M data. Thus, the amendment to the ECDSA algorithm would be very appropriate for the use of security measures with the longest life of the *SNs* from the original algorithm.

We have computed message complexity which is the number of messages trans-

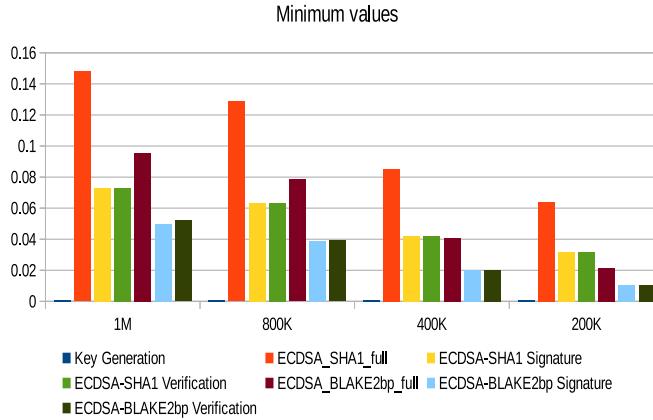


Figure 7.32: Minimum execution time of hash functions with 1MB data

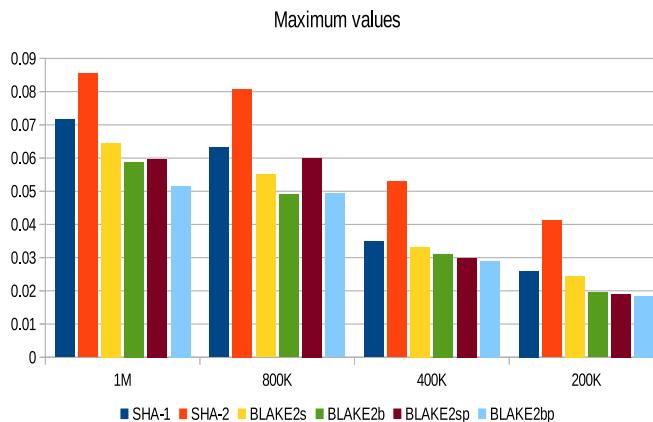


Figure 7.33: Maximum execution time of hash functions with 1MB data

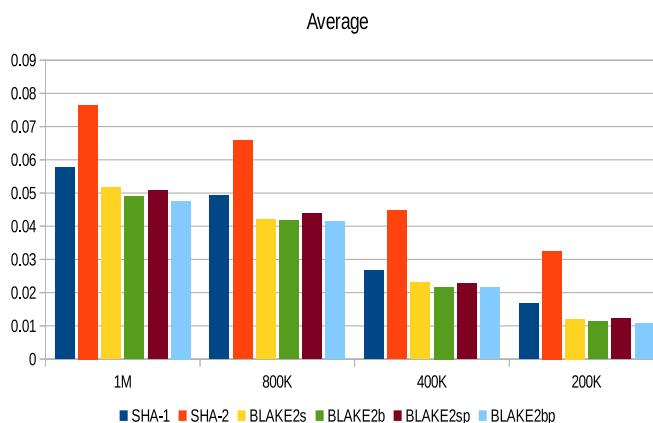


Figure 7.34: Average execution time of hash functions with 1MB data

mitted between network entities. Each round, SN and CH send one message while CH and LS receive a set of aggregated messages. Thus, the message complexity with modified algorithms for SNs is (156972), CHs is (8313) and LS is (165285) while with original algorithms for SNs is (142541), CHs is (7572) and LS is (150113).

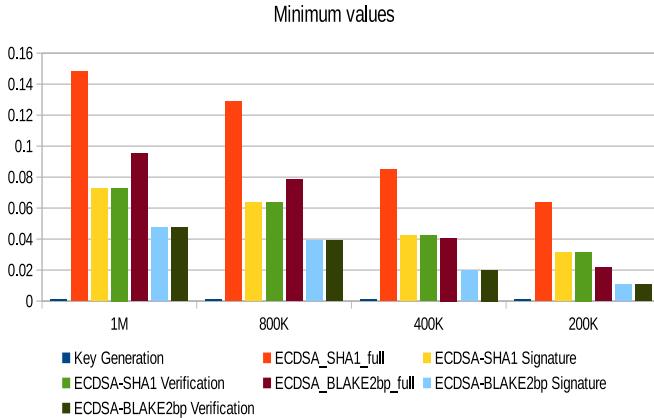


Figure 7.35: Minimum execution time of ECDSA algorithms with 1MB data

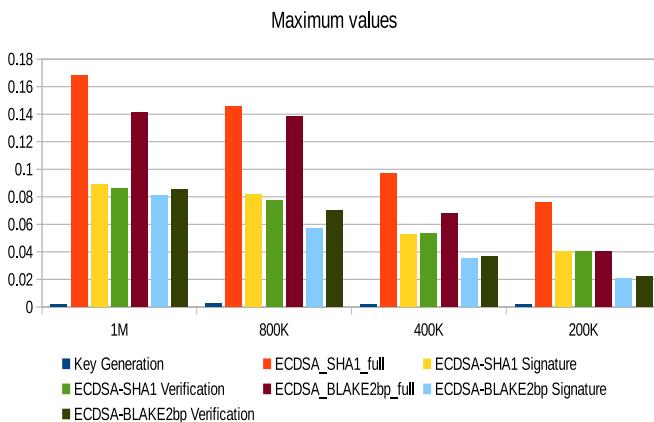


Figure 7.36: Maximum execution time of ECDSA algorithms with 1MB data

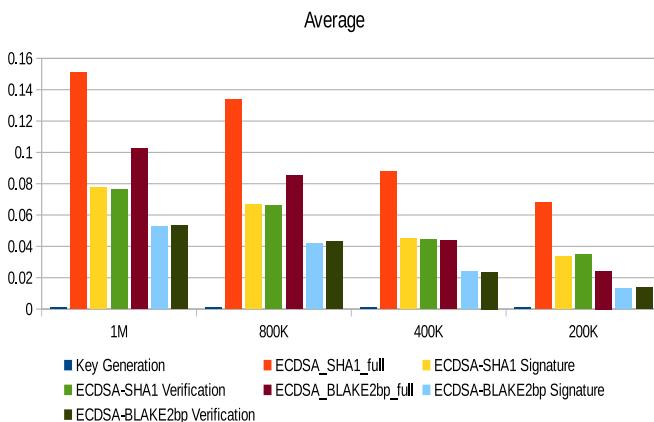


Figure 7.37: Average execution time of ECDSA algorithms with 1MB data

Message overhead is to calculate the message size between network entities. In each round, the message overhead of *SN* is $(1024 + 32)$ bytes while *CH* is $(15360 + 32)$ bytes. Figure 7.38 describes REISCH-ECDSA-BLAKE2bp is better than REISCH-ECDSA-SHA1 in terms of alive *SNs*, namely, HWSN will have more life span to

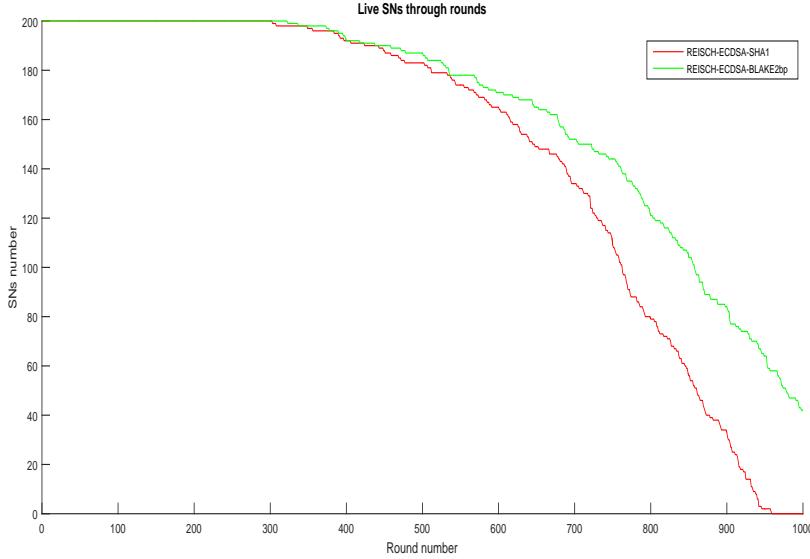


Figure 7.38: Comparison of alive SN_s

collect patients' data when it uses REISCH-ECDSA-BLAKE2bp. It also contributes to the energy balance of SN_s which improves the continuity of electing CH_s and collecting the most patients' data in each round. We noticed that REISCH with the modified algorithm (ECDSA-BLAKE2bp) has more alive SN_s by 24% than the original algorithm (ECDSA-SHA1) as well as that the first SN dies when using the modified algorithm is in round 322 while in the original algorithm is in round 295.

7.4.2.3 Performance Comparison

In this Section, we will discuss the superiority REISCH on existing schemes in terms of performance (Table 7.9 shows a comparison of ECDSA's signature and verification (running time) between our scheme and existing schemes). Due to different environments, security parameters and network parameters such as key length, number of SN_s , etc., it is very difficult to compare schemes' performance. However, we have made some comparisons to illustrate the superiority of REISCH on the existing schemes in terms of performance.

The scheme in (Fan & Gong 2012) focused on accelerating ECDSA's verification based on computation results for neighbouring SN_s . These computations consume additional energy. In addition, this scheme is very expensive if applied to cluster scheme because CH needs to accomplish one PM in each signature for each SN_i and thus will consume energy in the intermediate SN_s . REISCH does not need these computations because signatures' verification is performed in LS . Schemes in (Kodali 2013, Lavanya & Natarajan 2017b, Malathy et al. 2018) were used

ECDSA to sign data without using homomorphic. Consequently, the performance of the *SNs* would be very low due to signature and verification processes in each round. The scheme in (Kodali 2013) addressed the bits (8 and 32) of data processing in SHA1 but did not address the cost of energy consumption by SHA1. Also, the scheme in (Lavanya & Natarajan 2017b) did not support the clustering environment to reduce energy consumption as well as the computation time to generate and verify the signature was not clearly indicated. Furthermore, the scheme in (Sharavanan et al. 2018) has used SHA2, which is more secure than SHA1 but performs heavy processes that significantly affect the energy of *SNs*. It also addresses only computations in transport while REISCH addresses computations in transport and processing using BLAKE2bp and homomorphic.

Schemes in (Staudemeyer et al. 2018, Hathaliya et al. 2019, Furtak et al. 2019) rely on the use of encryption to protect data without a homomorphic property, since encryption processes extremely consume *SNs* resources (as mentioned in subsection 3.1.1.3.4, point 4). While REISCH uses signatures and homomorphic to improve HWSN network performance. Although the scheme in (Sui & de Meer 2019) uses encryption and signature of data with homomorphic, encryption can particularly affect network performance especially a burden on the servers. Moreover, the scheme in (Furtak et al. 2019) has implemented RSA-2048 bits algorithm which is significantly expensive in encryption operations. In addition, it uses several parameters such as many keys, 2048-bit key length and SN_i addresses (master, replica and gateway) that cause storage problems in the pre-deployment and registration phases (consumption of *SNs* resources). It has used a random routing of the sensor network without relying on a specific routing protocol such as LEACH. This scheme has considered the structure of the data in the SN_i memory and did not pay attention to the structure of the data as it was transferred to the servers. REISCH uses XML to support performance in *LS* and *CS* without having to convert data formats between network devices. Many recent research (Kittur & Pais 2019, Kuang et al. 2019, Marino et al. 2019, Zhao et al. 2019, Liu, Zhao, Tian, Yu & Du 2019) have used different ways to improve ECDSA's procedures. However, REISCH provides better performance in terms of ECDSA's signature and verification than existing schemes (as shown in Table 7.9).

7.5 Summary of the Chapter

In this chapter, firstly, we explained security testing tools (simulation and mathematical logic) to analyse protocols security. Thereafter, we discussed and analysed the security results in terms of authentication, authorisation and data collection in

Table 7.9: Comparison of ECDSA's procedures

Running time (second)	Fan & Gong (2012)	Kodali (2013)	Malathy et al. (2018)	Kittur & Pais (2019)	Kuang et al. (2019)	Marino et al. (2019)	Zhao et al. (2019)	Liu, Zhao, Tian, Yu & Du (2019)	REISCH scheme
Signature Verification	0.38 0.65	0.941 -	0.59 -	0.078 0.079	0.3472 -	0.434 0.429	0.084 0.088	0.051 0.105	0.050 0.052

preventing a wide spectrum of attacks. The theoretical and practical security analysis tools such as AVISPA and BAN logic are used to detect weak protocols. In analysing the results, we found that our project protocols are safe against passive, active, internal, and external attacks.

Chapter 8: Conclusions

In this chapter, we will present the conclusions of our project. we have addressed security and privacy issues in both EHR and EMR healthcare systems. We also have explained that security procedures in authentication, authorisation and data collection schemes are significantly critical to accept healthcare system by users or health institutions. This chapter includes the following topics:

- Conclusions for our project in terms of authentication (RAMHU), authorisation (PAX) and data collection (REISCH) schemes.
- Future directions to develop our project.

8.1 Conclusions of the Dissertation

In recent years, modern healthcare systems require tightly security procedures to authenticate, authorise and collect patients' data. To build an efficient healthcare application in terms of security and performance, we have provided three security schemes as solutions to address security/privacy vulnerabilities and heavy performance costs.

In terms of authentication scheme, healthcare systems require robust authentication to ensure that only legitimate users exchange patients' data. During the investigation of the previous authentication protocols, we found that they were vulnerable to weak security against some known attacks. Therefore, we proposed a new robust authentication protocol (RAMHU) to prevent internal, external, passive, and active attacks. We have used a variety of mechanisms that ensure the protection and concealment of personal information to legitimate users. Our scheme uses multi pseudonyms for both users and medical centres to prevent the transmission of real information in the authentication request and MAC address to prevent counterfeit devices from connecting to the network. We used lightweight encryption and signature algorithms (as described in Chapter 3 Section 3.1.1.1.2 and Section 3.1.1.1.3) to ensure that RAMHU's efficient interaction with user requests is ensured. In addition, we provided a formal and informal security analysis to demonstrate the effectiveness of RAMHU in repelling known attacks. We conclude

that the RAMHU scheme provides a high-level security and performance that maintains authentication information for users against various attacks.

In terms of authorisation scheme, the security and privacy of medical records have become essential requirements for the establishment of any healthcare system in recent years. To ensure the provision of security and privacy, this thesis proposes a PAX authorisation system that supports pseudonym, anonymity and XACML. Specifically, the proposed system uses pseudonyms to separate personal information about patients' data, anonymity to hide subjects' information, and XACML to create distributed access control policies to authorise subjects' requests to objects' records in EHR. Different from a large amount of theoretical investigation in the existing literature, this scheme achieves the security and privacy preservation by utilizing the pseudonym and anonymity techniques, which can reduce the unnecessary time consumption and the burden on the server. We conclude that the PAX system provides a security level that maintains patients' privacy, and the system especially protects patients' information from indirect users (advisors, patients' relatives, researchers, and emergency doctors), who have been considered a serious security threat to any healthcare system because they can carry out internal attacks using the privileges granted to them.

In terms of data collection scheme, wireless sensor networks provide unique and important care services when used with EMR. Unfortunately, these networks suffer from performance and security problems as mentioned in the previous Sections. Therefore, we have proposed a REISCH scheme to address performance and security problems and cover gaps in existing research. As a result, REISCH uses ECDSA-BLAKE2bp and provides the best performance from using the original ECDSA-SHA1 algorithm. REISCH with the modified algorithm saves more than %24 alive *SNs*. In addition, the results of the security analysis prove that REISCH is safe against attacks in the threat model.

8.2 Future Directions

To further develop the proposed HC project, we intend to add some features to support security and privacy in EHR and EMR.

1. To support the authentication scheme (RAMHU), we intend to add users' biometric properties such as fingerprint, iris, or sound recognition to the authentication procedures. This procedure strengthens security precautions in preventing external attackers from accessing network services. However, adding

these features requires performance evaluation in the login and authentication protocols.

2. RAMHU uses lightweight and efficient performance algorithms that, according to many researchers, have shown that ECIES and PHOTON are efficient encryption and signature algorithms, respectively. We intend to evaluate RAMHU in terms of efficiency and discovery of performance standards such as end-to-end request delay, throughput, and error rate.
3. From other future works, we intend to use a robust security mechanism with \oplus operation to support the exchange and management of public keys. Broadcasting public keys in general needs more attention to prevent various attacks. Public key storage on users' devices can also be a reason to compromise authentication.
4. For more testing in preventing analysis of authorisation requests and responses, we intend to test the authorisation scheme with side-channel attacks (SCA) such as simple power analysis (SPA) and differential power analysis (DPA) and template attacks. In addition to performance testing, we intend to test XACML (PDP engine) with complex combining policies and algorithms while maintaining the confidentiality of users' information and preventing leakage to intruders.
5. We will focus on patients' data without the use of cryptographic mechanisms in examining the patients' daily condition, use patients' real data to test PAX with large data, and allow PAX to distinguish between patients' history, daily status, and purpose of data access. We will also encrypt the patients' old medical records (within a certain period) that are not frequently retrieved by healthcare providers in a manner that does not affect the efficiency of the server in providing the service to users.
6. We will investigate the application of a light hash algorithm to generate key ephemeral k in ECDSA and patients' pseudonyms, which support increased randomization while maintaining system performance as an additional security measure to protect the privacy of medical records in EHR.
7. After store data collection in EMR, our project needs supporting security procedures between CS and DS to store partial records in the remote repository. This process requires accurate and robust security procedures to prevent intruders from modifying history data for patients.
8. The NTRUSign algorithm is more efficient in term of performance than ECDSA but it is less secure (Driessen et al. 2008). We intend to investigate

the integration of NTRUSign performance features with ECDSA to improve computation operations and energy savings in HWSN. In addition, we will try to compare NTRUSign-BLAKE2bp and ECDSA-BLAKE2bp in terms of security and performance.

9. Support our scheme is by using ECDSA-BLAKE2bp with efficient curves, such as Edward curve, efficient PM methods, such as Frobenius and system coordinates, such as λ -Projective in (Oliveira et al. 2014) to improve the efficiency of patients' data signing in HWSN.
10. We intend to integrate our scheme into a real HWSN environment to evaluate the efficiency and feasibility of REISCH algorithms to improve the lifetime of *SNs* in patients' data collection as long as possible.

8.3 Summary of the Chapter

In this chapter, we explained the conclusions of our project schemes (the authentication, authorisation and data collection schemes) in the construction of a robust HC application in support of security and privacy issues. Then, we described the future work to develop our project in terms of authentication, authorisation and data collection.

References

- AbdAllah, E. G., Zulkernine, M. & Hassanein, H. S. 2018, ‘Preventing unauthorized access in information centric networking’, *Security and Privacy*, vol. 1, no. 4, pp. 1–13.
- Abdelraheem, M. A. 2012, ‘Estimating the probabilities of low-weight differential and linear approximations on PRESENT-like ciphers’, *International Conference on Information Security and Cryptology, Springer*, pp. 368–382.
- Abdouli, A. S., Baek, J. & Yeun, C. Y. 2011, ‘Survey on computationally hard problems and their applications to cryptography’, *2011 International Conference for Internet Technology and Secured Transactions (ICITST), IEEE*, pp. 46–52.
- Abueh, Y. J. & Liu, H. 2016, ‘Message authentication in driverless cars’, *Technologies for Homeland Security (HST), 2016 IEEE Symposium on, IEEE*, pp. 1–6.
- Aceto, G., Persico, V. & Pescapé, A. 2018, ‘The role of information and communication technologies in healthcare: taxonomies, perspectives, and challenges’, *Journal of Network and Computer Applications*, vol. 107, pp. 125–154.
- Ahmad, N., Cruickshank, H., Cao, Y., Khan, F. A., Asif, M., Ahmad, A. & Jeon, G. 2017, ‘Privacy by architecture pseudonym framework for delay tolerant network’, *Future Generation Computer Systems*, pp. 979–992.
- Ahmadian, Z. & Jamshidpour, S. 2018, ‘Linear subspace cryptanalysis of Harn’s secret sharing-based group authentication scheme’, *IEEE Transactions on Information Forensics and Security*, vol. 13, no. 2, pp. 502–510.
- Aitzhan, N. Z. & Svetinovic, D. 2018, ‘Security and privacy in decentralized energy trading through multi-signatures, blockchain and anonymous messaging streams’, *IEEE Transactions on Dependable and Secure Computing*, vol. 15, no. 5, pp. 840–852.
- Al-Adhami, A., Ambrose, M., Stenget, I. & Tomlinson, M. 2017, ‘A 256 bit implementation of ecc-rfid based system using shamir secret sharing scheme and keccak hash function’, *2017 Ninth International Conference on Ubiquitous and Future Networks (ICUFN), IEEE*, pp. 165–171.
- Al Ameen, M. & Kwak, K. S. 2011, ‘Social issues in wireless sensor networks with healthcare perspective’, *The International Arab Journal of Information Technology*, vol. 8, no. 1, pp. 52–58.
- Al Ameen, M., Liu, J. & Kwak, K. 2012, ‘Security and privacy issues in wireless sensor networks for healthcare applications’, *Journal of medical systems*, vol. 36, no. 1, pp. 93–101.

- Al-Janabi, S., Al-Shourbaji, I., Shojafar, M. & Shamshirband, S. 2017, 'Survey of main challenges (security and privacy) in wireless body area networks for healthcare applications', *Egyptian Informatics Journal*, vol. 18, no. 2, pp. 113–122.
- Al Maashri, A., Pathuri, L., Awadalla, M., Ahmad, A. & Ould-Khaoua, M. 2016, 'Optimized hardware crypto engines for XTEA and SHA-512 for wireless sensor nodes', *Indian Journal of Science and Technology*, vol. 9, no. 29.
- Al-Turjman, F. & Alturjman, S. 2018, 'Confidential smart-sensing framework in the IoT era', *The Journal of Supercomputing*, vol. 74, no. 10, pp. 5187–5198.
- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019a, 'Efficient and secure ECDSA algorithm and its applications: a survey', *International Journal of Communication Networks and Information Security*, vol. 11, no. 1, pp. 7–35.
- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019b, 'PAX: using pseudonymization and anonymization to protect patients' identities and data in the healthcare system', *International Journal of Environmental Research and Public Health*, vol. 16, no. 9, pp. 1–36.
- Al-Zubaidie, M., Zhang, Z. & Zhang, J. 2019c, 'RAMHU: a new robust lightweight scheme for mutual users authentication in healthcare applications', *Security and Communication Networks*, vol. 2019, pp. 1–26.
- Alhaqbani, B. & Fidge, C. 2008, 'Privacy-preserving electronic health record linkage using pseudonym identifiers', *HealthCom 2008-10th International Conference on E-health Networking, Applications and Services, IEEE*, pp. 108–117.
- Alkureishi, M. A., Lee, W. W., Lyons, M., Wroblewski, K., Farnan, J. M. & Arora, V. M. 2018, 'Electronic-clinical evaluation exercise (e-CEX): a new patient-centered EHR use tool', *Patient education and counseling*, vol. 101, no. 3, pp. 481–489.
- Alsahafi, A. Y. A. & Gay, B. V. 2018, 'An overview of electronic personal health records', *Health Policy and Technology*, vol. 7, no. 4, pp. 427–432.
- Alturki, M. 2017, 'Achieving a secured collaborative environment in e-SiHi system users perspective on a framework to improve patients information', *2017 International Conference on Informatics, Health & Technology (ICIHT), IEEE*, pp. 1–4.
- Amin, R., Islam, S. H., Biswas, G., Khan, M. K. & Kumar, N. 2018, 'A robust and anonymous patient monitoring system using wireless medical sensor networks', *Future Generation Computer Systems*, vol. 80, pp. 483–495.
- Amin, R., Kumar, N., Biswas, G., Iqbal, R. & Chang, V. 2018, 'A light weight authentication protocol for IoT-enabled devices in distributed cloud computing environment', *Future Generation Computer Systems*, vol. 78, pp. 1005–1019.
- Amy, M., Di Matteo, O., Gheorghiu, V., Mosca, M., Parent, A. & Schanck, J. 2016, 'Estimating the cost of generic quantum pre-image attacks on SHA-2 and SHA-3', *International Conference on Selected Areas in Cryptography, Springer*, pp. 317–337.
- Anandakumar, N. N., Peyrin, T. & Poschmann, A. 2014, 'A very compact FPGA implementation of LED and PHOTON', *International Conference in Cryptology in India, Springer*, pp. 304–321.

- Anjum, A., Choo, K.-K. R., Khan, A., Haroon, A., Khan, S., Khan, S. U., Ahmad, N., Raza, B. et al. 2018, 'An efficient privacy mechanism for electronic health records', *computers & security*, vol. 72, pp. 196–211.
- Arshad, H., Teymoori, V., Nikooghadam, M. & Abbassi, H. 2015, 'On the security of a two-factor authentication and key agreement scheme for telecare medicine information systems', *Journal of medical systems*, vol. 39, no. 8, pp. 1–10.
- Asan, O. 2017, 'Providers' perceived facilitators and barriers to EHR screen sharing in outpatient settings', *Applied ergonomics*, vol. 58, pp. 301–307.
- Ateniese, G., Bianchi, G., Capossele, A. T., Petrioli, C. & Spenza, D. 2017, 'Low-cost standard signatures for energy-harvesting wireless sensor networks', *ACM Transactions on Embedded Computing Systems (TECS)*, vol. 16, no. 3, pp. 1–23.
- Aumasson, J.-P., Henzen, L., Meier, W. & Naya-Plasencia, M. 2013, 'Quark: a lightweight hash', *Journal of cryptology*, vol. 26, no. 2, pp. 313–339.
- Aumasson, J.-P., Henzen, L., Meier, W. & Phan, R. C.-W. 2008, 'SHA-3 proposal BLAKE', *Submission to NIST*, vol. 92, pp. 1–76.
- Aumasson, J.-P., Neves, S., Wilcox-O'Hearn, Z. & Winnerlein, C. 2013, 'BLAKE2: simpler, smaller, fast as MD5', *International Conference on Applied Cryptography and Network Security, Springer*, pp. 119–135.
- Awaad, M. H. & Jebbar, W. A. 2015, 'Extending the WSN lifetime by dividing the network area into a specific zones', *International Journal of Computer Network and Information Security*, vol. 7, no. 2, pp. 33–39.
- Ayyildiz, C., Erdem, H. E., Dirikgil, T., Dugenci, O., Kocak, T., Altun, F. & Gungor, V. C. 2019, 'Structure health monitoring using wireless sensor networks on structural elements', *Ad Hoc Networks*, vol. 82, pp. 68–76.
- Babu, K. R. & Padmanabhan, V. 2018, 'Automated validation of DNSSEC', *Progress in Computing, Analytics and Networking, Springer*, pp. 51–59.
- Bachiller, Y., Busch, P., Kavakli, M. & Hamey, L. 2018, 'Survey: big data application in biomedical research', *Proceedings of the 2018 10th International Conference on Computer and Automation Engineering, ACM*, pp. 174–178.
- Barker, E. & Dang, Q. 2016, *NIST special publication 800-57 part 1, revision 4*, Technical report, National Institute of Standards and Technology, U.S. Department of Commerce. Available at <http://dx.doi.org/10.6028/NIST.SP.800-57pt1r4>.
- Bauer, M. S., Chadha, R., Sistla, A. P. & Viswanathan, M. 2018, 'Model checking indistinguishability of randomized security protocols', *International Conference on Computer Aided Verification, Springer*, pp. 117–135.
- Beglaryan, M., Petrosyan, V. & Bunker, E. 2017, 'Development of a tripolar model of technology acceptance: hospital-based physicians' perspective on EHR', *International journal of medical informatics*, vol. 102, pp. 50–61.
- Beltran, V., Martinez, J. & Skarmeta, A. 2017, 'User-centric access control for efficient security in smart cities', *Global Internet of Things Summit (GIoTS), 2017, IEEE*, pp. 1–6.

- Berger, T. P., D'Hayer, J., Marquet, K., Minier, M. & Thomas, G. 2012, 'The GLUON family: a lightweight hash function family based on FCSRs', *International Conference on Cryptology in Africa, Springer*, pp. 306–323.
- Bhatia, T. & Verma, A. 2017, 'Data security in mobile cloud computing paradigm: a survey, taxonomy and open research issues', *The Journal of Supercomputing*, vol. 73, no. 6, pp. 2558–2631.
- Bogdanov, A., Knežević, M., Leander, G., Toz, D., Varıcı, K. & Verbauwhede, I. 2011, 'SPONGENT: a lightweight hash function', *International Workshop on Cryptographic Hardware and Embedded Systems, Springer*, pp. 312–325.
- Bogos, S., Gaspoz, J. & Vaudenay, S. 2018, 'Cryptanalysis of a homomorphic encryption scheme', *Cryptography and Communications*, vol. 10, no. 1, pp. 27–39.
- Bojjagani, S. & Sastry, V. 2017, 'A secure end-to-end sms-based mobile banking protocol', *International journal of communication systems*, vol. 30, no. 15, pp. 1–19.
- Bojjagani, S. & Sastry, V. 2019, 'A secure end-to-end proximity NFC-based mobile payment protocol', *Computer Standards & Interfaces*, vol. 66, pp. 1–21.
- Bos, J. W., Halderman, J. A., Heninger, N., Moore, J., Naehrig, M. & Wustrow, E. 2014, 'Elliptic curve cryptography in practice', *International Conference on Financial Cryptography and Data Security, Springer*, pp. 157–175.
- Boubiche, D. E., Boubiche, S., Toral-Cruz, H., Pathan, A.-S. K., Bilami, A. & Athmani, S. 2016, 'SDAW: secure data aggregation watermarking-based scheme in homogeneous WSNs', *Telecommunication Systems*, vol. 62, no. 2, pp. 277–288.
- Bradford Networks 2012, *Top 4 network security challenges in healthcare*. Available at <http://cipherwire.net/wp-content/uploads/2013/06/>.
- Brockmann, A. 2018, 'A formula that generates hash collisions', *arXiv preprint arXiv:1808.10668, Cornell University*.
- Brossard, D., Gebel, G. & Berg, M. 2017, 'A systematic approach to implementing ABAC', *Proceedings of the 2nd ACM Workshop on Attribute-Based Access Control, ACM*, pp. 53–59.
- Bruland, P., Doods, J., Brix, T., Dugas, M. & Storck, M. 2018, 'Connecting health-care and clinical research: workflow optimizations through seamless integration of EHR, pseudonymization services and EDC systems', *International journal of medical informatics*, vol. 119, pp. 103–108.
- Burrows, M., Abadi, M. & Needham, R. M. 1989, 'A logic of authentication', *Proceedings of the Royal Society of London. A. Mathematical and Physical Sciences*, vol. 426, no. 1871, pp. 233–271.
- Calvillo-Arbizu, J., Roman-Martinez, I. & Roa-Romero, L. M. 2014, 'Standardized access control mechanisms for protecting ISO 13606-based electronic health record systems', *IEEE-EMBS International Conference on Biomedical and Health Informatics (BHI), IEEE*, pp. 539–542.
- Cantu, M., Kim, J. & Zhang, X. 2017, 'Finding hash collisions using MPI on HPC clusters', *Systems, Applications and Technology Conference (LISAT), 2017 IEEE Long Island, IEEE*, pp. 1–6.

- Carvalho, J. V., Rocha, Á., van de Wetering, R. & Abreu, A. 2019, ‘A maturity model for hospital information systems’, *Journal of Business Research*, vol. 94, pp. 388–399.
- Chadwick, D., Zhao, G., Otenko, S., Laborde, R., Su, L. & Nguyen, T. A. 2006, ‘Building a modular authorisation infrastructure’, *The UK e-Science All Hands Meeting, Nottingham*, pp. 1–8.
- Challa, S., Wazid, M., Das, A. K., Kumar, N., Reddy, A. G., Yoon, E.-J. & Yoo, K.-Y. 2017, ‘Secure signature-based authenticated key establishment scheme for future IoT applications’, *IEEE Access*, vol. 5, pp. 3028–3043.
- Chandrakar, P. & Om, H. 2017, ‘A secure and robust anonymous three-factor remote user authentication scheme for multi-server environment using ECC’, *Computer Communications*, vol. 110, pp. 26–34.
- Chaves, R., Sousa, L., Sklavos, N., Fournaris, A. P., Kalogeridou, G., Kitsos, P. & Sheikh, F. 2016, ‘Secure hashing: SHA-1, SHA-2, and SHA-3’, *Circuits and Systems for Security and Privacy*, pp. 105–132.
- Chen, C.-M., Fang, W., Wang, K.-H. & Wu, T.-Y. 2017, ‘Comments on “an improved secure and efficient password and chaos-based two-party key agreement protocol”’, *Nonlinear Dynamics*, vol. 87, no. 3, pp. 2073–2075.
- Chen, Y.-Y., Lu, J.-C. & Jan, J.-K. 2012, ‘A secure EHR system based on hybrid clouds’, *Journal of medical systems*, vol. 36, no. 5, pp. 3375–3384.
- Cheneau, T., Boudguiga, A. & Laurent, M. 2010, ‘Significantly improved performances of the cryptographically generated addresses thanks to ECC and GPGPU’, *computers & security*, vol. 29, no. 4, pp. 419–431.
- Chiriaco, V., Franzen, A., Thayil, R. & Zhang, X. 2017, ‘Finding partial hash collisions by brute force parallel programming’, *Systems, Applications and Technology Conference (LISAT), 2017 IEEE Long Island, IEEE*, pp. 1–6.
- Chiu, P.-H. & Hripcsak, G. 2017, ‘EHR-based phenotyping: bulk learning and evaluation’, *Journal of biomedical informatics*, vol. 70, pp. 35–51.
- Cho, H. 2018, ‘ASIC-resistance of multi-hash proof-of-work mechanisms for blockchain consensus protocols’, *IEEE Access*, vol. 6, pp. 66210–66222.
- Chuang, M.-C. & Chen, M. C. 2014, ‘An anonymous multi-server authenticated key agreement scheme based on trust computing using smart cards and biometrics’, *Expert Systems with Applications*, vol. 41, no. 4, pp. 1411–1418.
- City of Melbourne Open Data Team October 19, 2018, *Sensor readings, with temperature, light, humidity every 5 minutes at 8 locations*. Available at <https://data.melbourne.vic.gov.au/Environment/Sensor-readings-with-temperature-light-humidity-ev/ez6b-syvw>.
- Consultants to Government and Industries 2015, *Cyberprivacy and cybersecurity for health data: building confidence in health systems*, Technical report, CGI GROUP INC. Available at <https://www.cgi.com/sites/default/files/>.

- Czaja, A. S., Ross, M. E., Liu, W., Fiks, A. G., Localio, R., Wasserman, R. C., Grundmeier, R. W., Adams, W. G. & through Collaborative Electronic Reporting (CER2) Consortium, C. E. R. 2018, 'Electronic health record (EHR) based postmarketing surveillance of adverse events associated with pediatric off-label medication use: a case study of short-acting beta-2 agonists and arrhythmias', *Pharmacoepidemiology and drug safety*, vol. 27, no. 7, pp. 815–822.
- Dabbagh, M. & Rayes, A. 2019, 'Internet of things security and privacy', *Internet of Things From Hype to Reality, Springer*, pp. 211–238.
- Dallaglio, M., Giorgetti, A., Sambo, N., Cugini, F. & Castoldi, P. 2015, 'Provisioning and restoration with sliceability in GMPLS-based elastic optical networks', *IEEE/OSA Journal of Optical Communications and Networking*, vol. 7, no. 2, pp. A309–A317.
- Danger, J.-L., Guilley, S., Hoogvorst, P., Murdica, C. & Naccache, D. 2013, 'A synthesis of side-channel attacks on elliptic curve cryptography in smart-cards', *Journal of Cryptographic Engineering*, vol. 3, no. 4, pp. 241–265.
- Das, A. K., Sutrala, A. K., Odelu, V. & Goswami, A. 2017, 'A secure smartcard-based anonymous user authentication scheme for healthcare applications using wireless medical sensor networks', *Wireless Personal Communications*, vol. 94, no. 3, pp. 1899–1933.
- Davis, J. 2017, *EHR server hack threatens data of 14,000 IVF clinic patients*, Technical report, healthcare IT News. Available at <http://www.healthcareitnews.com/news/ehr-server-hack-threatens-data-14000-ivf-clinic-patients>.
- De Dormale, G. M. & Quisquater, J.-J. 2007, 'High-speed hardware implementations of elliptic curve cryptography: a survey', *Journal of systems architecture*, vol. 53, no. 2, pp. 72–84.
- De Meulenaer, G., Gosset, F., Standaert, F.-X. & Pereira, O. 2008, 'On the energy cost of communication and cryptography in wireless sensor networks', *2008 IEEE International Conference on Wireless and Mobile Computing, Networking and Communications, IEEE*, pp. 580–585.
- Deng, F., Wang, S., Zhang, L., Wei, X. & Yu, J. 2018, 'Establishment of attribute bitmaps for efficient XACML policy evaluation', *Knowledge-Based Systems*, vol. 143, pp. 93–101.
- Dhillon, P. K. & Kalra, S. 2018, 'Multi-factor user authentication scheme for IoT-based healthcare services', *Journal of Reliable Intelligent Environments*, vol. 4, no. 3, pp. 141–160.
- Di Pietro, R., Guarino, S., Verde, N. V. & Domingo-Ferrer, J. 2014, 'Security in wireless ad-hoc networks—a survey', *Computer Communications*, vol. 51, pp. 1–20.
- Dikshit, P. & Singh, K. 2017, 'Efficient weighted threshold ECDSA for securing bitcoin wallet', *Asia Security and Privacy (ISEASP), 2017 ISEA, IEEE*, pp. 1–9.
- Diro, A. A., Chilamkurti, N. & Kumar, N. 2017, 'Lightweight cybersecurity schemes using elliptic curve cryptography in publish-subscribe fog computing', *Mobile Networks and Applications*, vol. 22, no. 5, pp. 848–858.

- Dobraunig, C., Eichlseder, M. & Mendel, F. 2015, 'Analysis of SHA-512/224 and SHA-512/256', *International Conference on the Theory and Application of Cryptology and Information Security*, Springer, pp. 612–630.
- Dolev, D. & Yao, A. 1983, 'On the security of public key protocols', *IEEE Transactions on information theory*, vol. 29, no. 2, pp. 198–208.
- Dong, Q., Chen, M., Li, L. & Fan, K. 2018, 'Cloud-based radio frequency identification authentication protocol with location privacy protection', *International Journal of Distributed Sensor Networks*, vol. 14, no. 1, pp. 1–12.
- Donovan, F. 2018, *417K patients exposed in latest phishing attack at AU health*, Technical report, Health IT Security. Available at <https://healthitsecurity.com/news/417k-patients-exposed-in-latest-phishing-attack-at-au-health>.
- Dou, Y., Weng, J., Ma, C. & Wei, F. 2017, 'Secure and efficient ECC speeding up algorithms for wireless sensor networks', *Soft Computing*, vol. 21, no. 19, pp. 5665–5673.
- Driessens, B., Poschmann, A. & Paar, C. 2008, 'Comparison of innovative signature algorithms for WSNs', *Proceedings of the first ACM conference on Wireless network security, ACM*, pp. 30–35.
- Duan, L., Zhang, Y., Chen, S., Zhao, S., Wang, S., Liu, D., Liu, R. P., Cheng, B. & Chen, J. 2016, 'Automated policy combination for secure data sharing in cross-organizational collaborations', *IEEE Access*, vol. 4, pp. 3454–3468.
- Dwivedi, A. D., Srivastava, G., Dhar, S. & Singh, R. 2019, 'A decentralized privacy-preserving healthcare blockchain for IoT', *Sensors*, vol. 19, no. 2, pp. 1–17.
- El Barachi, M. & Alfandi, O. 2013, 'The design and implementation of a wireless healthcare application for WSN-enabled IMS environments', *2013 IEEE 10th Consumer Communications and Networking Conference (CCNC)*, IEEE, pp. 892–897.
- El-Semary, A. M. & Abdel-Azim, M. M. 2013, 'New trends in secure routing protocols for wireless sensor networks', *International Journal of Distributed Sensor Networks*, vol. 9, no. 5, pp. 1–16.
- El-Tawab, S., Yorio, Z., Salman, A., Oram, R. & Park, B. B. 2019, 'Origin-destination tracking analysis of an intelligent transit bus system using internet of things', *2019 IEEE International Conference on Pervasive Computing and Communications Workshops (PerCom Workshops)*, IEEE, pp. 139–144.
- Elhoseny, M., Yuan, X., El-Minir, H. K. & Riad, A. M. 2016, 'An energy efficient encryption method for secure dynamic WSN', *Security and Communication Networks*, vol. 9, no. 13, pp. 2024–2031.
- Emmanuel, N., Khan, A., Alam, M., Khan, T. & Khan, M. K. 2018, 'Structures and data preserving homomorphic signatures', *Journal of Network and Computer Applications*, vol. 102, pp. 58–70.
- Entzeridou, E., Markopoulou, E. & Mollaki, V. 2018, 'Public and physician's expectations and ethical concerns about electronic health record: benefits outweigh risks except for information security', *International journal of medical informatics*, vol. 110, pp. 98–107.

- Esiner, E. & Datta, A. 2019, 'Two-factor authentication for trusted third party free dispersed storage', *Future Generation Computer Systems*, vol. 90, pp. 291–306.
- Ever, Y. K. 2018, 'Secure-anonymous user authentication scheme for e-healthcare application using wireless medical sensor networks', *IEEE Systems Journal*, vol. 13, no. 1, pp. 456–467.
- Fan, J., Guo, X., De Mulder, E., Schaumont, P., Preneel, B. & Verbauwhede, I. 2010, 'State-of-the-art of secure ECC implementations: a survey on known side-channel attacks and countermeasures', *2010 IEEE International Symposium on Hardware-Oriented Security and Trust (HOST)*, IEEE, pp. 76–87.
- Fan, J. & Verbauwhede, I. 2012, 'An updated survey on secure ECC implementations: attacks, countermeasures and cost', *Cryptography and Security: From Theory to Applications*, Springer, pp. 265–282.
- Fan, S., Wang, W. & Cheng, Q. 2016, 'Attacking openssl implementation of ECDSA with a few signatures', *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, ACM, pp. 1505–1515.
- Fan, X. & Gong, G. 2012, 'Accelerating signature-based broadcast authentication for wireless sensor networks', *Ad Hoc Networks*, vol. 10, no. 4, pp. 723–736.
- Farash, M. S., Nawaz, O., Mahmood, K., Chaudhry, S. A. & Khan, M. K. 2016, 'A provably secure RFID authentication protocol based on elliptic curve for healthcare environments', *Journal of medical systems*, vol. 40, no. 7, pp. 1–7.
- Fernández-Alemán, J. L., Señor, I. C., Lozoya, P. Á. O. & Toval, A. 2013, 'Security and privacy in electronic health records: a systematic literature review', *Journal of biomedical informatics*, vol. 46, no. 3, pp. 541–562.
- Franeková, M., Holečko, P., Bubeníková, E. & Kanáliková, A. 2017, 'Transport scenarios analysis within C2C communications focusing on security aspects', *2017 IEEE 15th International Symposium on Applied Machine Intelligence and Informatics (SAMI)*, IEEE, pp. 461–466.
- Furtak, J., Zieliński, Z. & Chudzikiewicz, J. 2019, 'A framework for constructing a secure domain of sensor nodes', *Sensors*, vol. 19, no. 12, pp. 1–30.
- Gajanayake, R., Iannella, R. & Sahama, T. 2014, 'Privacy oriented access control for electronic health records', *Electronic Journal of Health Informatics*, vol. 8, no. 2, pp. 1–8.
- Ganiga, R., Pai, R. M., MM, M. P. & Sinha, R. K. 2018, 'Private cloud solution for securing and managing patient data in rural healthcare system', *Procedia Computer Science*, vol. 135, pp. 688–699.
- Gao, Y., Ao, H., Feng, Z., Zhou, W., Hu, S. & Tang, W. 2018, 'Mobile network security and privacy in WSN', *Procedia Computer Science*, vol. 129, pp. 324–330.
- García-Holgado, A., Marcos-Pablos, S., Therón-Sánchez, R. & García-Peña, F. J. 2019, 'Technological ecosystems in the health sector: a mapping study of European research projects', *Journal of medical systems*, vol. 43, no. 4, pp. 1–11.
- Garrett, B. 2016, *VORMETRIC data threat report*, Technical report, 451 RESEARCH, Thales Group. Available at <https://www.thalesesecurity.com/>.

- Giechaskiel, I., Cremers, C. & Rasmussen, K. B. 2018, 'When the crypto in cryptocurrencies breaks: Bitcoin security under broken primitives', *IEEE Security & Privacy*, vol. 16, no. 4, pp. 46–56.
- Giri, D., Maitra, T., Amin, R. & Srivastava, P. 2015, 'An efficient and robust RSA-based remote user authentication for telecare medical information systems', *Journal of medical systems*, vol. 39, no. 1, pp. 1–9.
- Gold, R., Cottrell, E., Bunce, A., Middendorf, M., Hollombe, C., Cowburn, S., Mahr, P. & Melgar, G. 2017, 'Developing electronic health record (EHR) strategies related to health center patients' social determinants of health', *The Journal of the American Board of Family Medicine*, vol. 30, no. 4, pp. 428–447.
- Grace, P. & Surridge, M. 2017, 'Towards a model of user-centered privacy preservation', *Proceedings of the 12th International Conference on Availability, Reliability and Security, ACM*, pp. 1–8.
- Griggs, K. N., Ossipova, O., Kohlios, C. P., Baccarini, A. N., Howson, E. A. & Hayajneh, T. 2018, 'Healthcare blockchain system using smart contracts for secure automated remote patient monitoring', *Journal of medical systems*, vol. 42, no. 7, pp. 1–7.
- Guesmi, R., Farah, M., Kachouri, A. & Samet, M. 2016, 'A novel chaos-based image encryption using DNA sequence operation and secure hash Algorithm SHA-2', *Nonlinear Dynamics*, vol. 83, no. 3, pp. 1123–1136.
- Gumaei, A., Sammouda, R., Al-Salman, A. M. S. & Alsanad, A. 2019, 'Anti-spoofing cloud-based multi-spectral biometric identification system for enterprise security and privacy-preservation', *Journal of Parallel and Distributed Computing*, vol. 124, pp. 27–40.
- Guo, J., Peyrin, T. & Poschmann, A. 2011, 'The PHOTON family of lightweight hash functions', *Annual Cryptology Conference, Springer*, pp. 222–239.
- Gupta, S., Parne, B. L. & Chaudhari, N. S. 2018, 'An efficient handover AKA protocol for wireless network using Chameleon Hash function', *2018 4th International Conference on Recent Advances in Information Technology (RAIT), IEEE*, pp. 1–7.
- Haftu, G. G. 2019, 'Information communications technology and economic growth in Sub-Saharan Africa: a panel data approach', *Telecommunications Policy*, vol. 43, no. 1, pp. 88–99.
- Hamidi, H. 2019, 'An approach to develop the smart health using Internet of things and authentication based on biometric technology', *Future generation computer systems*, vol. 91, pp. 434–449.
- Harkanson, R. & Kim, Y. 2017, 'Applications of elliptic curve cryptography: a light introduction to elliptic curves and a survey of their applications', *Proceedings of the 12th Annual Conference on Cyber and Information Security Research, ACM*, pp. 1–7.
- Harman, L. B., Flite, C. A. & Bond, K. 2012, 'Electronic health records: privacy, confidentiality, and security', *AMA Journal of Ethics*, vol. 14, no. 9, pp. 712–719.
- Harran, M., Farrelly, W. & Curran, K. 2018, 'A method for verifying integrity & authenticating digital media', *Applied computing and informatics*, vol. 14, no. 2, pp. 145–158.

- Hathaliya, J. J., Tanwar, S., Tyagi, S. & Kumar, N. 2019, ‘Securing electronics healthcare records in Healthcare 4.0: A biometric-based approach’, *Computers & Electrical Engineering*, vol. 76, pp. 398–410.
- He, D. & Zeadally, S. 2015, ‘Authentication protocol for an ambient assisted living system’, *IEEE Communications Magazine*, vol. 53, no. 1, pp. 71–77.
- Heart, T., Ben-Assuli, O. & Shabtai, I. 2017, ‘A review of PHR, EMR and EHR integration: a more personalized healthcare and public health policy’, *Health Policy and Technology*, vol. 6, no. 1, pp. 20–25.
- Heigl, M., Schramm, M. & Fiala, D. 2019, ‘A lightweight quantum-safe security concept for wireless sensor network communication’, *2019 IEEE International Conference on Pervasive Computing and Communications Workshops (PerCom Workshops)*, IEEE, pp. 906–911.
- Hoceini, O., Afifi, H. & Aoudjit, R. 2017, ‘Authentication based elliptic curves digital signature for ZigBee networks’, *International Conference on Mobile, Secure, and Programmable Networking*, Springer, pp. 63–73.
- Homsirikamol, E., Rogawski, M. & Gaj, K. 2011, ‘Comparing hardware performance of round 3 SHA-3 candidates using multiple hardware architectures in Xilinx and Altera FPGAs’, *Crypt II Hash Workshop*, Vol. 2011, pp. 1–15.
- Huang, W., Langberg, M., Kliewer, J. & Bruck, J. 2016, ‘Communication efficient secret sharing’, *IEEE Transactions on Information Theory*, vol. 62, no. 12, pp. 7195–7206.
- Ibrahim, A. & Dalkılıç, G. 2017, ‘An Advanced Encryption Standard Powered Mutual Authentication Protocol Based on Elliptic Curve Cryptography for RFID, Proven on WISP’, *Journal of Sensors*, vol. 2017.
- Ijaz, R. & Pasha, M. A. 2017, ‘Area-efficient and high-throughput hardware implementations of TAV-128 hash function for resource-constrained IoT devices’, *2017 9th IEEE International Conference on Intelligent Data Acquisition and Advanced Computing Systems: Technology and Applications (IDAACS)*, Vol. 2, IEEE, pp. 832–835.
- Ilhan, Ö. M., Thatmann, D. & Küpper, A. 2015, ‘A performance analysis of the xacml decision process and the impact of caching’, *2015 11th International Conference on Signal-Image Technology & Internet-Based Systems (SITIS)*, IEEE, pp. 216–223.
- Imran, M., Rashid, M. & Shafi, I. 2018, ‘Lopez Dahab based elliptic crypto processor (ECP) over GF (2¹⁶³) for low-area applications on FPGA’, *2018 International Conference on Engineering and Emerging Technologies (ICEET)*, IEEE, pp. 1–6.
- Imran, M., Shafi, I., Jafri, A. R. & Rashid, M. 2017, ‘Hardware design and implementation of ECC based crypto processor for low-area-applications on FPGA’, *2017 International Conference on Open Source Systems & Technologies (ICOSSST)*, IEEE, pp. 54–59.
- Iqbal, U. & Shafi, S. 2019, ‘A provable and secure key exchange protocol based on the elliptical curve Diffe–Hellman for WSN’, *Advances in Big Data and Cloud Computing*, Springer, pp. 363–372.

- Islam, S. H., Amin, R., Biswas, G., Farash, M. S., Li, X. & Kumari, S. 2017, 'An improved three party authenticated key exchange protocol using hash function and elliptic curve cryptography for mobile-commerce environments', *Journal of King Saud University-Computer and Information Sciences*, vol. 29, no. 3, pp. 311–324.
- Jariwala, V. & Jinwala, D. 2012, 'A novel approach for secure data aggregation in wireless sensor networks', *arXiv preprint arXiv:1203.4698*, Cornell University.
- Javadi, S. S. & Razzaque, M. 2013, 'Security and privacy in wireless body area networks for health care applications', *Wireless Networks and Security*, Springer, pp. 165–187.
- Jessica Davis 2019, *Breach Tally of Oregon DHS Phishing Attack Reaches 645K Patients*. Available at <https://healthitsecurity.com/news/breach-tally-of-oregon-dhs-phishing-attack-reaches-645k-patients>.
- Jiang, Q., Khan, M. K., Lu, X., Ma, J. & He, D. 2016, 'A privacy preserving three-factor authentication protocol for e-health clouds', *The Journal of Supercomputing*, vol. 72, no. 10, pp. 3826–3849.
- Jin, X., Krishnan, R. & Sandhu, R. 2012, 'A unified attribute-based access control model covering DAC, MAC and RBAC', *IFIP Annual Conference on Data and Applications Security and Privacy*, Springer, pp. 41–55.
- Jo, S.-M. & Chung, K.-Y. 2015, 'Design of access control system for telemedicine secure XML documents', *Multimedia Tools and Applications*, vol. 74, no. 7, pp. 2257–2271.
- Johnson, D., Menezes, A. & Vanstone, S. 2001, 'The elliptic curve digital signature algorithm (ECDSA)', *International Journal of Information Security*, vol. 1, no. 1, pp. 36–63.
- Joye, M. 2008, 'Fast point multiplication on elliptic curves without precomputation', *International Workshop on the Arithmetic of Finite Fields*, Springer, pp. 36–46.
- Kale, S. S. & Bhagwat, D. 2018, 'A Secured IoT based webcare healthcare controlling system using BSN', *2018 Second International Conference on Inventive Communication and Computational Technologies (ICICCT)*, IEEE, pp. 816–821.
- Kapusta, K., Memmi, G. & Noura, H. 2019, 'Additively homomorphic encryption and fragmentation scheme for data aggregation inside unattended wireless sensor networks', *Annals of Telecommunications*, pp. 1–9.
- Kavun, E. B. & Yalcin, T. 2010, 'A lightweight implementation of Keccak hash function for radio-frequency identification applications', *International Workshop on Radio Frequency Identification: Security and Privacy Issues*, Springer, pp. 258–269.
- Khatoun, R. & Zeadally, S. 2017, 'Cybersecurity and privacy solutions in smart cities', *IEEE Communications Magazine*, vol. 55, no. 3, pp. 51–59.
- Kittur, A. S. & Pais, A. R. 2019, 'A new batch verification scheme for ECDSA* signatures', *Sādhanā*, vol. 44, no. 7, pp. 1–12.
- Knellwolf, S. & Khovratovich, D. 2012, 'New preimage attacks against reduced SHA-1', *Advances in Cryptology-Crypto 2012*, Springer, pp. 367–383.

- Koczkodaj, W. W., Mazurek, M., Strzałka, D., Wolny-Dominiak, A. & Woodbury-Smith, M. 2018, 'Electronic health record breaches as social indicators', *Social Indicators Research*, pp. 1–11.
- Kodali, R. K. 2013, 'Implementation of ECDSA in WSN', *2013 International Conference on Control Communication and Computing (ICCC)*, IEEE, pp. 310–314.
- Körber, O., Keller, J. & Holmbacka, S. 2018, 'Energy-efficient execution of cryptographic hash functions on big. LITTLE architecture', *2018 13th International Symposium on Reconfigurable Communication-centric Systems-on-Chip (ReCoSoC)*, IEEE, pp. 1–7.
- Kuang, B., Fu, A., Yu, S., Yang, G., Su, M. & Zhang, Y. 2019, 'ESDRA: an efficient and secure distributed remote attestation scheme for IoT swarms', *IEEE Internet of Things Journal*, pp. 1–12.
- Kumar, N., Kaur, K., Misra, S. C. & Iqbal, R. 2016, 'An intelligent RFID-enabled authentication scheme for healthcare applications in vehicular mobile cloud', *Peer-to-Peer Networking and Applications*, vol. 9, no. 5, pp. 824–840.
- Kumar, P. & Lee, H.-J. 2011, 'Security issues in healthcare applications using wireless medical sensor networks: a survey', *Sensors*, vol. 12, no. 1, pp. 55–91.
- Kumar, V., Shekhawat, R. S. & Bohra, M. K. 2018, 'Secure data aggregation in WSNs: A two level framework', *Proceedings of the 11th International Conference on Security of Information and Networks*, ACM, pp. 1–7.
- Latinov, L. 2018, *Md5, sha-1, sha-256 and sha-512 speed performance*. Available at <https://automationrhapsody.com/md5-sha-1-sha-256-sha-512-speed-performance/>.
- Lavanya, M. & Natarajan, V. 2017a, 'Lightweight key agreement protocol for IoT based on IKEv2', *Computers & Electrical Engineering*, vol. 64, pp. 580–594.
- Lavanya, M. & Natarajan, V. 2017b, 'LWDSA: light-weight digital signature algorithm for wireless sensor networks', *Sādhana*, pp. 1–15.
- Levine, M. E., Albers, D. J. & Hripcak, G. 2018, 'Methodological variations in lagged regression for detecting physiologic drug effects in EHR data', *arXiv preprint arXiv:1801.08929*, Cornell University.
- Li, J., Zhang, W., Kumari, S., Choo, K.-K. R. & Hogrefe, D. 2018, 'Security analysis and improvement of a mutual authentication and key agreement solution for wireless sensor networks using chaotic maps', *Transactions on Emerging Telecommunications Technologies*, vol. 29, no. 6, pp. 1–17.
- Li, X., Niu, J., Bhuiyan, M. Z. A., Wu, F., Karuppiah, M. & Kumari, S. 2018, 'A robust ECC-based provable secure authentication protocol with privacy preserving for industrial internet of things', *IEEE Transactions on Industrial Informatics*, vol. 14, no. 8, pp. 3599–3609.
- Li, X., Niu, J., Kumari, S., Liao, J., Liang, W. & Khan, M. K. 2016, 'A new authentication protocol for healthcare applications using wireless medical sensor networks with user anonymity', *Security and Communication Networks*, vol. 9, no. 15, pp. 2643–2655.

- Liu, C.-H. & Chung, Y.-F. 2017, 'Secure user authentication scheme for wireless healthcare sensor networks', *Computers & Electrical Engineering*, vol. 59, pp. 250–261.
- Liu, X., Xia, Y., Yang, W. & Yang, F. 2018, 'Secure and efficient querying over personal health records in cloud computing', *Neurocomputing*, vol. 274, pp. 99–105.
- Liu, X., Zhang, R. & Zhao, M. 2019, 'A robust authentication scheme with dynamic password for wireless body area networks', *Computer Networks*, vol. 161, pp. 220–234.
- Liu, Y., Yang, C., Wang, Y., Zhu, L. & Ji, W. 2018, 'Cheating identifiable secret sharing scheme using symmetric bivariate polynomial', *Information Sciences*, vol. 453, pp. 21–29.
- Liu, Y., Zhao, Y., Tian, A., Yu, Y. & Du, X. 2019, 'Blockchain based privacy-preserving software updates with proof-of-delivery for Internet of Things', *Journal of Parallel and Distributed Computing*, vol. 132, pp. 141–149.
- Liu, Z., Huang, X., Hu, Z., Khan, M. K., Seo, H. & Zhou, L. 2017, 'On emerging family of elliptic curves to secure internet of things: ECC comes of age', *IEEE Transactions on Dependable and Secure Computing*, vol. 14, no. 3, pp. 237–248.
- Lokshina, I. & Lanting, C. 2019, 'A qualitative evaluation of IoT-driven eHealth: knowledge management, business models and opportunities, deployment and evolution', *Data-Centric Business and Applications*, Springer, pp. 23–52.
- Lu, Y. & Sinnott, R. O. 2018, 'Semantic privacy-preserving framework for electronic health record linkage', *Telematics and Informatics*, vol. 35, no. 4, pp. 737–752.
- Lu, Y., Zhai, J., Zhu, R. & Qin, J. 2016, 'Study of wireless authentication center with mixed encryption in WSN', *Journal of Sensors*, vol. 2016.
- Luo, F., Wang, F., Wang, K. & Chen, K. 2019, 'A more efficient leveled strongly-unforgeable fully homomorphic signature scheme', *Information Sciences*, vol. 480, pp. 70–89.
- Luo, P., Athanasiou, K., Fei, Y. & Wahl, T. 2017, 'Algebraic fault analysis of SHA-3', *2017 Design, Automation & Test in Europe Conference & Exhibition (DATE)*, IEEE, pp. 151–156.
- Luo, P., Li, C. & Fei, Y. 2016, 'Concurrent error detection for reliable SHA-3 design', *Great Lakes Symposium on VLSI, 2016 International*, IEEE, pp. 39–44.
- Madhavi, A. & Lincke, S. 2018, 'Security risk assessment in electronic health record system', *2018 IEEE Technology and Engineering Management Conference (TEMSCON)*, IEEE, pp. 1–4.
- Mahmood, K., Chaudhry, S. A., Naqvi, H., Kumari, S., Li, X. & Sangaiah, A. K. 2018, 'An elliptic curve cryptography based lightweight authentication scheme for smart grid communication', *Future Generation Computer Systems*, vol. 81, pp. 557–565.
- Malathy, S., Geetha, J., Suresh, A. & Priya, S. 2018, 'Implementing elliptic curve cryptography with ACO based algorithm in clustered WSN for border surveillance', *2018 Fourth International Conference on Advances in Electrical, Electronics, Information, Communication and Bio-Informatics (AEEICB)*, IEEE, pp. 1–5.

- Manogaran, G., Varatharajan, R., Lopez, D., Kumar, P. M., Sundarasekar, R. & Thota, C. 2018, 'A new architecture of Internet of Things and big data ecosystem for secured smart healthcare monitoring and alerting system', *Future Generation Computer Systems*, vol. 82, pp. 375–387.
- Marino, F., Moiso, C. & Petracca, M. 2019, 'PKIoT: a public key infrastructure for the Internet of Things', *Transactions on Emerging Telecommunications Technologies*, pp. 1–13.
- Martin, J., Mayberry, T., Donahue, C., Foppe, L., Brown, L., Riggins, C., Rye, E. C. & Brown, D. 2017, 'A study of MAC address randomization in mobile devices and when it fails', *Proceedings on Privacy Enhancing Technologies*, vol. 2017, no. 4, pp. 365–383.
- Masoud, M. Z., Jaradat, Y. & Jannoud, I. 2015, 'On preventing ARP poisoning attack utilizing Software Defined Network (SDN) paradigm', *2015 IEEE Jordan Conference on Applied Electrical Engineering and Computing Technologies (AEECT), IEEE*, pp. 1–5.
- Masud, M. & Hossain, M. S. 2017, 'Secure data-exchange protocol in a cloud-based collaborative health care environment', *Multimedia Tools and Applications*, pp. 1–15.
- Mathur, A., Newe, T., Elgenaidi, W., Rao, M., Dooly, G. & Toal, D. 2017, 'A secure end-to-end IoT solution', *Sensors and Actuators A: Physical*, vol. 263, pp. 291–299.
- Matte, C., Cunche, M., Rousseau, F. & Vanhoef, M. 2016, 'Defeating MAC address randomization through timing attacks', *Proceedings of the 9th ACM Conference on Security & Privacy in Wireless and Mobile Networks, ACM*, pp. 15–20.
- Mattos, D. M. F. & Duarte, O. C. M. B. 2016, 'AuthFlow: authentication and access control mechanism for software defined networking', *Annals of Telecommunications*, vol. 71, no. 11–12, pp. 607–615.
- Mayer, H. 2016, 'ECDSA security in Bitcoin and Ethereum: a research survey', *CoinFabrik*, vol. 28, pp. 1–10.
- Meddah, N., Jebrane, A. & Toumanari, A. 2017, 'Scalable Lightweight ABAC Scheme for Secure Sharing PHR in Cloud Computing', *International Conference on Advanced Information Technology, Services and Systems, Springer*, pp. 333–346.
- Mehmood, A., Natgunanathan, I., Xiang, Y., Poston, H. & Zhang, Y. 2018, 'Anonymous authentication scheme for smart cloud based healthcare applications', *IEEE access*, vol. 6, pp. 33552–33567.
- Meri, A., Hasan, M., Danaee, M., Jaber, M., Safei, N., Dauwed, M., Abd, S. K., Al-bsheish, M. et al. 2019, 'Modelling the utilization of cloud health information systems in the Iraqi public healthcare sector', *Telematics and Informatics*, vol. 36, pp. 132–146.
- Merrill, N. 2017, 'Better not to know?: the SHA1 collision & the limits of polemic computation', *Proceedings of the 2017 Workshop on Computing Within Limits, ACM*, pp. 37–42.

- Mi, B., Huang, D. & Wan, S. 2018, 'NTRU implementation of efficient privacy-preserving location-based querying in VANET', *Wireless Communications and Mobile Computing*, vol. 2018.
- Mozaffari-Kermani, M. & Azarderakhsh, R. 2015, 'Reliable hash trees for post-quantum stateless cryptographic hash-based signatures', *2015 IEEE International Symposium on Defect and Fault Tolerance in VLSI and Nanotechnology Systems (DFTS)*, IEEE, pp. 103–108.
- Mozaffari-Kermani, M., Azarderakhsh, R. & Aghaie, A. 2017, 'Fault detection architectures for post-quantum cryptographic stateless hash-based secure signatures benchmarked on ASIC', *ACM Transactions on Embedded Computing Systems (TECS)*, vol. 16, no. 2, pp. 1–19.
- Muthee, V., Bochner, A. F., Osterman, A., Liku, N., Akhwale, W., Kwach, J., Prachi, M., Wamicwe, J., Odhiambo, J., Onyango, F. et al. 2018, 'The impact of routine data quality assessments on electronic medical record data quality in Kenya', *PloS one*, vol. 13, no. 4, pp. 1–14.
- Nabil, G., Naziha, K., Lamia, F. & Lotfi, K. 2012, 'Hardware implementation of elliptic curve digital signature algorithm (ECDSA) on Koblitz curves', *2012 8th International Symposium on Communication Systems, Networks & Digital Signal Processing (CSNDSP)*, IEEE, pp. 1–6.
- Najaftorkaman, M., Ghapanchi, A. H., Talaei-Khoei, A. & Ray, P. 2015, 'A taxonomy of antecedents to user adoption of health information systems: a synthesis of thirty years of research', *Journal of the Association for Information Science and Technology*, vol. 66, no. 3, pp. 576–598.
- Naya-Plasencia, M. & Peyrin, T. 2012, 'Practical cryptanalysis of ARMADILLO2', *Fast Software Encryption*, Springer, pp. 146–162.
- Neubauer, T. & Heurix, J. 2011, 'A methodology for the pseudonymization of medical data', *International Journal of Medical Informatics*, vol. 80, no. 3, pp. 190–204.
- Nizzi, F., Pecorella, T., Esposito, F., Pierucci, L. & Fantacci, R. 2019, 'IoT security via address shuffling: The easy way', *IEEE Internet of Things Journal*, vol. 6, no. 2, pp. 3764–3774.
- Oliveira, T., López, J., Aranha, D. F. & Rodríguez-Henríquez, F. 2014, 'Two is the fastest prime: lambda coordinates for binary elliptic curves', *Journal of Cryptographic Engineering*, vol. 4, no. 1, pp. 3–17.
- Oliveira, T., López, J. & Rodríguez-Henríquez, F. 2018, 'The Montgomery ladder on binary elliptic curves', *Journal of Cryptographic Engineering*, vol. 8, no. 3, pp. 241–258.
- Osmani, V., Li, L., Danieletto, M., Glicksberg, B., Dudley, J. & Mayora, O. 2018, 'Processing of electronic health records using deep learning: a review', *arXiv preprint arXiv:1804.01758*, Cornell University.
- Ostad-Sharif, A., Arshad, H., Nikooghadam, M. & Abbasinezhad-Mood, D. 2019, 'Three party secure data transmission in IoT networks through design of a lightweight authenticated key agreement scheme', *Future Generation Computer Systems*, vol. 100, pp. 882–892.

- Othman, S. B., Alzaid, H., Trad, A. & Youssef, H. 2013, 'An efficient secure data aggregation scheme for wireless sensor networks', *2013 Fourth International Conference on Information, Intelligence, Systems and Applications (IISA)*, IEEE, pp. 1–4.
- Paganini, P. 2014, *Risks and Cyber Threats to the Healthcare Industry*, Technical report, INFOSEC Institute. Available at <http://resources.infosecinstitute.com/risks-cyber-threats-healthcare-industry/#gref>.
- Pan, W., Zheng, F., Zhao, Y., Zhu, W.-T. & Jing, J. 2017, 'An efficient elliptic curve cryptography signature server with GPU acceleration', *IEEE Transactions on Information Forensics and Security*, vol. 12, no. 1, pp. 111–122.
- Park, S.-y. & Kim, K. 2018, 'A study on the processing and reinforcement of message digest through two-dimensional array masking', *2018 International Conference on Information Networking (ICOIN)*, IEEE, pp. 540–544.
- Pawar, P. M., Nielsen, R. H., Prasad, N. R. & Prasad, R. 2018, 'GSHMAC: green and secure hybrid medium access control for wireless sensor network', *Wireless Personal Communications*, vol. 100, no. 2, pp. 267–281.
- Porambage, P., Braeken, A., Schmitt, C., Gurto, A., Yliantila, M. & Stiller, B. 2015, 'Group key establishment for secure multicasting in IoT-enabled Wireless Sensor Networks', *2015 IEEE 40th Conference on Local Computer Networks (LCN)*, IEEE, pp. 482–485.
- Prakasha, K., Gowda, P., Acharya, V., Muniyal, B. & Khandelwal, M. 2018, 'Enhanced Authentication and Key Agreement Mechanism Using PKI', *International Conference on Applications and Techniques in Information Security*, Springer, pp. 40–51.
- proofpoint 2018, *A 12-month analysis of ransomware, email fraud and other healthcare threats—and how you can stop them*, Technical report, NASDAQ:PFPT. Available at <https://www.proofpoint.com/sites/default/files/pfpt-us-tr-2018-healthcare-threat-report-181005.pdf>.
- Quantin, C., Jaquet-Chiffelle, D.-O., Coatrieux, G., Benzenine, E. & Allaert, F.-A. 2011, 'Medical record search engines, using pseudonymised patient identity: an alternative to centralised medical records', *international journal of medical informatics*, vol. 80, no. 2, pp. e6–e11.
- Rafik, M. B. O. & Mohammed, F. 2013, 'The impact of ECC's scalar multiplication on wireless sensor networks', *2013 11th International Symposium on Programming and Systems (ISPS)*, IEEE, pp. 17–23.
- Rajput, U., Abbas, F. & Oh, H. 2016, 'A hierarchical privacy preserving pseudonymous authentication protocol for VANET', *IEEE Access*, vol. 4, pp. 7770–7784.
- Rajput, U., Abbas, F., Wang, J., Eun, H. & Oh, H. 2016, 'CACPPA: a cloud-assisted conditional privacy preserving authentication protocol for VANET', *2016 16th IEEE/ACM International Symposium on Cluster, Cloud and Grid Computing (CCGrid)*, IEEE, pp. 434–442.
- Rantos, K., Fysarakis, K., Manifavas, C. & Askokylakis, I. G. 2018, 'Policy-controlled authenticated access to LLN-connected healthcare resources', *IEEE Systems Journal*, vol. 12, no. 1, pp. 92–102.

- Rasjid, Z. E., Soewito, B., Witjaksono, G. & Abdurachman, E. 2017, 'A review of collisions in cryptographic hash function used in digital forensic tools', *Procedia Computer Science*, vol. 116, pp. 381–392.
- Rathert, C., Mittler, J. N., Banerjee, S. & McDaniel, J. 2017, 'Patient-centered communication in the era of electronic health records: what does the evidence say?', *Patient education and counseling*, vol. 100, no. 1, pp. 50–64.
- Rezaeibagha, F., Win, K. T. & Susilo, W. 2015, 'A systematic literature review on security and privacy of electronic health record systems: technical perspectives', *Health Information Management Journal*, vol. 44, no. 3, pp. 23–38.
- Riedl, B., Grascher, V., Fenz, S. & Neubauer, T. 2008, 'Pseudonymization for improving the privacy in e-health applications', *Hawaii International Conference on System Sciences, Proceedings of the 41st Annual, IEEE*, pp. 255–255.
- Riedl, B., Grascher, V. & Neubauer, T. 2007, 'Applying a threshold scheme to the pseudonymization of health data', *13th Pacific Rim International Symposium on Dependable Computing (PRDC 2007), IEEE*, pp. 397–400.
- Rijmen, V. & Oswald, E. 2005, 'Update on SHA-1', *Cryptographers' Track at the RSA Conference, Springer*, pp. 58–71.
- Saha, S., Das, R., Datta, S. & Neogy, S. 2016, 'A cloud security framework for a data centric wsn application', *Proceedings of the 17th International Conference on Distributed Computing and Networking, ACM*, pp. 1–6.
- Sánchez, Y. K. R., Demurjian, S. A. & Baihan, M. S. 2017, 'Achieving RBAC on RESTful APIs for mobile apps using FHIR', *2017 5th IEEE International Conference on Mobile Cloud Computing, Services, and Engineering (MobileCloud), IEEE*, pp. 139–144.
- Sarkar, B. K. 2017, 'Big data for secure healthcare system: a conceptual design', *Complex & Intelligent Systems*, vol. 3, no. 2, pp. 133–151.
- Sartoli, S. & Namin, A. S. 2019, 'Modeling adaptive access control policies using answer set programming', *Journal of Information Security and Applications*, vol. 44, pp. 49–63.
- Save, T. & Chhatani, R. 2015, 'Elliptic curve cryptography for EAACK intrusion detection system', *Proceedings of the Sixth International Conference on Computer and Communication Technology 2015, ACM*, pp. 355–359.
- Senteio, C., Veinot, T., Adler-Milstein, J. & Richardson, C. 2018, 'Physicians' perceptions of the impact of the EHR on the collection and retrieval of psychosocial information in outpatient diabetes care', *International journal of medical informatics*, vol. 113, pp. 9–16.
- Seol, K., Kim, Y.-G., Lee, E., Seo, Y.-D. & Baik, D.-K. 2018, 'Privacy-preserving attribute-based access control model for XML-based electronic health record system', *IEEE Access*, vol. 6, pp. 9114–9128.
- Sghaier, A., Zeghid, M. & Machhout, M. 2016, 'Fast hardware implementation of ECDSA signature scheme', *International Symposium on Signal, Image, Video and Communications (ISIVC), IEEE*, pp. 343–348.
- Shafeeq, S., Alam, M. & Khan, A. 2019, 'Privacy aware decentralized access control system', *Future Generation Computer Systems*, pp. 420–433.

- Shankar, S. K., Tomar, A. S. & Tak, G. K. 2015, 'Secure medical data transmission by using ECC with mutual authentication in WSNs', *Procedia Computer Science*, vol. 70, pp. 455–461.
- Sharavanan, P., Sridharan, D. & Kumar, R. 2018, 'A privacy preservation secure cross layer protocol design for IoT based wireless body area networks using ECDSA framework', *Journal of medical systems*, vol. 42, no. 10, pp. 1–11.
- Shen, J., Gui, Z., Ji, S., Shen, J., Tan, H. & Tang, Y. 2018, 'Cloud-aided lightweight certificateless authentication protocol with anonymity for wireless body area networks', *Journal of Network and Computer Applications*, vol. 106, pp. 117–123.
- Shi, Z., Ma, C., Cote, J. & Wang, B. 2012, 'Hardware implementation of hash functions', *Introduction to Hardware Security and Trust*, Springer, pp. 27–50.
- Shickel, B., Tighe, P. J., Bihorac, A. & Rashidi, P. 2018, 'Deep EHR: a survey of recent advances in deep learning techniques for electronic health record (EHR) analysis', *IEEE journal of biomedical and health informatics*, vol. 22, no. 5, pp. 1589–1604.
- Shrestha, N., Alsadoon, A., Prasad, P., Hourany, L. & Elchouemi, A. 2016, 'Enhanced e-health framework for security and privacy in healthcare system', *2016 Sixth International Conference on Digital Information Processing and Communications (ICDIPC)*, IEEE, pp. 75–79.
- Sittig, D. F., Belmont, E. & Singh, H. 2018, 'Improving the safety of health information technology requires shared responsibility: it is time we all step up', *Healthcare*, vol. 6, no. 1, pp. 7–12.
- Siwicki, B. 2016, *Brute force ransomware attacks on the rise*, Technical report, healthcare IT News. Available at <https://www.healthcareit.com.au/article/brute-force-ransomware-attacks-rise>.
- Sojka-Piotrowska, A. & Langendoerfer, P. 2017, 'Shortening the security parameters in lightweight WSN applications for IoT-lessons learned', *2017 IEEE International Conference on Pervasive Computing and Communications Workshops (PerCom Workshops)*, IEEE, pp. 636–641.
- Sowjanya, K., Dasgupta, M. & Ray, S. 2019, 'An elliptic curve cryptography based enhanced anonymous authentication protocol for wearable health monitoring systems', *International Journal of Information Security*, pp. 1–18.
- Staudemeyer, R. C., Pöhls, H. C. & Wójcik, M. 2018, 'The road to privacy in IoT: beyond encryption and signatures, towards unobservable communication', *2018 IEEE 19th International Symposium on "A World of Wireless, Mobile and Multimedia Networks" (WoWMoM)*, IEEE, pp. 14–20.
- Stevens, M. 2013, 'New collision attacks on SHA-1 based on optimal joint local-collision analysis', *Annual International Conference on the Theory and Applications of Cryptographic Techniques*, Springer, pp. 245–261.
- Stinson, D. R. & Wei, R. 2018, 'Combinatorial repairability for threshold schemes', *Designs, Codes and Cryptography*, vol. 86, no. 1, pp. 195–210.
- Suárez-Albela, M., Fraga-Lamas, P., Castedo, L. & Fernández-Caramés, T. 2019, 'Clock frequency impact on the performance of high-security cryptographic cipher suites for energy-efficient resource-constrained iot devices', *Sensors*, vol. 19, no. 1, pp. 1–16.

- Sugier, J. 2017, ‘Simplifying FPGA implementations of BLAKE hash algorithm with block memory resources’, *Procedia Engineering*, vol. 178, pp. 33–41.
- Sui, Z. & de Meer, H. 2019, ‘BAP: a batch and auditable privacy preservation scheme for demand-response in smart grids’, *IEEE Transactions on Industrial Informatics*, pp. 1–13.
- Sun, J., Zhu, X., Zhang, C. & Fang, Y. 2011, ‘HCPP: cryptography based secure EHR system for patient privacy and emergency healthcare’, *Distributed Computing Systems (ICDCS), 2011 31st International Conference on, IEEE*, pp. 373–382.
- Sun, W., Cai, Z., Li, Y., Liu, F., Fang, S. & Wang, G. 2018, ‘Security and privacy in the medical Internet of Things: a review’, *Security and Communication Networks*, vol. 2018.
- Teguig, E., Touati, Y. & Ali-Cherif, A. 2017, ‘ECC based-approach for Keys authentication and security in WSN’, *2017 9th IEEE-GCC Conference and Exhibition (GCCCE), IEEE*, pp. 1–4.
- The AVISPA Team 2006, *AVISPA v1.1 user manual*. Available at <http://www.avispa-project.org>.
- Thiranant, N., Lee, Y. S. & Lee, H. 2015, ‘Performance comparison between RSA and elliptic curve cryptography-based QR code authentication’, *2015 IEEE 29th International Conference on Advanced Information Networking and Applications Workshops (WAINA), IEEE*, pp. 278–282.
- Timpner, J., Schürmann, D. & Wolf, L. 2016, ‘Trustworthy parking communities: helping your neighbor to find a space’, *IEEE Transactions on Dependable and Secure Computing*, vol. 13, no. 1, pp. 120–132.
- Tipton, S. J., Forkey, S. & Choi, Y. B. 2016, ‘Toward Proper Authentication Methods in Electronic Medical Record Access Compliant to HIPAA and CIA Triangle’, *Journal of medical systems*, vol. 40, no. 4, pp. 1–8.
- Tiwari, H. D. & Kim, J. H. 2018, ‘Novel method for DNA-based elliptic curve cryptography for IoT devices’, *ETRI Journal*, vol. 40, no. 3, pp. 396–409.
- Trakadas, P., Zahariadis, T., Leligou, H., Voliotis, S. & Papadopoulos, K. 2008, ‘Analyzing energy and time overhead of security mechanisms in wireless sensor networks’, *2008 15th International Conference on Systems, Signals and Image Processing, IEEE*, pp. 137–140.
- Turkmen, F., den Hartog, J., Ranise, S. & Zannone, N. 2017, ‘Formal analysis of XACML policies using SMT’, *Computers & Security*, vol. 66, pp. 185–203.
- U.S. Department of Health and Human Services 2018, *Breaches affecting 500 or more individuals*. Available at https://ocrportal.hhs.gov/ocr/breach/breach_report.jsf#.
- Vanhoef, M., Matte, C., Cunche, M., Cardoso, L. S. & Piessens, F. 2016, ‘Why MAC address randomization is not enough: an analysis of Wi-Fi network discovery mechanisms’, *Proceedings of the 11th ACM on Asia Conference on Computer and Communications Security, ACM*, pp. 413–424.

- Varchola, M., Drutarovsky, M., Repka, M. & Zajac, P. 2015, 'Side channel attack on multiprecision multiplier used in protected ECDSA implementation', *2015 International Conference on ReConfigurable Computing and FPGAs (ReConFig)*, IEEE, pp. 1–6.
- Vatsalan, D., Sehili, Z., Christen, P. & Rahm, E. 2017, 'Privacy-preserving record linkage for big data: current approaches and research challenges', *Handbook of Big Data Technologies*, Springer, pp. 851–895.
- Verma, G. K., Singh, B. & Singh, H. 2018, 'Bandwidth efficient designated verifier proxy signature scheme for healthcare wireless sensor networks', *Ad Hoc Networks*, vol. 81, pp. 100–108.
- Vijayakumar, V., Priyan, M., Ushadevi, G., Varatharajan, R., Manogaran, G. & Tarare, P. V. 2019, 'E-health cloud security using timing enabled proxy re-encryption', *Mobile Networks and Applications*, vol. 24, no. 3, pp. 1034–1045.
- Wander, A. S., Gura, N., Eberle, H., Gupta, V. & Shantz, S. C. 2005, 'Energy analysis of public-key cryptography for wireless sensor networks', *Third IEEE international conference on pervasive computing and communications*, IEEE, pp. 324–328.
- Wang, H. & Li, Q. 2006, 'Efficient implementation of public key cryptosystems on mote sensors (short paper)', *International Conference on Information and Communications Security*, Springer, pp. 519–528.
- Wang, H., Ning, J., Huang, X., Wei, G., Poh, G. S. & Liu, X. 2019, 'Secure fine-grained encrypted keyword search for e-healthcare cloud', *IEEE Transactions on Dependable and Secure Computing*, pp. 1–13.
- Wang, H., Sheng, B. & Li, Q. 2006, 'Elliptic curve cryptography-based access control in sensor networks', *International Journal of Security and Networks*, vol. 1, no. 3-4, pp. 127–137.
- Wang, X., Yin, Y. L. & Yu, H. 2005, 'Finding collisions in the full SHA-1', *Annual International Cryptology Conference*, Springer, pp. 17–36.
- Washington Health Care Authority 2016, *Data breach for Apple Health (Medicaid) managed care plan*, Technical report, Washington State, Health Care Authority. Available at <https://www.hca.wa.gov/about-hca/apple-health-medicaid/data-breach-apple-health-medicaid-managed-care-plan-what-clients>.
- Wazid, M., Zeadally, S., Das, A. K. & Odelu, V. 2016, 'Analysis of security protocols for mobile healthcare', *Journal of medical systems*, vol. 40, no. 11, pp. 1–10.
- WSO2 Team 2017, *WSO2 Identity Server*, Technical report, WSO2 Inc. Available at <https://docs.wso2.com/display/IS530/WSO2+Identity+Server+Documentation>.
- Xia, W., Jiang, H., Feng, D., Douglis, F., Shilane, P., Hua, Y., Fu, M., Zhang, Y. & Zhou, Y. 2016, 'A comprehensive study of the past, present, and future of data deduplication', *Proceedings of the IEEE*, vol. 104, no. 9, pp. 1681–1710.
- Xiao, L., Li, Y., Han, G., Liu, G. & Zhuang, W. 2016, 'PHY-layer spoofing detection with reinforcement learning in wireless networks', *IEEE Transactions on Vehicular Technology*, vol. 65, no. 12, pp. 10037–10047.

- Xu, G., Liu, J., Lu, Y., Zeng, X., Zhang, Y. & Li, X. 2018, 'A novel efficient MAKA protocol with desynchronization for anonymous roaming service in global mobility networks', *Journal of Network and Computer Applications*, vol. 107, pp. 83–92.
- Xu, S., Li, C., Li, F. & Zhang, S. 2012, 'An improved sliding window algorithm for ECC multiplication', *World Automation Congress (WAC), 2012, IEEE*, pp. 335–338.
- Yang, Q., Zhu, X., Fu, H. & Che, X. 2015, 'Survey of security technologies on wireless sensor networks', *Journal of Sensors*, vol. 2015.
- Yang, Y., Chen, F., Sun, Z., Wang, S., Li, J., Chen, J. & Ming, Z. 2018, 'Secure and efficient parallel hash function construction and its application on cloud audit', *Soft Computing*, pp. 1–19.
- Yang, Y., Zhang, X., Yu, J., Zhang, P. et al. 2017, 'Research on the hash function structures and its application', *Wireless Personal Communications*, vol. 94, no. 4, pp. 2969–2985.
- Yeh, K.-H. 2016, 'A secure IoT-based healthcare system with body sensor networks', *IEEE Access*, vol. 4, pp. 10288–10299.
- Yoshida, H., Watanabe, D., Okeya, K., Kitahara, J., Wu, H., Küçük, Ö. & Preneel, B. 2007, 'MAME: a compression function with reduced hardware requirements', *International Workshop on Cryptographic Hardware and Embedded Systems, Springer*, pp. 148–165.
- Yuehong, Y., Zeng, Y., Chen, X. & Fan, Y. 2016, 'The internet of things in healthcare: an overview', *Journal of Industrial Information Integration*, vol. 1, pp. 3–13.
- Zhang, G. & Liu, M. 2017, 'A distinguisher on PRESENT-like permutations with application to SPONGENT', *Science China Information Sciences*, vol. 60, no. 7, pp. 072101.
- Zhang, Y., Sun, L., Song, H. & Cao, X. 2014, 'Ubiquitous wsn for healthcare: recent advances and future prospects', *IEEE Internet of Things Journal*, vol. 1, no. 4, pp. 311–318.
- Zhang, Y. & Zhang, B. 2017, 'A new testing method for XACML 3.0 policy based on ABAC and data flow', *2017 13th IEEE International Conference on Control & Automation (ICCA), IEEE*, pp. 160–164.
- Zhao, Y., Yu, Y., Li, Y., Han, G. & Du, X. 2019, 'Machine learning based privacy-preserving fair data trading in big data market', *Information Sciences*, vol. 478, pp. 449–460.
- Zhong, H., Zhao, R., Cui, J., Jiang, X. & Gao, J. 2016, 'An improved ECDSA scheme for wireless sensor network', *International Journal of Future Generation Communication and Networking*, vol. 9, no. 2, pp. 73–82.
- Zhou, J., Cao, Z., Dong, X. & Vasilakos, A. V. 2017, 'Security and privacy for cloud-based IoT: challenges', *IEEE Communications Magazine*, vol. 55, no. 1, pp. 26–33.