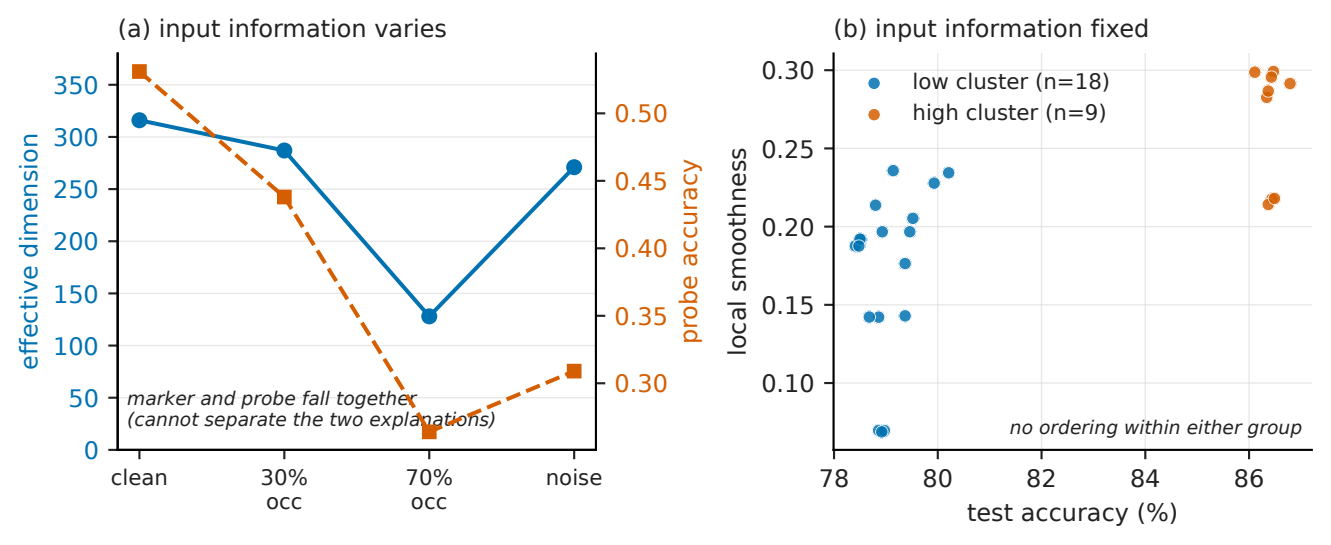
(a) input information varies
effective dimension
probe accuracy
350
300
250
200
150
100
50
0
0.50
0.45
0.40
0.35
0.30
marker and probe fall together
(cannot separate the two explanations)
clean
30%
occ
70%
occ
noise
(b) input information fixed
low cluster (n=18)
high cluster (n=9)
local smoothness
0.30
0.25
0.20
0.15
0.10
no ordering within either group
78
80
82
84
86
test accuracy (%)