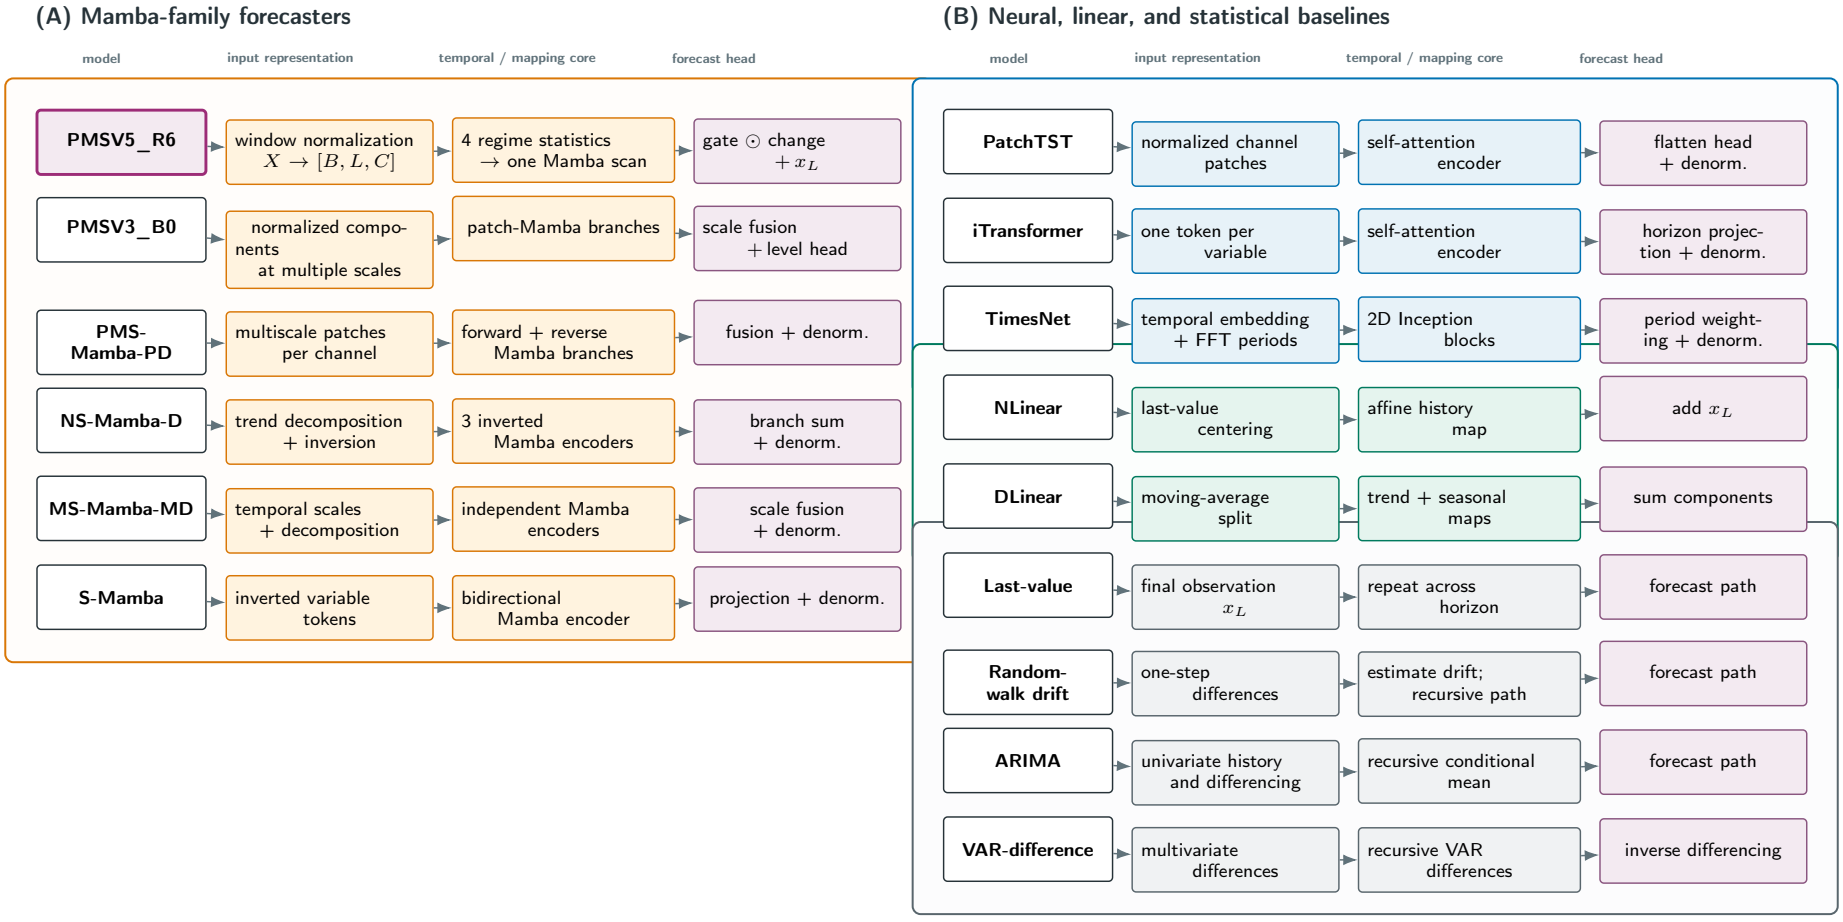


Tensor convention. Every learned forecaster receives an input window $X \in \mathbb{R}^{B \times L \times C}$ and returns a path $\widehat{Y} \in \mathbb{R}^{B \times H \times C}$; "denorm." denotes reversal of window normalization. Colors identify mechanism families, while the magenta outline marks the selected PMSV5_R6 model.