



Best weak target-shift shoulder: N=31, start=(2, 4), q1=0.7, q2=0.2; class=weak_target_shift_shoulder; F2 true double=False


raw $f(t)$

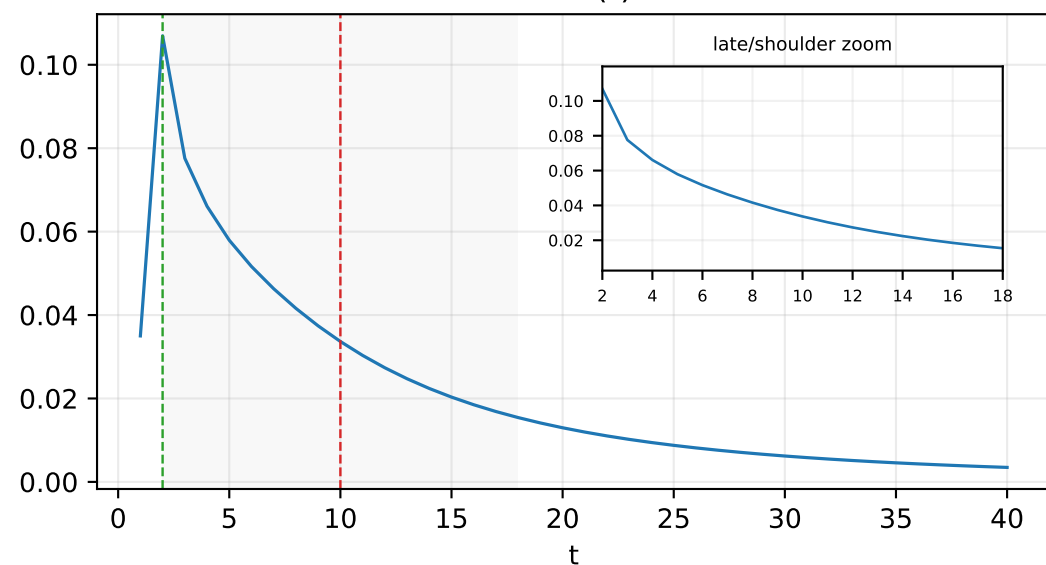


smoothed $f(t)$

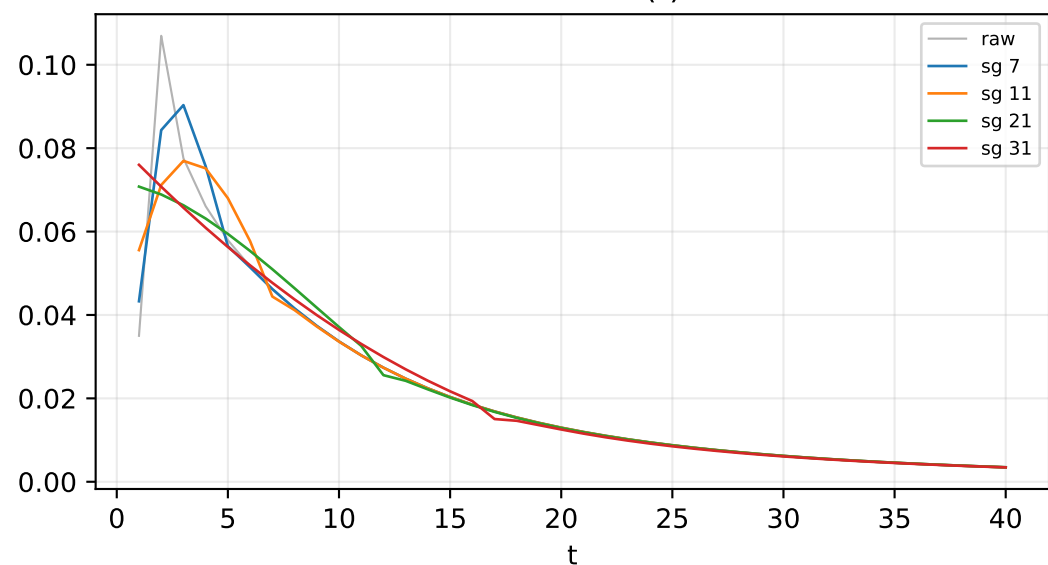


$F2=f(2n-1)+f(2n)$

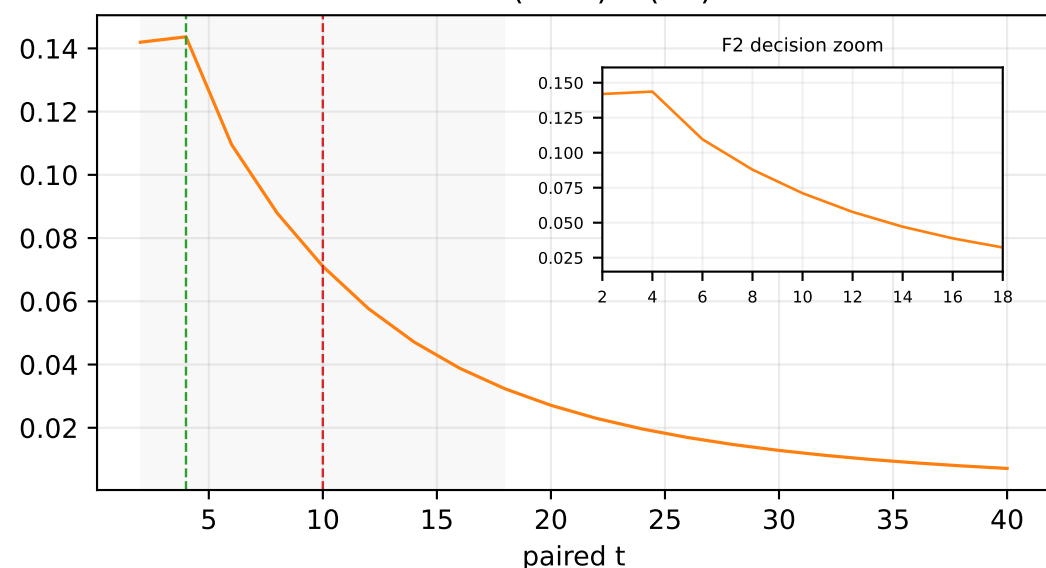


log $f(t)$, zoomed

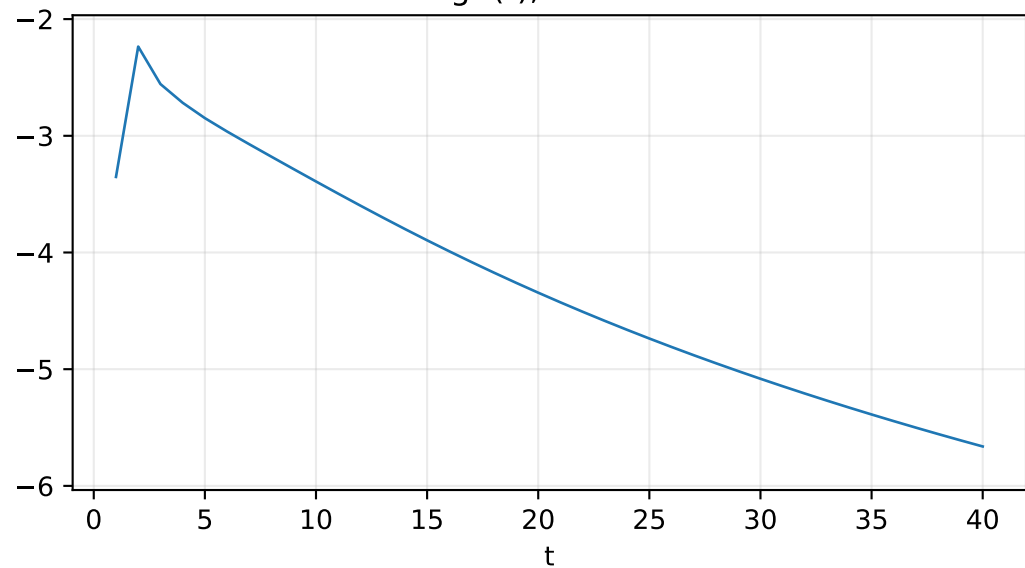


hazard $h(t)=f(t)/S(t-1)$

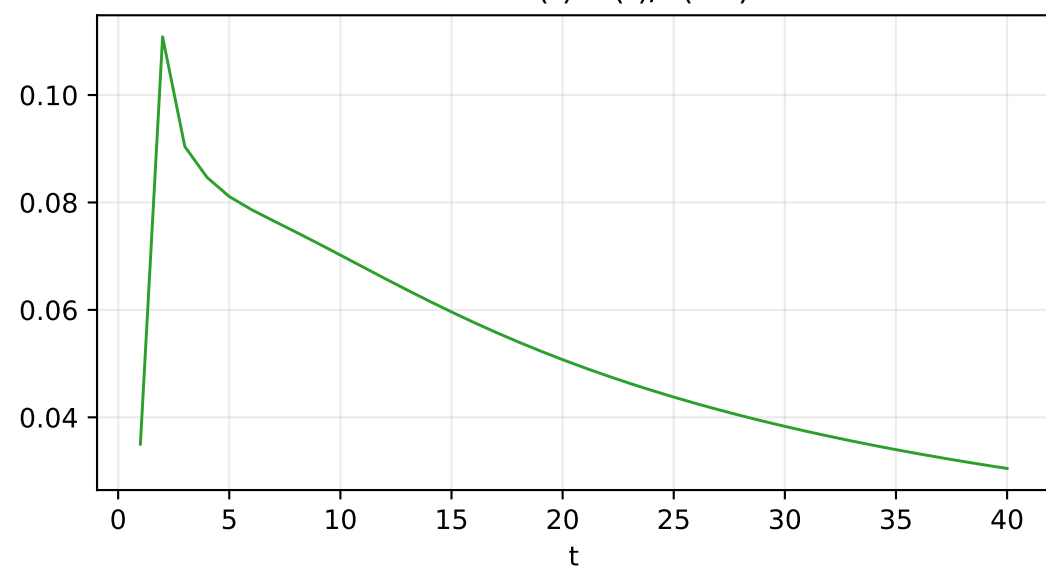

log-derivative of F2

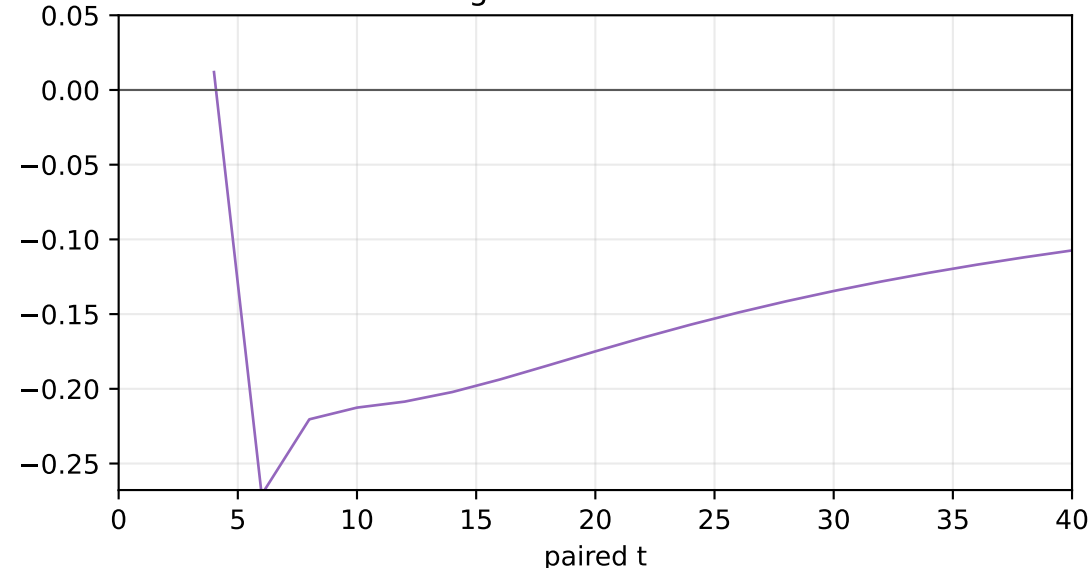

k-time heatmap, $\log_{10} f_k(t)$

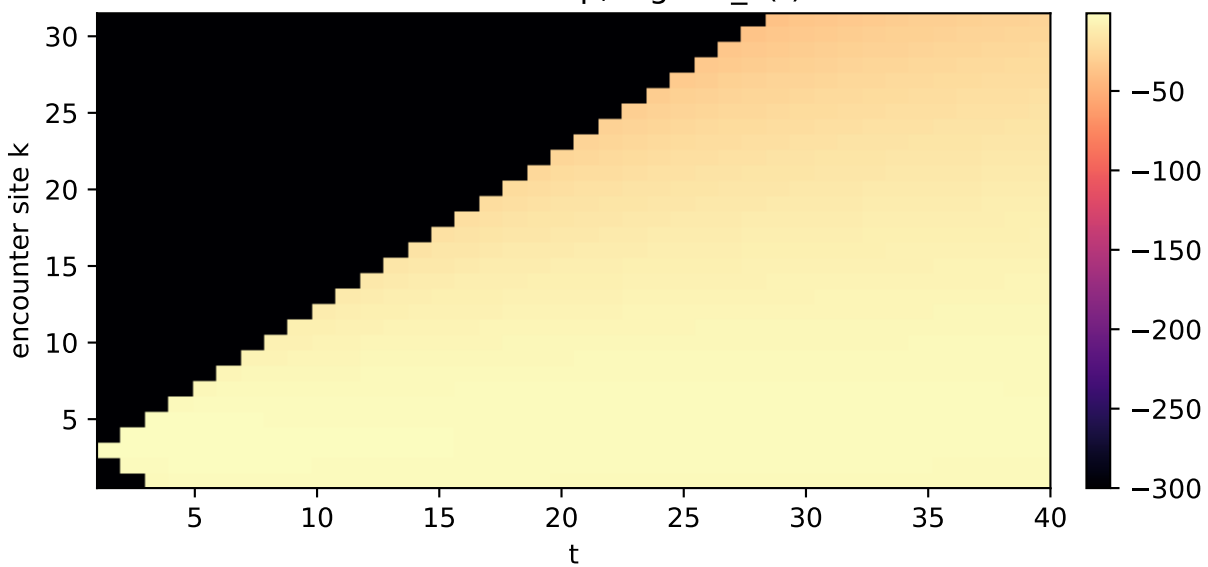

early/late encounter-site C_k

