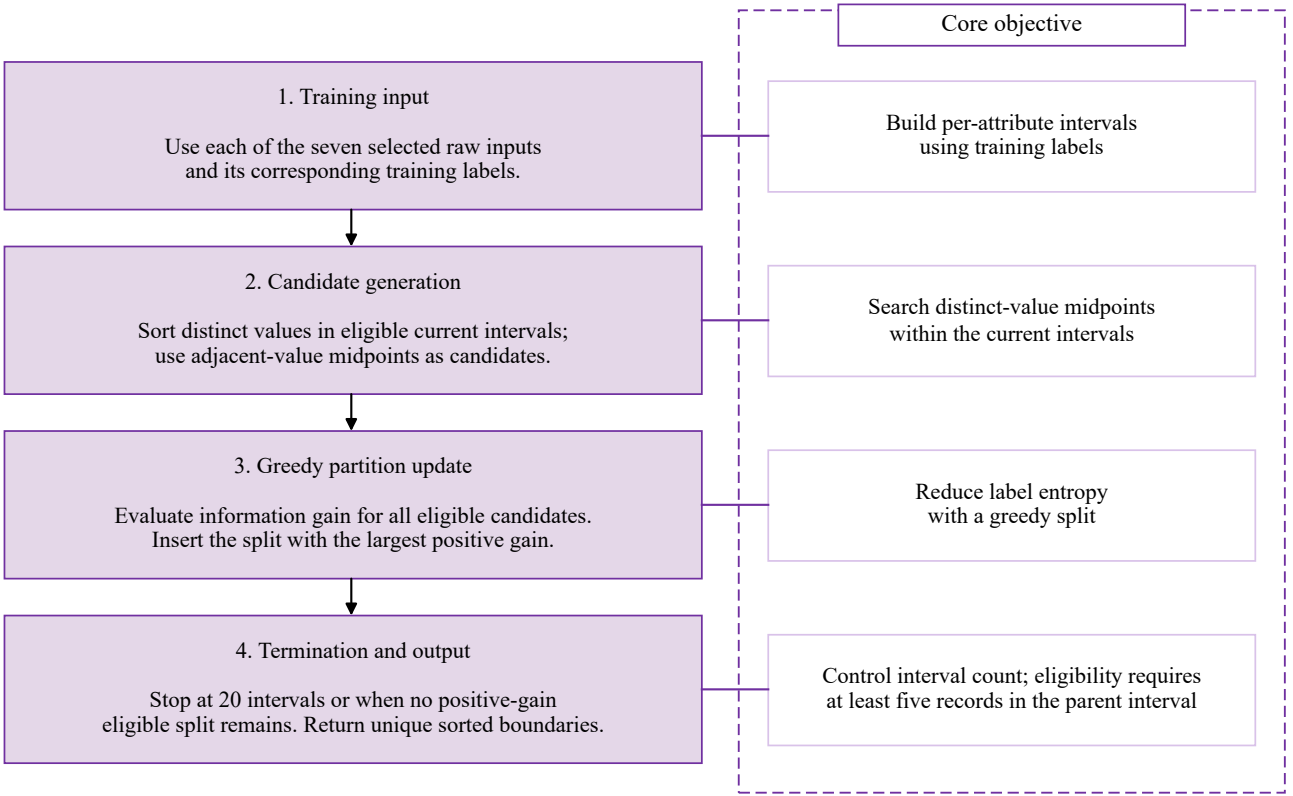
Core objective
1. Training input
Use each of the seven selected raw inputs and its corresponding training labels.
Build per-attribute intervals using training labels
2. Candidate generation
Sort distinct values in eligible current intervals; use adjacent-value midpoints as candidates.
Search distinct-value midpoints within the current intervals
3. Greedy partition update
Evaluate information gain for all eligible candidates. Insert the split with the largest positive gain.
Reduce label entropy with a greedy split
4. Termination and output
Stop at 20 intervals or when no positive-gain eligible split remains. Return unique sorted boundaries.
Control interval count; eligibility requires at least five records in the parent interval