

CS1010S Mock Midterm

26 February 2024

Time allowed: 1 hour 20 minutes

Matriculation No:

--	--	--	--	--	--	--	--	--

Instructions (please read carefully):

1. Write down your matriculation number on the **question paper**. DO NOT WRITE YOUR NAME ON THE QUESTION SET!
2. This is **an open-sheet quiz**. You are allowed to bring one A4 sheet of notes (written on both sides).
3. This paper comprises **FOUR (4) questions** and **TWENTY-FIVE (25) pages**. The time allowed for solving this mock midterm is **1 hour 20 minutes**.
4. The maximum score of this mock midterm is **60 marks**. The weight of each question is given in square brackets beside the question number.
5. All questions must be answered correctly for the maximum score to be attained.
6. All questions must be answered in the space provided in the answer sheet; no extra sheets will be accepted as answers.
7. The back-sides of the sheets and the pages marked “scratch paper” in the question set may be used as scratch paper.
8. You are allowed to un-staple the sheets while you solve the questions. Please make sure you staple them back in the right order at the end of the mock midterm.
9. You are allowed to use pencils, ball-pens or fountain pens, as you like (no red color, please).
10. Use of calculators are not allowed in the test.

Disclaimer: This unofficial mock midterm was created by TA Zhu Ming, TA Brian, and TA Russell. It does not reflect the standards of an official CS1010S midterm.

GOOD LUCK!

Question	Marks	Remark
Q1		
Q2		
Q3		
Q4		
Total		

Question 1: Python Expressions [17 marks]

There are several parts to this problem. Answer each part **independently and separately**. In each part, one or more Python expressions are entered into the interpreter (Python shell). If the interpreter produces an error message, or enters an infinite loop, explain why. For diagrams, you are expected to demonstrate the techniques you have learnt in class.

Consider the following definition of `recursive_tree` for parts **A** and **B**.

```
def recursive_tree(n):  
    if n == 0:  
        return 1  
    else:  
        for i in range(0, n, 1):  
            recursive_tree(n-1)
```

A. Draw the recursive tree model for the function call `recursive_tree(3)`.

[3 marks]

- B.** Draw the call stack when the function call `recursive_tree(3)` reaches the base case the first time.

[3 marks]


C. Draw the trace table for the following code and determine the output clearly:

```
x = "12345678901"
res = "0"
for i in range(2, 9, 1):
    if int(x[i]) % 3 == 0:
        res = x[i]
        print(res)
    elif i > 5:
        print(res)
        continue
    else:
        res = x[-1 * i]
        print(res)
print(i)
```

[3 marks]

- D. Given the Polya flowchart below, convert it to a Python code. You may assume that the function `factorial(n)` has been provided to you. `factorial(n)` returns the factorial of `n`.

[2 marks]

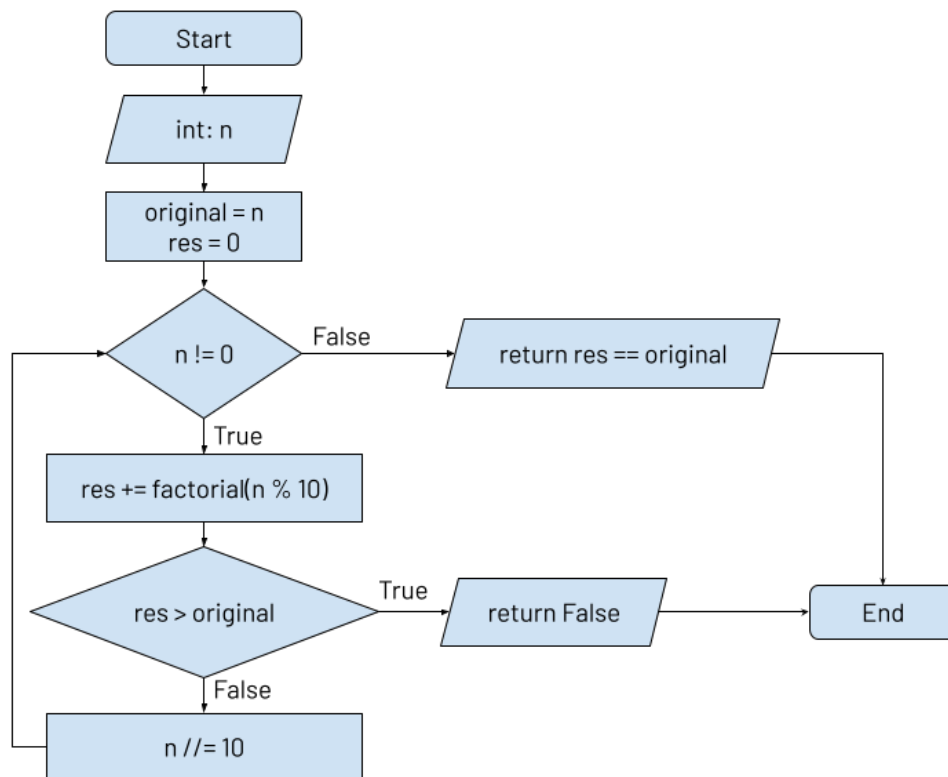

- E.** Given the Python code below, construct a Polya flowchart of it. You may assume that the function `is_prime(n)` has been provided to you. `is_prime(n)` returns `True` if `n` is a prime number, and `False` otherwise.

```
def nearest_prime(n):  
    if is_prime(n):  
        return n  
    count = 1  
    while True:  
        if is_prime(n - count):  
            return n - count  
        elif is_prime(n + count):  
            return n + count  
        count += 1
```

[3 marks]

F. Determine the output of the following Python code:

```
x = 10
new_x = -x
this_x = new_x + x
that_x = new_x - x

def why_so_many_x(takes_in_x):
    my_x = this_x
    your_x = that_x
    same_x = takes_in_x
    def new_x(x):
        if your_x is my_x:
            print("same x!")
            return same_x
        elif this_x is that_x:
            print("which x!")
            return x
        else:
            print("takes in x!")
            return takes_in_x
    if new_x(same_x) is takes_in_x:
        print("new_x is takes_in_x!")
        return x
    else:
        print("new_x is not takes_in_x!")
        return new_x(takes_in_x)

print(why_so_many_x(x))
```

[3 marks]

Question 2: Datetimes [8 marks]

Warning: You should **NOT** use any string-related methods such as `.split`, `.find`, `.join`. You may assume that the function `substring(string, start, end, step)` has been provided to you and you should **NOT** use slice operator.

When working with data analysis, handling dates is a common task. In this question, you will explore how to process dates in string format using basic Python.

- A.** Implement a Python function `later_date` that takes in two dates given in the form of **YYYY-MM-DD** strings (also known as the ISO format). The function should return the first date if the first date is larger than the second date, the second date if the second date is larger than the first date, and either date if the two dates are equal. You should **NOT** use any built-in functions such as `max` and `min`.

Here's a sample execution:

```
>>> later_date("2024-02-08", "2023-01-12")
"2024-02-08"
>>> later_date("2023-01-12", "2023-01-12")
"2023-01-12"
>>> later_date("2024-02-26", "2025-10-01")
"2025-10-01"
```

Hint: You can just *directly compare* the strings. This is what makes the ISO format awesome!

[3 marks]

```
def later_date(date1, date2):
```


- B.** Zhu Ming realizes that the dates given are apparently not always in the **YYYY-MM-DD** format, but the **DD-MM-YYYY** format instead. Brian, not caring about the ongoing issue, still wants Zhu Ming to find the later date between two dates.

Implement a function `to_iso` that takes in a date in the form of EITHER **YYYY-MM-DD** or **DD-MM-YYYY**, and returns the same date in the **YYYY-MM-DD** format.

Here's a sample execution:

```
>>> to_iso("2024-10-18")
"2024-10-18"
>>> to_iso("01-02-2028")
"2028-02-01"
```

[3 marks]

```
def to_iso(date):
```

- C. Having implemented the `to_iso` function, Zhu Ming feels safer now. Now, there is one last thing to do.

You are to implement a function `better_later_date` that takes in two dates, each in either of the **YYYY-MM-DD** or the **DD-MM-YYYY** format, and returns the later date among the two in the form of **YYYY-MM-DD**.

Being the generous of a person, Brian has given you the template of the code. In return, you simply need to fill in the blank with just **ONE** line of code, i.e. `<T3>`.

```
def better_later_date(date1, date2):  
    return <T3>
```

[2 marks]

`<T3>`:

Question 3: More Datetimes! [12 marks]

Russell sees what Zhu Ming and Brian are working on and decided to take things up a notch. Let's try to sort these dates!

Warning: You should **NOT** use any tuples/lists and built-in functions such as `max`, `min`, `sorted`. You should also **NOT** use any string-related methods such as `.split`, `.find`, `.join`. You may assume that the function `substring(string, start, end, step)` has been provided to you and you should **NOT** use slice operator.

- A.** Implement a Python function `latest_date` that takes in a comma-separated string-of-dates in the form of **YYYY-MM-DD**. The function should return the latest date among all of the dates.

You may assume that the `later_date(date1, date2)` function from Question 2 has also been provided to you and the dates are all distinct.

Here's a sample execution:

```
>>> latest_date("2024-02-08,2025-10-01,2021-10-13")
"2025-10-01"
>>> latest_date("2024-02-08")
"2024-02-08"
```

Hint: The dates are always of length 10 due to the fixed **YYYY-MM-DD** format.

[3 marks]

```
def latest_date(dates):
```

- B.** Implement a Python function `remove_date` that takes in a comma-separated string-of-dates in the form of **YYYY-MM-DD** and a target date in the same form of **YYYY-MM-DD**. The function should return the comma-separated string with the target date removed.

You may assume that the dates are all distinct and the target date exists within the string-of-dates.

Note that you may use the function `latest_date(dates)` from Question 3A.

Here's a sample execution:

```
>>> remove_date("2024-02-08,2025-10-01,2021-10-13", "2025-10-01")
"2024-02-08,2021-10-13"
>>> remove_date("2024-02-08", "2024-02-08")
""
```

[3 marks]

```
def remove_date(dates, target_date):
```

- C. We are finally ready to sort these dates in descending order and impress Russell with your Python skills!

The way we are going to do this is by doing what is called the *selection sort*. In summary, you repeatedly take the largest date from the dates that remain, remove that largest date from it, and put the largest date into your (partially complete but sorted) collection of dates. In the end, your collection of dates is guaranteed to be complete and sorted!

Implement an **ITERATIVE** Python function `sort_dates` that takes in a comma-separated string-of-dates in the form of **YYYY-MM-DD**. The function should return the comma-separated string with all the dates sorted in decreasing order. You may assume there is at least date inside the string and the dates are all distinct. You are strongly encouraged to use the functions defined in Questions 3A and 3B.

Here's a sample execution:

```
>>> sort_dates("2024-02-08,2025-10-01,2021-10-13")
"2025-10-01,2024-02-08,2021-10-13"
>>> sort_dates("2024-02-08")
"2024-02-08"
```

[3 marks]

```
def sort_dates(dates):
```

D. Implement the same function `sort_dates` but **RECURSIVELY**.

[3 marks]

```
def sort_dates(dates):
```

E. [OPTIONAL] Is it possible to sort these dates on an ascending order using the same helper functions provided in Questions 3A and 3B?

[0 marks]

Question 4: Burger Ming [23 marks]

INSTRUCTIONS: Please read the question description clearly before you attempt this problem! You are **NOT** allowed to use **TUPLES** and any Python data types which have not yet been taught in class. You should **NOT** use any string-related methods such as `.split`, `.find`, `.join`. You may assume that the function `substring(string, start, end, step)` has been provided to you and you should **NOT** use slice operator.

Zhu Ming wants to run a business when he's not teaching his CS1010S class. He asked Russell, who loves all things Python, to work alongside him on creating a burger restaurant called Burger Ming!

As a CEO, Zhu Ming tasked Russell to build a system that represents the orders from the prospective customers of Burger Ming using Python. However, Russell realized that this is not an easy task to do all by himself. Therefore, knowing that you are currently taking CS1010S, he asked for your help.

To start off, Russell has provided you an abstraction `Burger` that supports **only** two functions:

- `make_burger(name)` that takes in an input name (a string) and returns a new burger. There are only **FOUR (4)** possible names for the burger: `"BigMing"`, `"HamBurger"`, `"CheeseBurger"`, `"HuatBurger"`
- `get_burger_name(burger)` that takes in a burger (a `Burger`) and returns the burger name (a string).

Your task is to implement the abstraction `Order` that supports these functions:

- `make_empty_order()` that takes in no inputs and returns a new order.
- `add_to_order(order, burger)` that takes in an order (an `Order`) and a burger (a `Burger`) and adds a burger into the order.
- `remove_from_order(order, burger)` that takes in an order (an `Order`) and a burger (a `Burger`) and removes **all** occurrences of the burger from the order.
- `combine_order(order1, order2)` that takes in two orders, combines both orders into a single order, and return that one order.
- `is_equal_order(order1, order2)` that takes in two orders, and checks if they are both equivalent orders, i.e. 1 `BigMing` and 2 `CheeseBurger` is equivalent to 2 `CheeseBurger` and 1 `BigMing`.
- `count_burger(order, burger)` that takes in an order (an `Order`) and a burger (a `Burger`) and returns the number of occurrences of the burger in the order.

[IMPORTANT!] For the remaining parts of this question, you should not break the abstraction of Burger in your code.

A. Implement `make_empty_order` without using tuples.

[1 mark]

```
def make_empty_order():
```

B. Implement `add_to_order` and `remove_from_order`.

[5 marks]

```
def add_to_order(order, burger):
```

```
def remove_from_order(order, burger):
```

C. Obviously the function `add_to_order` only handles an addition of one burger. We have not considered the case of bulk ordering. Implement the function `bulk_add_to_order` that takes in an order, a burger (a `Burger`), and the quantity. It returns the modified order after adding such quantity of the given burger. [2 marks]

```
def bulk_add_to_order(order, burger, n):
```

D. Implement `combine_order`. [3 marks]

```
def combine_order(order1, order2):
```

E. Implement `is_equal_order`.

```
>>> Big_Ming = make_burger("BigMing")
>>> Cheese_Burger = make_burger("CheeseBurger")
>>> prime_meal = make_empty_order()
>>> prime_meal = add_to_order(prime_meal, Big_Ming)
>>> prime_meal = add_to_order(prime_meal, Big_Ming)
>>> prime_meal = add_to_order(prime_meal, Cheese_Burger)
>>> emirp_meal = make_empty_order()
>>> emirp_meal = add_to_order(emirp_meal, Cheese_Burger)
>>> emirp_meal = add_to_order(emirp_meal, Big_Ming)
>>> emirp_meal = add_to_order(emirp_meal, Big_Ming)
>>> is_equal_order(prime_meal, emirp_meal)
True # 2 BigMing and 1 CheeseBurger == 1 CheeseBurger and 2 BigMing

>>> diff_meal = make_empty_order()
>>> diff_meal = add_to_order(diff_meal, Big_Ming)
>>> diff_meal = add_to_order(diff_meal, Big_Ming)
>>> is_equal_order(prime_meal, diff_meal)
False # 2 BigMing and 1 CheeseBurger != 2 BigMing
```

[3 marks]

```
def is_equal(order1, order2):
```

F. Implement `count_burger`.

[3 marks]

```
def count_burger(order, burger):
```

Suppose we modify the implementation of `Burger` such that we do not know how many different burger names are there and `Burger` supports **only** these two functions instead:

- `make_burger(name)` that takes in an input name (a string) and returns a new burger.
- `get_burger_id(burger)` that takes in a burger (a `Burger`) and returns a single integer (an `int`) between 1 to the number of distinct burger names, which is unknown.

A sample execution is shown below:

```
>>> prosperity = make_burger("LuckyBurger")
>>> get_burger_id(prosperity)
161      # wow Zhu Ming sells a lot of burgers
>>> chocolate = make_burger("Chocolate")
>>> get_burger_id(chocolate)
1        # first burger he came up with
```

Nevertheless, we can still implement the remaining functions despite the implementation change **without having to modify** `combine_order` **and** `is_equal_order`.

G. Modify the function `add_to_order` and `remove_from_order` such that it addresses the implementation changes stated above. This might require you to modify your current answer to the previous parts as well (especially `combine_order` and `is_equal_order`). A sample execution is shown on the next page:

```
>>> o1 = make_empty_order()
>>> o1 = add_to_order(o1, prosperity)
>>> o2 = make_empty_order()
>>> o2 = add_to_order(o2, prosperity)
>>> is_equal_order(o1, o2)
```

True

```
>>> o3 = make_empty_order()
>>> o3 = add_to_order(o3, chocolate)
>>> is_equal_order(o1, o3)
```

False

```
>>> o3 = add_to_order(o3, prosperity)
>>> o3 = remove_from_order(o3, prosperity)
>>> o4 = make_empty_order()
>>> o4 = add_to_order(o4, chocolate)
>>> is_equal_order(o3, o4)
```

True

```
>>> o5 = combine_order(o1, o3)
>>> o6 = combine_order(o2, o4)
>>> is_equal_order(o5, o6)
```

True

[6 marks]

```
def add_to_order(order, burger):
```

```
def remove_from_order(order, burger):
```

Appendix

The following are some functions that were introduced in class. For your reference, they are reproduced here.

```
def substring(s, start, end, step):
    res = ""
    while start < len(s) and start < end:
        res += s[start]
        start += step
    return res

def factorial(n):
    if n == 0:
        return 1
    else:
        return n * factorial(n-1)

def factorial_iter(n):
    result = 1
    for i in range(2, n+1, 1):
        result *= i
    return result

def fibonacci(n):
    if n < 2:
        return n
    else:
        return fibonacci(n-1) + fibonacci(n-2)

def is_prime(n):
    if n < 2:
        return False
    elif n <= 3:
        return True
    else:
        for d in range(2, int(n**0.5)+1):
            if n % d == 0:
                return False
        return True
```


Scratch Paper

— END OF PAPER —