


CS 188: Artificial Intelligence

Reinforcement Learning III

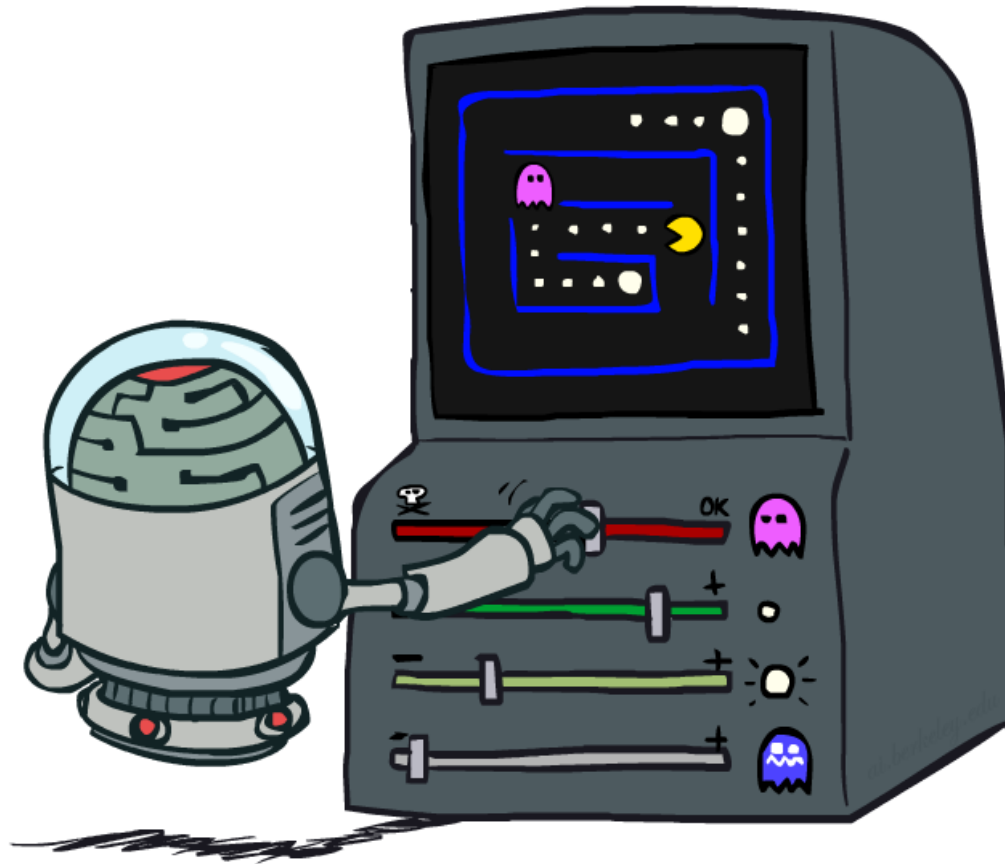

Instructor: Anca Dragan, University of California, Berkeley

[These slides were created by Dan Klein, Pieter Abbeel, and Anca Dragan. <http://ai.berkeley.edu>.]

Reinforcement Learning

- We still assume an MDP:
 - A set of states $s \in S$
 - A set of actions (per state) A
 - A model $T(s,a,s')$
 - A reward function $R(s,a,s')$
- Still looking for a policy $\pi(s)$
- New twist: don't know T or R , so must try out actions
- Big idea: Compute all averages over T using sample outcomes



The Story So Far: MDPs and RL

Known MDP: Offline Solution

Goal	Technique
Compute V^* , Q^* , π^*	Value / policy iteration
Evaluate a fixed policy π	Policy evaluation

Unknown MDP: Model-Based

Goal	Technique
Compute V^* , Q^* , π^*	VI/PI on approx. MDP
Evaluate a fixed policy π	PE on approx. MDP

Unknown MDP: Model-Free

Goal	Technique
Compute V^* , Q^* , π^*	Q-learning
Evaluate a fixed policy π	Value Learning

Q-Learning

- Q-Learning: sample-based Q-value iteration

$$Q_{k+1}(s, a) \leftarrow \sum_{s'} T(s, a, s') \left[R(s, a, s') + \gamma \max_{a'} Q_k(s', a') \right]$$

- Learn $Q(s,a)$ values as you go

- Receive a sample (s,a,s',r)

- Consider your old estimate: $Q(s, a)$


- Consider your new sample estimate:

$$sample = R(s, a, s') + \gamma \max_{a'} Q(s', a')$$

no longer policy evaluation!

- Incorporate the new estimate into a running average:

$$Q(s, a) \leftarrow (1 - \alpha)Q(s, a) + (\alpha)[sample]$$

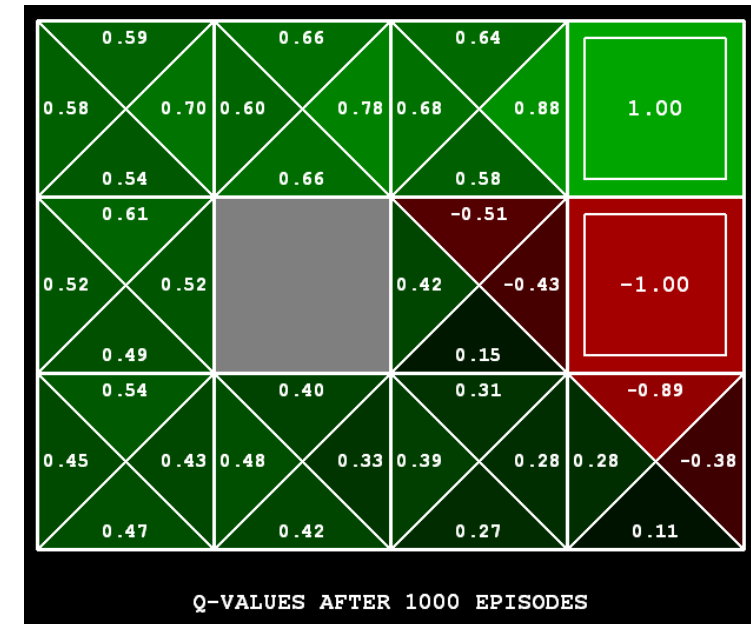


[Demo: Q-learning - gridworld (L10D2)]


[Demo: Q-learning - crawler (L10D3)]

Q-Learning Properties


- Amazing result: Q-learning converges to optimal policy -- even if you're acting suboptimally!
- This is called **off-policy learning**
- Caveats:
 - You have to explore enough
 - You have to eventually make the learning rate small enough
 - ... but not decrease it too quickly
 - Basically, in the limit, it doesn't matter how you select actions (!)

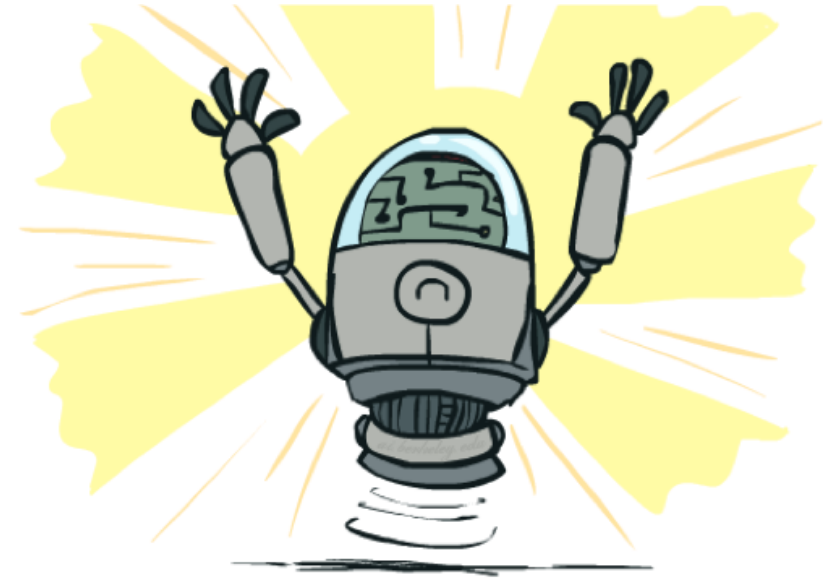


Video of Demo Q-Learning -- Crawler

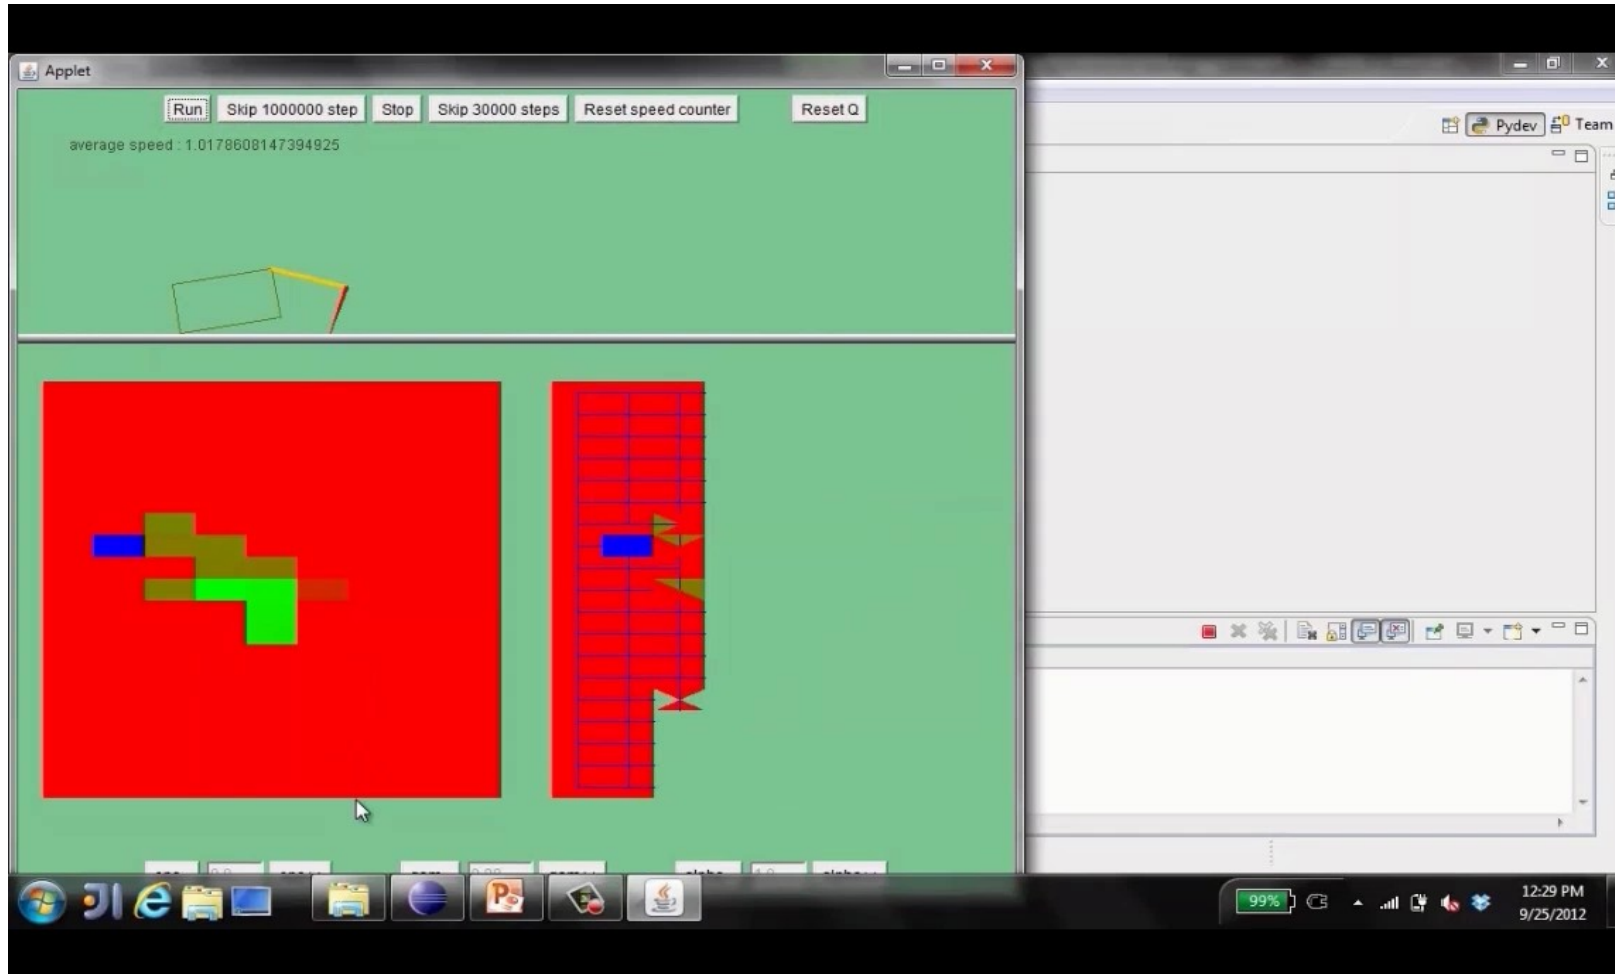


Exploration vs. Exploitation

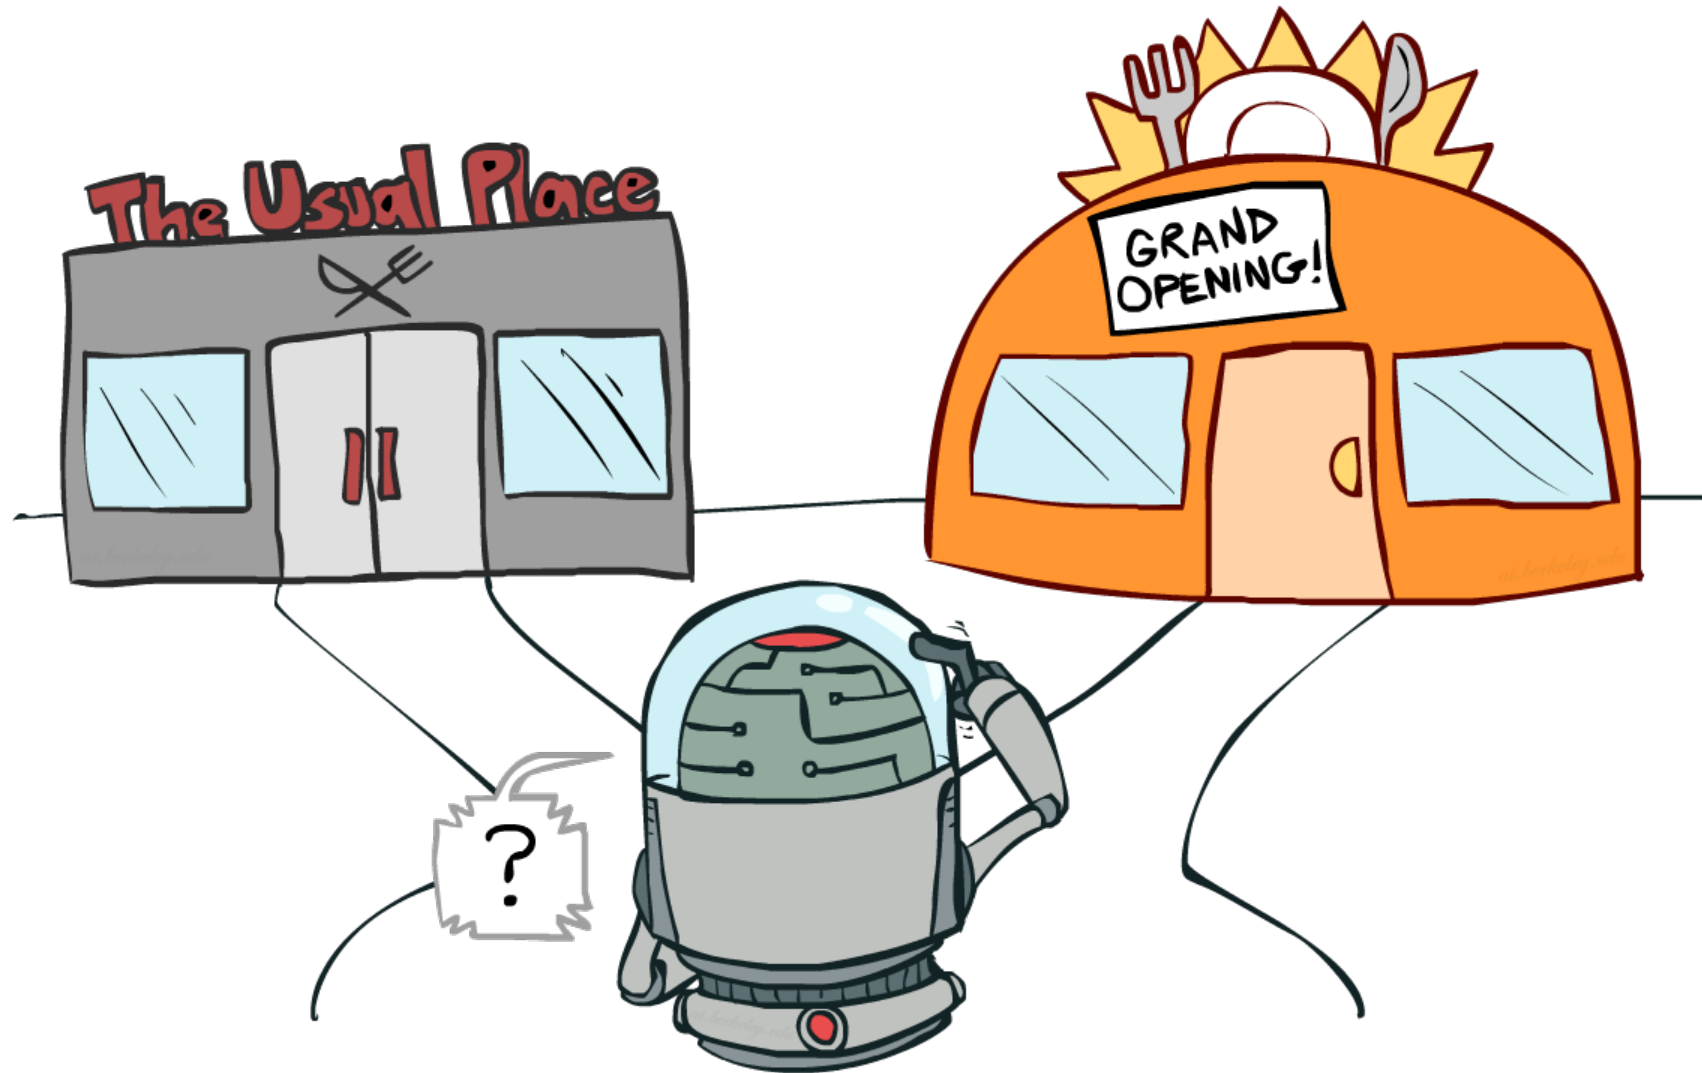


Video of Demo Q-learning – Manual Exploration – Bridge Grid

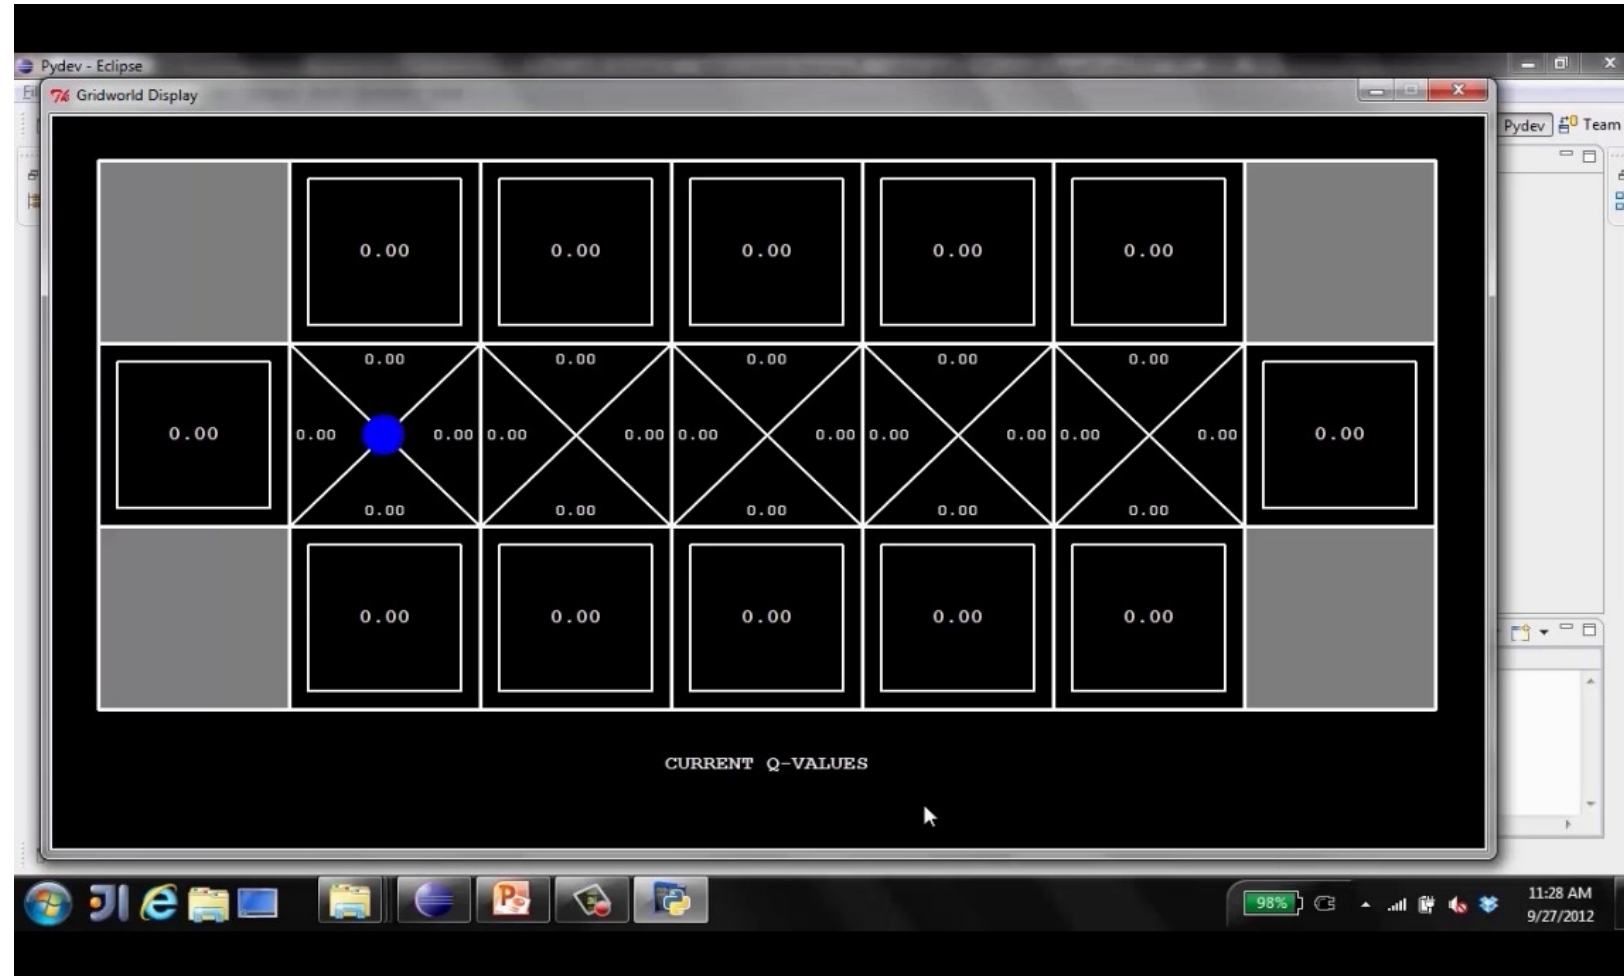

Video of Demo Q-learning – Epsilon-Greedy – Crawler

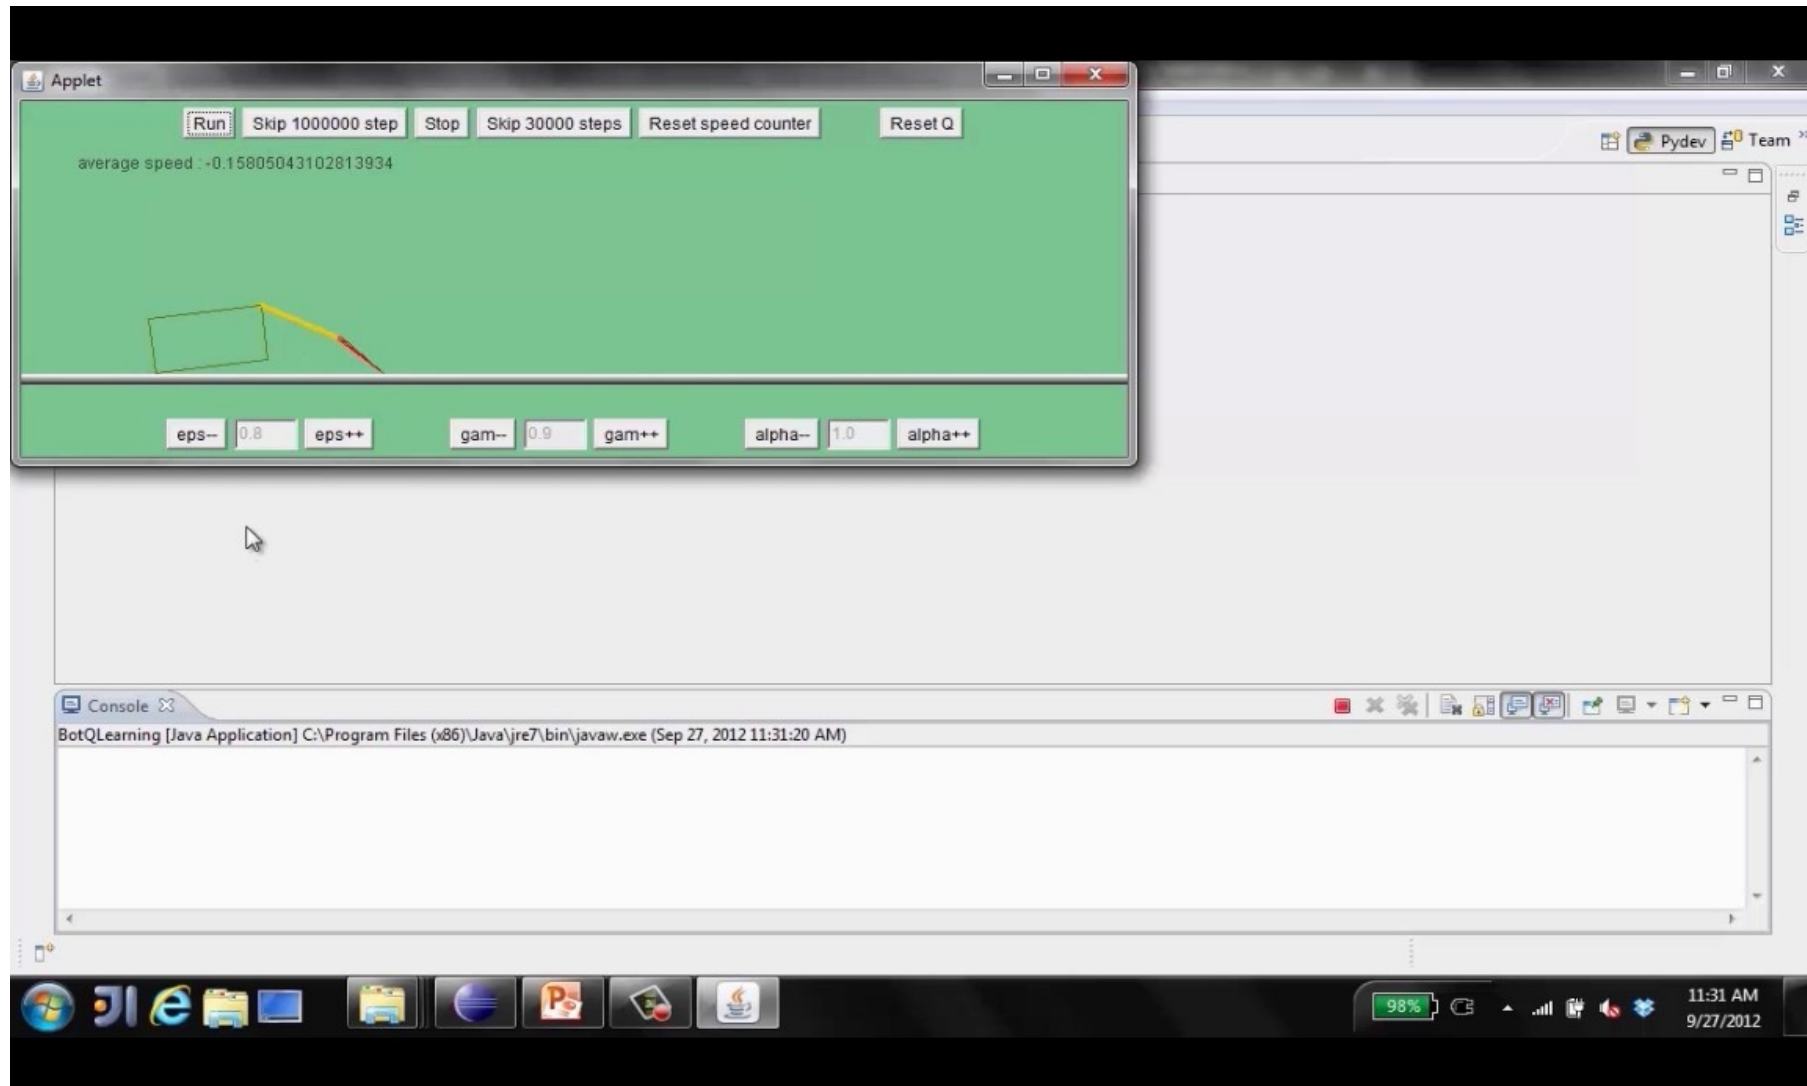


Video of Demo Q-learning – Exploration Function – Crawler

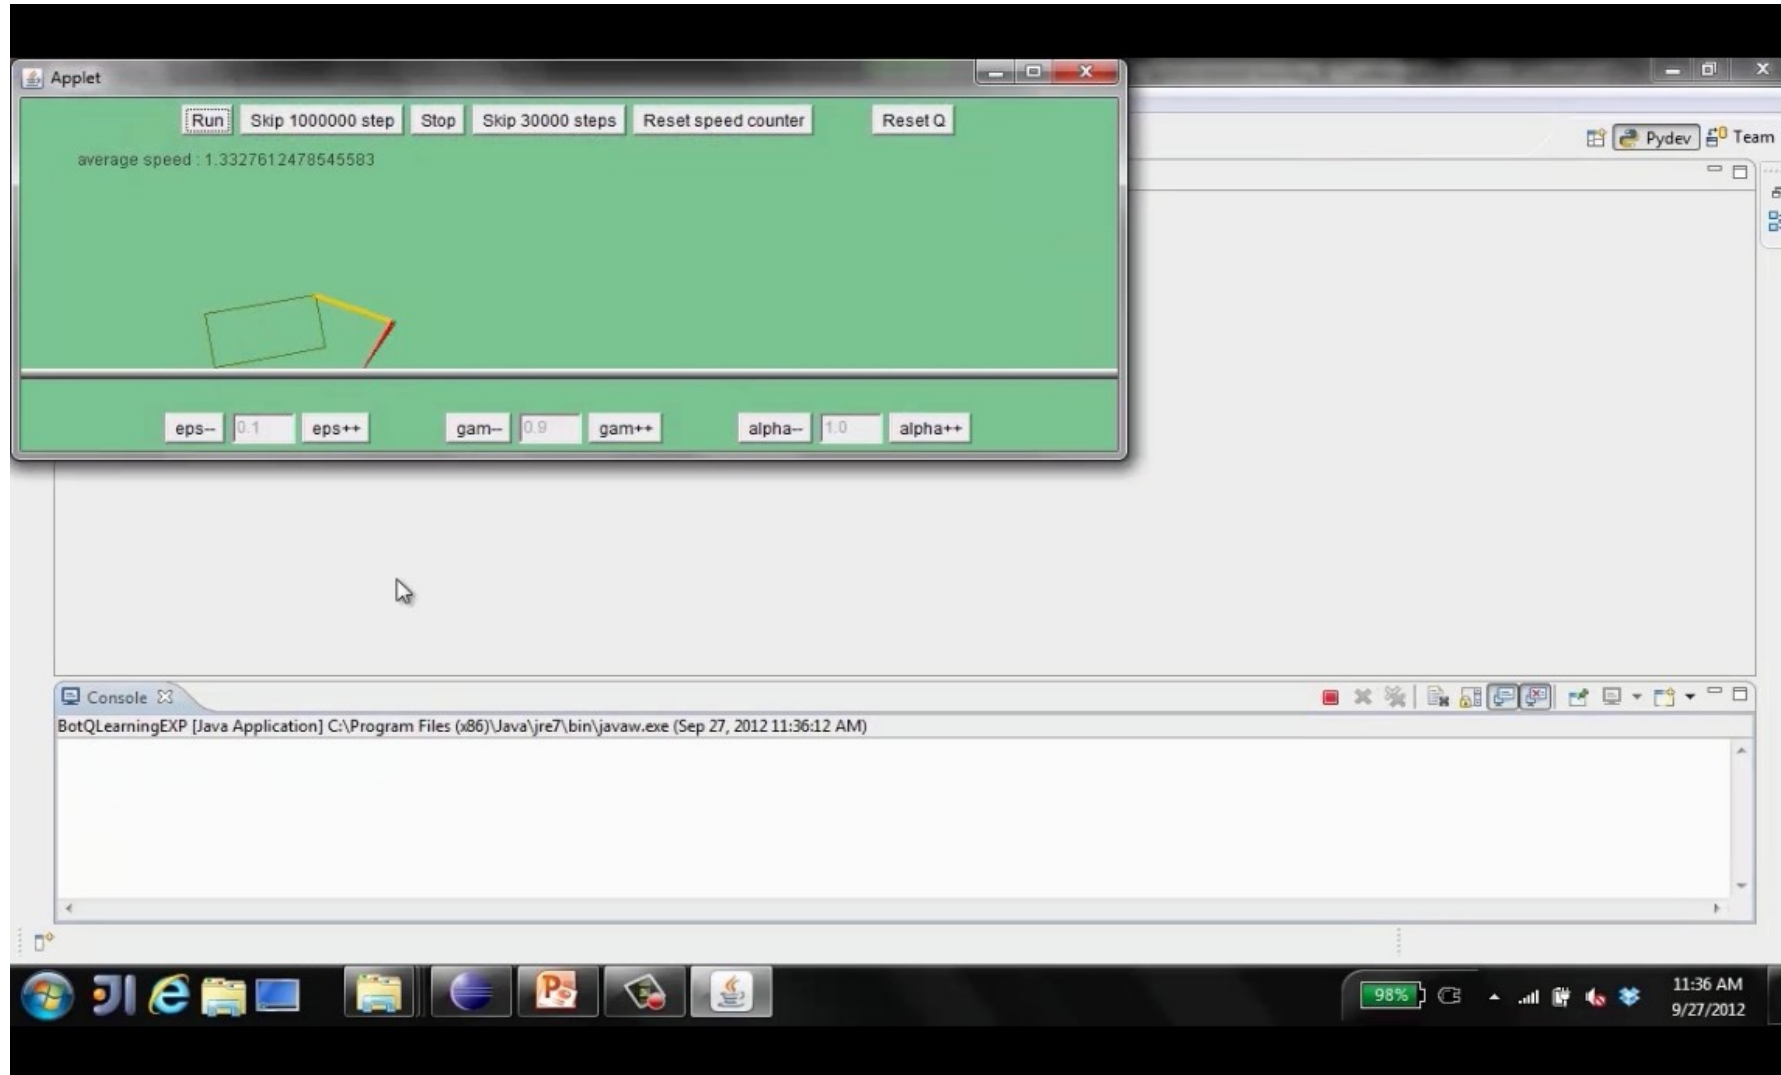


Regret

- Even if you learn the optimal policy, you still make mistakes along the way!
- Regret is a measure of your total mistake cost: the difference between your (expected) rewards, including youthful suboptimality, and optimal (expected) rewards
- Minimizing regret goes beyond learning to be optimal – it requires optimally learning to be optimal
- Example: random exploration and exploration functions both end up optimal, but random exploration has higher regret

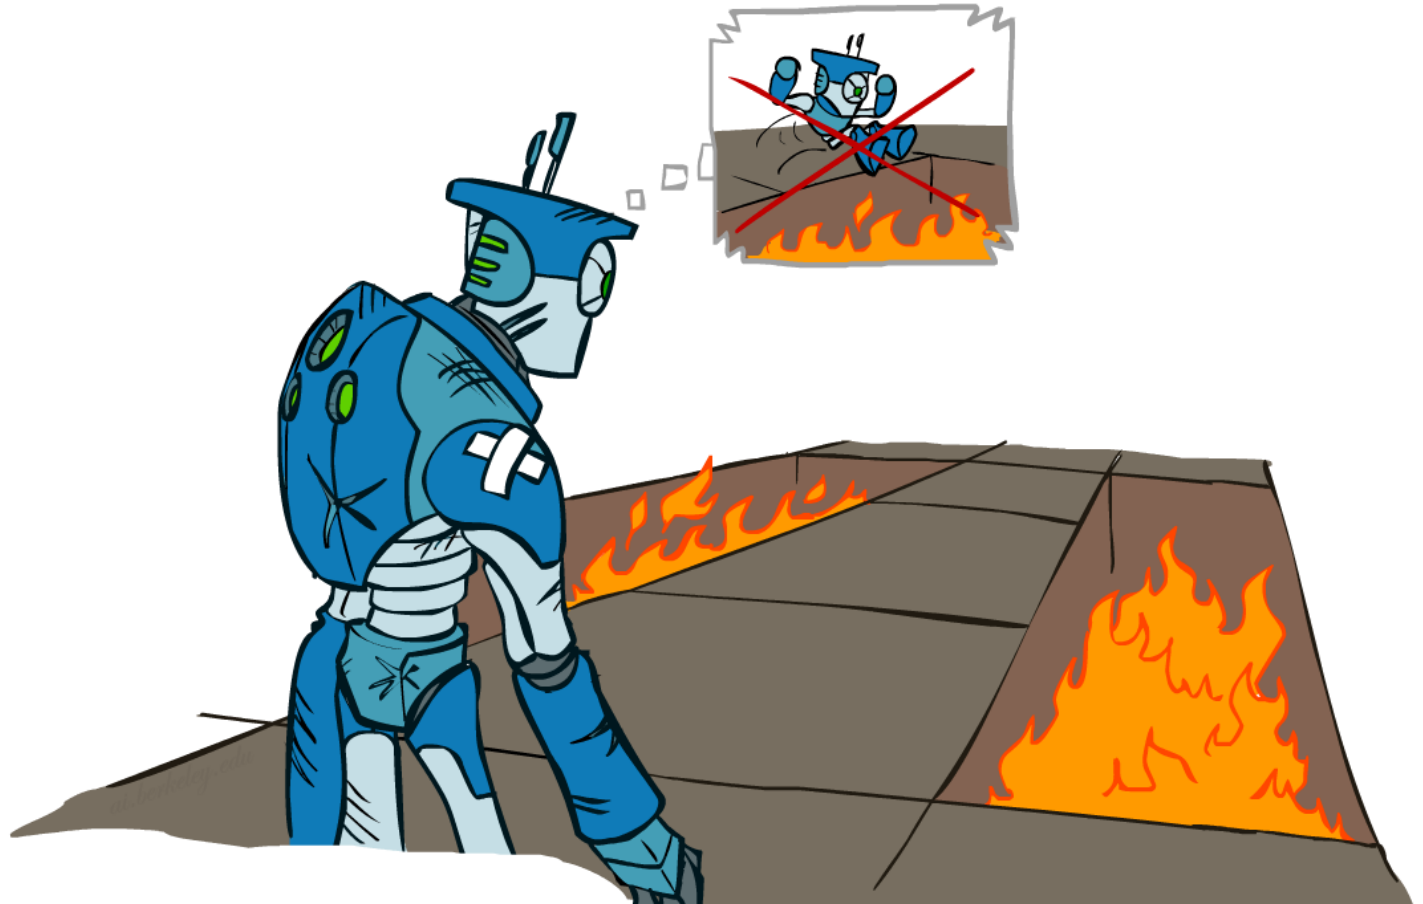


Approximate Q-Learning

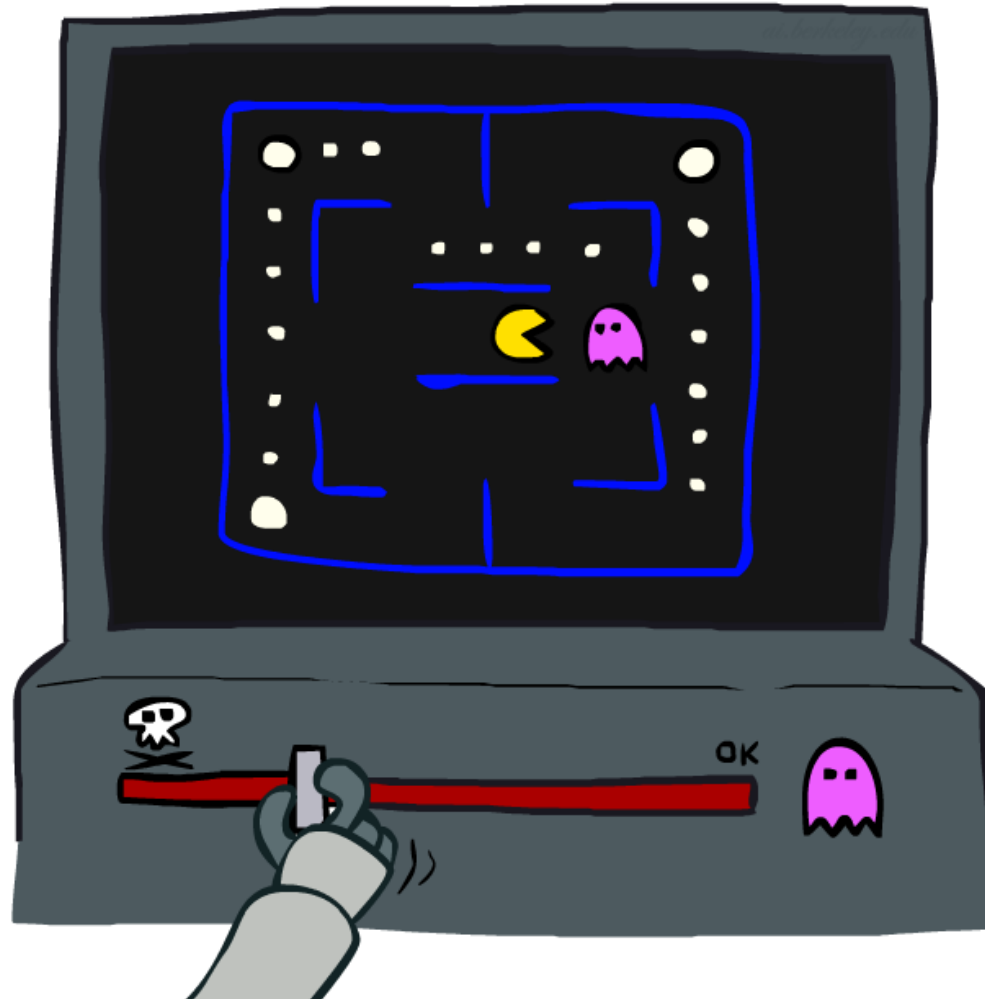

Generalizing Across States

- Basic Q-Learning keeps a table of all q-values
- In realistic situations, we cannot possibly learn about every single state!
 - Too many states to visit them all in training
 - Too many states to hold the q-tables in memory
- Instead, we want to generalize:
 - Learn about some small number of training states from experience
 - Generalize that experience to new, similar situations
 - This is a fundamental idea in machine learning, and we'll see it over and over again

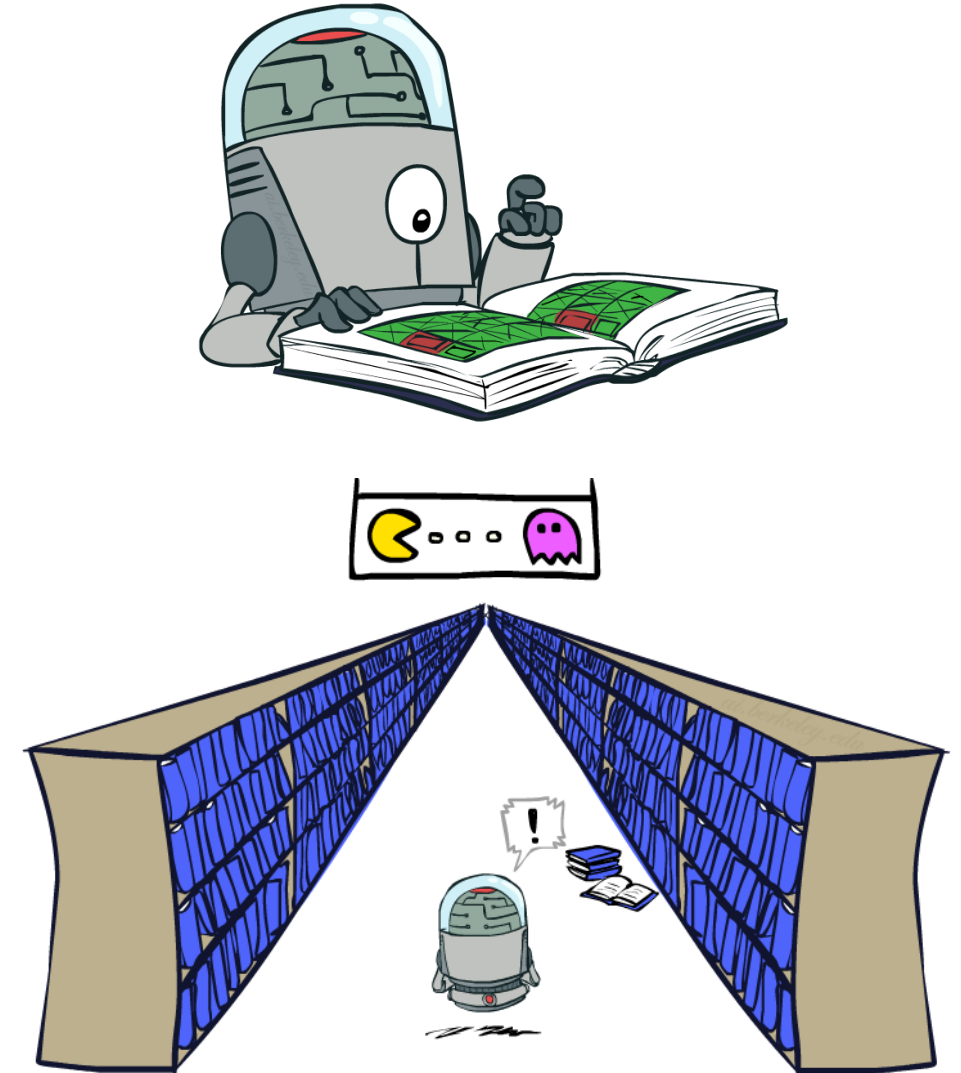


Example: Pacman


Let's say we discover
through experience
that this state is bad:



In naïve q-learning,
we know nothing
about this state:

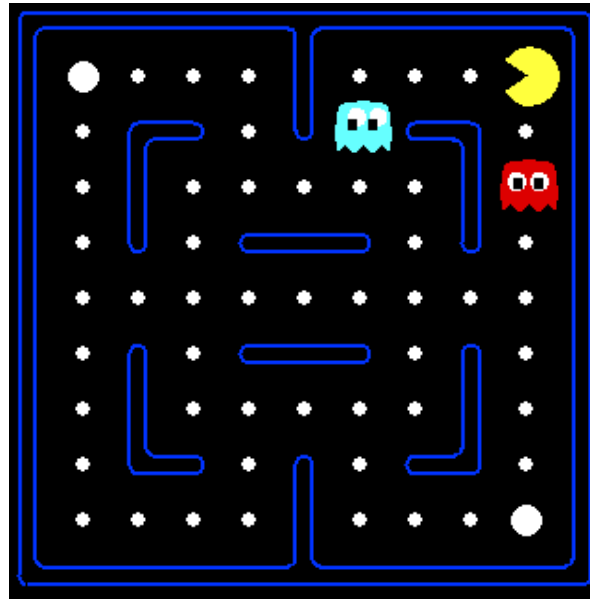


Or even this one!

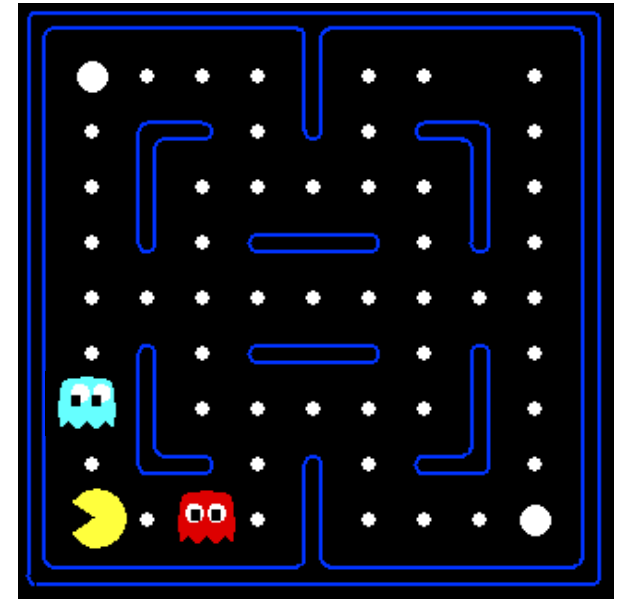


[Demo: Q-learning - pacman - tiny - watch all (L11D5)]
[Demo: Q-learning - pacman - tiny - silent train (L11D6)]
[Demo: Q-learning - pacman - tricky - watch all (L11D7)]


Video of Demo Q-Learning Pacman – Tiny – Watch All

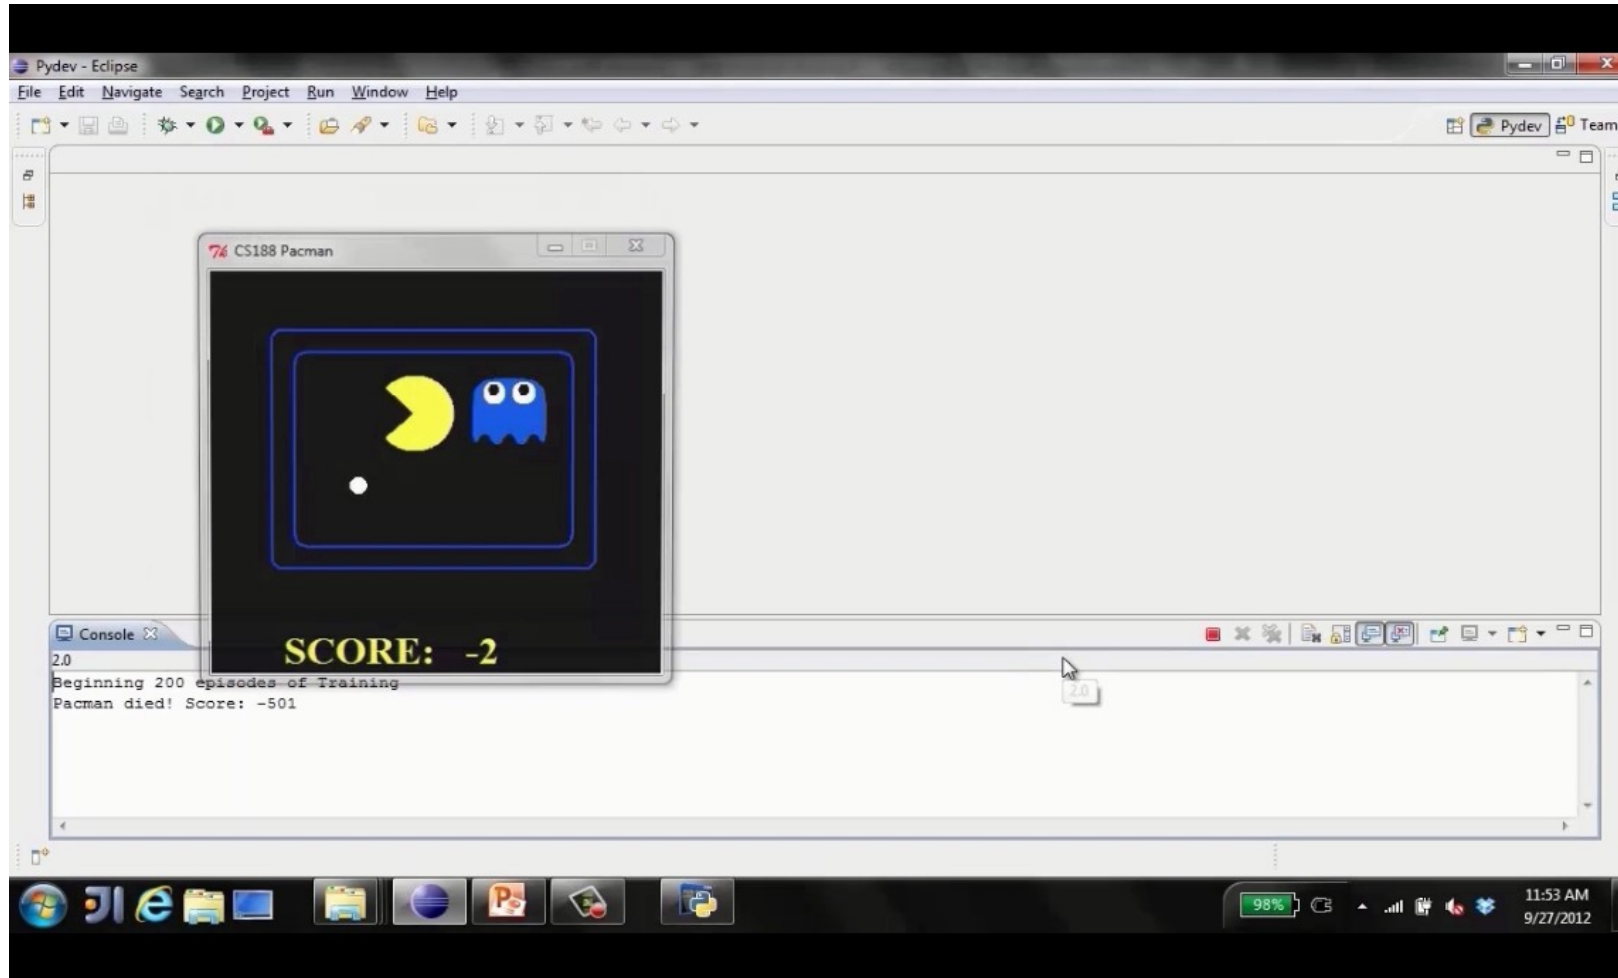

Video of Demo Q-Learning Pacman – Tiny – Silent Train

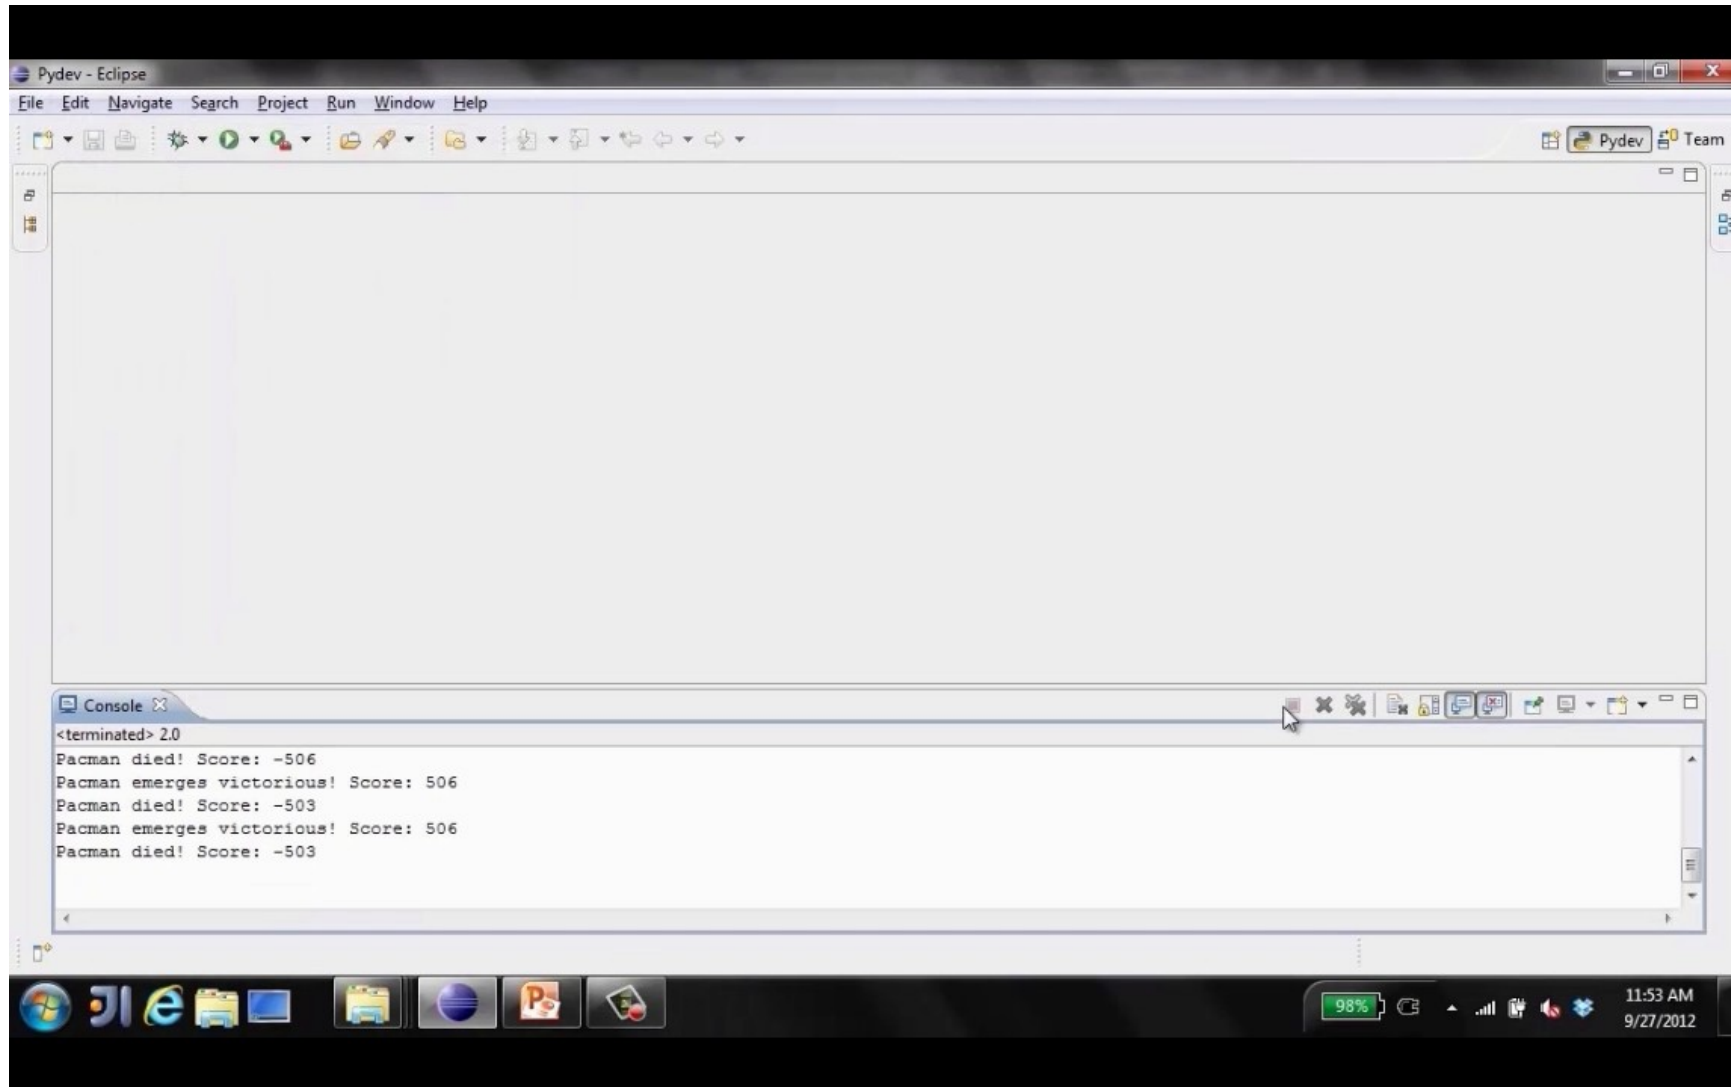


Video of Demo Q-Learning Pacman – Tricky – Watch All

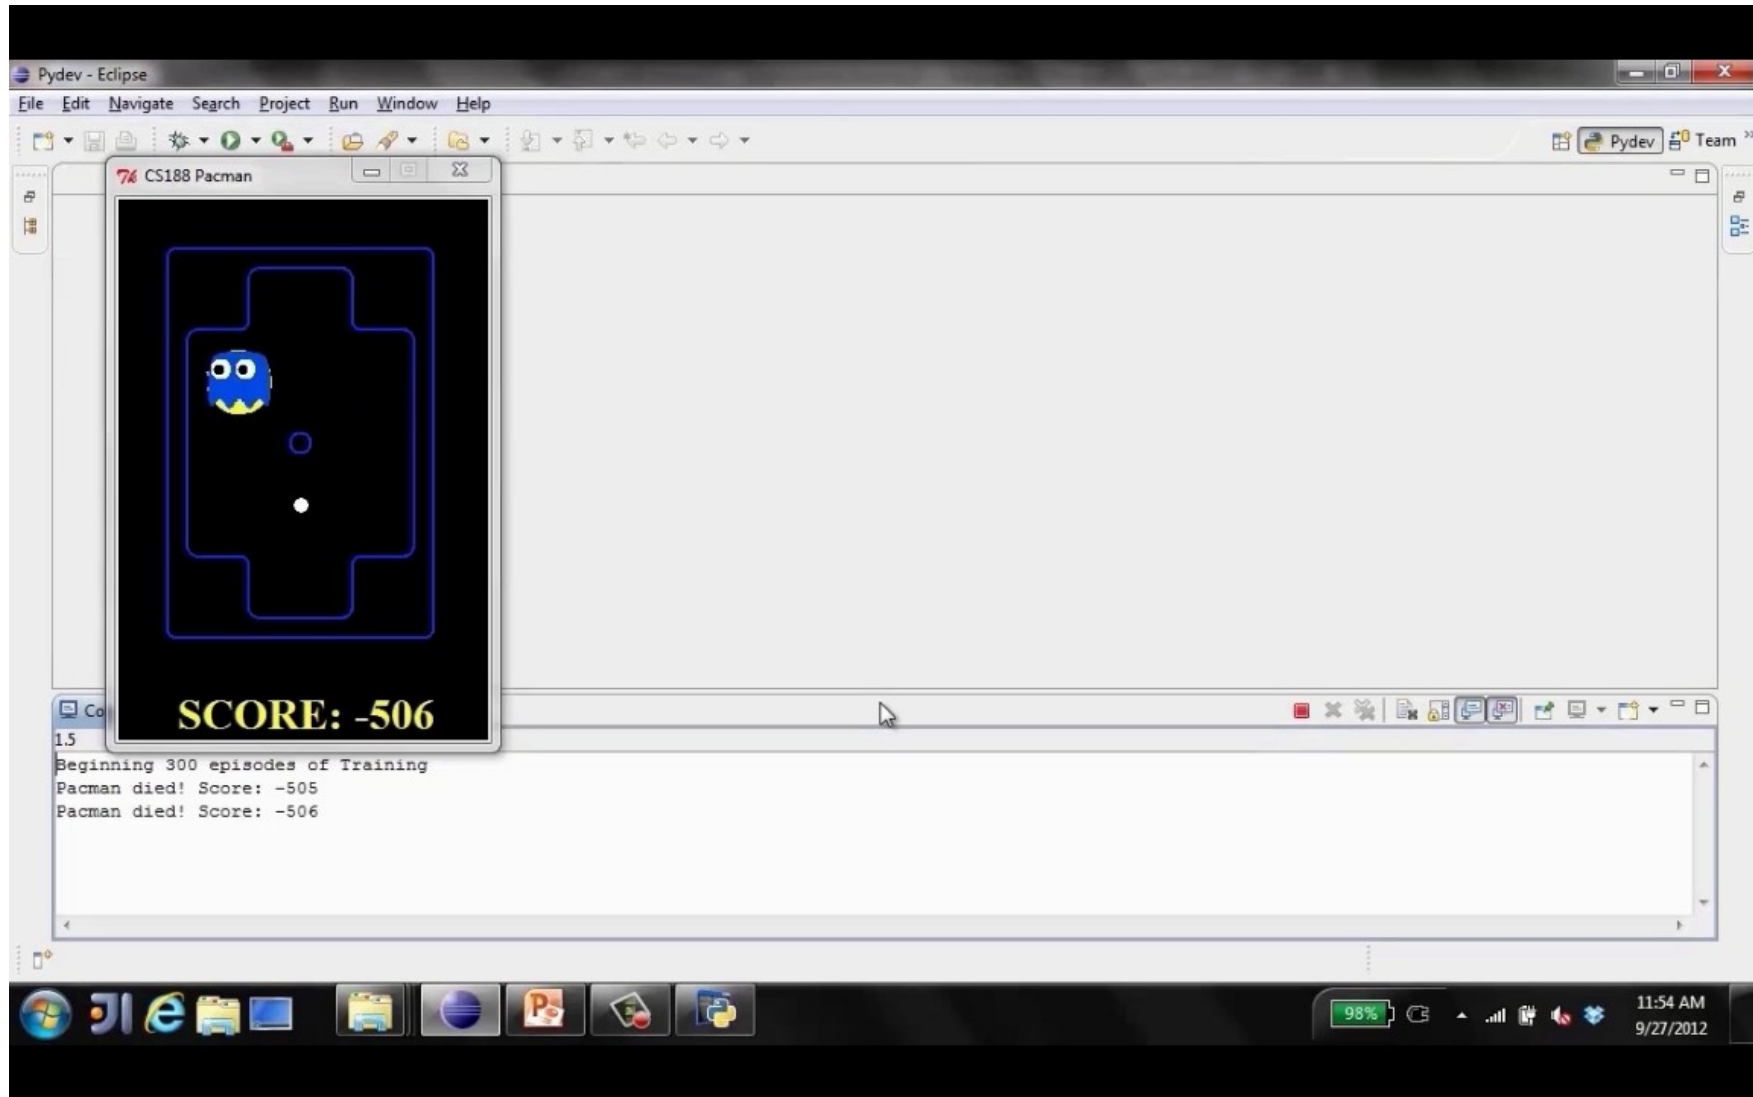

Feature-Based Representations

- Solution: describe a state using a vector of features (properties)
 - Features are functions from states to real numbers (often 0/1) that capture important properties of the state
 - Example features:
 - Distance to closest ghost
 - Distance to closest dot
 - Number of ghosts
 - $1 / (\text{dist to dot})^2$
 - Is Pacman in a tunnel? (0/1)
 - etc.
 - Is it the exact state on this slide?
 - Can also describe a q-state (s, a) with features (e.g. action moves closer to food)

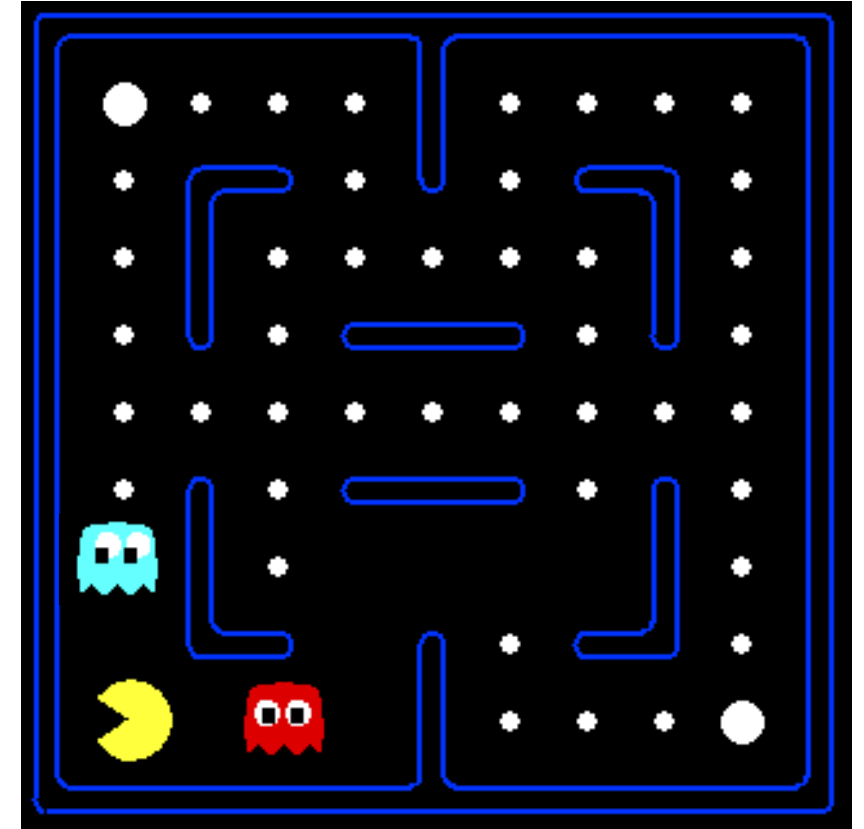

Linear Value Functions

- Using a feature representation, we can write a q function (or value function) for any state using a few weights:

$$V(s) = w_1 f_1(s) + w_2 f_2(s) + \dots + w_n f_n(s)$$

$$Q(s, a) = w_1 f_1(s, a) + w_2 f_2(s, a) + \dots + w_n f_n(s, a)$$

- Advantage: our experience is summed up in a few powerful numbers
- Disadvantage: states may share features but actually be very different in value!

Approximate Q-Learning

$$Q(s, a) = w_1 f_1(s, a) + w_2 f_2(s, a) + \dots + w_n f_n(s, a)$$

- Q-learning with linear Q-functions:

transition = (s, a, r, s')

difference = $\left[r + \gamma \max_{a'} Q(s', a') \right] - Q(s, a)$

$Q(s, a) \leftarrow Q(s, a) + \alpha [\text{difference}]$

$w_i \leftarrow w_i + \alpha [\text{difference}] f_i(s, a)$


Exact Q's

Approximate Q's

- Intuitive interpretation:


- Adjust weights of active features
- E.g., if something unexpectedly bad happens, blame the features that were on: disprefer all states with that state's features

- Formal justification: online least squares

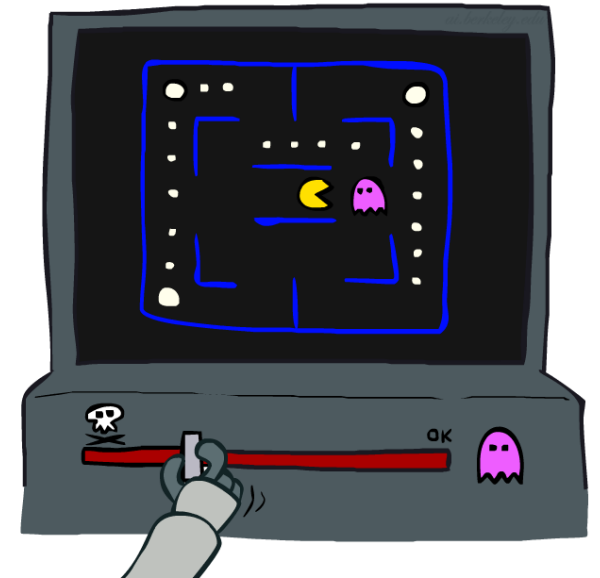

Example: Q-Pacman

$$Q(s, a) = 4.0 f_{DOT}(s, a) - 1.0 f_{GST}(s, a)$$

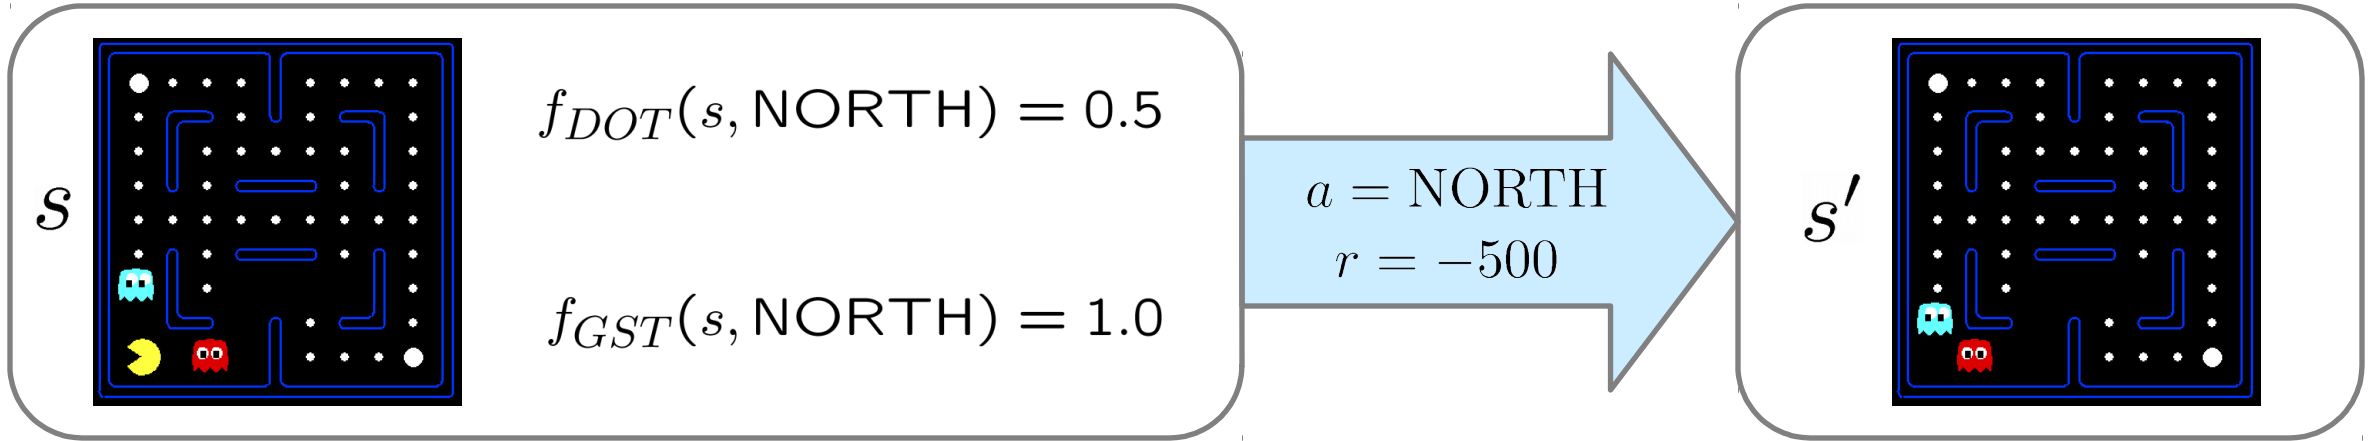

$$f_{DOT}(s, \text{NORTH}) = 0.5$$

$$f_{GST}(s, \text{NORTH}) = 1.0$$

$$Q(s, \text{NORTH}) = +1$$

$$r + \gamma \max_{a'} Q(s', a') = -500 + 0$$

$$Q(s', \cdot) = 0$$

difference = -501




$$w_{DOT} \leftarrow 4.0 + \alpha [-501] 0.5$$

$$w_{GST} \leftarrow -1.0 + \alpha [-501] 1.0$$

$$Q(s, a) = 3.0 f_{DOT}(s, a) - 3.0 f_{GST}(s, a)$$


[Demo: approximate Q-learning pacman (L11D10)]

Video of Demo Approximate Q-Learning -- Pacman

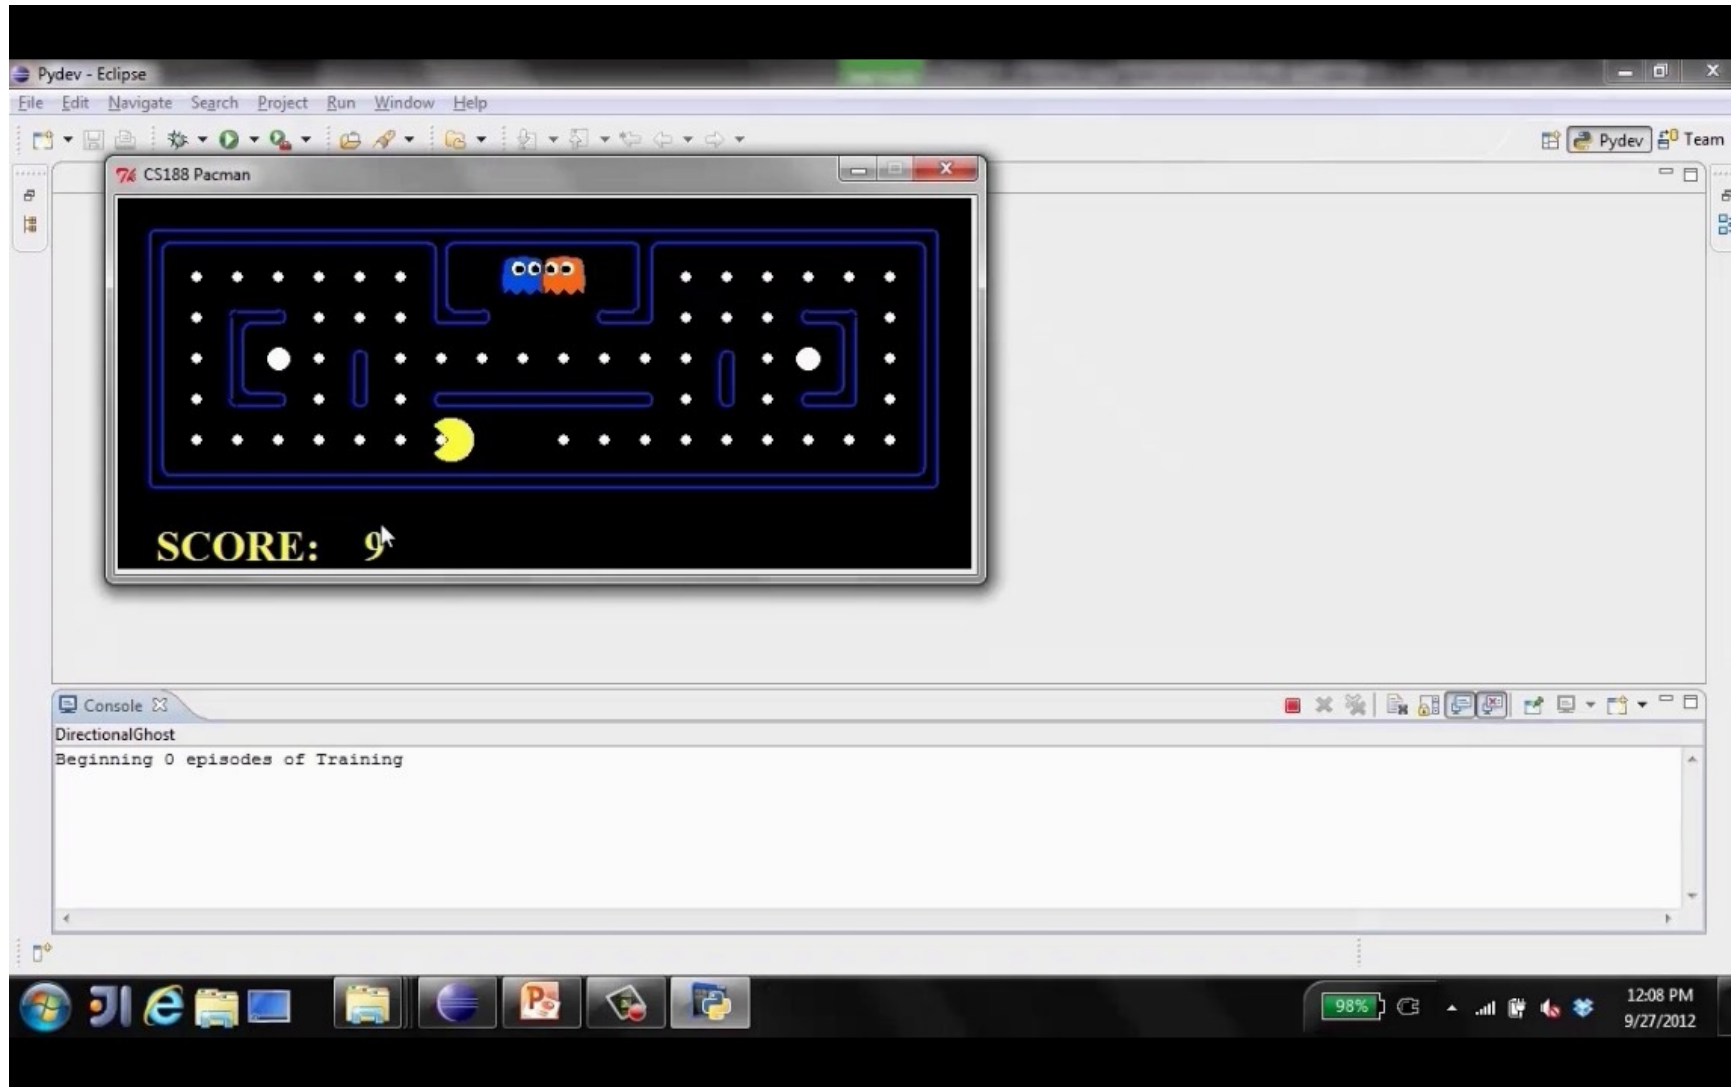


DeepMind Atari (©Two Minute Lectures)


approximate Q-learning with neural nets

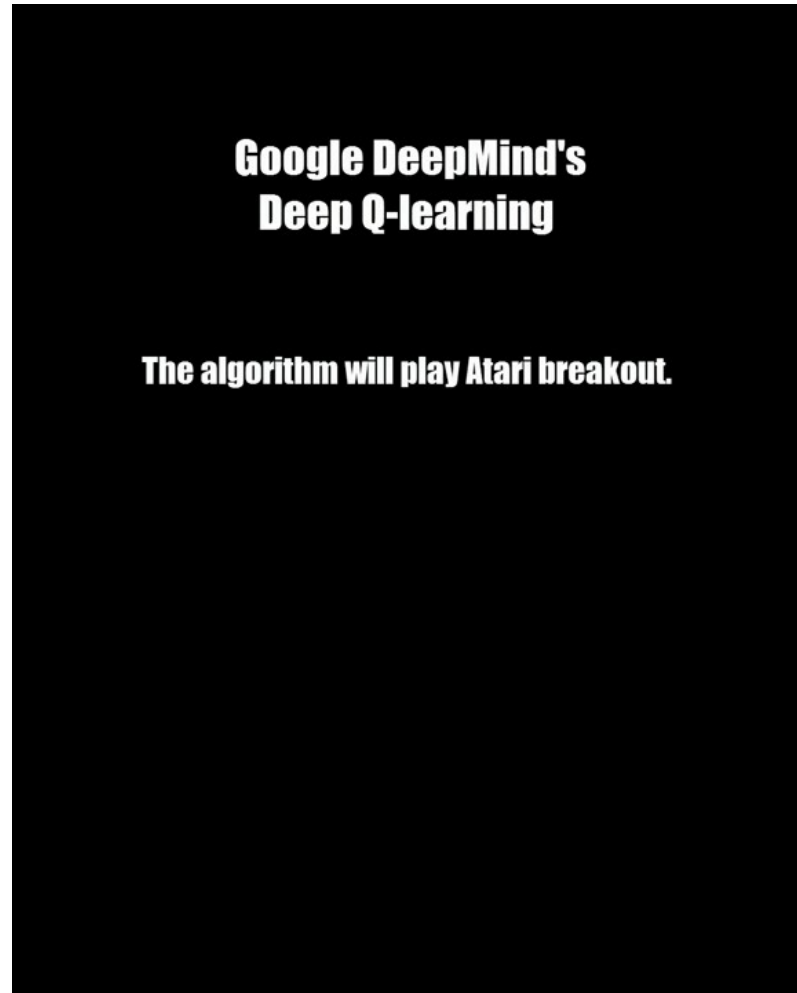

Q-Learning and Least Squares

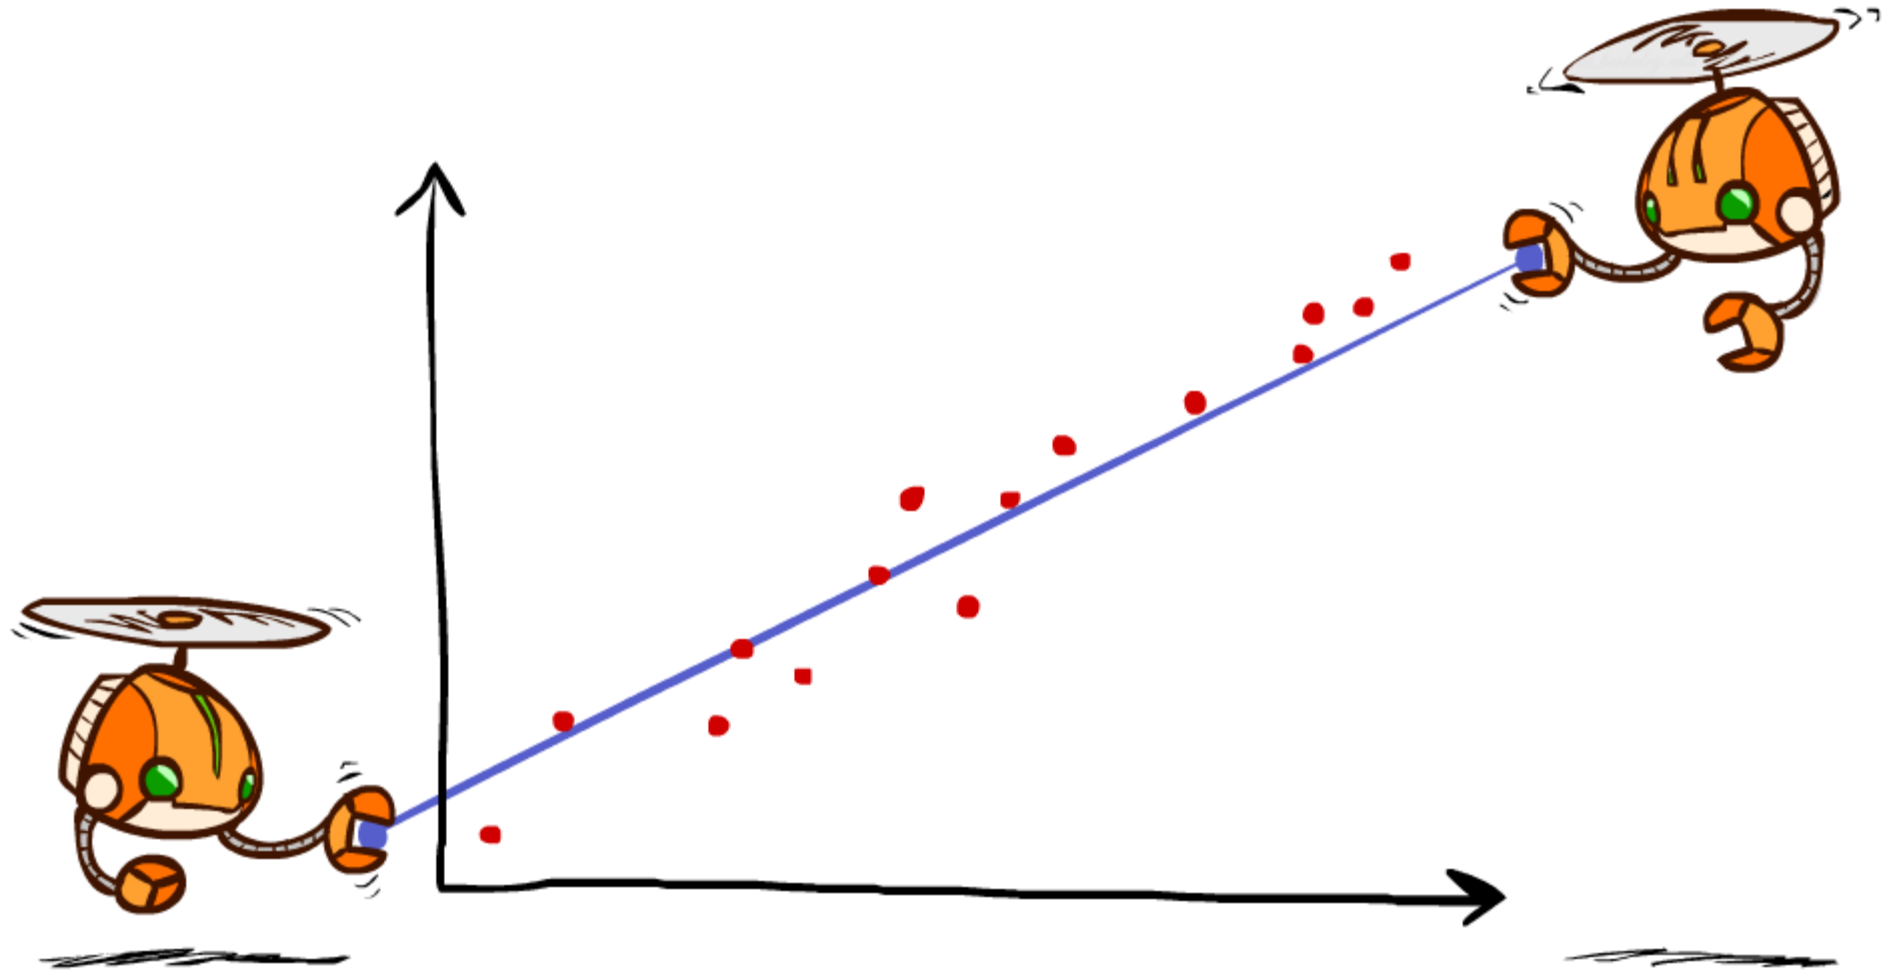


Linear Approximation: Regression

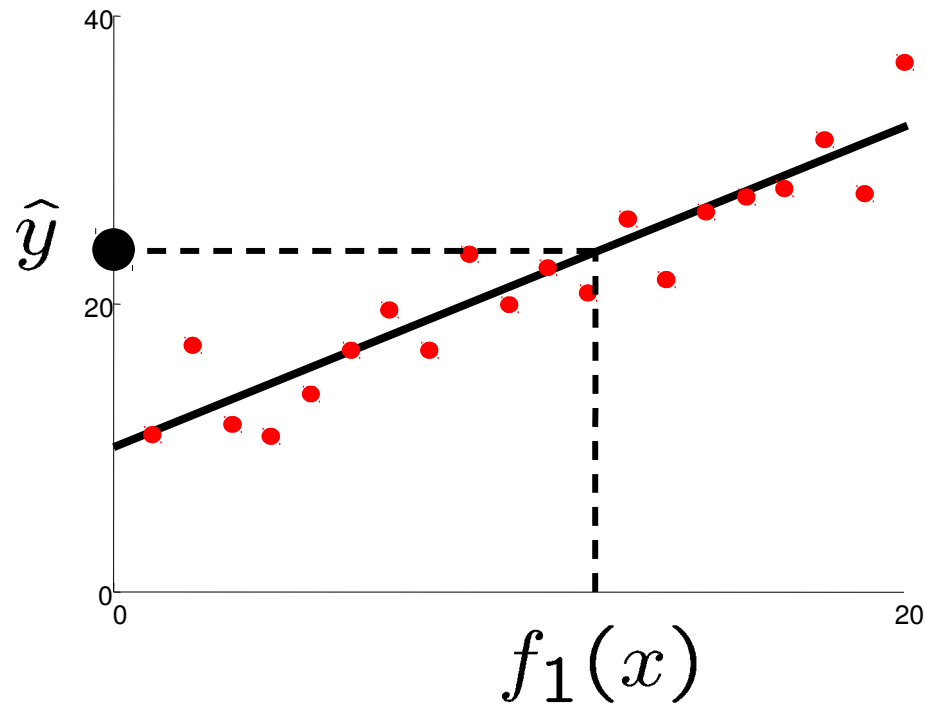

Prediction:

$$\hat{y} = w_0 + w_1 f_1(x)$$

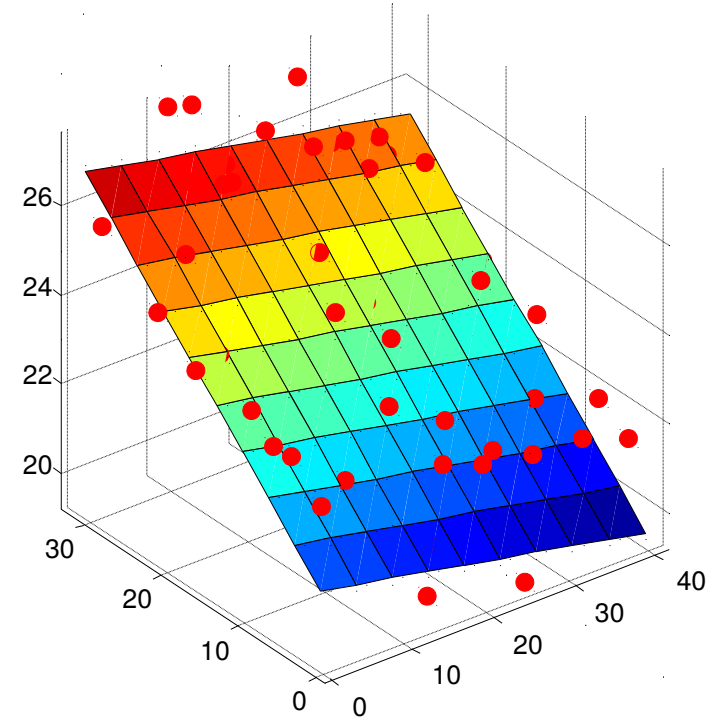


Prediction:

$$\hat{y}_i = w_0 + w_1 f_1(x) + w_2 f_2(x)$$

Optimization: Least Squares


$$\text{total error} = \sum_i (y_i - \hat{y}_i)^2 = \sum_i \left(y_i - \sum_k w_k f_k(x_i) \right)^2$$

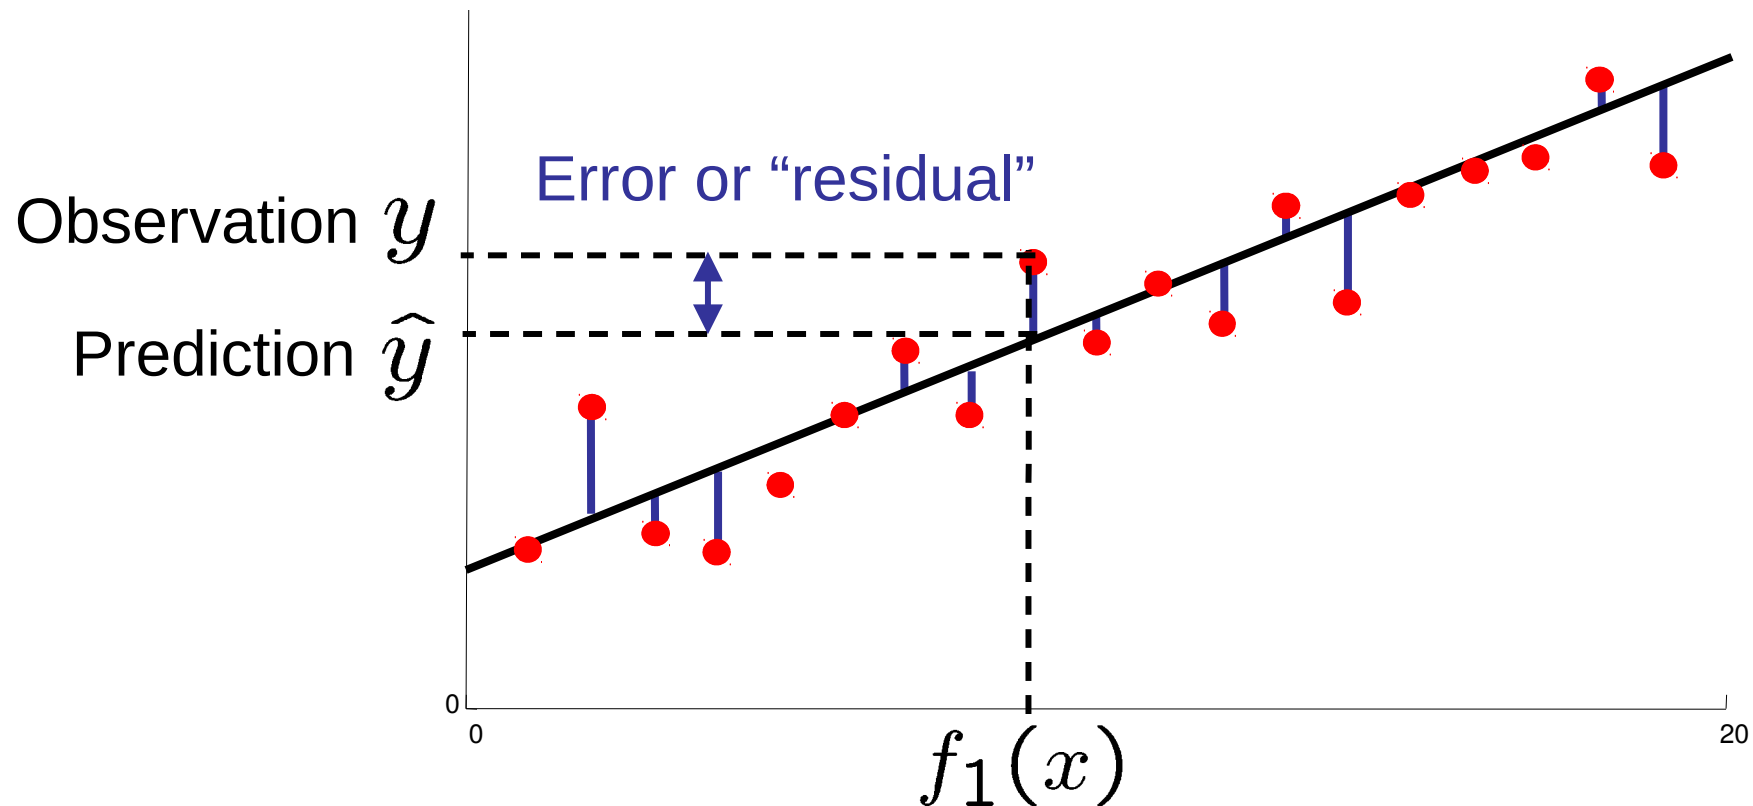

Minimizing Error

Imagine we had only one point x , with features $f(x)$, target value y , and weights w :

$$\begin{aligned}\text{error}(w) &= \frac{1}{2} \left(y - \sum_k w_k f_k(x) \right)^2 \\ \frac{\partial \text{error}(w)}{\partial w_m} &= - \left(y - \sum_k w_k f_k(x) \right) f_m(x) \\ w_m &\leftarrow w_m + \alpha \left(y - \sum_k w_k f_k(x) \right) f_m(x)\end{aligned}$$

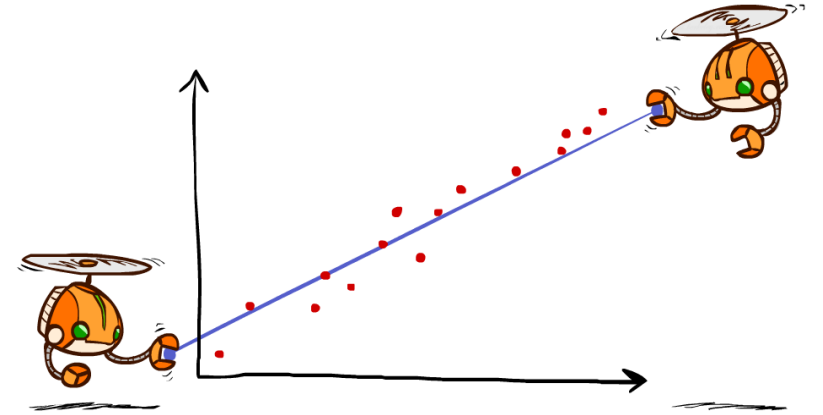


Approximate q update explained:

$$w_m \leftarrow w_m + \alpha \left[r + \gamma \max_a Q(s', a') - Q(s, a) \right] f_m(s, a)$$

“target”

“prediction”

Overfitting: Why Limiting Capacity Can Help

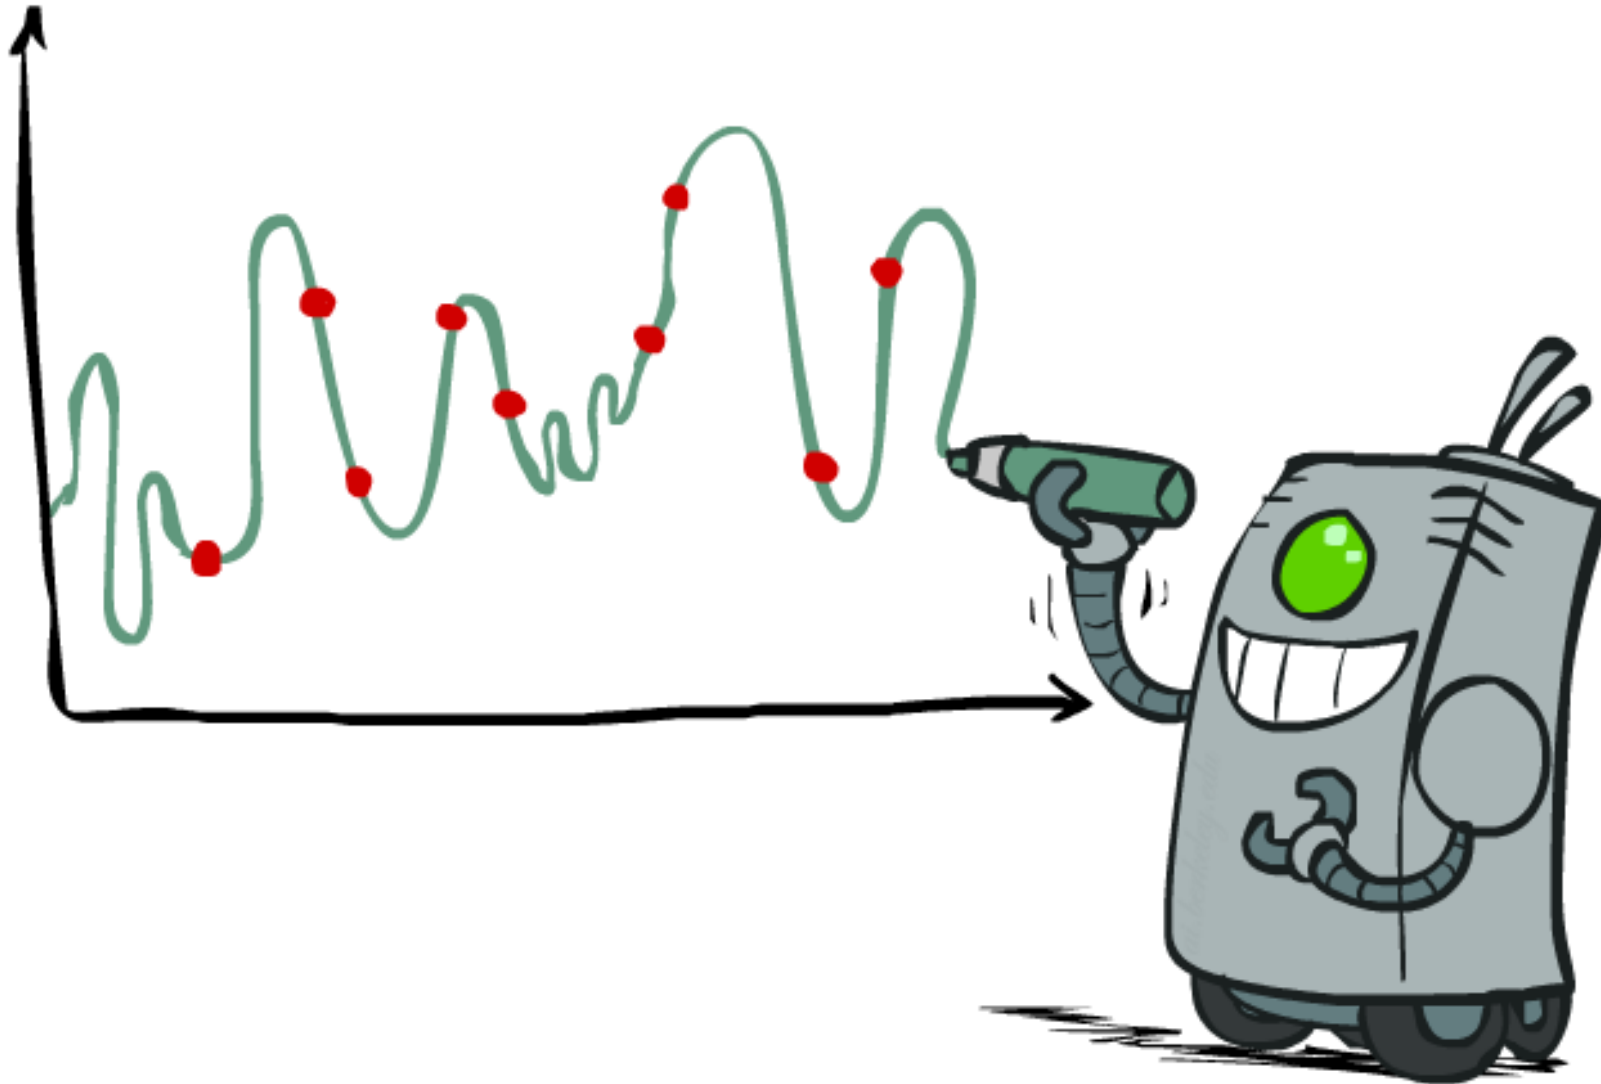


New in Model-Free RL

**Google DeepMind's
Deep Q-learning**

The algorithm will play Atari breakout.

Policy Search

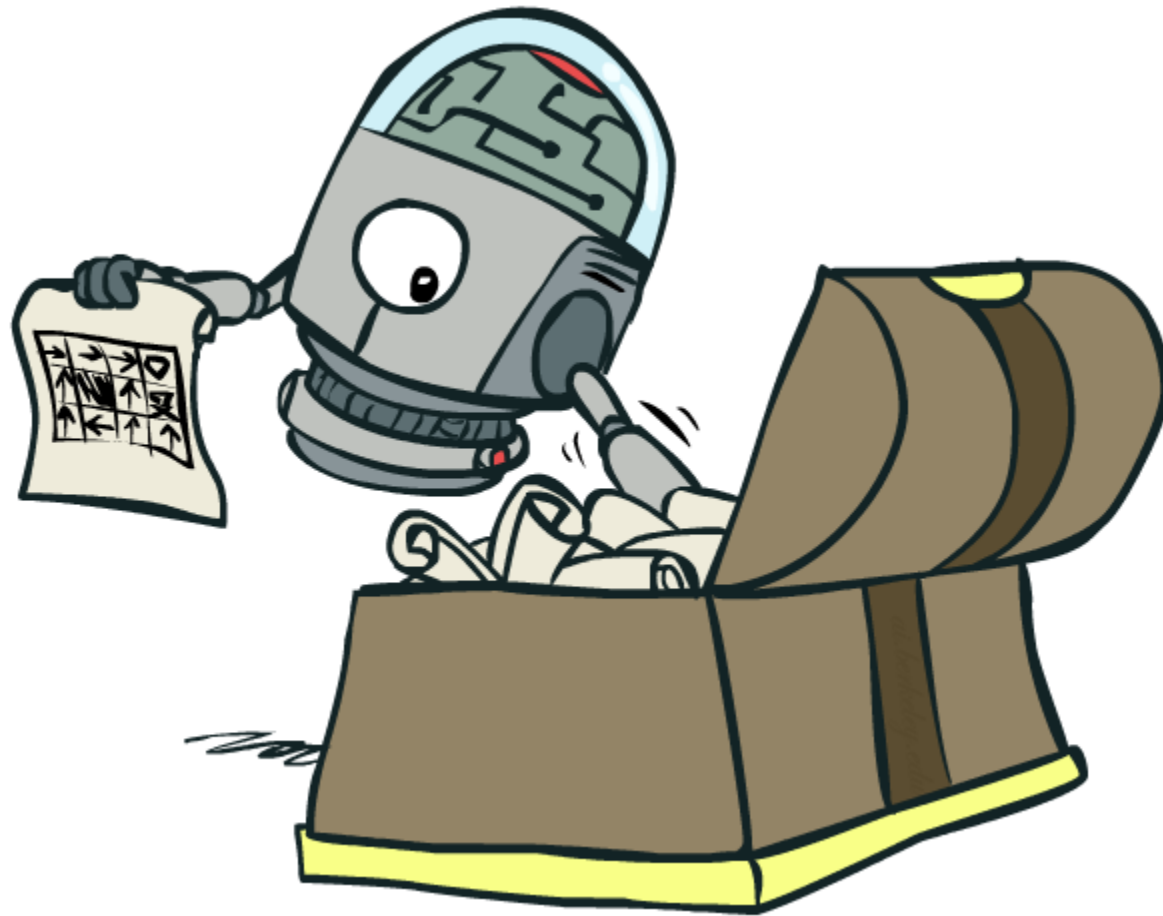


Policy Search

- Problem: often the feature-based policies that work well (win games, maximize utilities) aren't the ones that approximate V / Q best
 - E.g. your value functions from project 2 were probably horrible estimates of future rewards, but they still produced good decisions
 - Q-learning's priority: get Q-values close (modeling)
 - Action selection priority: get ordering of Q-values right (prediction)
 - We'll see this distinction between modeling and prediction again later in the course
- Solution: learn policies that maximize rewards, not the values that predict them
- Policy search: start with an ok solution (e.g. Q-learning) then fine-tune by hill climbing on feature weights

Policy Search

- Simplest policy search:
 - Start with an initial linear value function or Q-function
 - Nudge each feature weight up and down and see if your policy is better than before
- Problems:
 - How do we tell the policy got better?
 - Need to run many sample episodes!
 - If there are a lot of features, this can be impractical
- Better methods exploit lookahead structure, sample wisely, change multiple parameters...

Policy Search

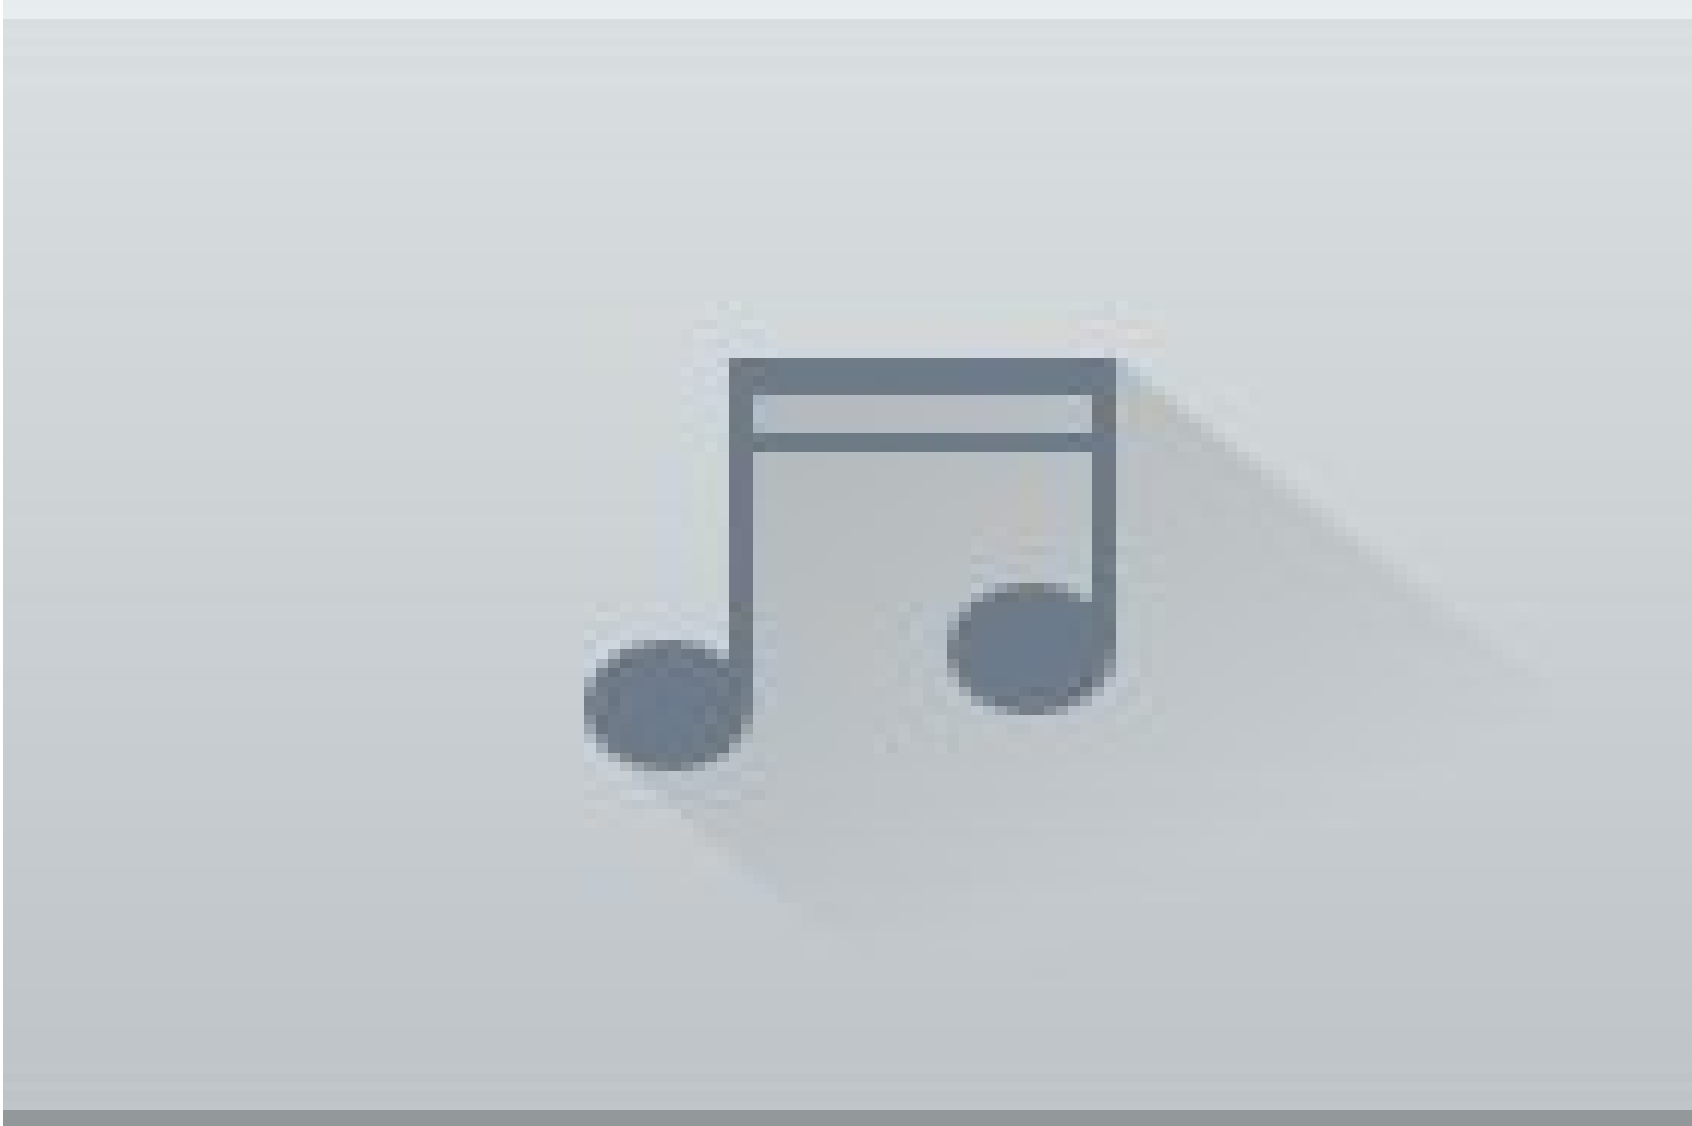

The Story So Far: MDPs and RL

Known MDP: Offline Solution

Goal	Technique
Compute V^*, Q^*, π^*	Value / policy iteration
Evaluate a fixed policy π	Policy evaluation

Unknown MDP: Model-Based

Goal	Technique
Compute V^*, Q^*, π^*	VI/PI on approx. MDP
Evaluate a fixed policy π	PE on approx. MDP

**use features
to generate model*

Unknown MDP: Model-Free

Goal	Technique
Compute V^*, Q^*, π^*	Q-learning
Evaluate a fixed policy π	Value Learning

**use features
to generate model*

Discussion: Model-Based vs Model-Free RL

New in Model-Based RL

- o <http://deepmpc.cs.cornell.edu/>
 - o Learn a model with a deep neural network and use it for MPC
- o <https://sites.google.com/site/visuomotorpolicy/>
 - o Gpolicy search (GPS) - trains local models around trajectories, planning with local models, then train a policy based on the local plans

Conclusion

- We're done with Part I: Search and Planning!
- We've seen how AI methods can solve problems in:
 - Search
 - Constraint Satisfaction Problems
 - Games
 - Markov Decision Problems
 - Reinforcement Learning
- Next up: Part II: Uncertainty and Learning!

