

CS 188: Artificial Intelligence

Constraint Satisfaction Problems




Instructors: Davis Foote and Jacob Andreas

University of California, Berkeley



[Slides by Dan Klein, Pieter Abbeel, Anca Dragan, Davis Foote, Jacob Andreas; ai.berkeley.edu]

Constraint Satisfaction Problems

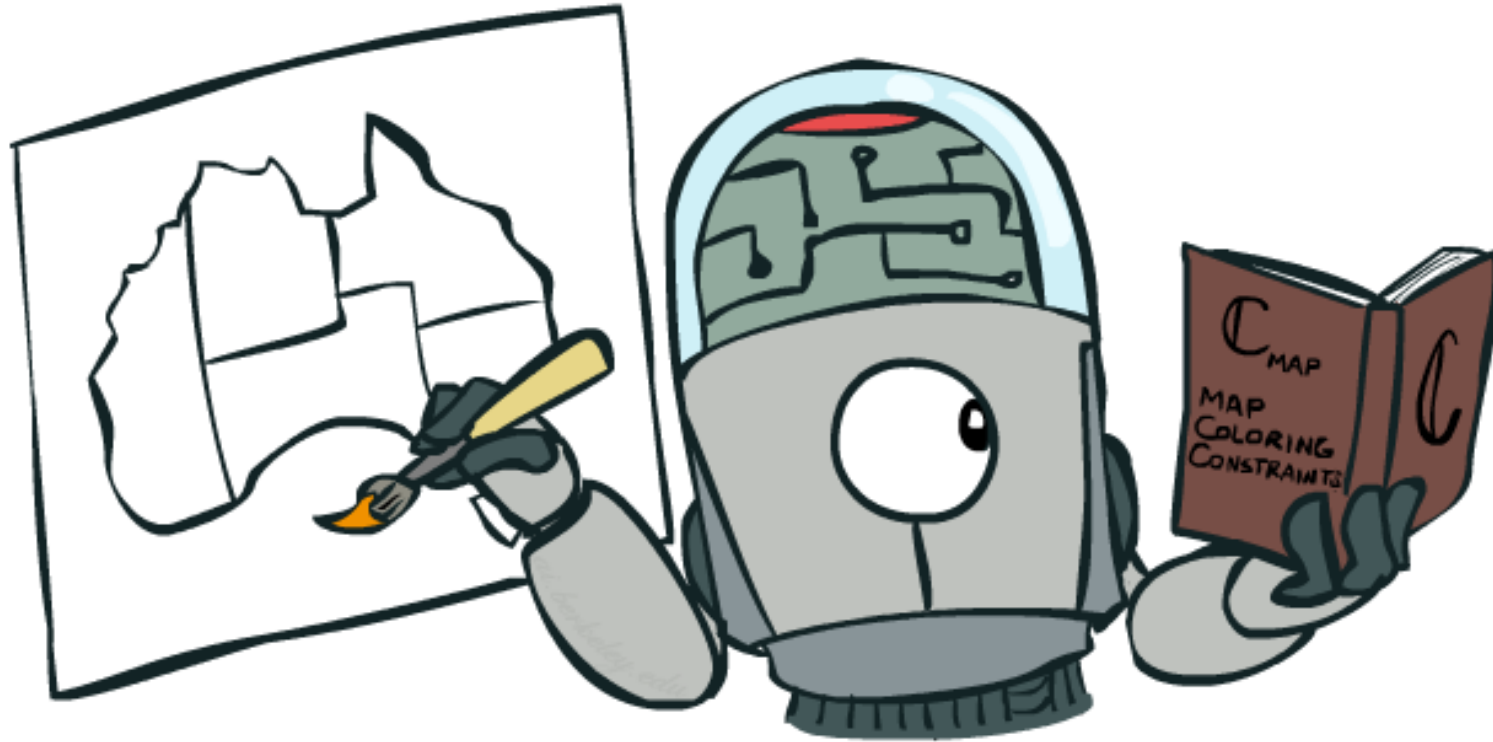


Constraint Satisfaction Problems

- Standard search problems:
 - State is a “black box”: arbitrary data structure
 - Goal test can be any function over states
 - Successor function can also be anything
- Constraint satisfaction problems (CSPs):
 - A special subset of search problems
 - State is defined by **variables X_i** with values from a **domain D** (sometimes D depends on i)
 - Goal test is a **set of constraints** specifying allowable combinations of values for subsets of variables
- Allows useful general-purpose algorithms with more power than standard search algorithms

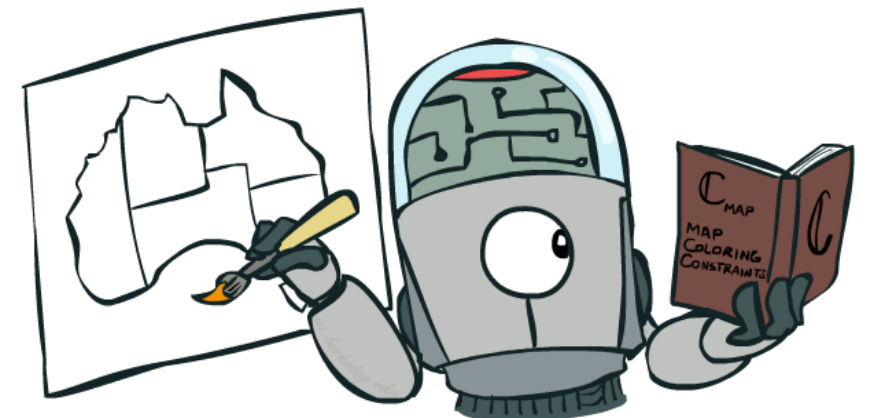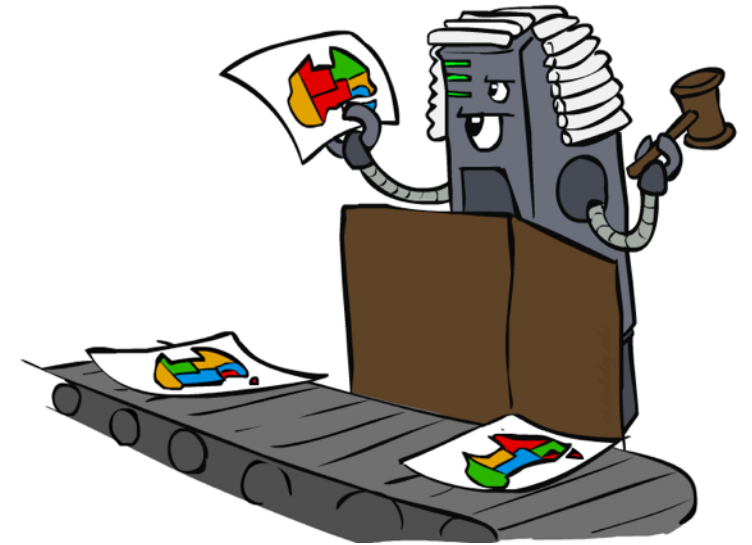

Constraint Satisfaction Problems

CSP Formulation

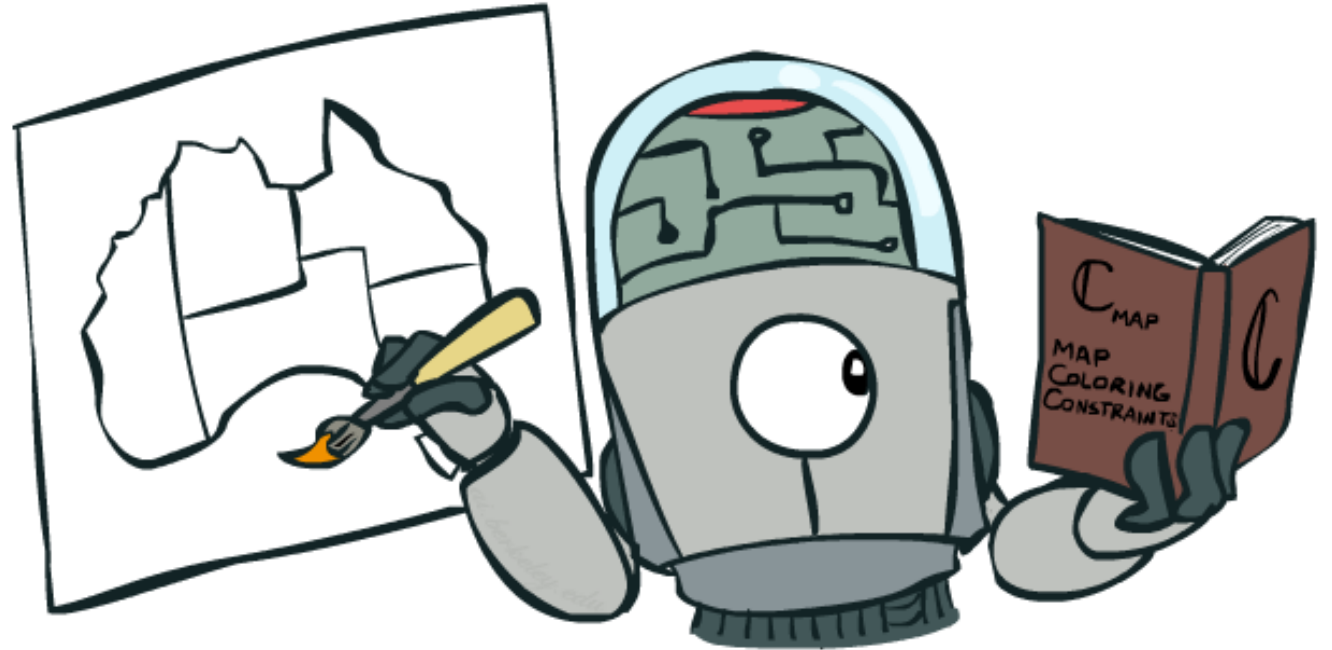

Search Formulation

States

Successor Function


Goal Test

What is Search For?

- Assumptions about the world: a single agent, deterministic actions, fully observed state, discrete state space
- Planning: sequences of actions
 - The path to the goal is the important thing
 - Paths have various costs, depths
 - Heuristics give problem-specific guidance
- Identification: assignments to variables
 - The goal itself is important, not the path
 - All paths at the same depth (for some formulations)
 - CSPs are specialized for identification problems



CSP Examples

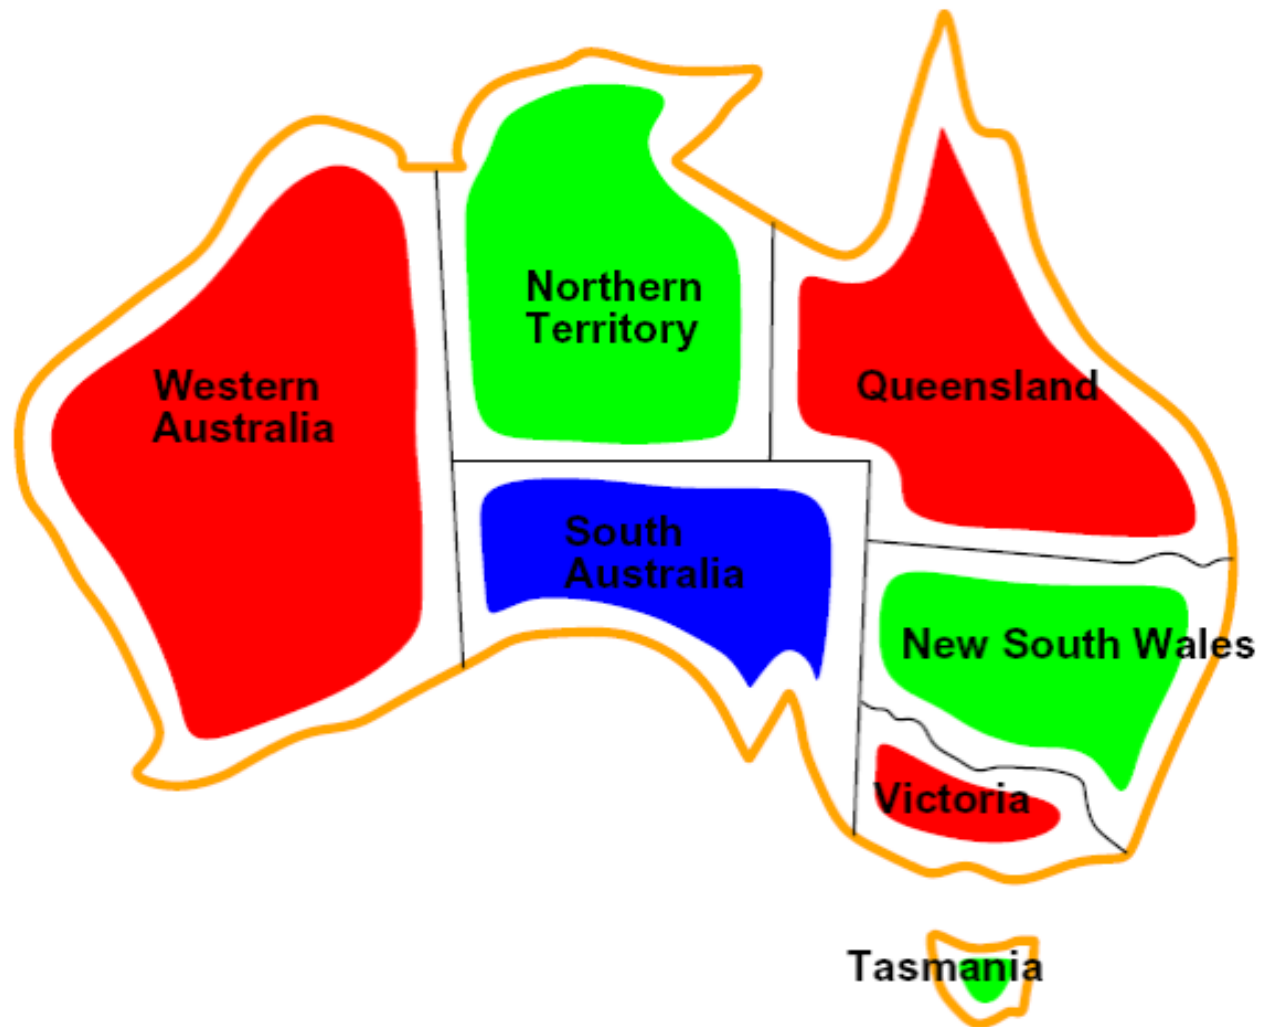

Example: Map Coloring



- Variables: WA, NT, Q, NSW, V, SA, T
- Domains: $D = \{\text{red, green, blue}\}$
- Constraints: adjacent regions must have different colors

Implicit: $WA \neq NT$


Explicit: $(WA, NT) \in \{(\text{red, green}), (\text{red, blue}), \dots\}$

- Solutions are assignments satisfying all constraints, e.g.:

$\{WA=\text{red}, NT=\text{green}, Q=\text{red}, NSW=\text{green}, V=\text{red}, SA=\text{blue}, T=\text{green}\}$

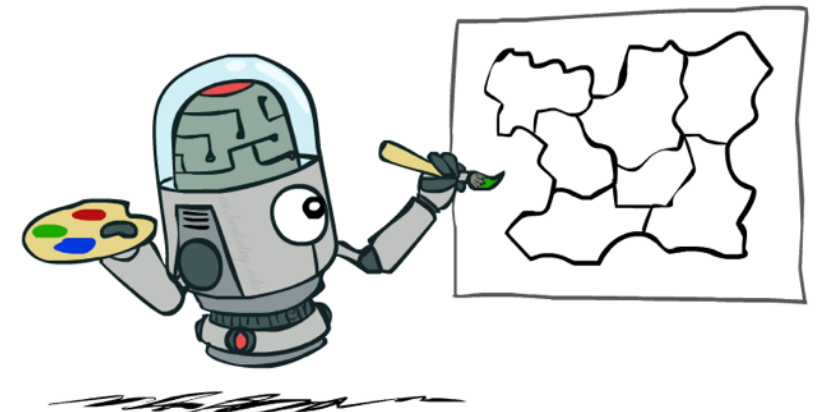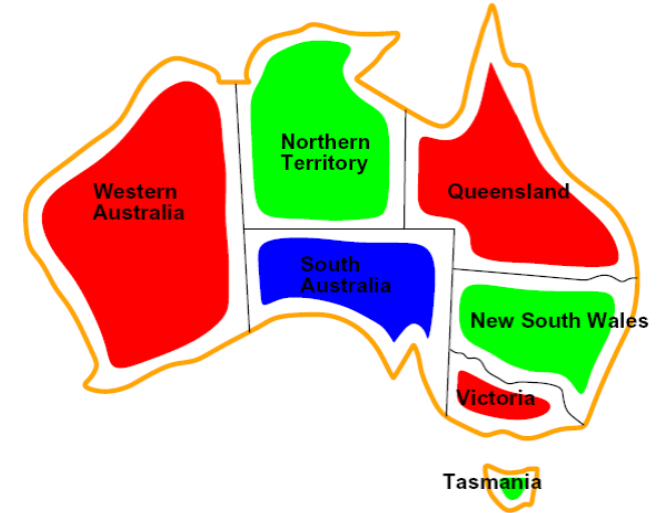


Constraint Graphs

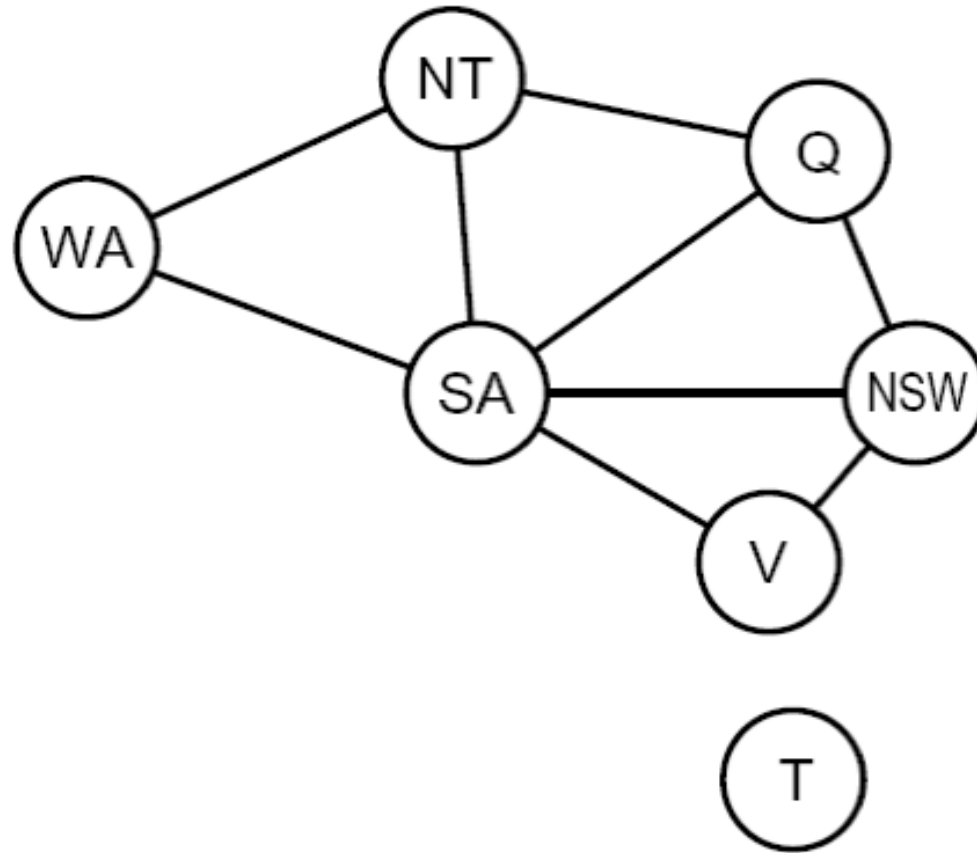

Constraint Graphs



- Binary CSP: each constraint relates (at most) two variables
- Binary constraint graph: nodes are variables, arcs show constraints
- General-purpose CSP algorithms use the graph structure to speed up search. E.g., Tasmania is an independent subproblem!

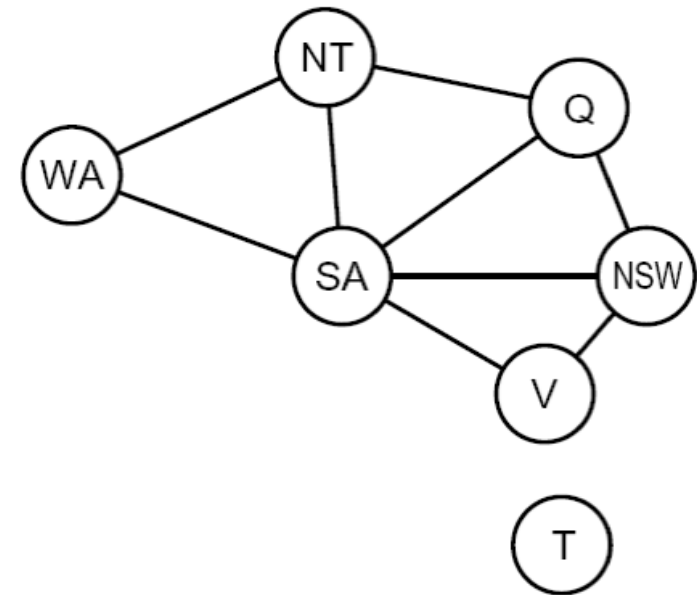

Example: N-Queens

■ Formulation 1:

- Variables: X_{ij}
- Domains: $\{0, 1\}$
- Constraints

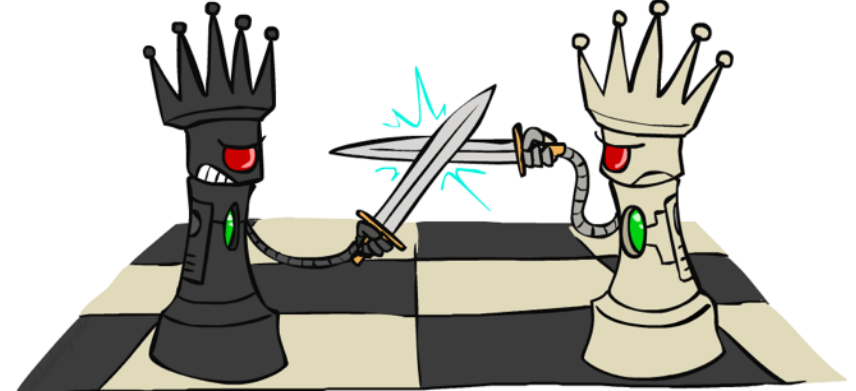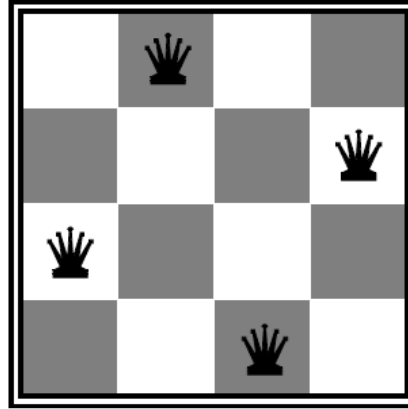

$$\forall i, j, k \quad (X_{ij}, X_{ik}) \in \{(0, 0), (0, 1), (1, 0)\}$$

$$\forall i, j, k \quad (X_{ij}, X_{kj}) \in \{(0, 0), (0, 1), (1, 0)\}$$

$$\forall i, j, k \quad (X_{ij}, X_{i+k, j+k}) \in \{(0, 0), (0, 1), (1, 0)\}$$

$$\forall i, j, k \quad (X_{ij}, X_{i+k, j-k}) \in \{(0, 0), (0, 1), (1, 0)\}$$

$$\sum_{i,j} X_{ij} = N$$

Example: N-Queens

- Formulation 2:

- Variables: Q_k


- Domains: $\{1, 2, 3, \dots, N\}$

- Constraints:


Implicit: $\forall i, j \text{ non-threatening}(Q_i, Q_j)$

Explicit: $(Q_1, Q_2) \in \{(1, 3), (1, 4), \dots\}$

...

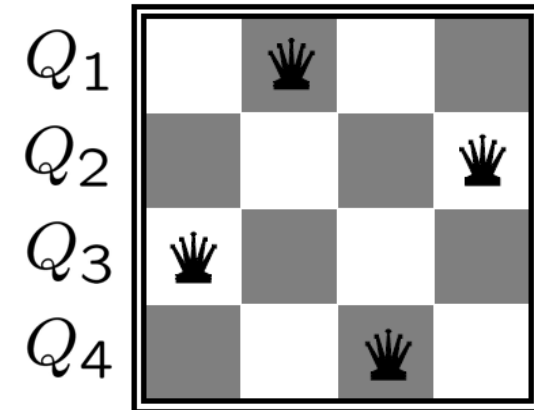

Example: Sudoku

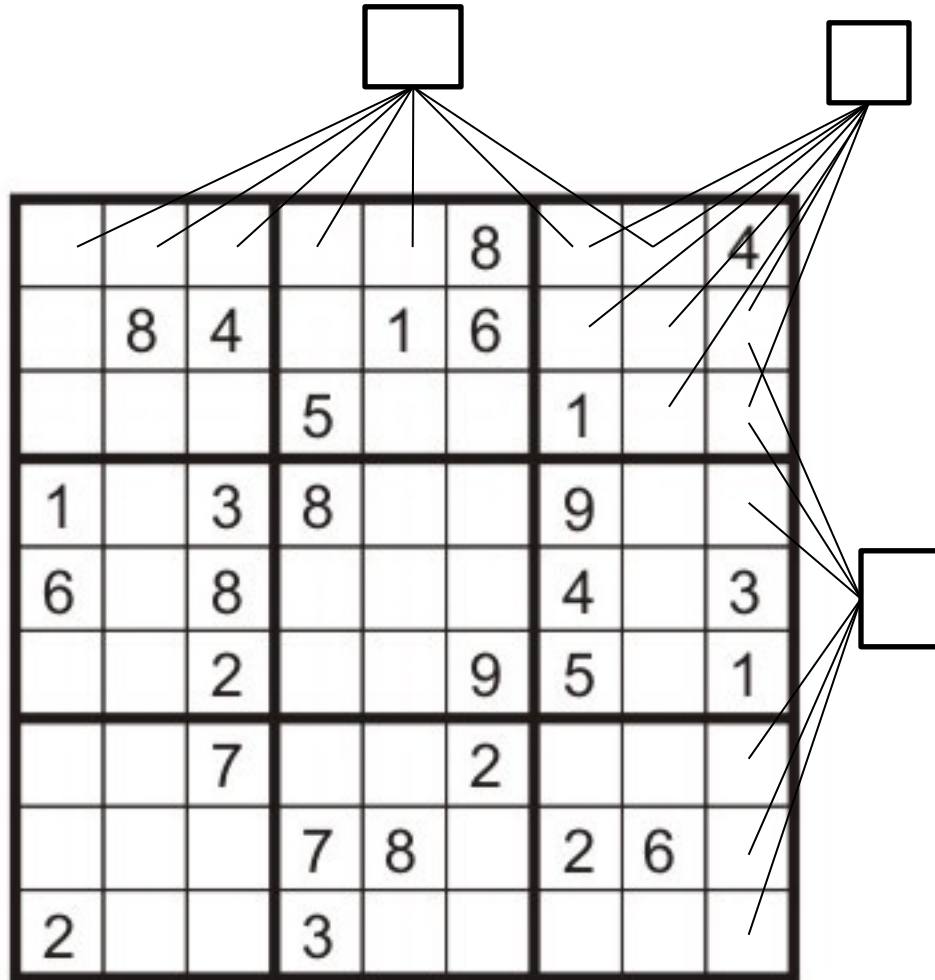

- Variables:
 - Each (open) square
- Domains:
 - $\{1,2,\dots,9\}$
- Constraints:


9-way alldiff for each column

9-way alldiff for each row

9-way alldiff for each region

(or can have a bunch of pairwise inequality constraints)

Varieties of CSPs and Constraints

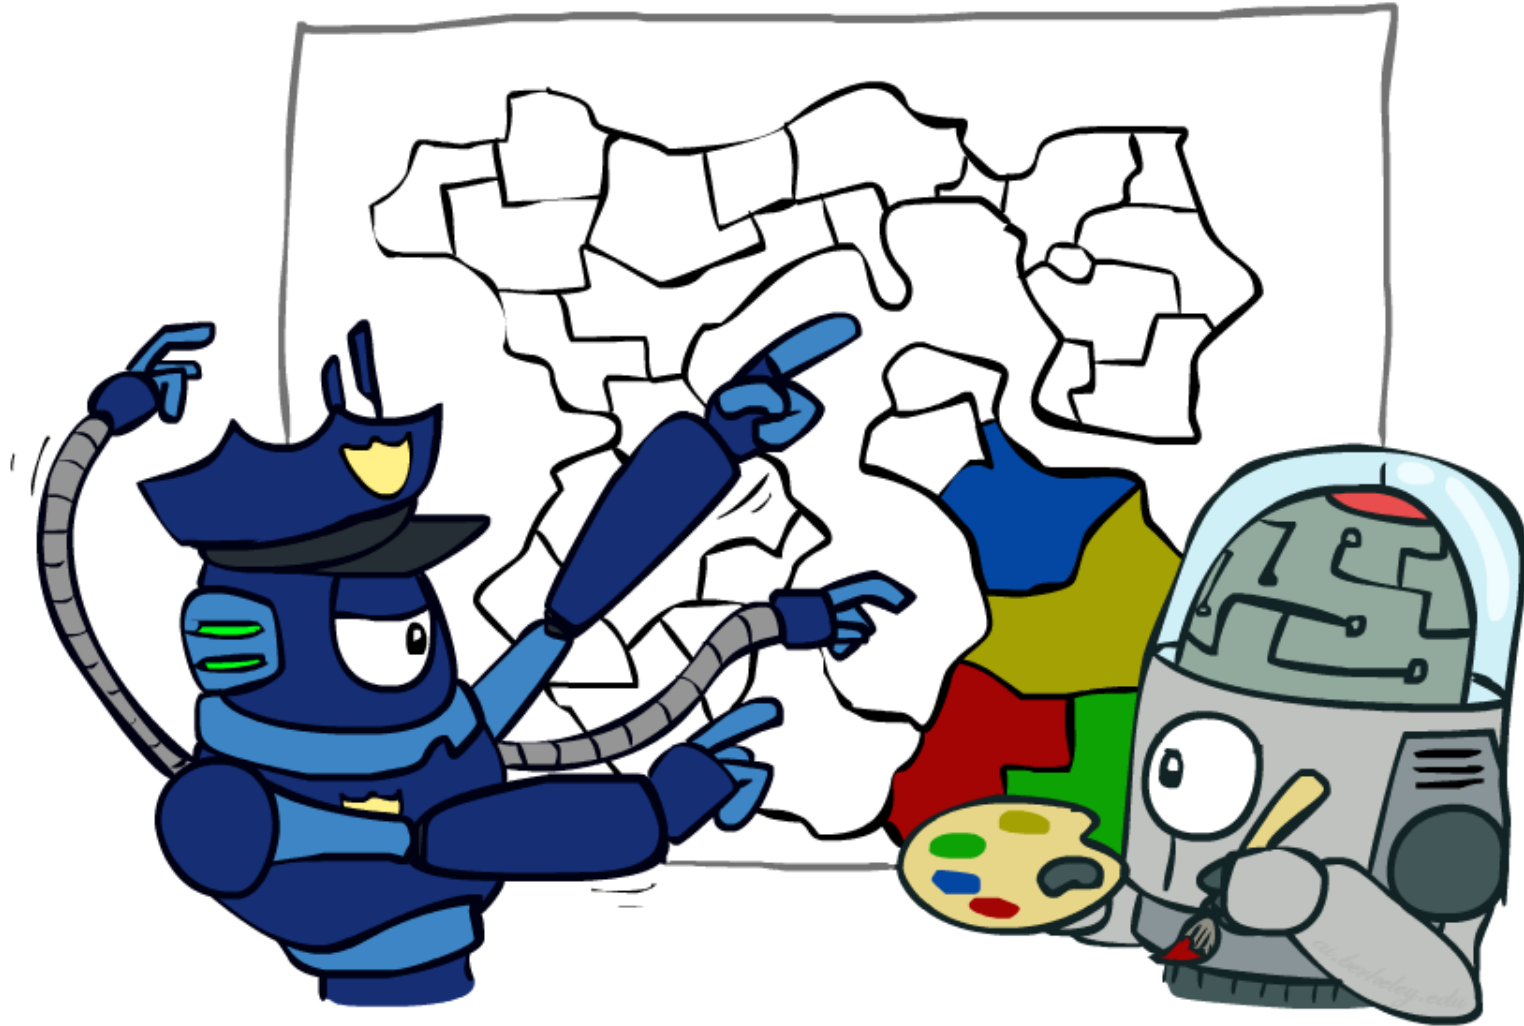


Varieties of CSPs

■ Discrete Variables

- Finite domains
 - Size d means $O(d^n)$ complete assignments
 - E.g., Boolean CSPs, including Boolean satisfiability (NP-complete)
- Infinite domains (integers, strings, etc.)
 - E.g., job scheduling, variables are start/end times for each job
 - Linear constraints solvable, nonlinear undecidable

■ Continuous variables

- E.g., start/end times for Hubble Telescope observations
- Linear constraints solvable in polynomial time by LP methods (see cs170, 270, 127/227 series for a bit of this theory)

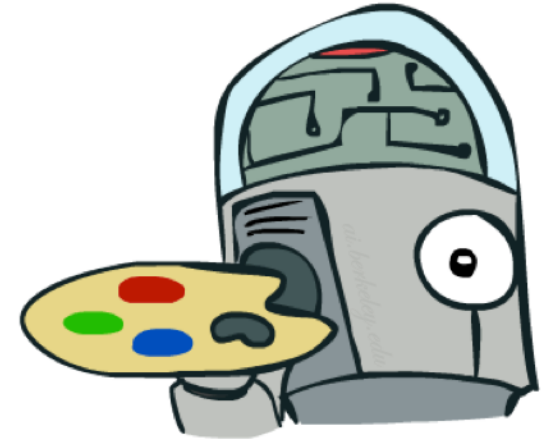

Varieties of Constraints

- Varieties of Constraints

- Unary constraints involve a single variable (equivalent to reducing domains), e.g.:

$$SA \neq \text{green}$$


- Binary constraints involve pairs of variables, e.g.:

$$SA \neq WA$$

- Higher-order constraints involve 3 or more variables:
e.g., Sudoku row constraints


- Preferences (soft constraints):

- E.g., red is better than green
- Often representable by a cost for each variable assignment
- Gives constrained optimization problems
- (We'll ignore these until we get to Bayes' nets)

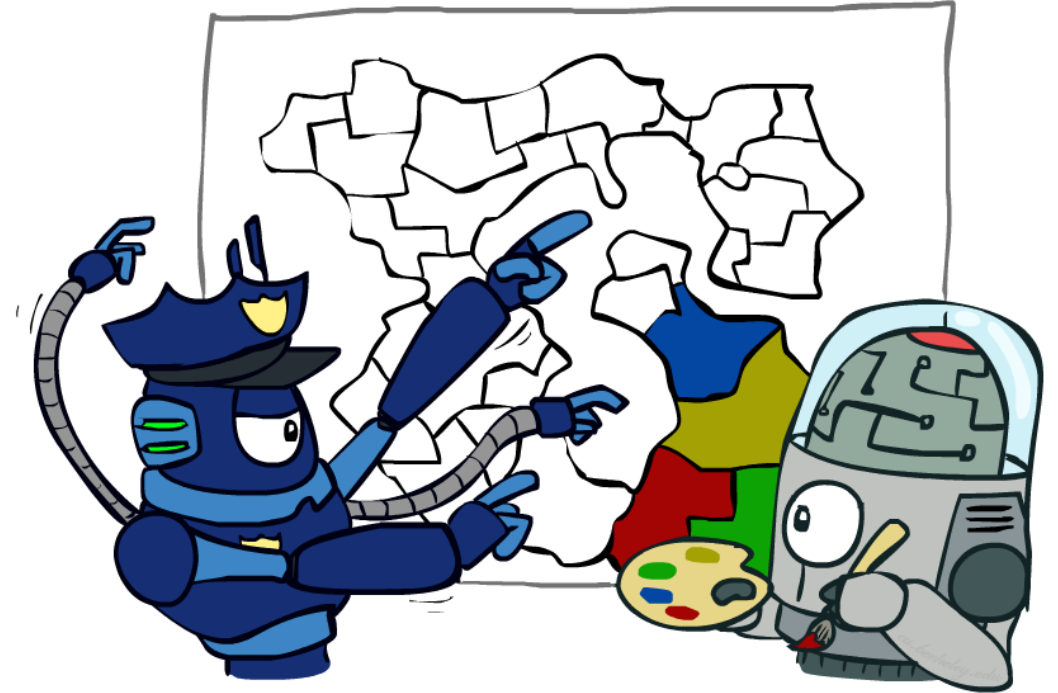

Real-World CSPs

- Timetabling problems: e.g., which class is offered when and where?
- Hardware configuration
- Transportation scheduling
- Factory scheduling
- Circuit layout
- Fault diagnosis
- ... lots more!

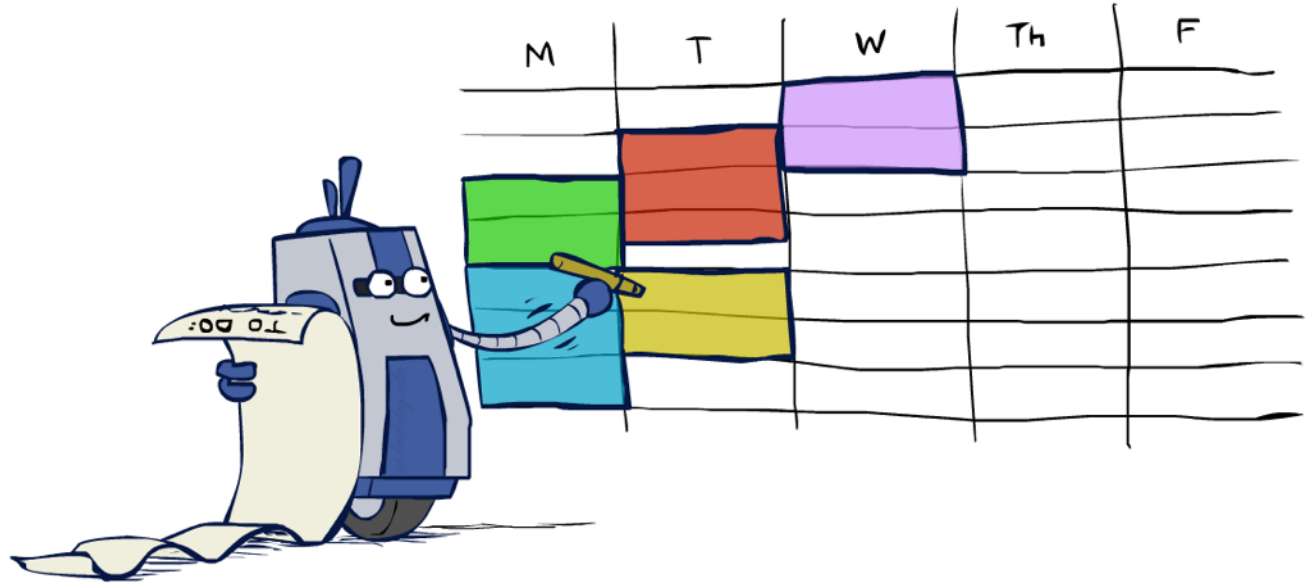


- Many real-world problems involve real-valued variables...

Solving CSPs



Standard Search Formulation

- Standard search formulation of CSPs
- States defined by the values assigned so far (partial assignments)
 - Initial state: the empty assignment, $\{\}$
 - Successor function: assign a value to an unassigned variable
 - Goal test: the current assignment is complete and satisfies all constraints
- We'll start with the straightforward, naïve approach, then improve it

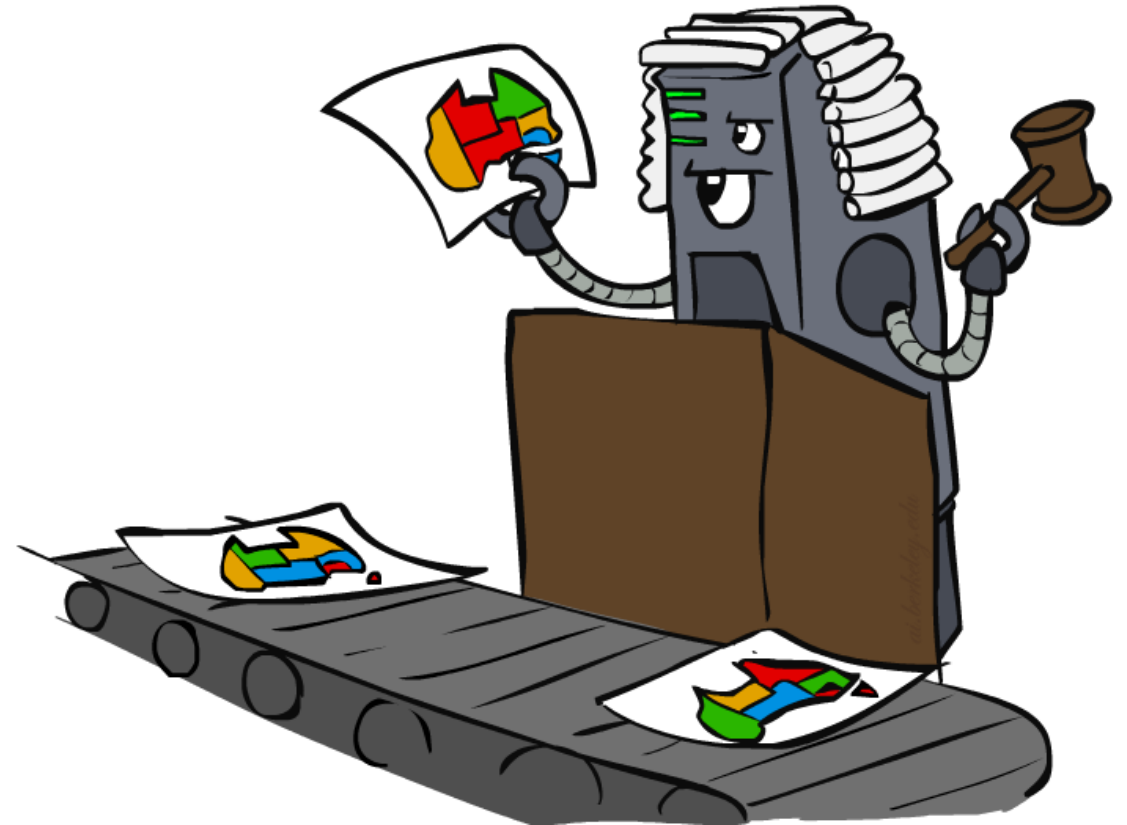


Search Methods

- What would BFS do?


$\{\}$

$\{WA=g\}$ $\{WA=r\}$... $\{NT=g\}$...

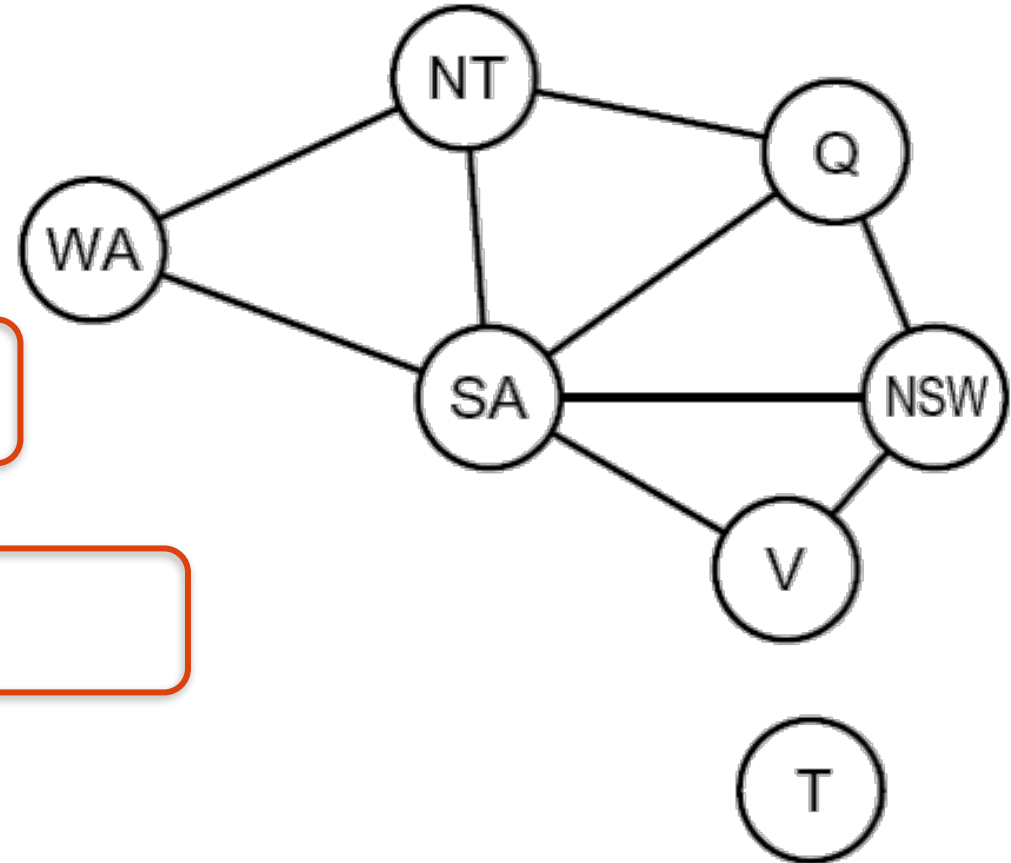


Search Methods

- What would BFS do?
- What would DFS do?
- What problems does naïve search have?

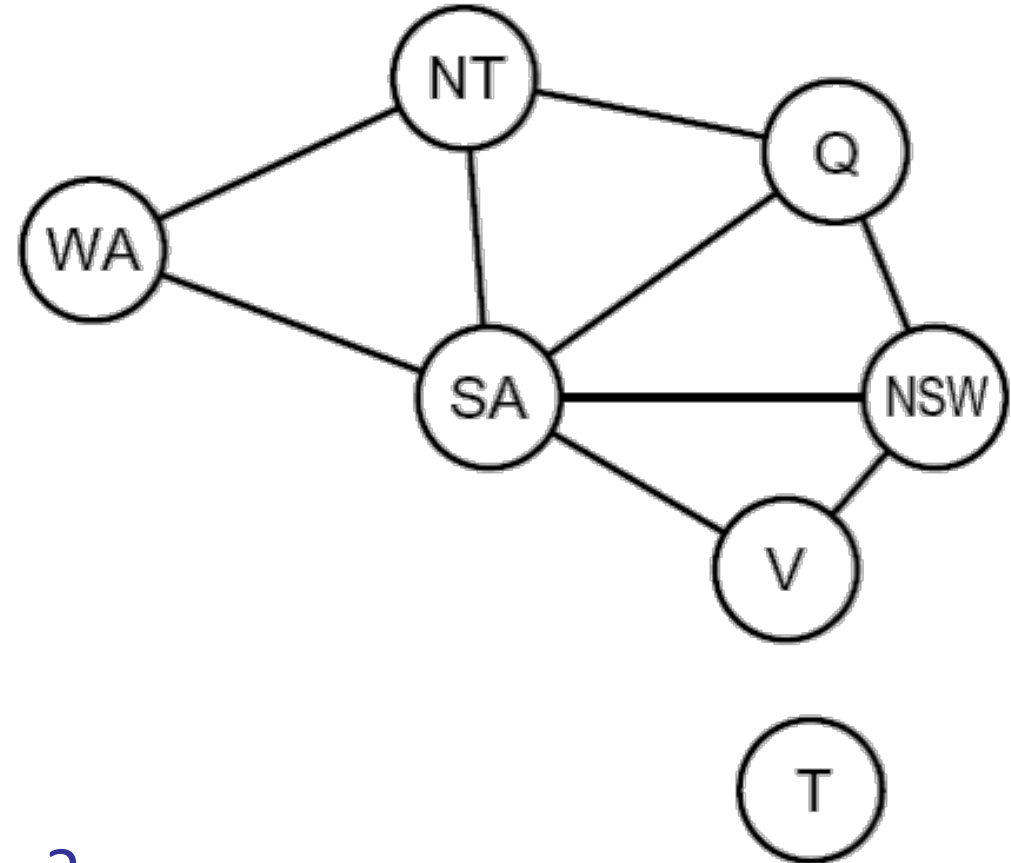


Backtracking Search


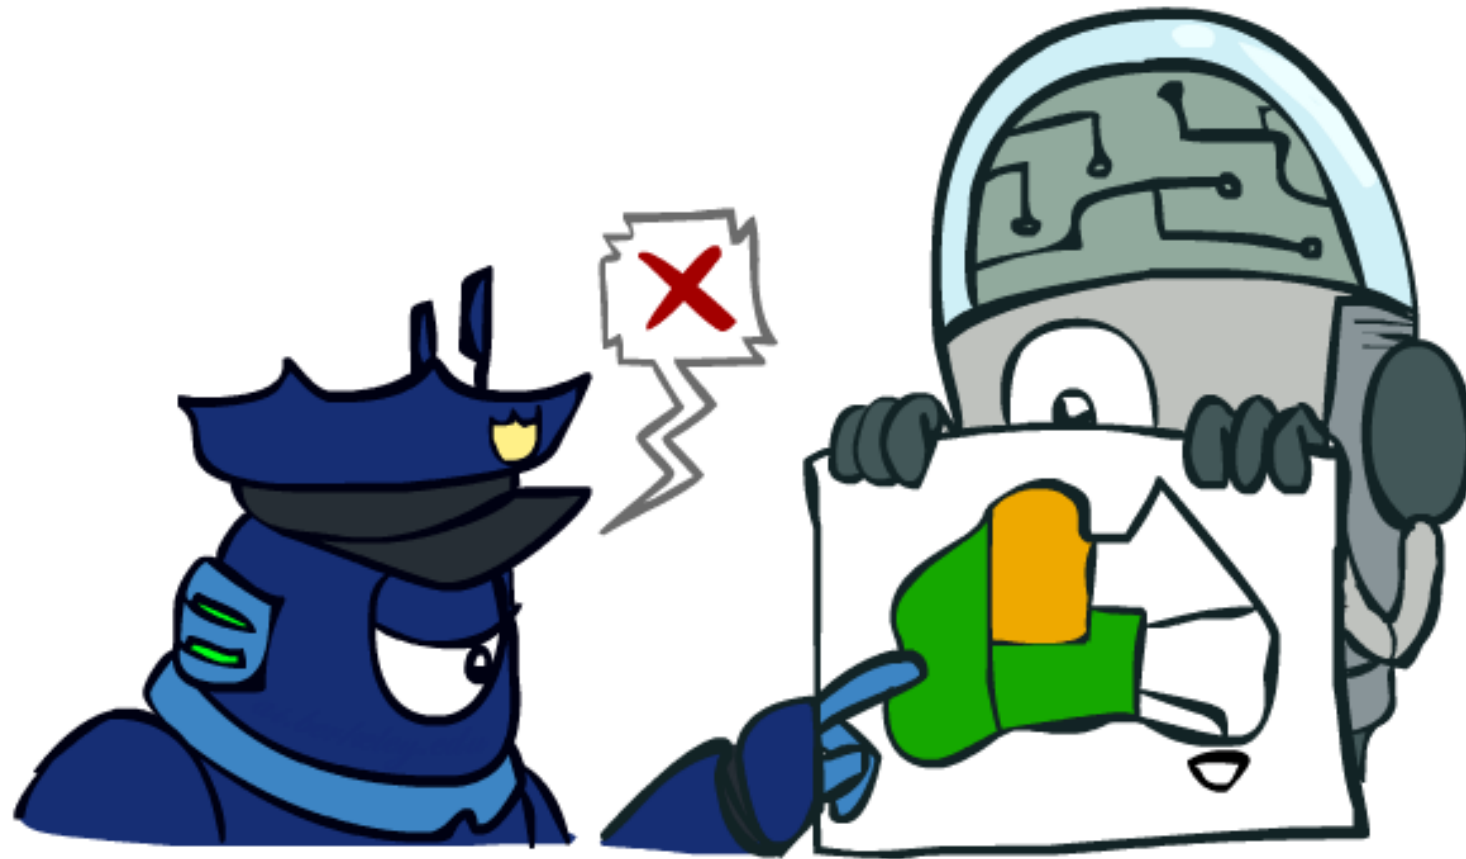


Backtracking Search

- Backtracking search is the basic uninformed algorithm for solving CSPs
- Idea 1: One variable at a time
 - Variable assignments are commutative, so fix ordering
 - I.e., [WA = red then NT = green] same as [NT = green then WA = red]
 - Only need to consider assignments to a single variable at each step
- Idea 2: Check constraints as you go
 - I.e. consider only values which do not conflict previous assignments
 - Might have to do some computation to check the constraints
 - “Incremental goal test”
- Depth-first search with these two improvements is called *backtracking search*
- Can solve n-queens for $n \approx 25$

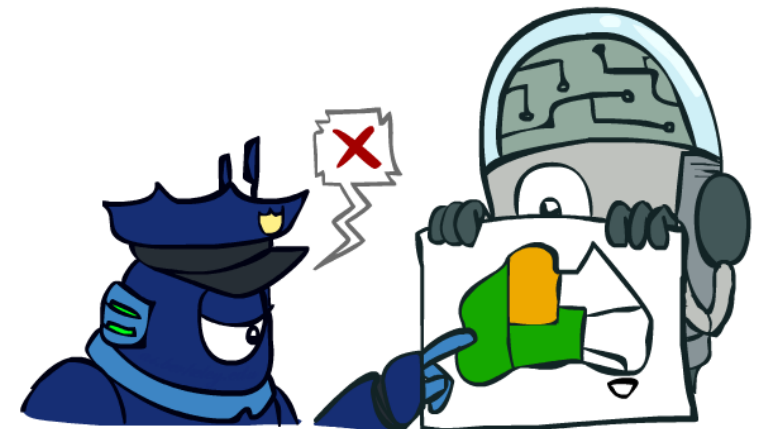

Backtracking Example

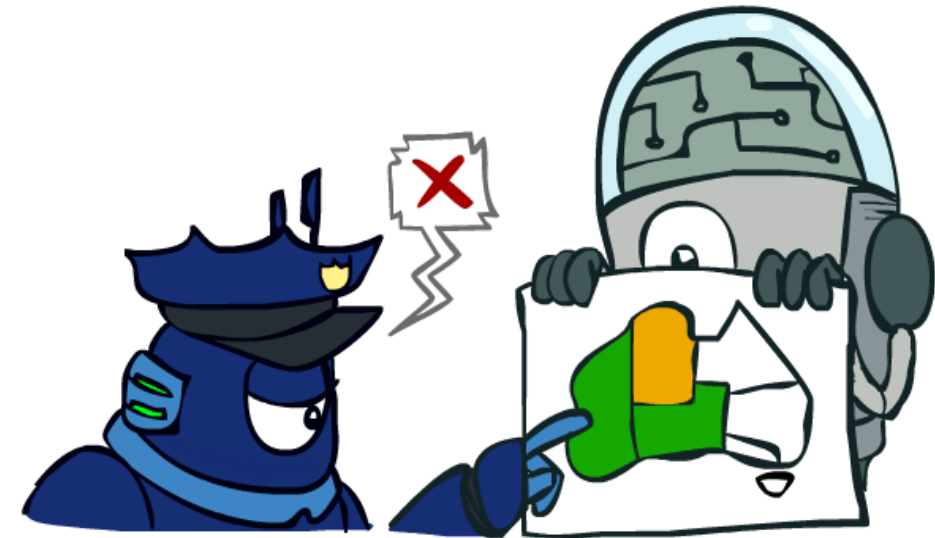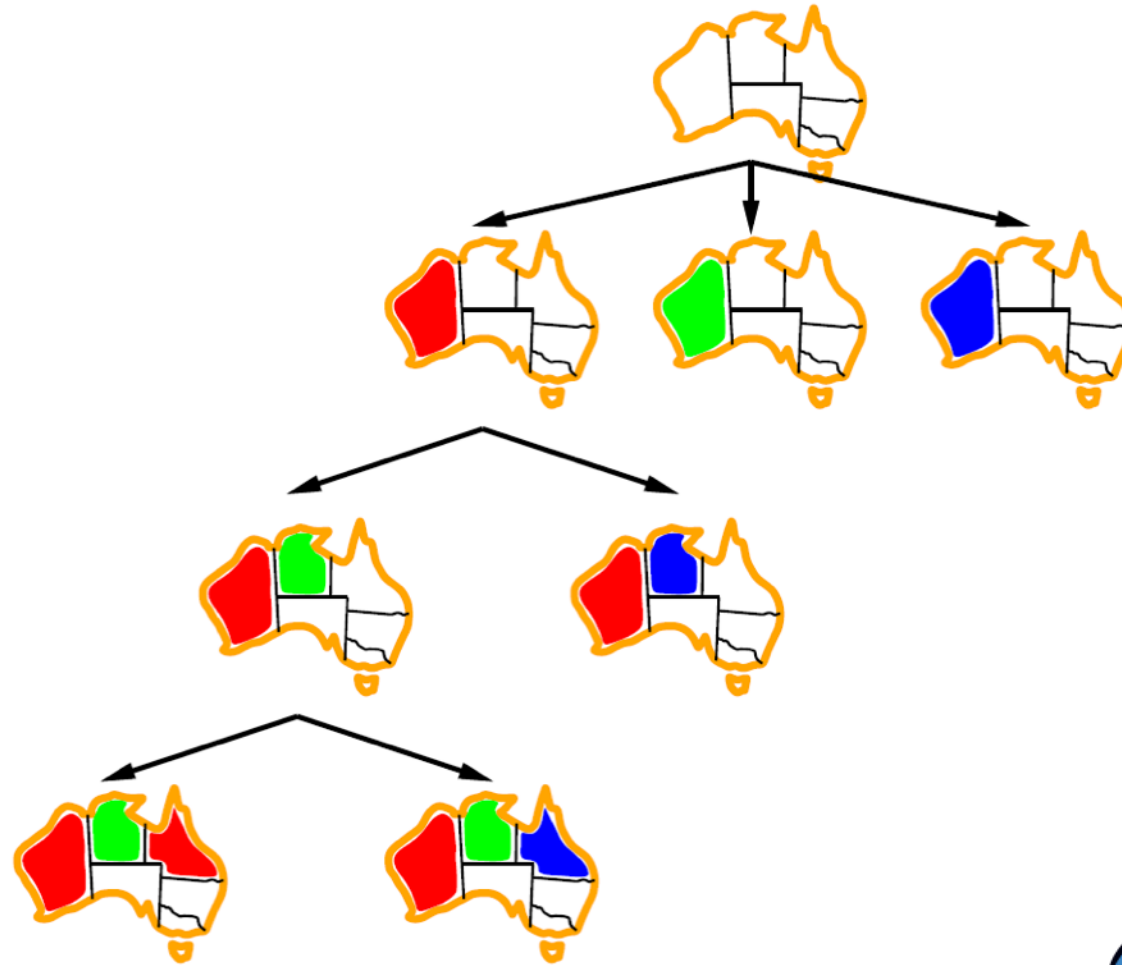

Backtracking Search


```
function BACKTRACKING-SEARCH(csp) returns solution/failure
  return RECURSIVE-BACKTRACKING({ }, csp)

function RECURSIVE-BACKTRACKING(assignment, csp) returns soln/failure
  if assignment is complete then return assignment
  var ← SELECT-UNASSIGNED-VARIABLE(VARIABLES[csp], assignment, csp)
  for each value in ORDER-DOMAIN-VALUES(var, assignment, csp) do
    if value is consistent with assignment given CONSTRAINTS[csp] then
      add {var = value} to assignment
      result ← RECURSIVE-BACKTRACKING(assignment, csp)
      if result ≠ failure then return result
      remove {var = value} from assignment
  return failure
```

- Backtracking = DFS + variable-ordering + fail-on-violation
- What are the choice points?

Improving Backtracking

- General-purpose ideas give huge gains in speed
- Filtering: Can we detect inevitable failure early?
- Ordering:
 - Which variable should be assigned next?

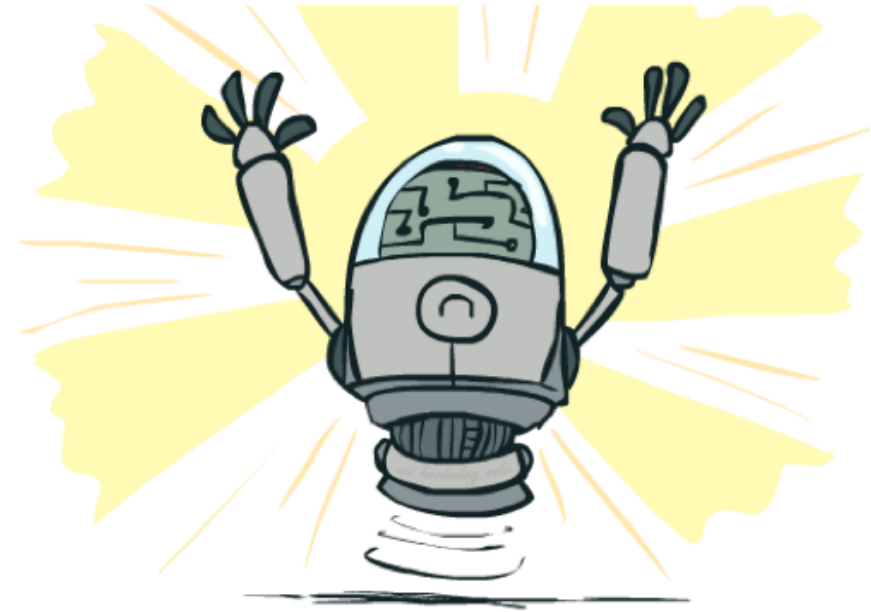

Filtering



Keep track of domains for unassigned variables and cross off bad options

Filtering: Forward Checking

- Filtering: Keep track of domains for unassigned variables and cross off bad options
- Forward checking: Cross off values that violate a constraint when added to the existing assignment



Ordering




Ordering: Minimum Remaining Values


- Variable Ordering: Minimum remaining values (MRV):
 - Choose the variable with the fewest legal left values in its domain



- Why min rather than max?
- Also called “most constrained variable”
- “Fail-fast” ordering

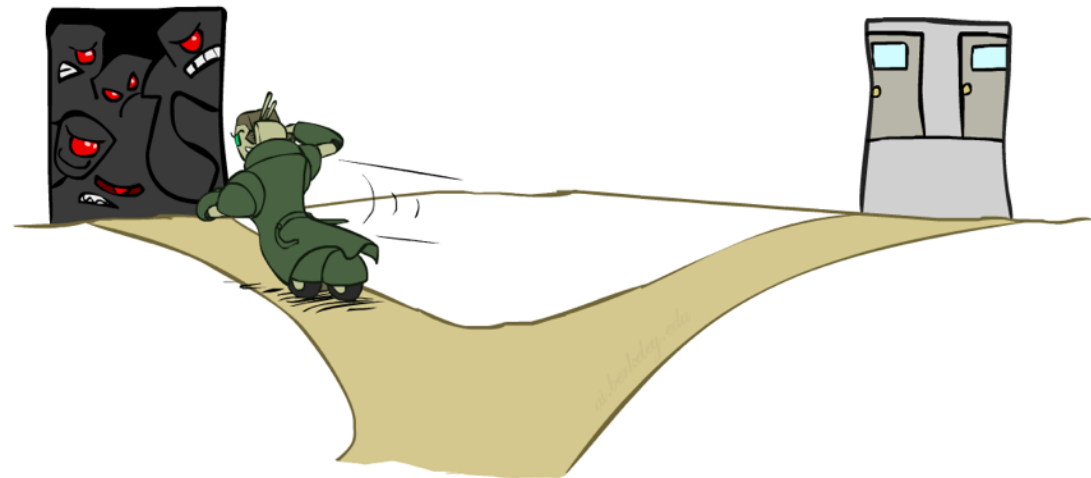

Iterative Improvement

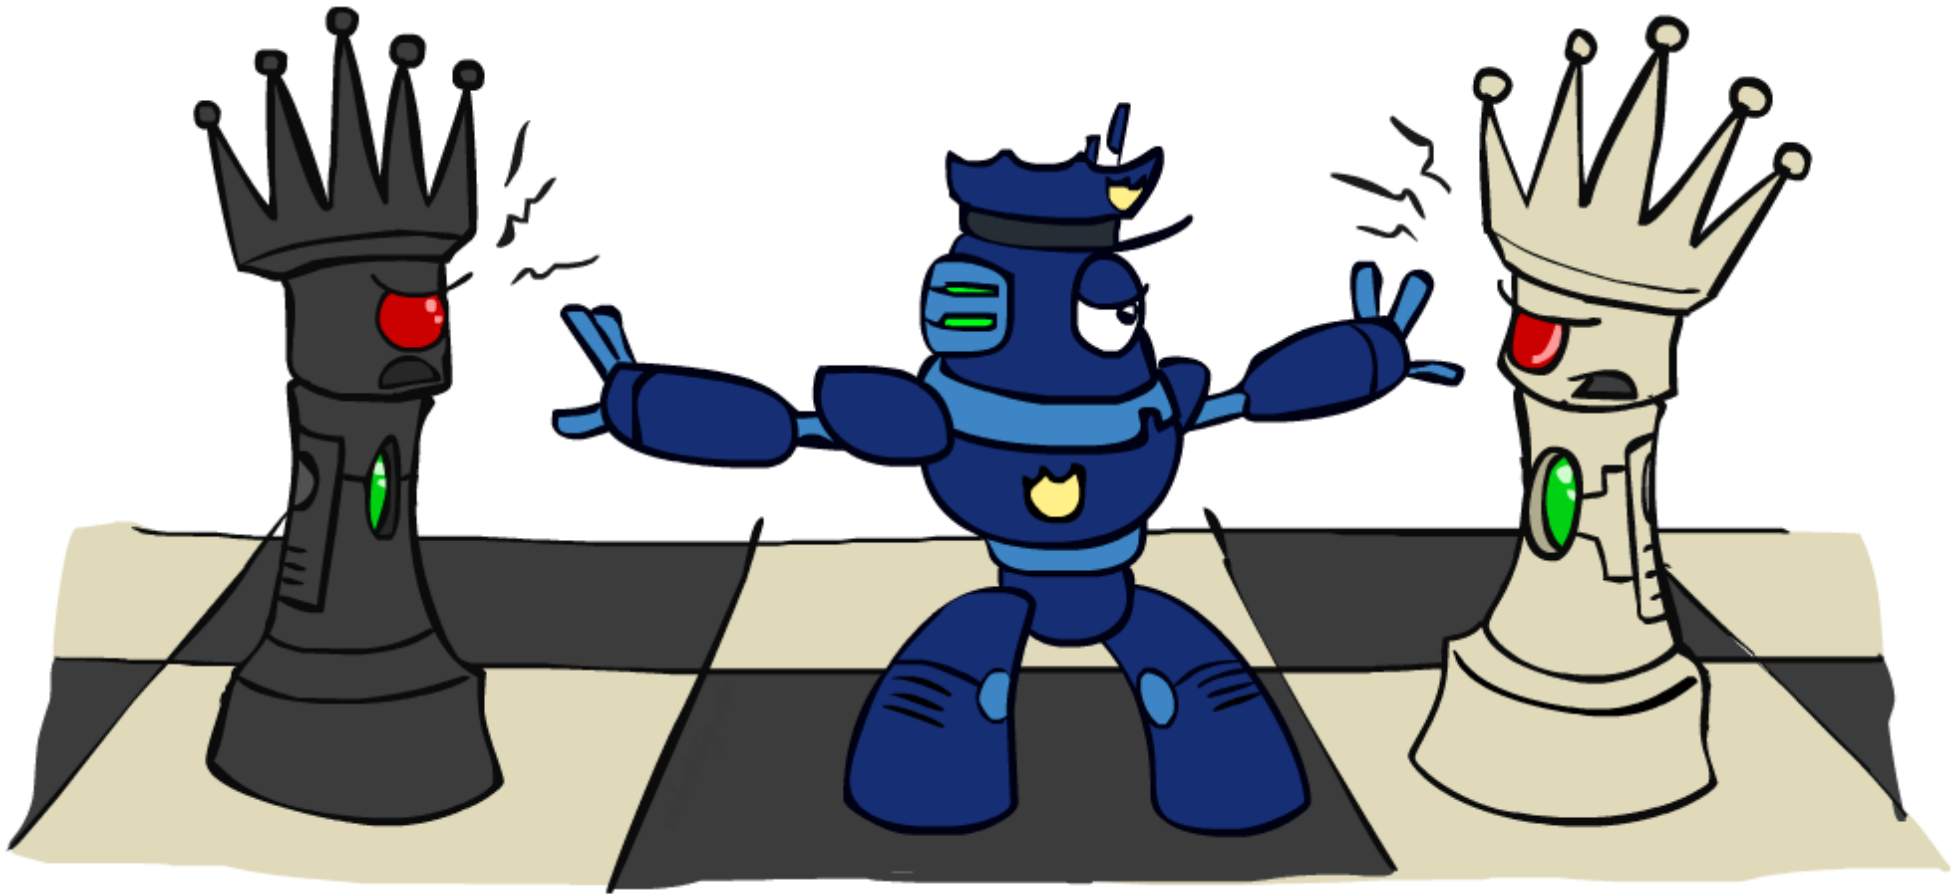


Iterative Algorithms for CSPs

- Local search methods typically work with “complete” states, i.e., all variables assigned
- To apply to CSPs:
 - Take an assignment with unsatisfied constraints
 - Operators *reassign* variable values
- Algorithm: While not solved,
 - Variable selection: randomly select any conflicted variable
 - Value selection: min-conflicts heuristic:
 - Choose a value that violates the fewest constraints
 - I.e., hill climb with $h(x)$ = total number of violated constraints




Example: 4-Queens

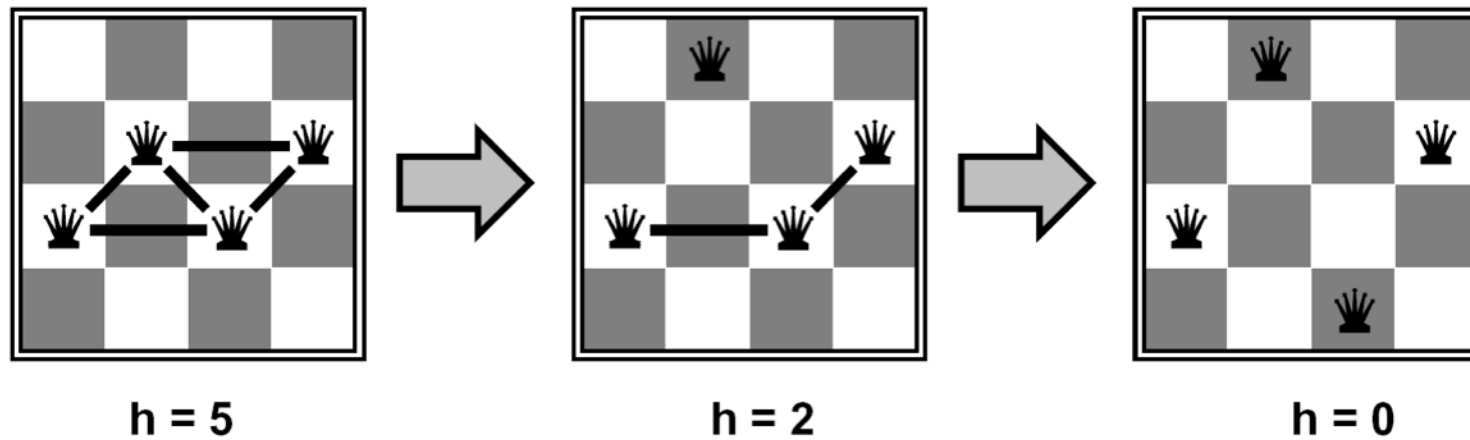

- States: 4 queens in 4 columns ($4^4 = 256$ states)
- Operators: move queen in column
- Goal test: no attacks
- Evaluation: $c(n)$ = number of attacks

Summary: CSPs

- CSPs are a special kind of search problem:
 - States are partial assignments
 - Goal test defined by constraints
- Basic solution: backtracking search
- Speed-ups:
 - Ordering
 - Filtering
- Iterative min-conflicts is often effective in practice

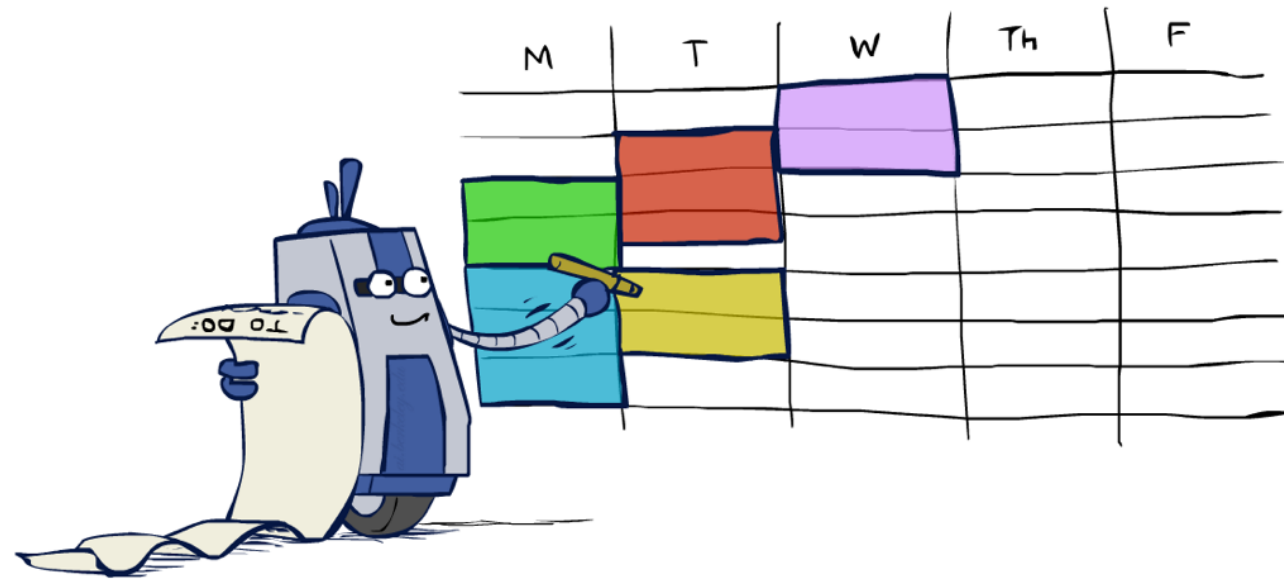


Local Search



Local Search

- Tree search keeps unexplored alternatives on the fringe (ensures completeness)
- Local search: improve a single option until you can't make it better (no fringe!)
- New successor function: local changes

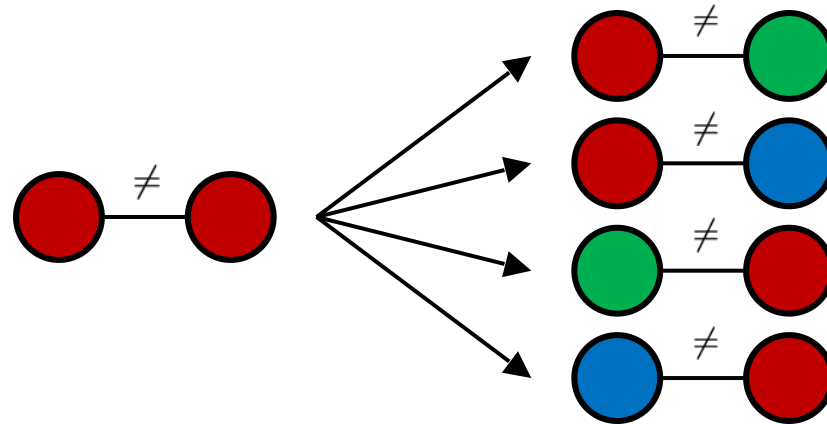


- Generally much faster and more memory efficient (but incomplete and suboptimal)

Hill Climbing


- Simple, general idea:
 - Start wherever
 - Repeat: move to the best neighboring state
 - If no neighbors better than current, quit
- What's bad about this approach?
 - Complete?
 - Optimal?
- What's good about it?



Hill Climbing Diagram

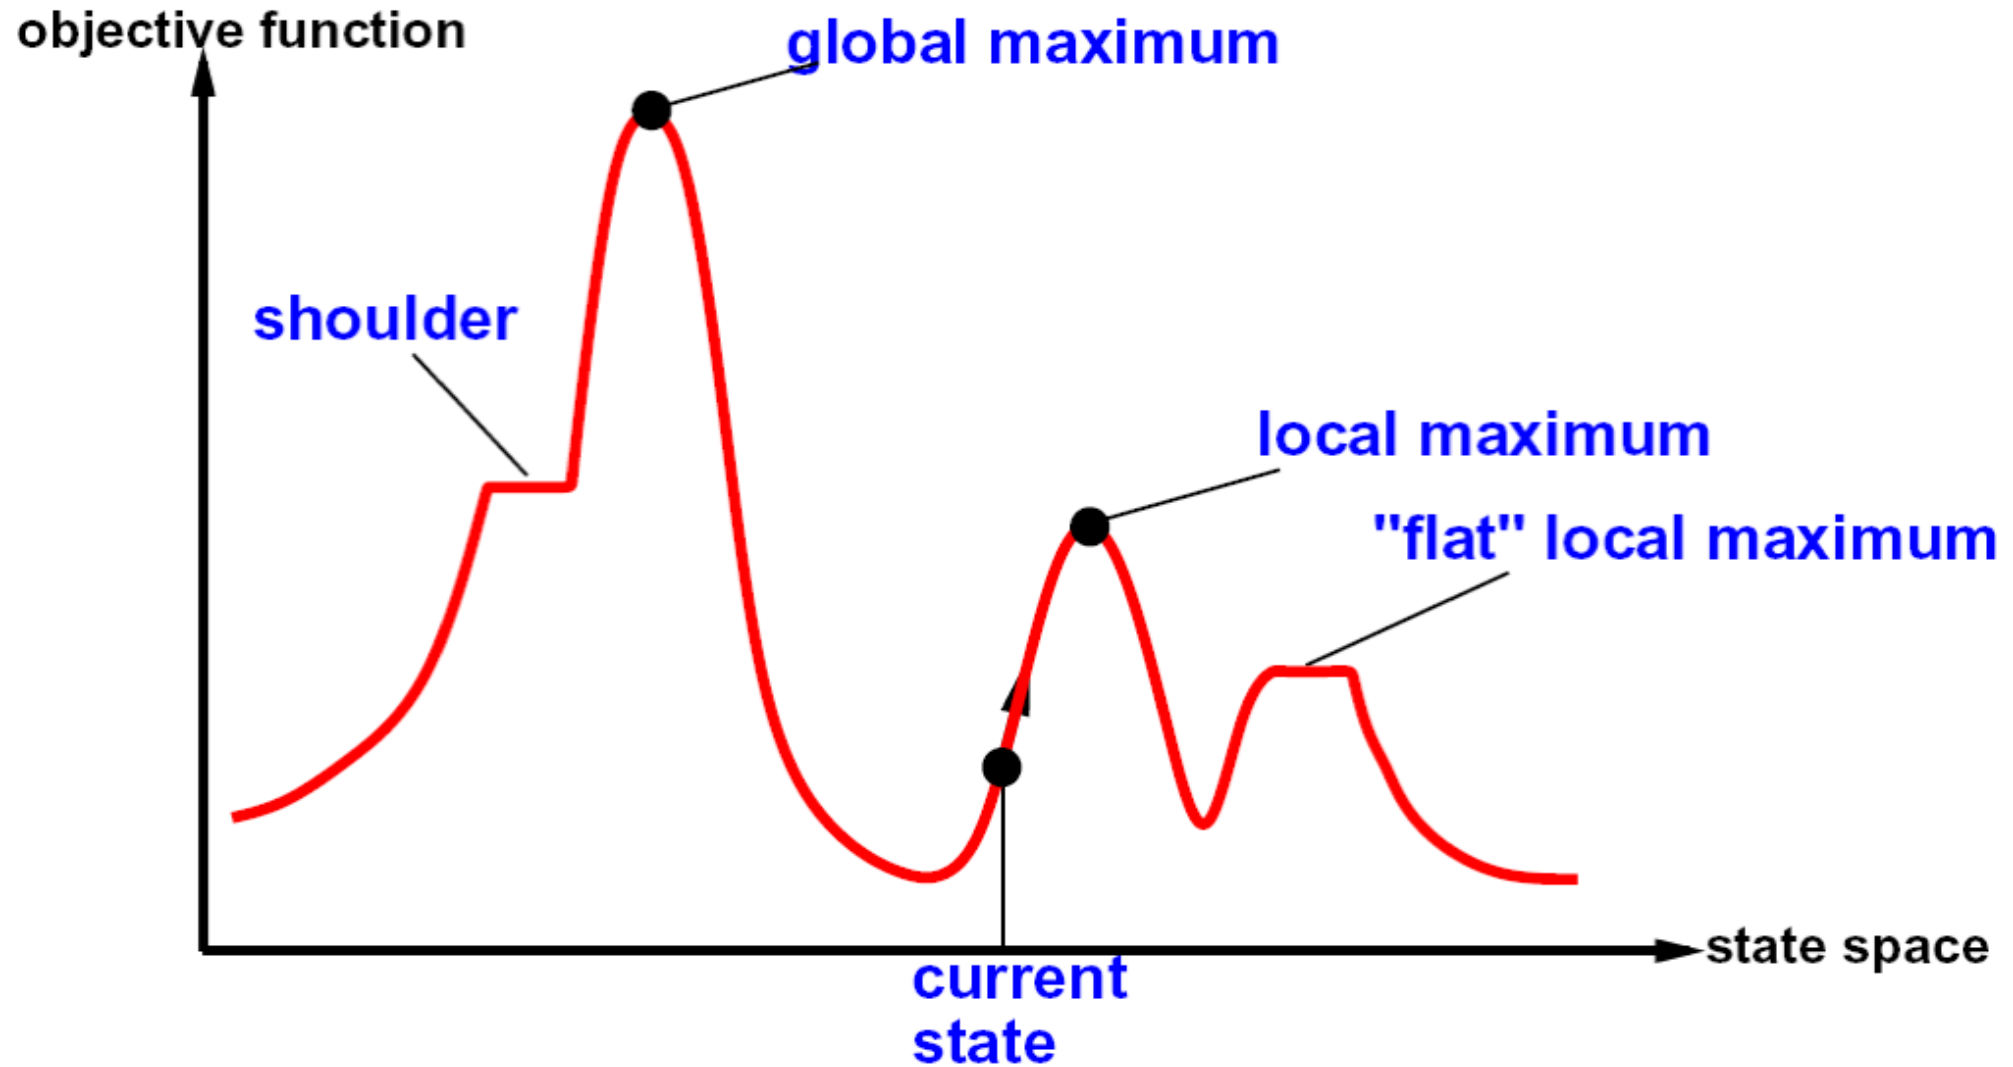

Hill Climbing Quiz

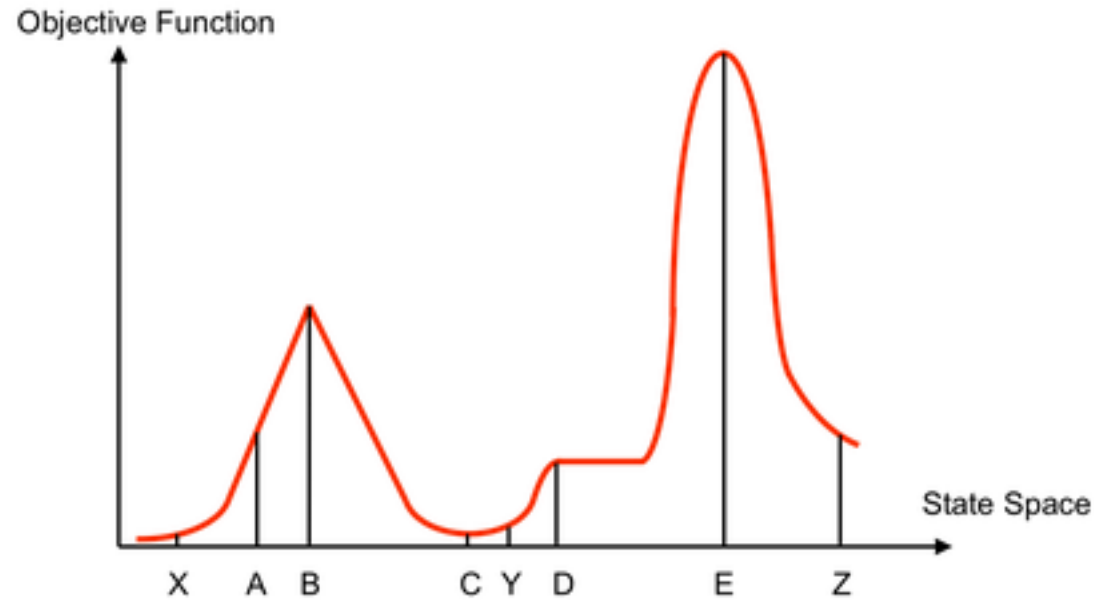

Starting from X, where do you end up ?

Starting from Y, where do you end up ?

Starting from Z, where do you end up ?

Simulated Annealing

- Idea: Escape local maxima by allowing downhill moves
 - But make them rarer as time goes on

```
function SIMULATED-ANNEALING(problem, schedule) returns a solution state
  inputs: problem, a problem
           schedule, a mapping from time to “temperature”
  local variables: current, a node
                   next, a node
                   T, a “temperature” controlling prob. of downward steps

  current ← MAKE-NODE(INITIAL-STATE[problem])
  for t ← 1 to ∞ do
    T ← schedule[t]
    if T = 0 then return current
    next ← a randomly selected successor of current
     $\Delta E \leftarrow \text{VALUE}[\textit{next}] - \text{VALUE}[\textit{current}]$ 
    if  $\Delta E > 0$  then current ← next
    else current ← next only with probability  $e^{\Delta E / T}$ 
```

