

CS 188: Artificial Intelligence

Hidden Markov Models



Instructor: Anca Dragan --- University of California, Berkeley


[These slides were created by Dan Klein, Pieter Abbeel, and Anca. <http://ai.berkeley.edu>.]

Reasoning over Time or Space

- Often, we want to **reason about a sequence** of observations
 - Speech recognition
 - Robot localization
 - User attention
 - Medical monitoring
- Need to introduce time (or space) into our models


Markov Models

- Value of X at a given time is called the **state**

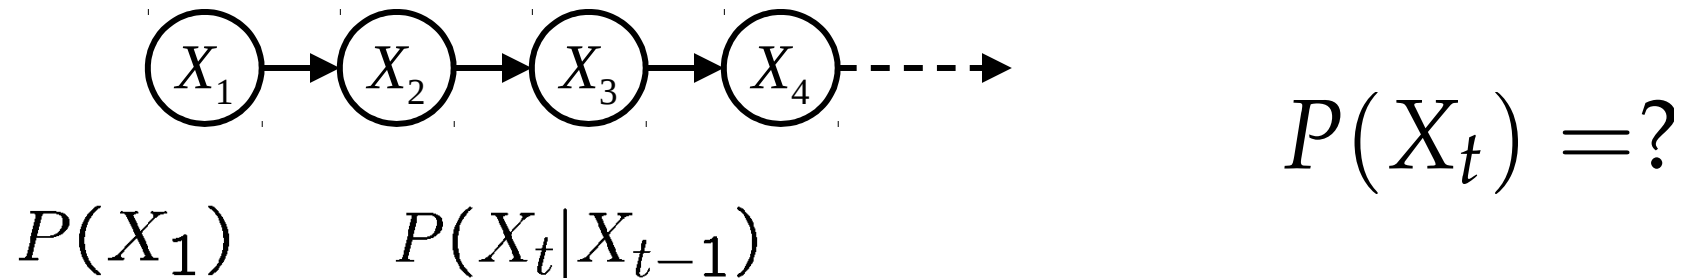

- Parameters: called **transition probabilities** or dynamics, specify how the state evolves over time (also, initial state probabilities)
- Stationarity assumption: transition probabilities the same at all times
- Same as MDP transition model, but no choice of action
- A (growable) BN: We can always use generic BN reasoning on it if we

Markov Assumption: Conditional Independence

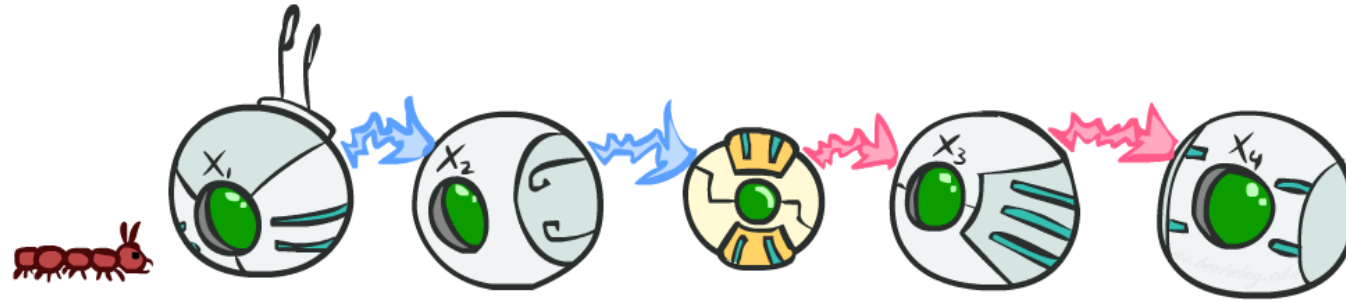

- Basic conditional independence:
 - Past and future independent given the present
 - Each time step only depends on the previous
 - This is called the (first order) Markov property


Example Markov Chain: Weather

○ States: $X = \{\text{rain}, \text{sun}\}$



■ Initial distribution: 1.0 sun

■ CPT $P(X_t \mid X_{t-1})$:

X_{t-1}	X_t	$P(X_t \mid X_{t-1})$
sun	sun	0.9
sun	rain	0.1
rain	sun	0.3
rain	rain	0.7

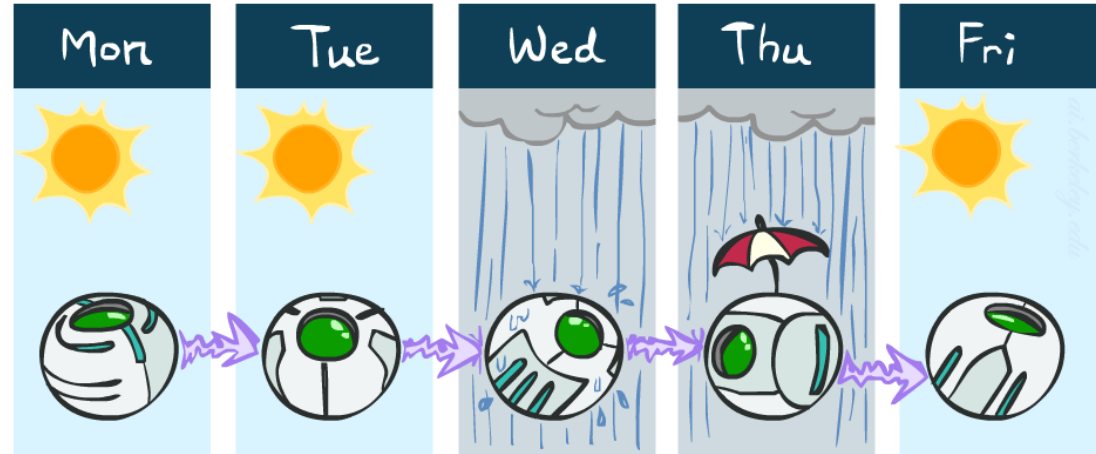


Two new ways of representing the same CPT

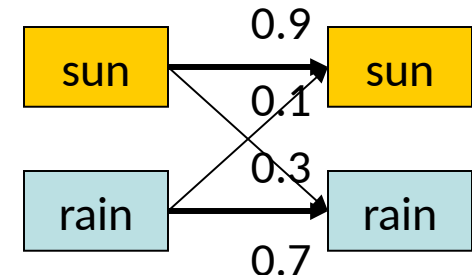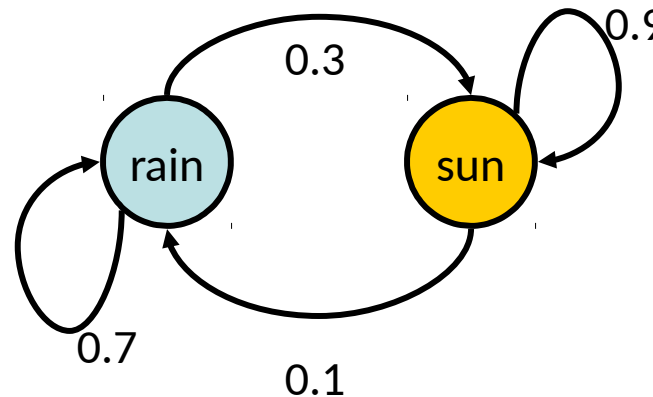

Example Markov Chain: Weather

- Initial distribution: 1.0 sun

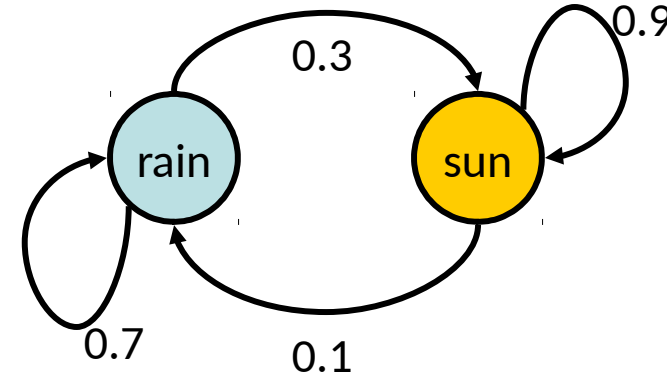


- What is the probability distribution after one step?

$$P(X_2 = \text{sun}) = \sum_{x_1} P(x_1, X_2 = \text{sun}) = \sum_{x_1} P(X_2 = \text{sun} | x_1) P(x_1)$$

$$\begin{aligned} P(X_2 = \text{sun}) &= P(X_2 = \text{sun} | X_1 = \text{sun}) P(X_1 = \text{sun}) + \\ &\quad P(X_2 = \text{sun} | X_1 = \text{rain}) P(X_1 = \text{rain}) \\ &= 0.9 \cdot 1.0 + 0.3 \cdot 0.0 = 0.9 \end{aligned}$$

Mini-Forward Algorithm


- Question: What's $P(X)$ on some day t ?



$$P(x_1) = \text{known}$$

$$\begin{aligned} P(x_t) &= \sum_{x_{t-1}} P(x_{t-1}, x_t) \\ &= \sum_{x_{t-1}} P(x_t \mid x_{t-1}) P(x_{t-1}) \end{aligned}$$

Forward simulation

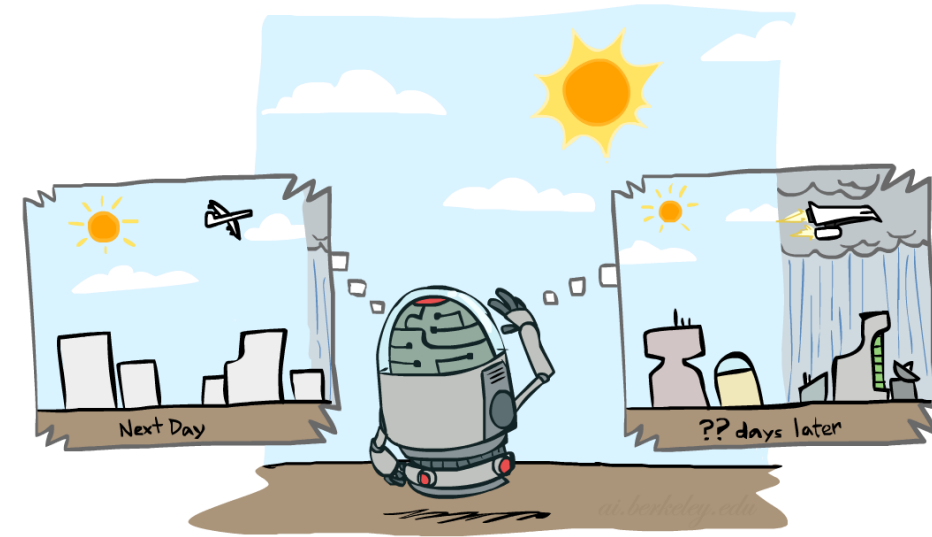

Example Run of Mini-Forward Algorithm

- From initial observation of sun

$$\begin{array}{ccccccc}
 \left\langle \begin{array}{c} 1.0 \\ 0.0 \end{array} \right\rangle & \left\langle \begin{array}{c} 0.9 \\ 0.1 \end{array} \right\rangle & \left\langle \begin{array}{c} 0.84 \\ 0.16 \end{array} \right\rangle & \left\langle \begin{array}{c} 0.804 \\ 0.196 \end{array} \right\rangle & \longrightarrow & \left\langle \begin{array}{c} 0.75 \\ 0.25 \end{array} \right\rangle \\
 P(X_1) & P(X_2) & P(X_3) & P(X_4) & & P(X_\infty)
 \end{array}$$


- From initial observation of rain

$$\begin{array}{ccccccc}
 \left\langle \begin{array}{c} 0.0 \\ 1.0 \end{array} \right\rangle & \left\langle \begin{array}{c} 0.3 \\ 0.7 \end{array} \right\rangle & \left\langle \begin{array}{c} 0.48 \\ 0.52 \end{array} \right\rangle & \left\langle \begin{array}{c} 0.588 \\ 0.412 \end{array} \right\rangle & \longrightarrow & \left\langle \begin{array}{c} 0.75 \\ 0.25 \end{array} \right\rangle \\
 P(X_1) & P(X_2) & P(X_3) & P(X_4) & & P(X_\infty)
 \end{array}$$


- From yet another initial distribution $P(X_1)$:

$$\begin{array}{ccc}
 \left\langle \begin{array}{c} p \\ 1-p \end{array} \right\rangle & \dots & \longrightarrow \left\langle \begin{array}{c} 0.75 \\ 0.25 \end{array} \right\rangle \\
 P(X_1) & & P(X_\infty)
 \end{array}$$


Video of Demo Ghostbusters Basic Dynamics

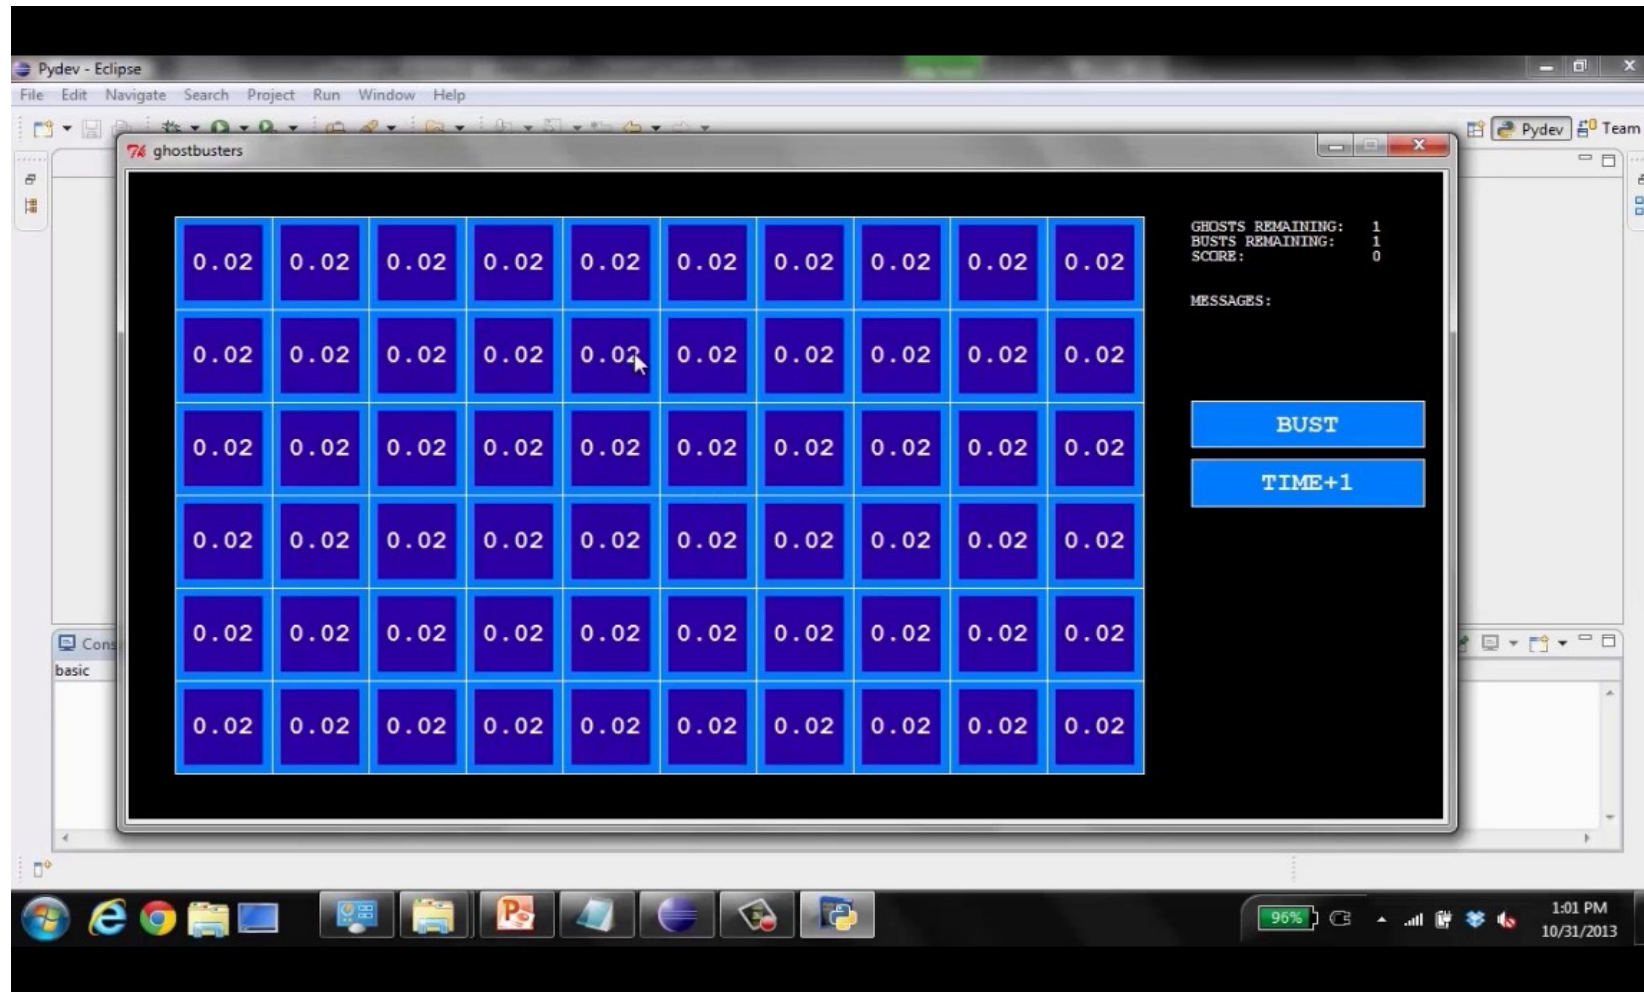

Video of Demo Ghostbusters Circular Dynamics

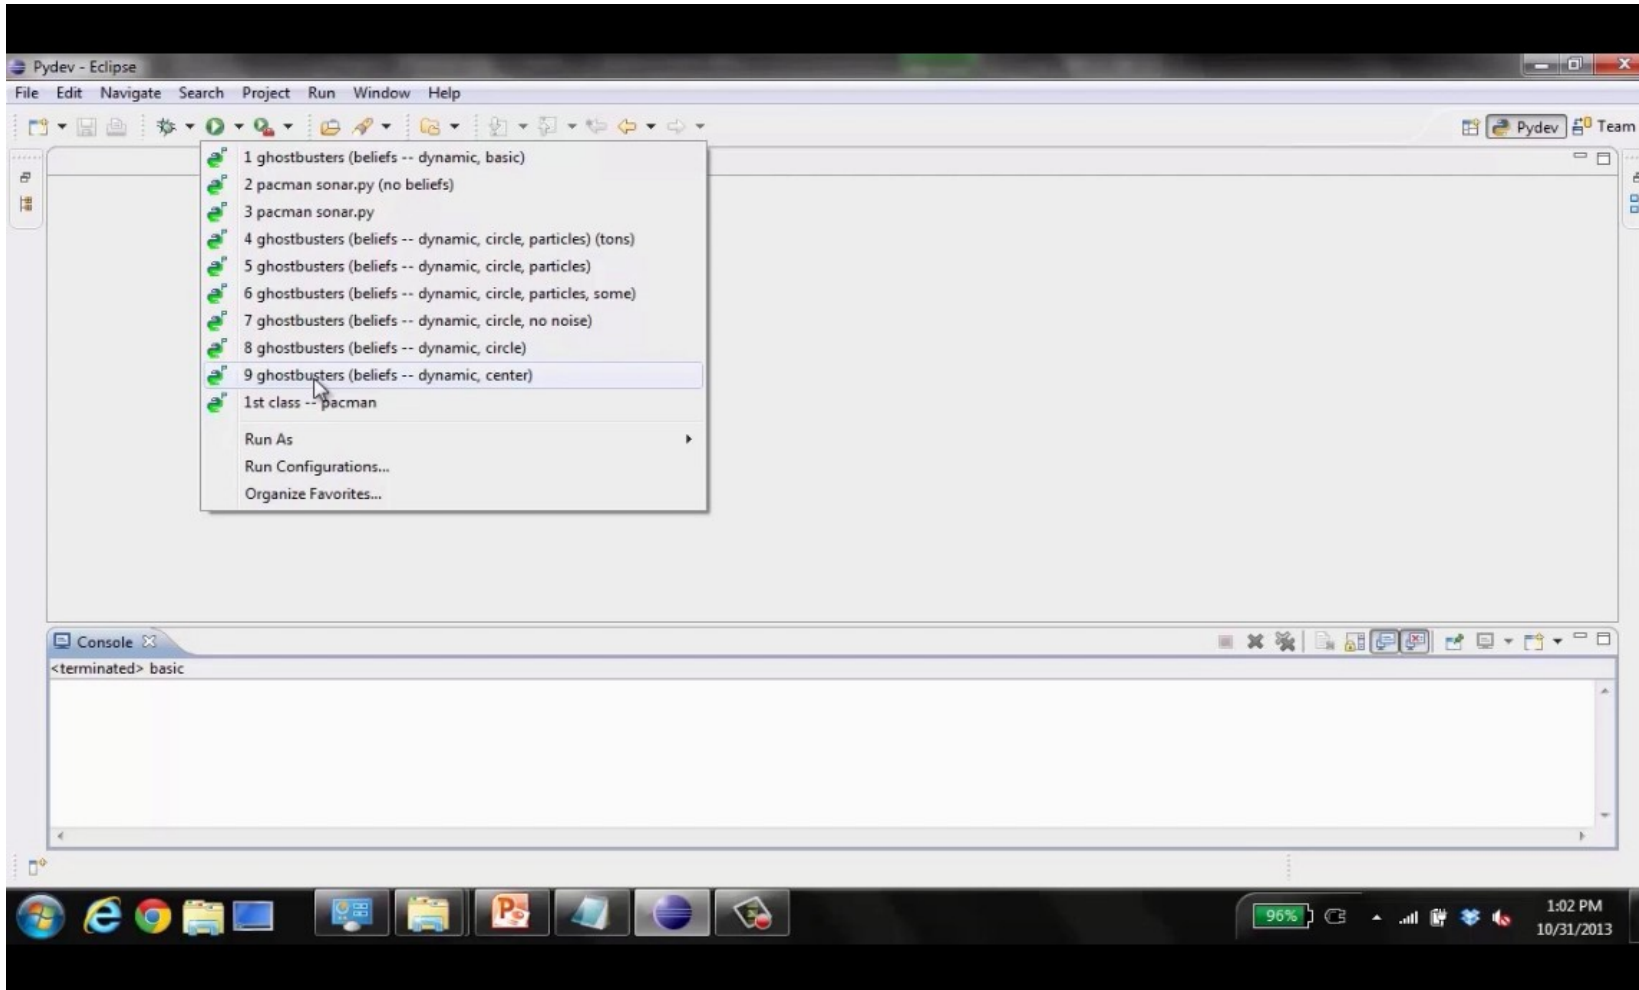

Video of Demo Ghostbusters Whirlpool Dynamics

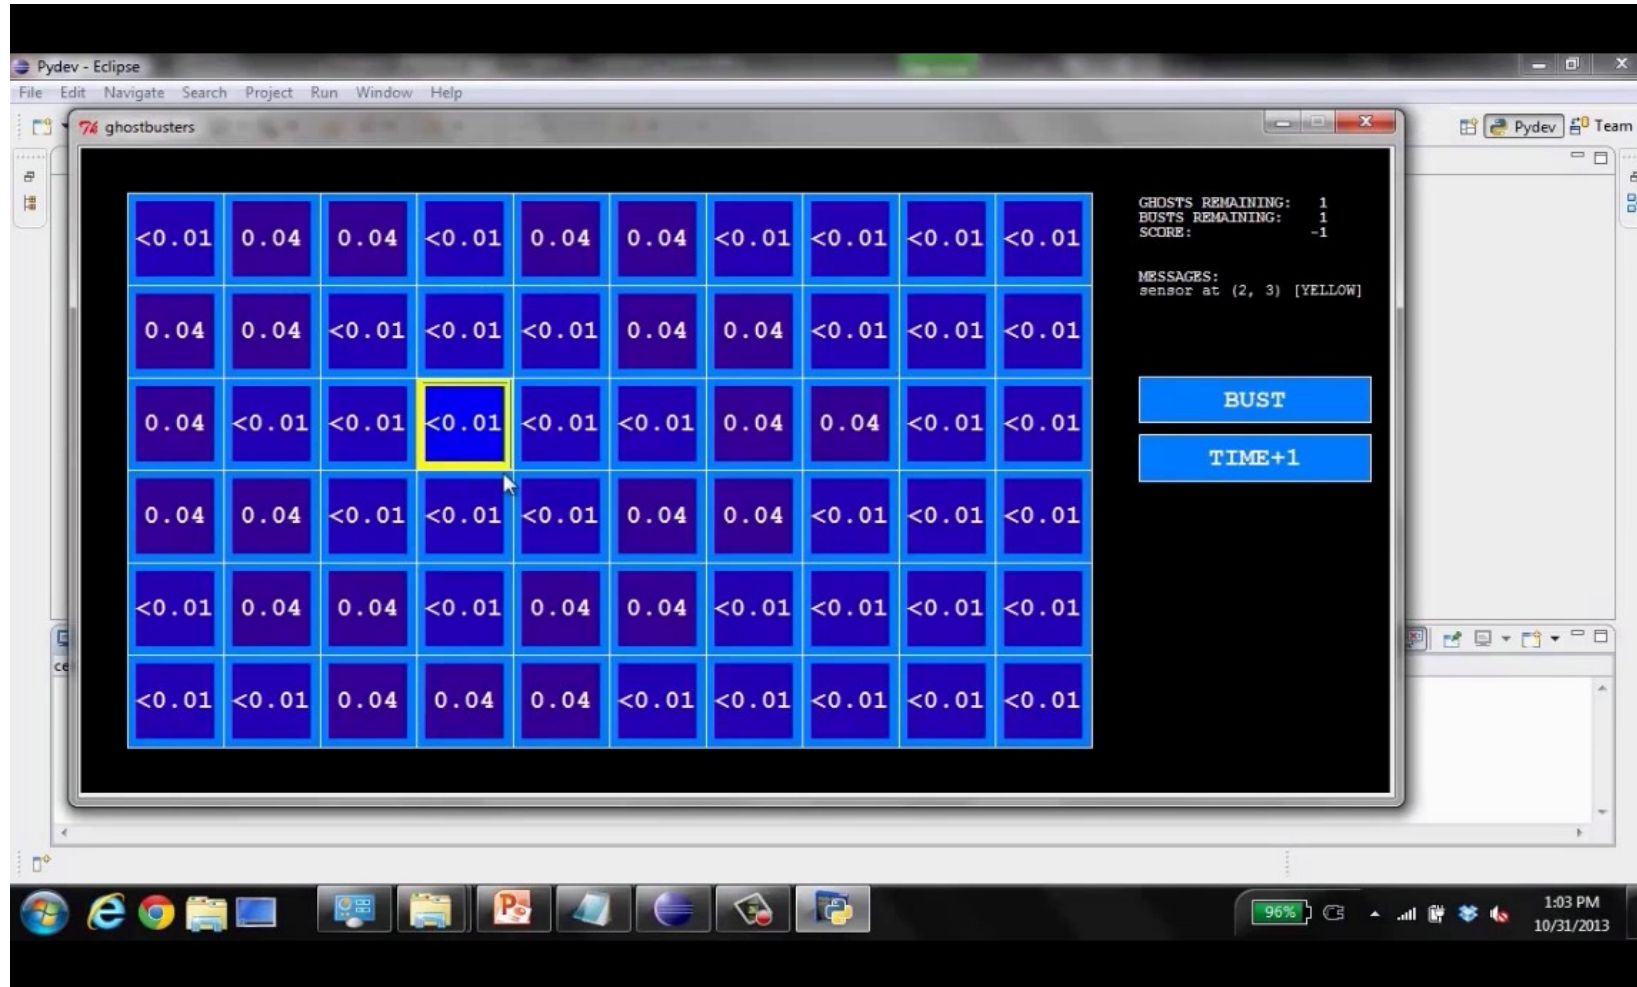

Stationary Distributions

- For most chains:

- Influence of the initial distribution gets less and less over time.
- The distribution we end up in is independent of the initial distribution

- Stationary distribution:


- The distribution we end up with is called the **stationary distribution** P_∞ of the chain
- It satisfies

$$P_\infty(X) = P_{\infty+1}(X) = \sum_x P(X|x)P_\infty(x)$$



Example: Stationary Distributions

○ Question: What's $P(X)$ at time $t = \text{infinity}$?



$$P_{\infty}(\text{sun}) = P(\text{sun}|\text{sun})P_{\infty}(\text{sun}) + P(\text{sun}|\text{rain})P_{\infty}(\text{rain})$$

$$P_{\infty}(\text{rain}) = P(\text{rain}|\text{sun})P_{\infty}(\text{sun}) + P(\text{rain}|\text{rain})P_{\infty}(\text{rain})$$

$$P_{\infty}(\text{sun}) = 0.9P_{\infty}(\text{sun}) + 0.3P_{\infty}(\text{rain})$$

$$P_{\infty}(\text{rain}) = 0.1P_{\infty}(\text{sun}) + 0.7P_{\infty}(\text{rain})$$

$$P_{\infty}(\text{sun}) = 3P_{\infty}(\text{rain})$$


$$P_{\infty}(\text{rain}) = 1/3P_{\infty}(\text{sun})$$

Also: $P_{\infty}(\text{sun}) + P_{\infty}(\text{rain}) = 1$



$$P_{\infty}(\text{sun}) = 3/4$$

$$P_{\infty}(\text{rain}) = 1/4$$

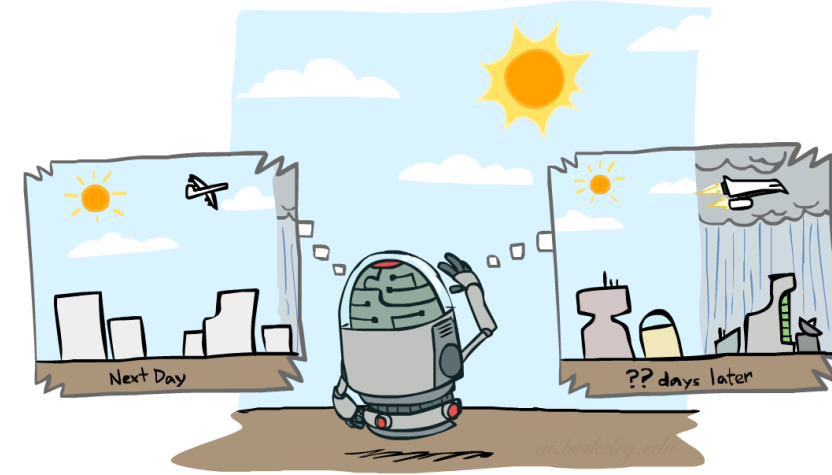


X_{t-1}	X_t	$P(X_t X_{t-1})$
sun	sun	0.9
sun	rain	0.1
rain	sun	0.3
rain	rain	0.7

Application of Stationary Distribution: Web Link Analysis


- PageRank over a web graph

- Each web page is a possible value of a state
- Initial distribution: uniform over pages
- Transitions:
 - With prob. c , uniform jump to a random page (dotted lines, not all shown)
 - With prob. $1-c$, follow a random outlink (solid lines)

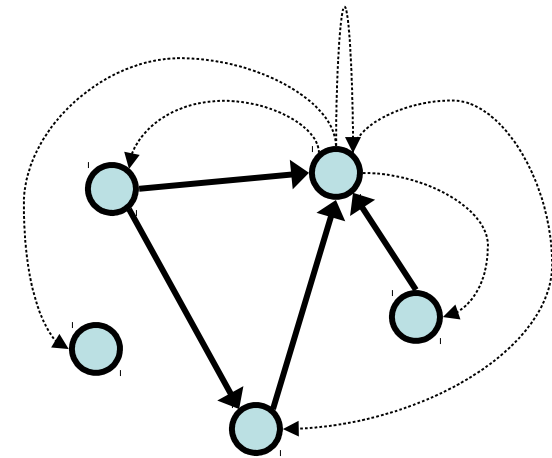

- Stationary distribution

- Will spend more time on highly reachable pages
- E.g. many ways to get to the Acrobat Reader download page
- Somewhat robust to link spam.
- Google 1.0 returned the set of pages containing all your keywords in decreasing rank, now all search engines

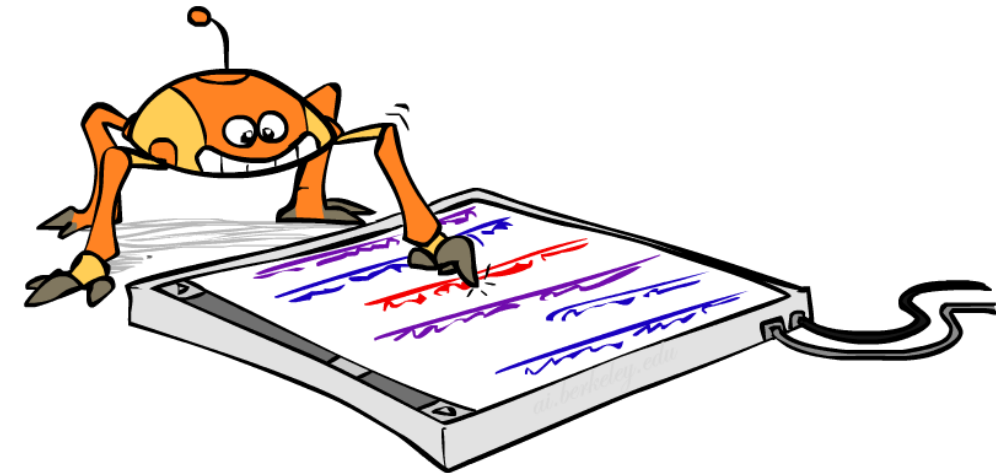


Hidden Markov Models



Pacman – Sonar




Video of Demo Pacman – Sonar (no beliefs)

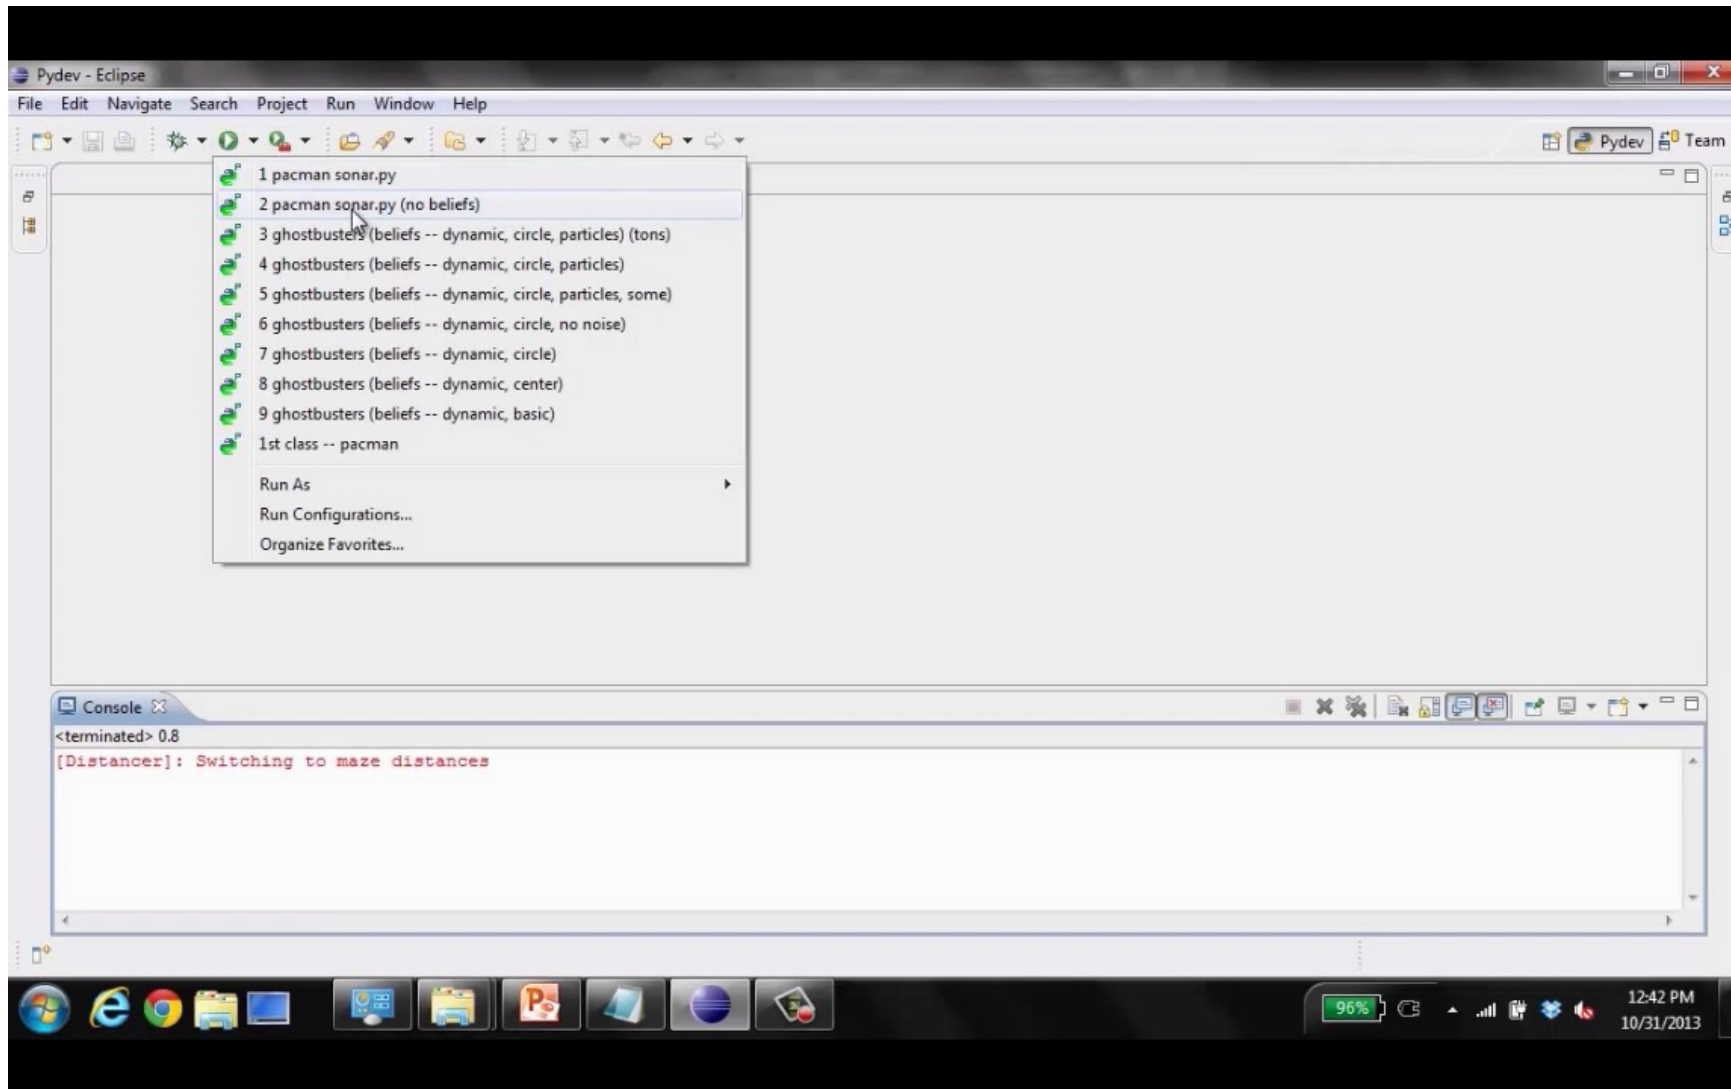


Hidden Markov Models

- Markov chains not so useful for most agents
 - Need observations to update your beliefs
- Hidden Markov models (HMMs)
 - Underlying Markov chain over states X
 - You observe outputs (effects) at each time step

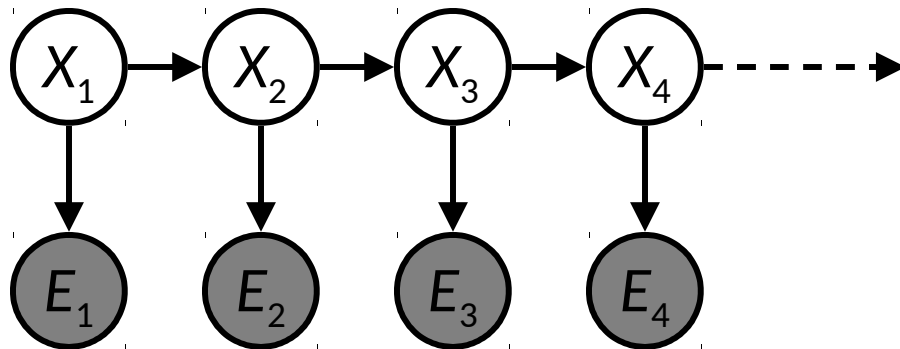

Example: Weather HMM

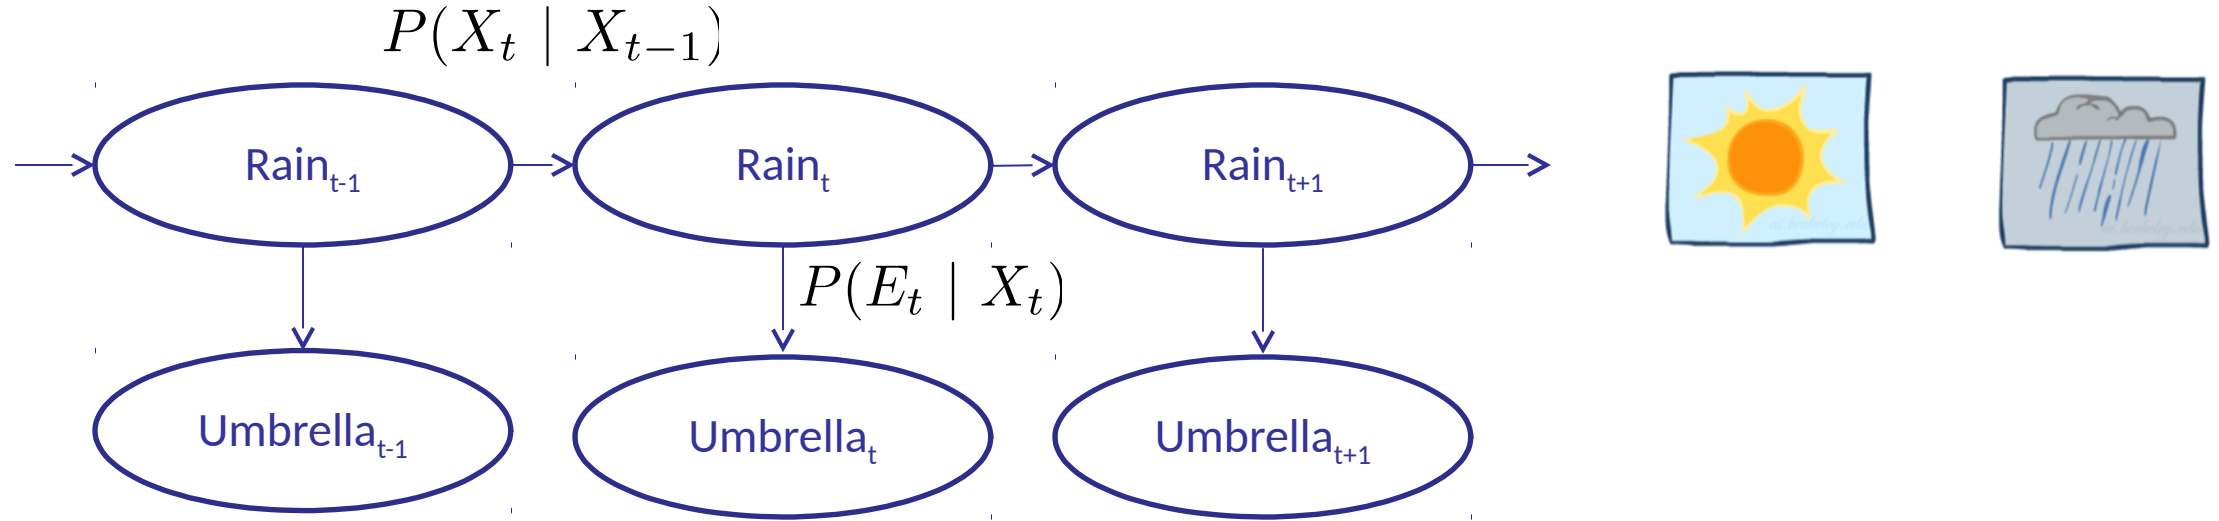



- An HMM is defined by:
 - Initial distribution: $P(X_1)$
 - Transitions: $P(X_t | X_{t-1})$
 - Emissions: $P(E_t | X_t)$

R_{t-1}	R_t	$P(R_t R_{t-1})$
+r	+r	0.7
+r	-r	0.3
-r	+r	0.3
-r	-r	0.7

R_t	U_t	$P(U_t R_t)$
+r	+u	0.9
+r	-u	0.1
-r	+u	0.2
-r	-u	0.8


Example: Ghostbusters HMM

- $P(X_1)$ = uniform
- $P(X|X')$ = usually move clockwise, but sometimes move in a random direction or stay in place
- $P(R_{ij}|X)$ = same sensor model as before: red means close, green means far away.

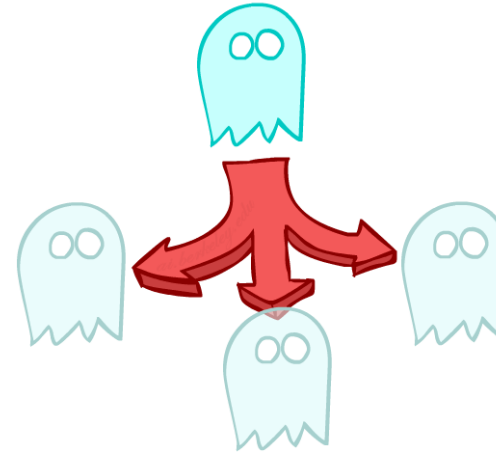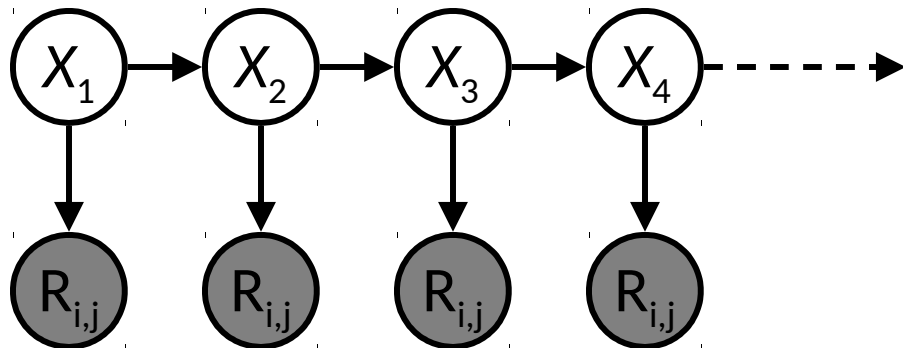

1/9	1/9	1/9
1/9	1/9	1/9
1/9	1/9	1/9


$P(X_1)$

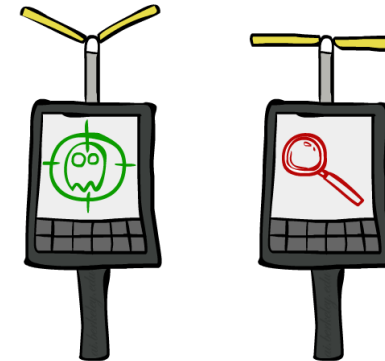

1/6	1/6 → 1/2	1/6
0	1/6	0
0	0	0


$P(X|X'=<1,2>)$

Video of Demo Ghostbusters – Circular Dynamics -- HMM

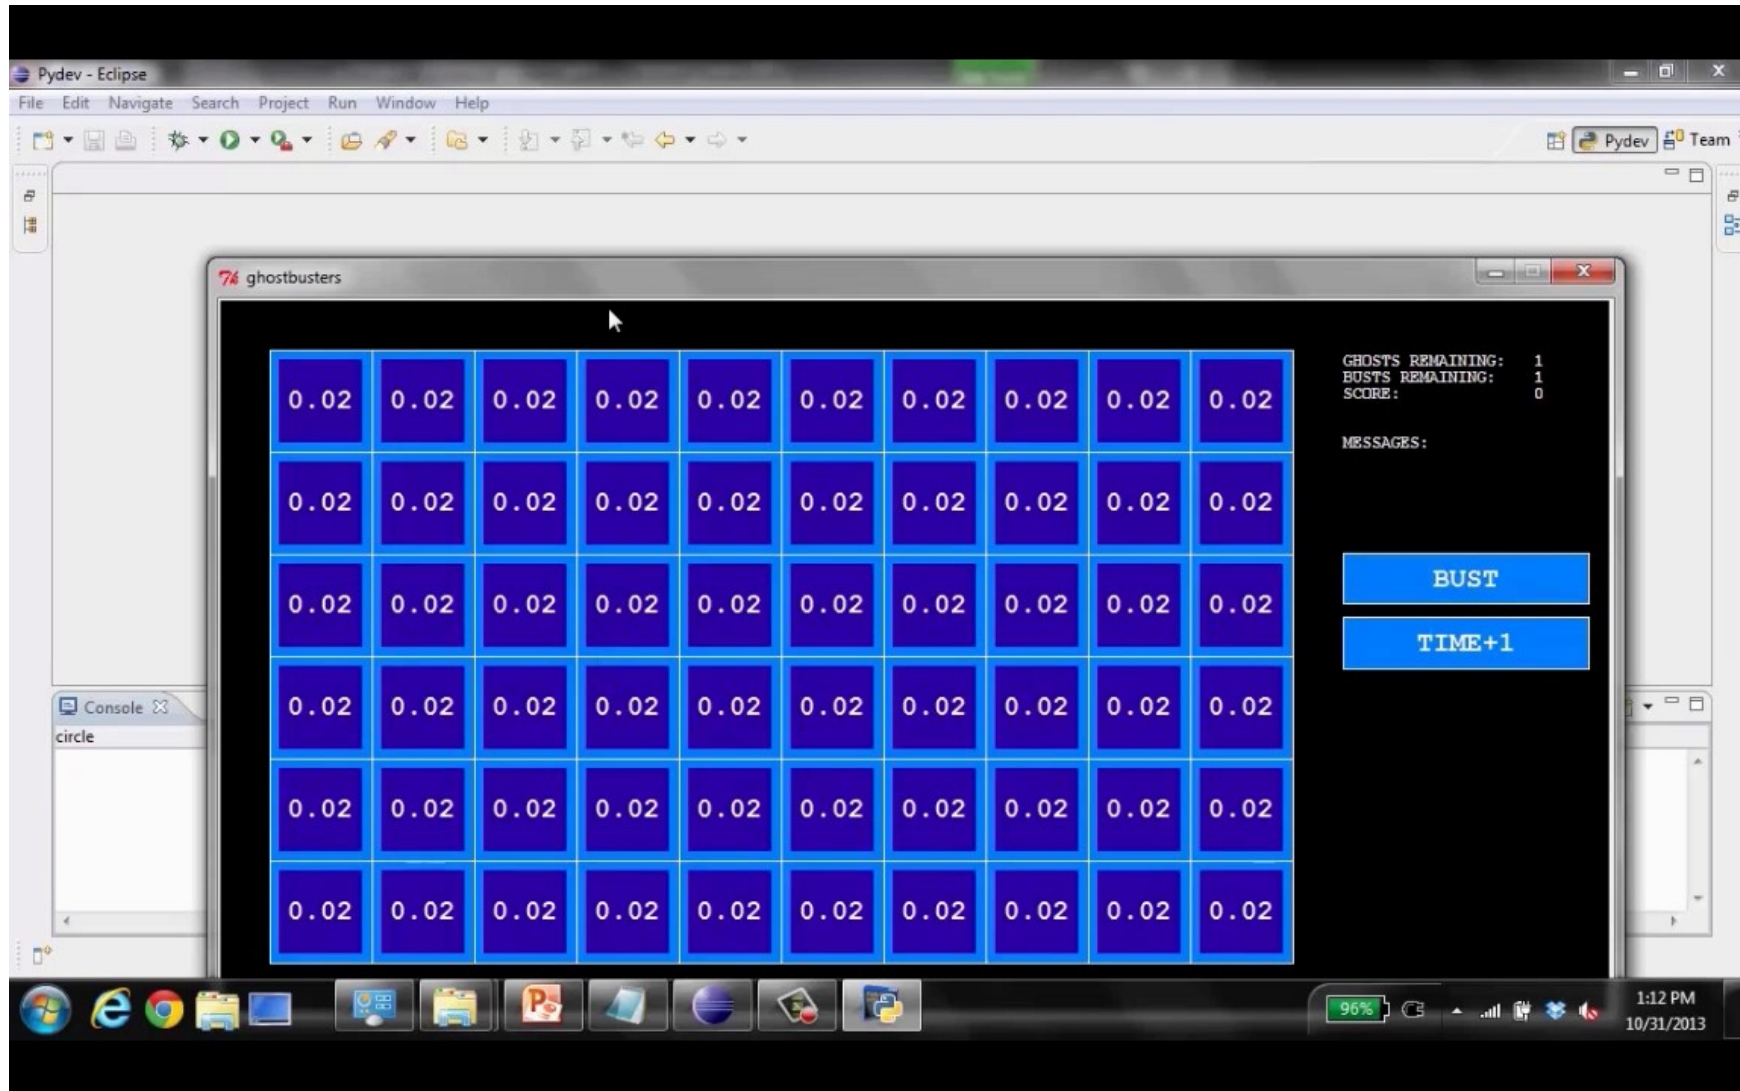

Conditional Independence

- HMMs have two important independence properties:
 - Markov hidden process: future depends on past via the present
 - Current observation independent of all else given current state

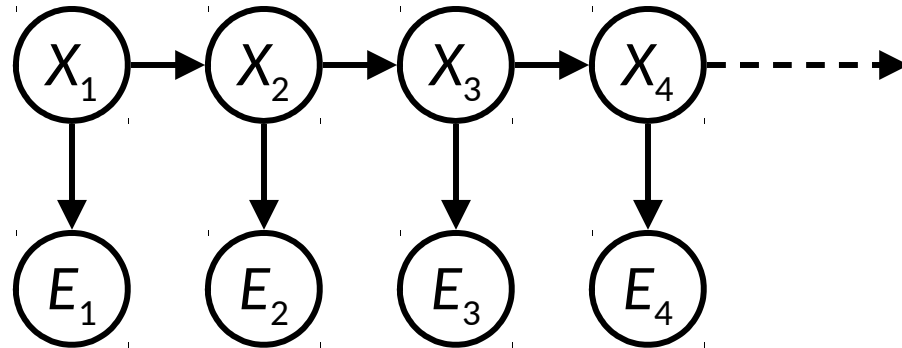

Real HMM Examples



- Robot tracking:
 - Observations are range readings (continuous)
 - States are positions on a map (continuous)
- Speech recognition HMMs:
 - Observations are acoustic signals (continuous valued)
 - States are specific positions in specific words (so, tens of thousands)
- Machine translation HMMs:
 - Observations are words (tens of thousands)
 - States are translation options

Filtering / Monitoring

- Filtering, or monitoring, is the task of tracking the distribution $B_t(X) = P_t(X_t \mid e_1, \dots, e_t)$ (the belief state) over time
- We start with $B_1(X)$ in an initial setting, usually uniform
- As time passes, or we get observations, we update $B(X)$
- The Kalman filter was invented in the 60's and first implemented as a method of trajectory estimation for the Apollo program

Example: Robot Localization



Example from
Michael Pfeiffer

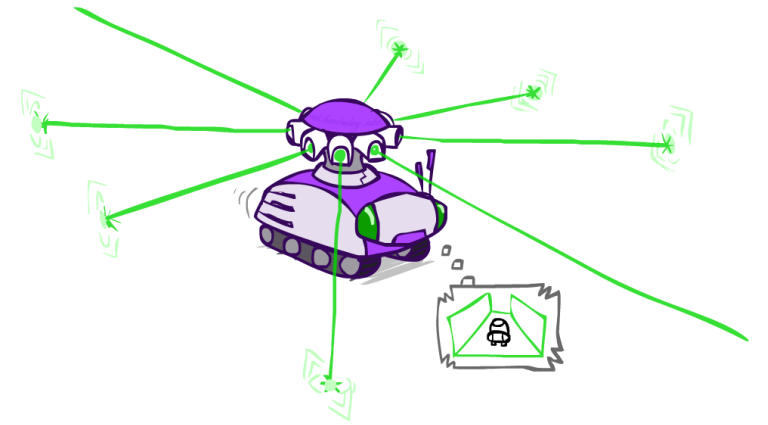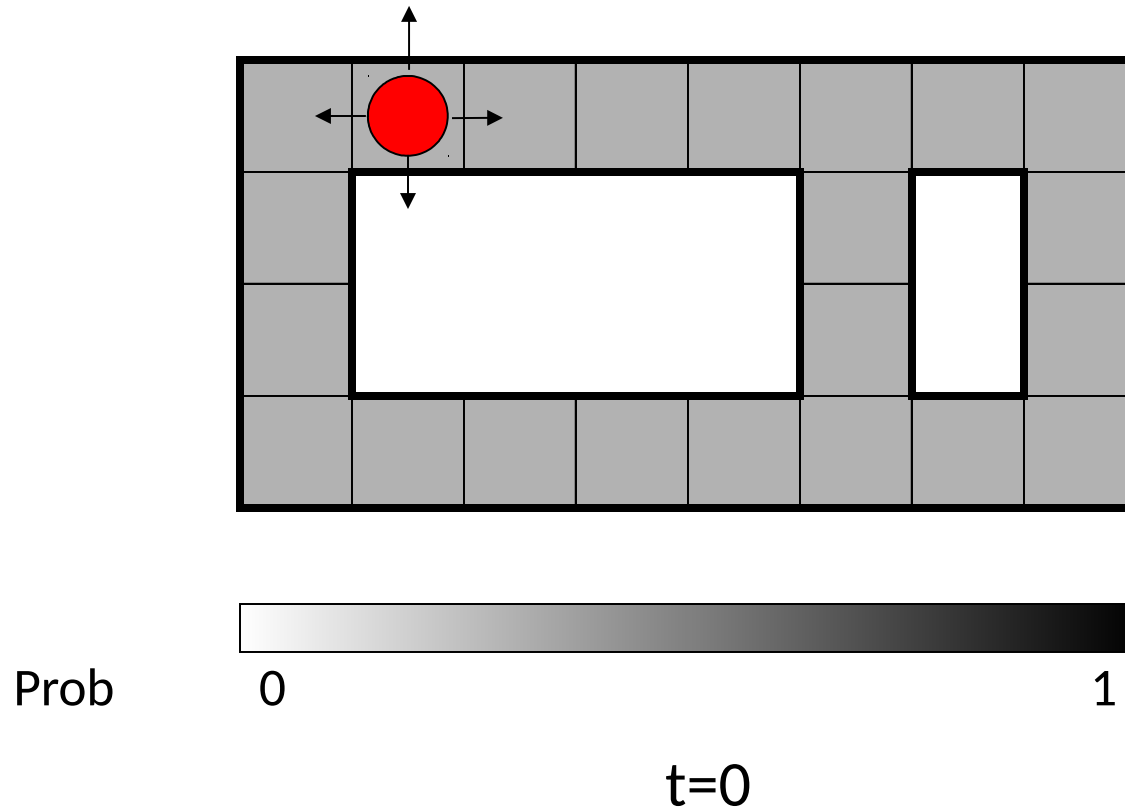

Sensor model: can read in which directions there is a wall,
never more than 1 mistake


Motion model: may not execute action with small prob.

Example: Robot Localization

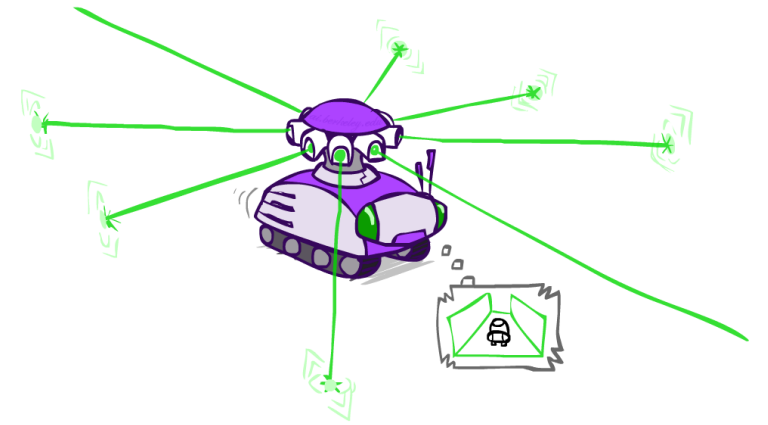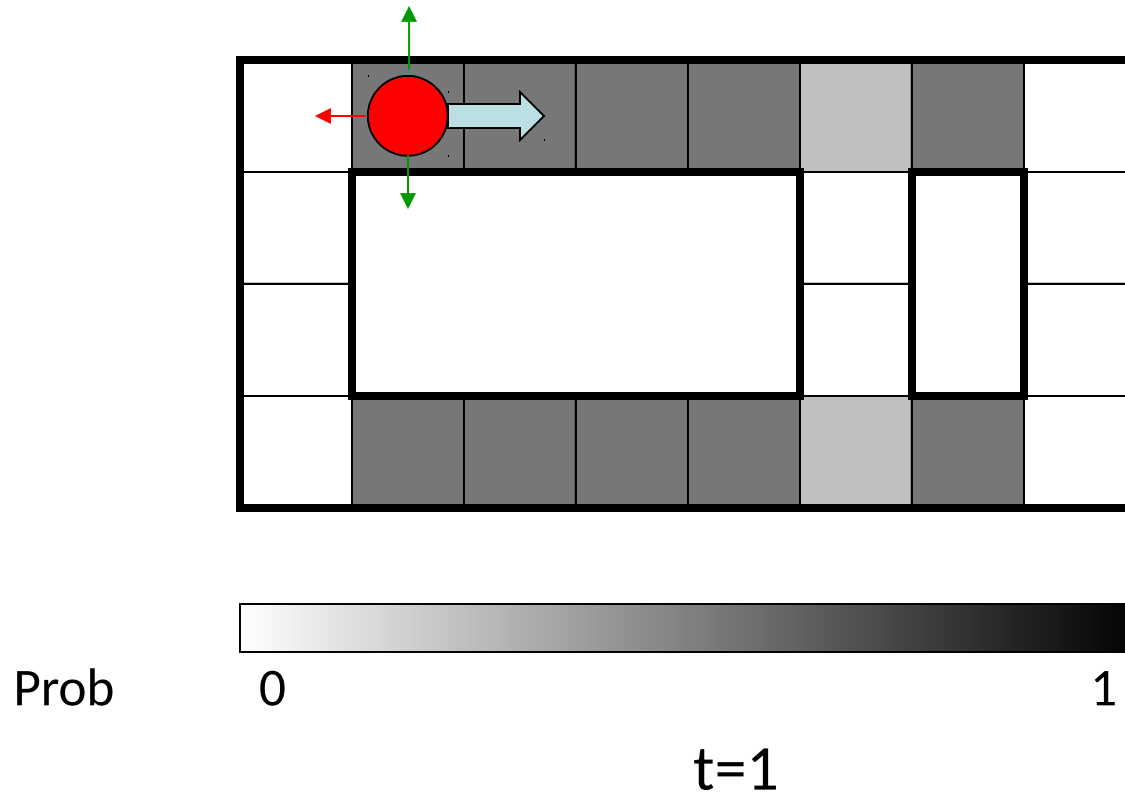


Lighter grey: was possible to get the reading, but less likely b/c required 1 mistake


Example: Robot Localization

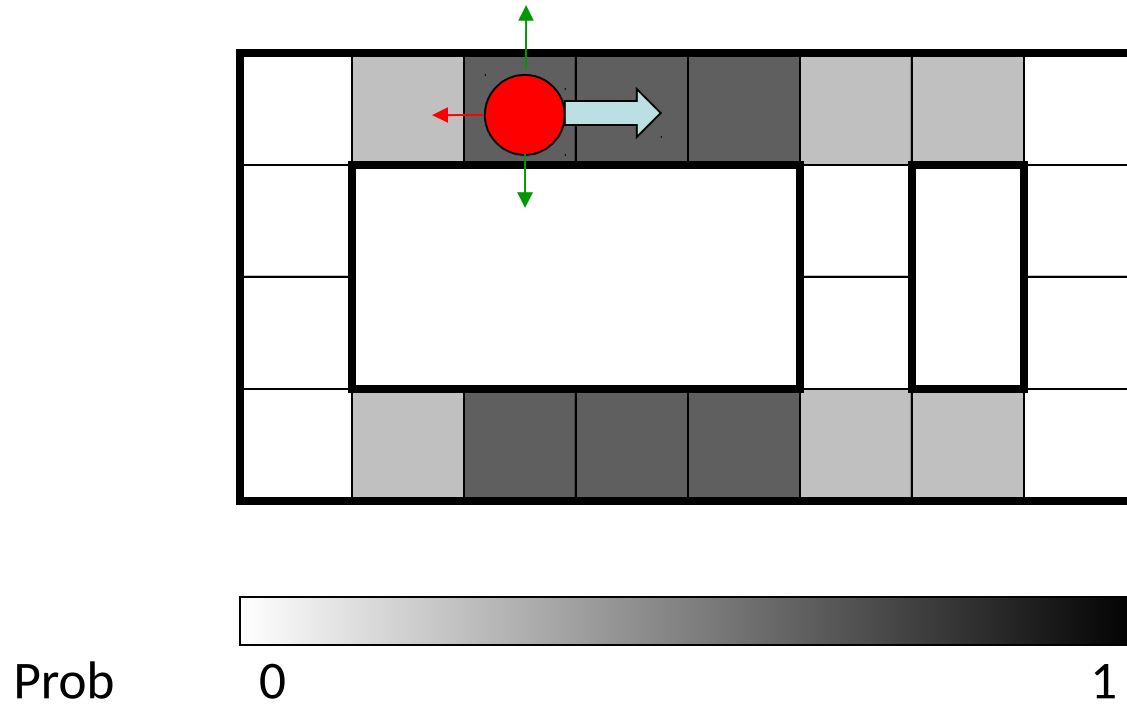


$t=2$

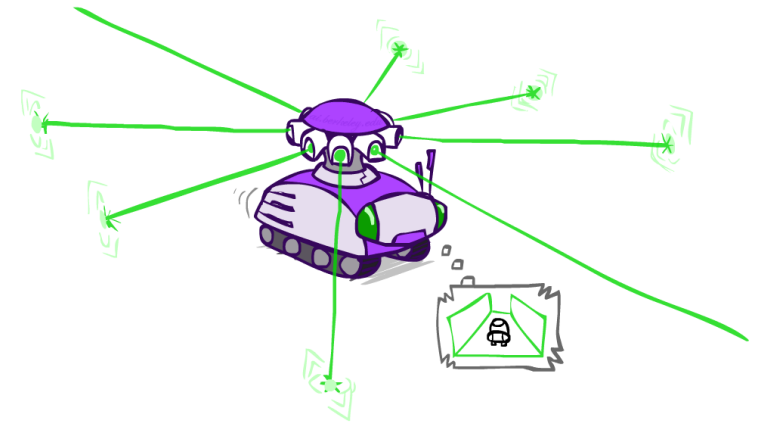


Example: Robot Localization

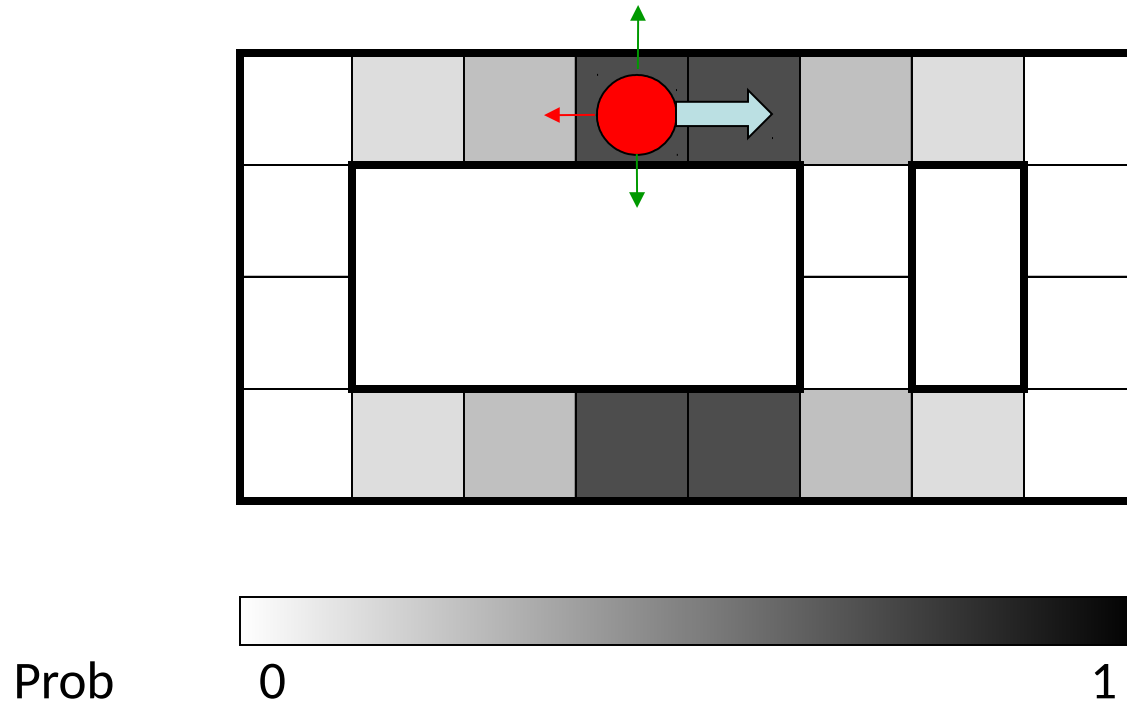


$t=3$

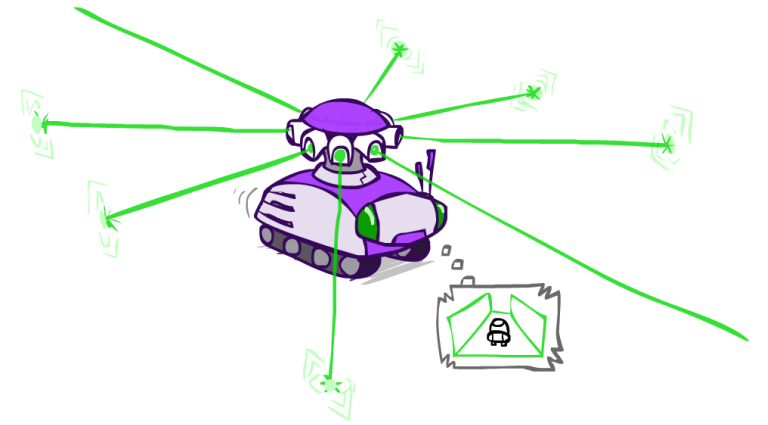


Example: Robot Localization

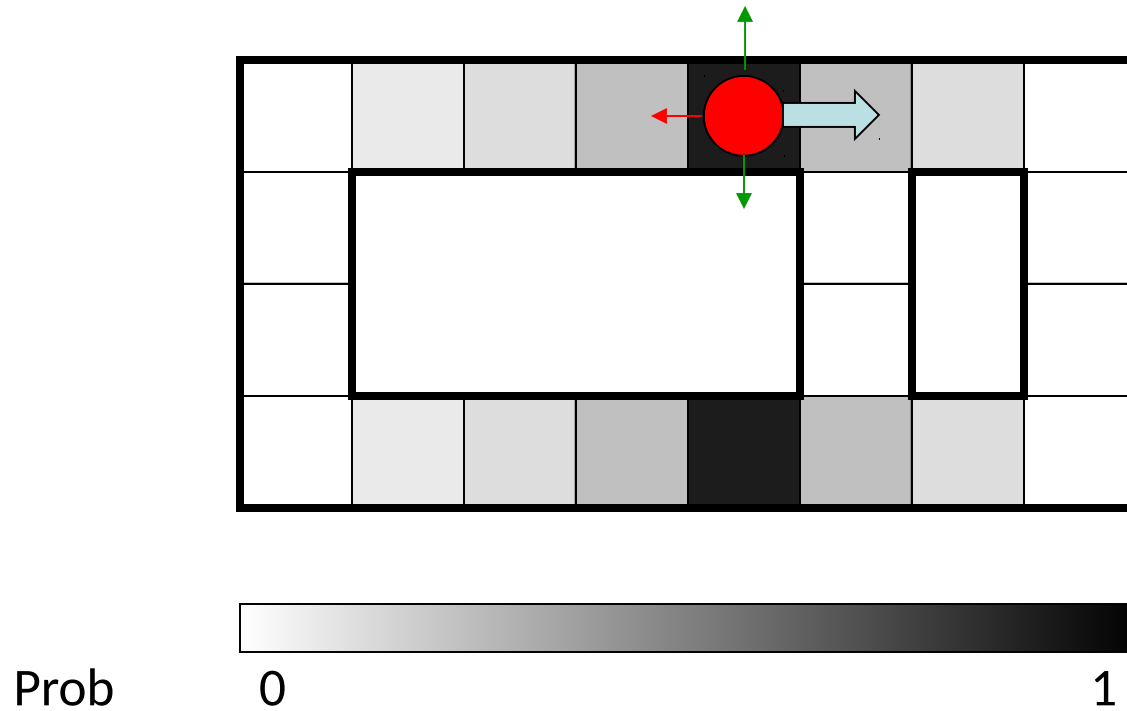


$t=4$

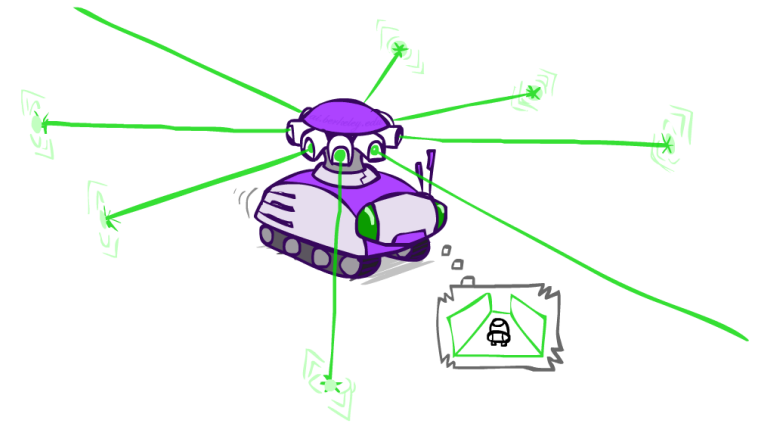

Example: Robot Localization

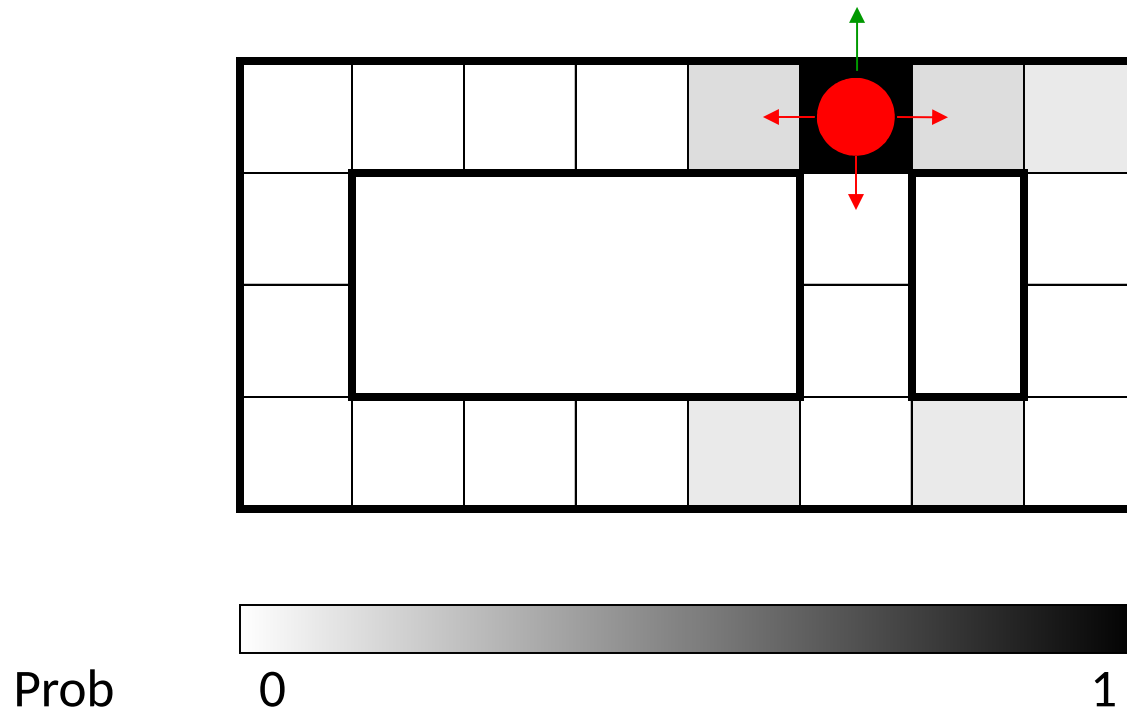

$t=5$

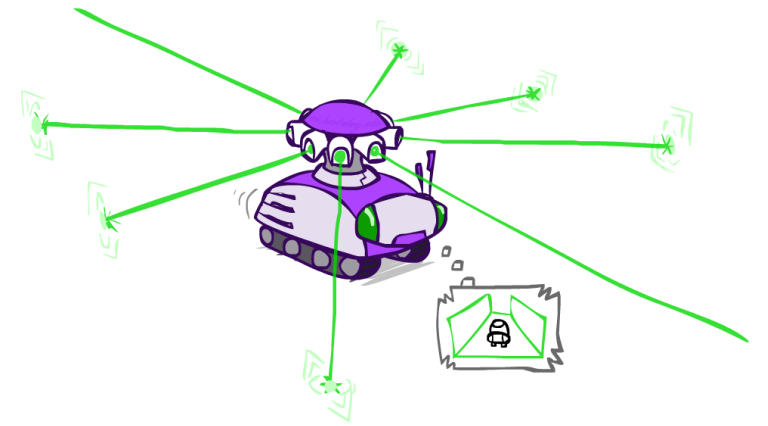


Inference: Find State Given Evidence

- We are given evidence at each time and want to know


$$B_t(X) = P(X_t | e_{1:t})$$

- Idea: start with $P(X_1)$ and derive B_t in terms of B_{t-1}
 - equivalently, derive B_{t+1} in terms of B_t

Two Steps: Passage of Time + Observation

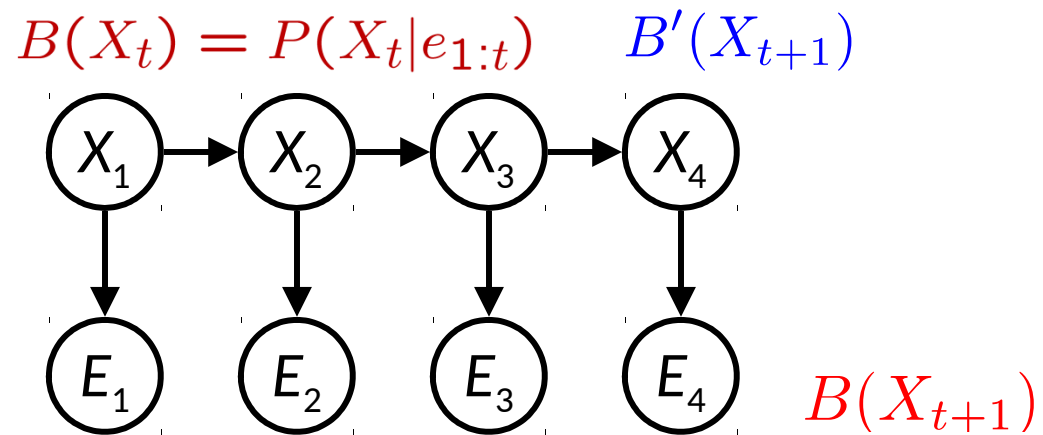


Inference: Base Cases

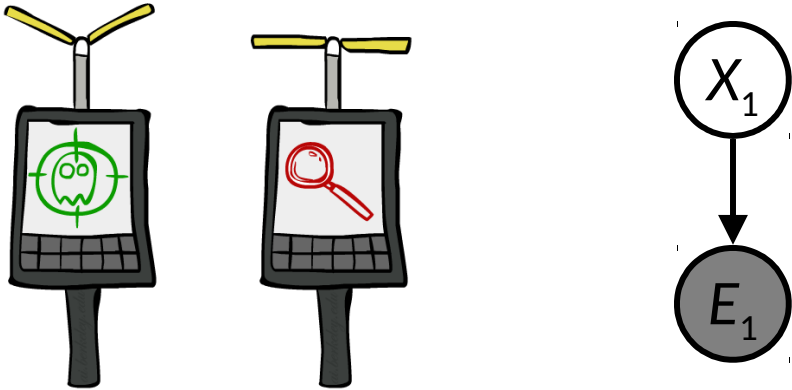

$$P(X_1|e_1)$$

$$P(X_1|e_1) = \frac{P(X_1, e_1)}{\sum_{x_1} P(x_1, e_1)}$$

$$P(X_1|e_1) = \frac{P(e_1|X_1)P(X_1)}{\sum_{x_1} P(e_1|x_1)P(x_1)}$$

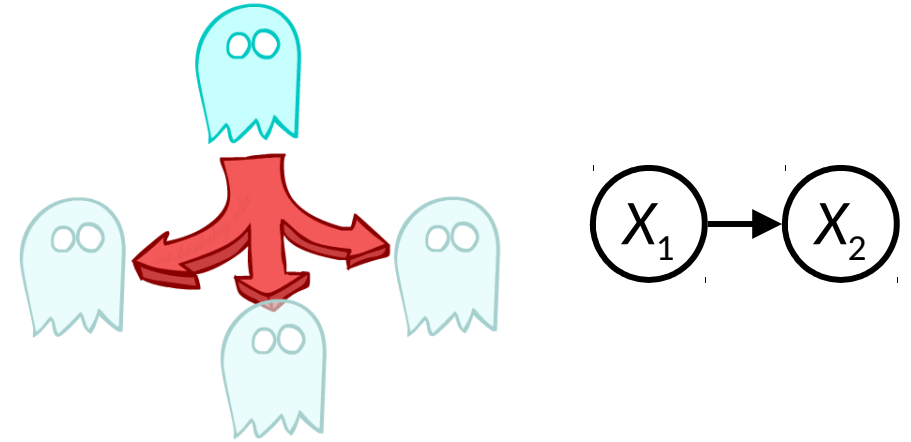

$$P(X_2)$$


$$P(X_2) = \sum_{x_1} P(x_1, X_2)$$

$$P(X_2) = \sum_{x_1} P(X_2|x_1)P(x_1)$$

Passage of Time

- Assume we have current belief $P(X \mid \text{evidence to date})$

$$B(X_t) = P(X_t | e_{1:t})$$

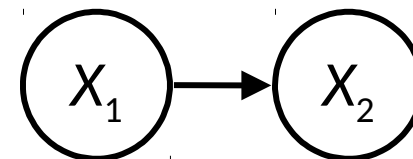

- Then, after one time step passes:

$$\begin{aligned} P(X_{t+1} | e_{1:t}) &= \sum_{x_t} P(X_{t+1}, x_t | e_{1:t}) \\ &= \sum_{x_t} P(X_{t+1} | x_t, e_{1:t}) P(x_t | e_{1:t}) \\ &= \sum_{x_t} P(X_{t+1} | x_t) P(x_t | e_{1:t}) \end{aligned}$$

- Or compactly:

$$B'(X_{t+1}) = \sum_{x_t} P(X' | x_t) B(x_t)$$

- Basic idea: beliefs get “pushed” through the transitions

- With the “B” notation, we have to be careful about what time step t the belief is about, and what evidence it includes

Example: Passage of Time

- As time passes, uncertainty “accumulates”

(Transition model: ghosts usually go clockwise)

<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
<0.01	<0.01	1.00	<0.01	<0.01	<0.01
<0.01	<0.01	<0.01	<0.01	<0.01	<0.01



T = 1

<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
<0.01	<0.01	0.06	<0.01	<0.01	<0.01
<0.01	0.76	0.06	0.06	<0.01	<0.01
<0.01	<0.01	0.06	<0.01	<0.01	<0.01

T = 2

0.05	0.01	0.05	<0.01	<0.01	<0.01
0.02	0.14	0.11	0.35	<0.01	<0.01
0.07	0.03	0.05	<0.01	0.03	<0.01
0.03	0.03	<0.01	<0.01	<0.01	<0.01

T = 5

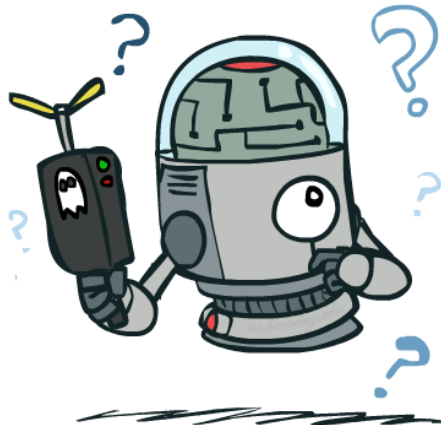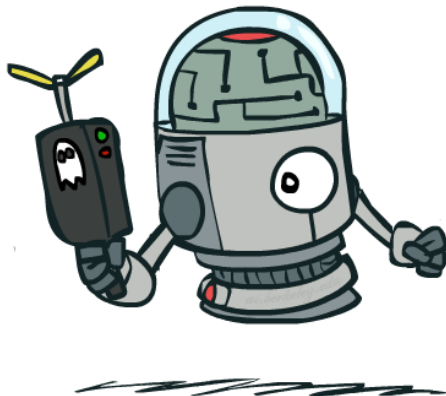

Observation

- Assume we have current belief $P(X \mid \text{previous evidence})$:


$$B'(X_{t+1}) = P(X_{t+1} | e_{1:t})$$

- Then, after evidence comes in:

$$\begin{aligned} P(X_{t+1} | e_{1:t+1}) &= P(X_{t+1}, e_{t+1} | e_{1:t}) / P(e_{t+1} | e_{1:t}) \\ &\propto_{X_{t+1}} P(X_{t+1}, e_{t+1} | e_{1:t}) \\ &= P(e_{t+1} | e_{1:t}, X_{t+1}) P(X_{t+1} | e_{1:t}) \\ &= P(e_{t+1} | X_{t+1}) P(X_{t+1} | e_{1:t}) \end{aligned}$$

- Or, compactly:

$$B(X_{t+1}) \propto_{X_{t+1}} P(e_{t+1} | X_{t+1}) B'(X_{t+1})$$

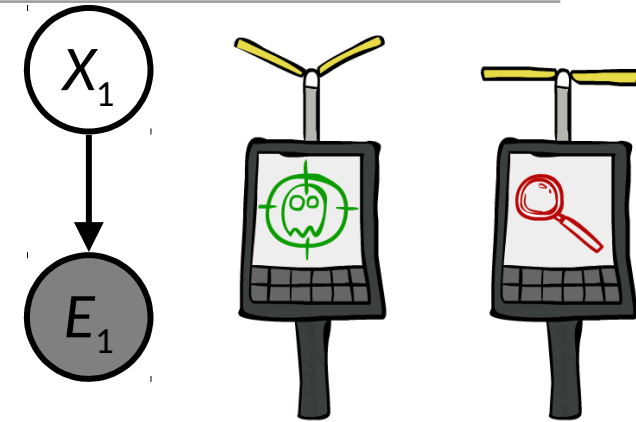

- Basic idea: beliefs “reweighted” by likelihood of evidence
- Unlike passage of time, we have to renormalize

Example: Observation

- As we get observations, beliefs get reweighted, uncertainty “decreases”


0.05	0.01	0.05	<0.01	<0.01	<0.01
0.02	0.14	0.11	0.35	<0.01	<0.01
0.07	0.03	0.05	<0.01	0.03	<0.01
0.03	0.03	<0.01	<0.01	<0.01	<0.01

Before observation


<0.01	<0.01	<0.01	<0.01	0.02	<0.01
<0.01	<0.01	<0.01	0.83	0.02	<0.01
<0.01	<0.01	0.11	<0.01	<0.01	<0.01
<0.01	<0.01	<0.01	<0.01	<0.01	<0.01

After observation

$$B(X) \propto P(e|X)B'(X)$$

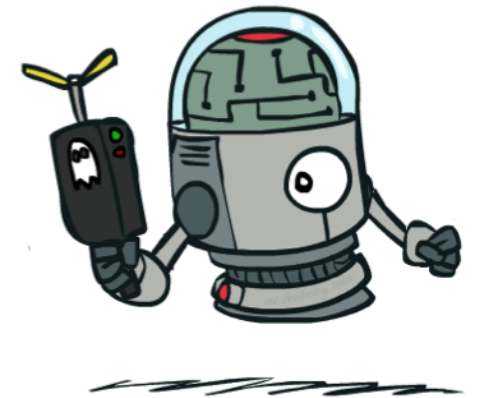

Example: Weather HMM

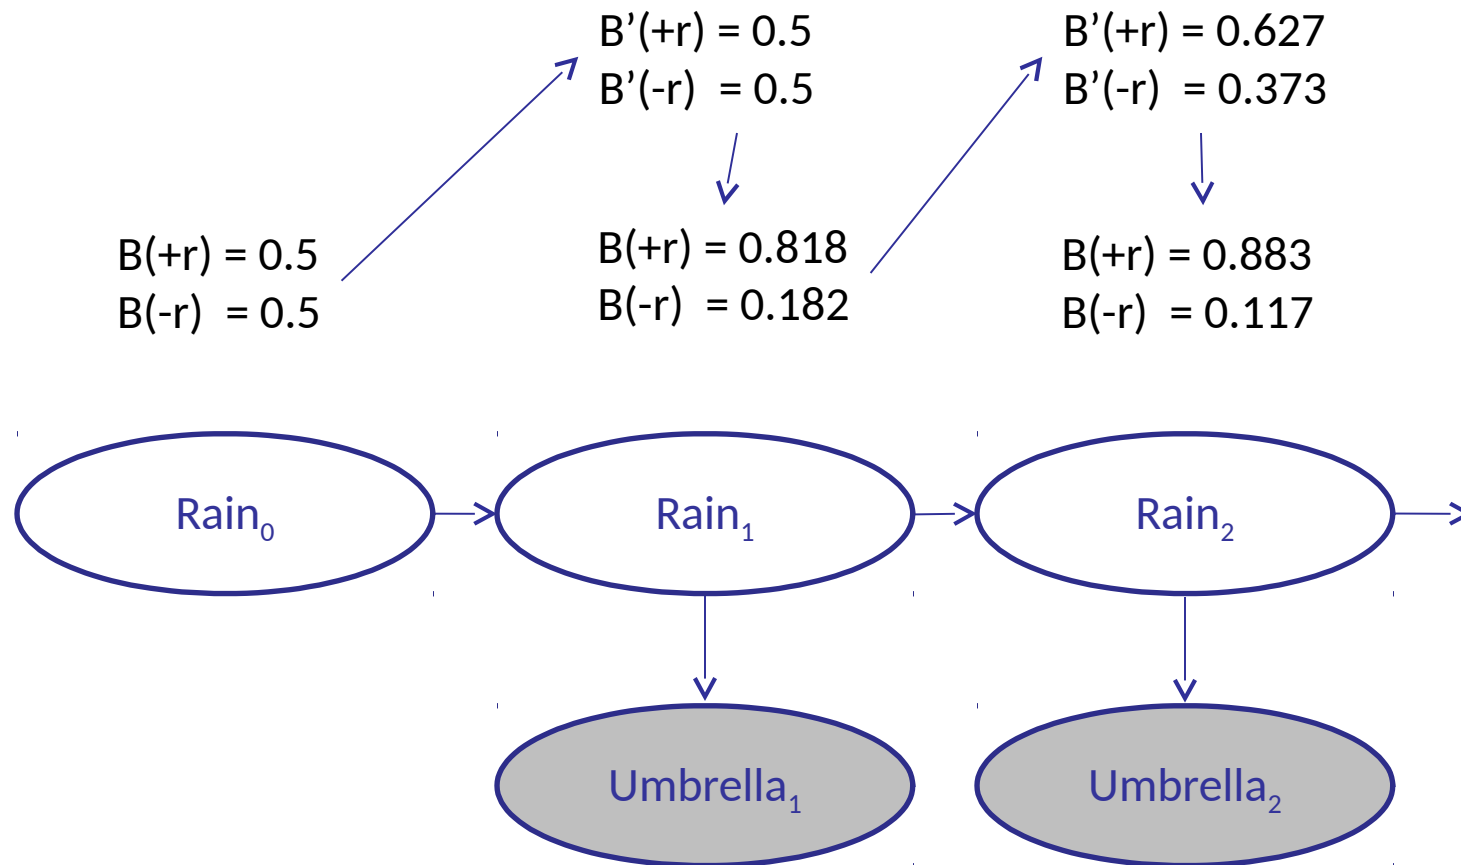

R_t	R_{t+1}	$P(R_{t+1} R_t)$
+r	+r	0.7
+r	-r	0.3
-r	+r	0.3
-r	-r	0.7

R_t	U_t	$P(U_t R_t)$
+r	+u	0.9
+r	-u	0.1
-r	+u	0.2
-r	-u	0.8

Online Belief Updates



- Every time step, we start with current $P(X \mid \text{evidence})$
- We update for time:

$$P(x_t | e_{1:t-1}) = \sum_{x_{t-1}} P(x_{t-1} | e_{1:t-1}) \cdot P(x_t | x_{t-1})$$

- We update for evidence:

$$P(x_t | e_{1:t}) \propto_X P(x_t | e_{1:t-1}) \cdot P(e_t | x_t)$$

- The forward algorithm does both at once (and doesn't normalize)

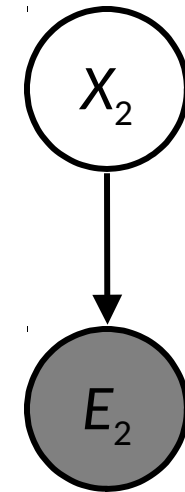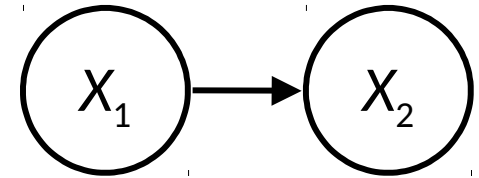

The Forward Algorithm

- We are given evidence at each time and want to know

$$B_t(X) = P(X_t | e_{1:t})$$

- We can derive the following updates

$$\begin{aligned} P(x_t | e_{1:t}) &\propto_{X_t} P(x_t, e_{1:t}) \\ &= \sum_{x_{t-1}} P(x_{t-1}, x_t, e_{1:t}) \\ &= \sum_{x_{t-1}} P(x_{t-1}, e_{1:t-1}) P(x_t | x_{t-1}) P(e_t | x_t) \\ &= P(e_t | x_t) \sum_{x_{t-1}} P(x_t | x_{t-1}) P(x_{t-1}, e_{1:t-1}) \end{aligned}$$


We can normalize as we go if we want to have $P(x|e)$ at each time step, or just once at the end...

Pacman – Sonar




[Demo: Pacman – Sonar – No Beliefs(L14D1)]

Video of Demo Pacman – Sonar (with beliefs)

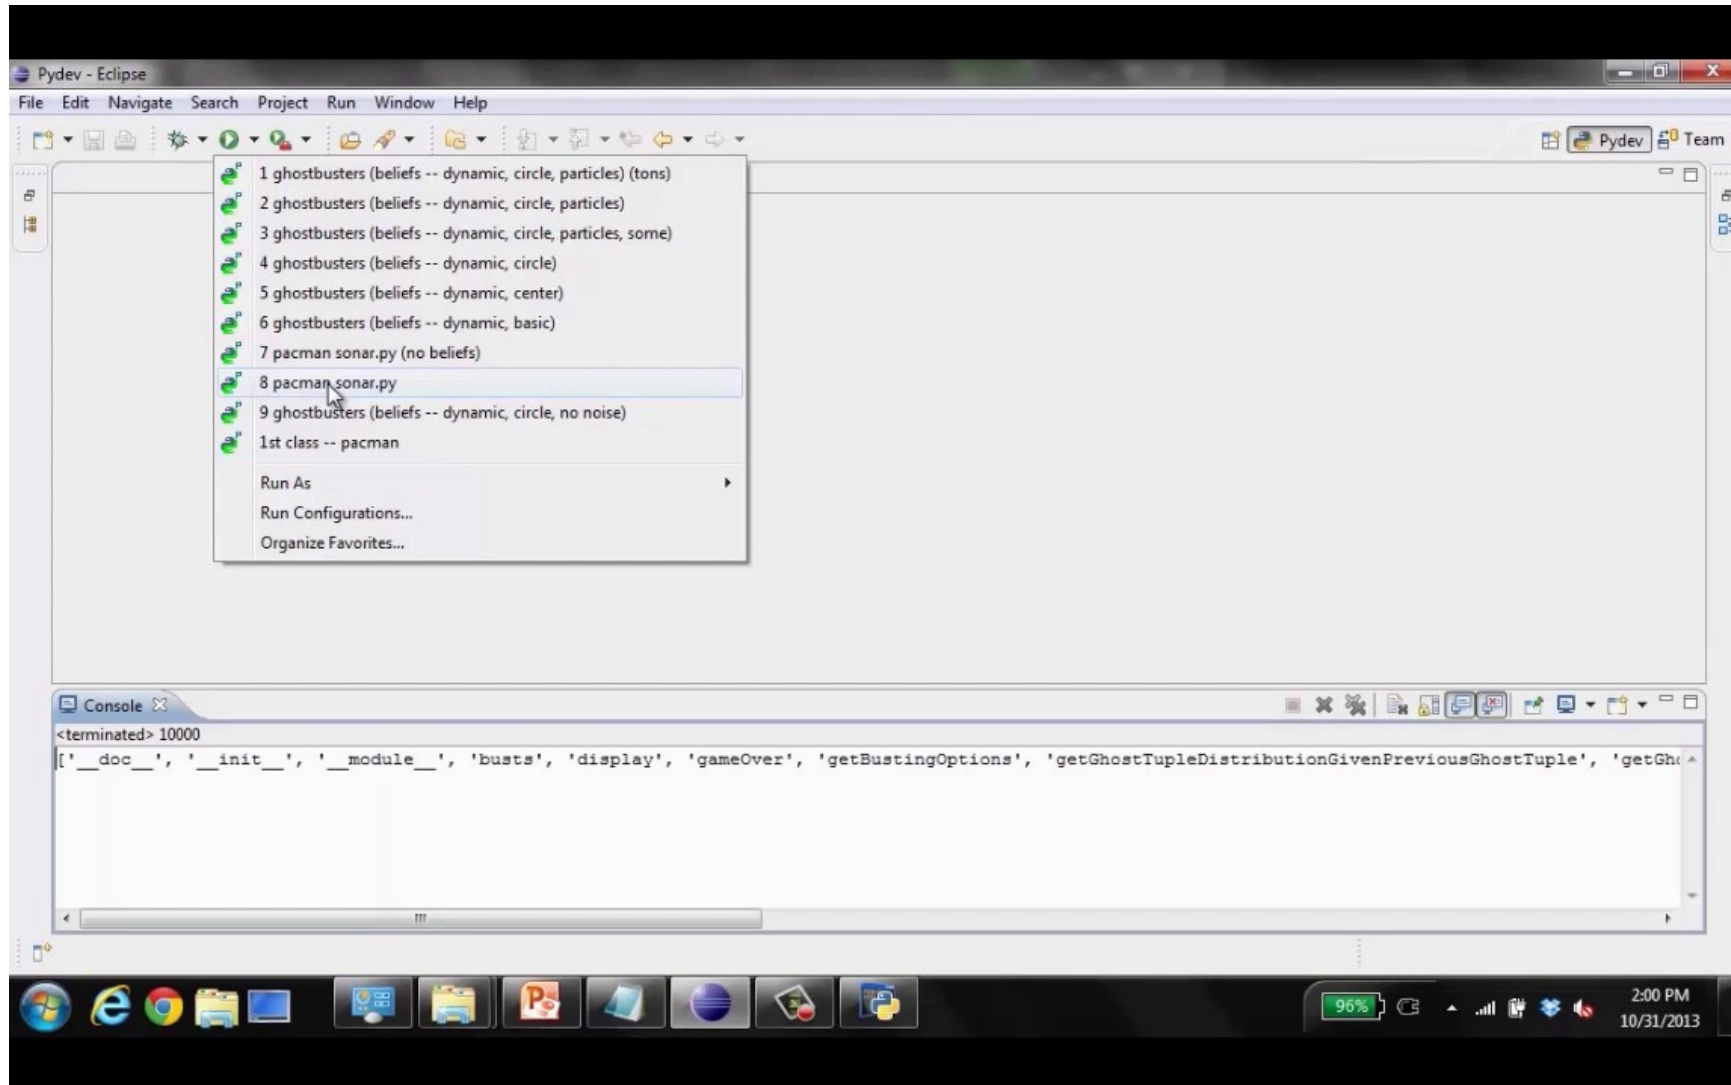

Particle Filtering

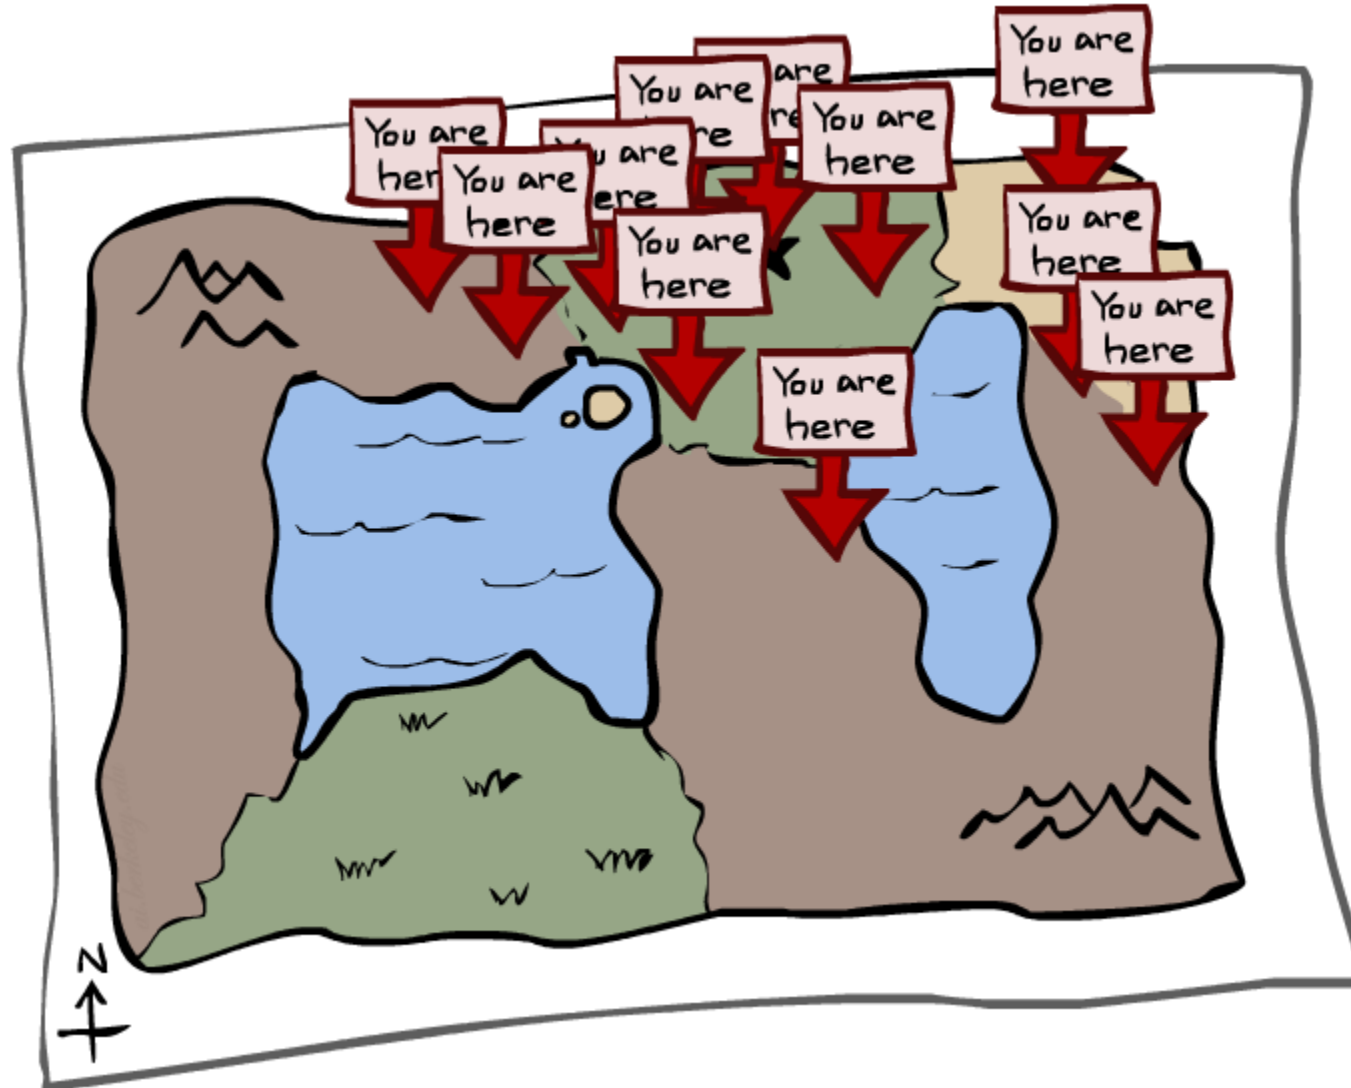

Particle Filtering

- Filtering: approximate solution
- Sometimes $|X|$ is too big to use exact inference
 - $|X|$ may be too big to even store $B(X)$
 - E.g. X is continuous
- Solution: approximate inference
 - Track samples of X , not all values
 - Samples are called particles
 - Time per step is linear in the number of samples
 - But: number needed may be large
 - In memory: list of particles, not states
- This is how robot localization works in practice
- Particle is just new name for sample


0.0	0.1	0.0
0.0	0.0	0.2
0.0	0.2	0.5



	●	
		● ●
	● ●	● ● ● ●

Representation: Particles

- Our representation of $P(X)$ is now a list of N particles (samples)
 - Generally, $N \ll |X|$
 - Storing map from X to counts would defeat the point
- $P(x)$ approximated by number of particles with value x
 - So, many x may have $P(x) = 0$!
 - More particles, more accuracy
- For now, all particles have a weight of 1

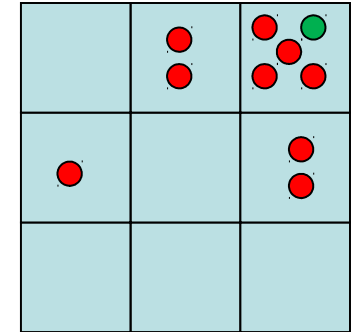

Particles:

(3,3)
(2,3)
(3,3)
(3,2)
(3,3)
(3,2)
(1,2)
(3,3)
(3,3)
(2,3)

Particle Filtering: Elapse Time


- Each particle is moved by sampling its next position from the transition model

$$x' = \text{sample}(P(X'|x))$$

- This is like prior sampling – samples' frequencies reflect the transition probabilities
 - Here, most samples move clockwise, but some move in another direction or stay in place
- This captures the passage of time
 - If enough samples, close to exact values before and after (consistent)


Particles:

(3,3)
(2,3)
(3,3)
(3,2)
(3,3)
(3,2)
(1,2)
(3,3)
(3,3)
(2,3)

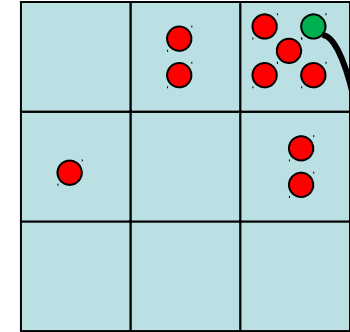

Particles:

(3,2)
(2,3)
(3,2)
(3,1)
(3,3)
(3,2)
(1,3)
(2,3)
(3,2)
(2,2)

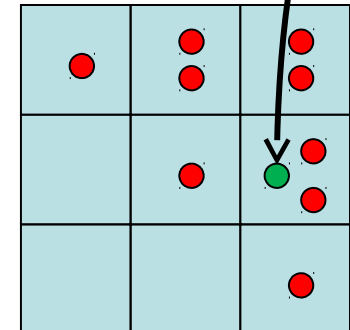

Particle Filtering: Observe

- Slightly trickier:

- Don't sample observation, fix it
- Similar to likelihood weighting, downweight samples based on the evidence


$$w(x) = P(e|x)$$

$$B(X) \propto P(e|X)B'(X)$$

- As before, the probabilities don't sum to one, since all have been downweighted (in fact they now sum to (N times) an approximation of $P(e)$)


Particles:

(3,2)
(2,3)
(3,2)
(3,1)
(3,3)
(3,2)
(1,3)
(2,3)
(3,2)
(2,2)



Particles:

(3,2) w=.9
(2,3) w=.2
(3,2) w=.9
(3,1) w=.4
(3,3) w=.4
(3,2) w=.9
(1,3) w=.1
(2,3) w=.2
(3,2) w=.9
(2,2) w=.4




Particle Filtering: Resample

- Rather than tracking weighted samples, we resample
- N times, we choose from our weighted sample distribution (i.e. draw with replacement)
- This is equivalent to renormalizing the distribution
- Now the update is complete for this time step, continue with the next one


Particles:

(3,2) $w=.9$
(2,3) $w=.2$
(3,2) $w=.9$
(3,1) $w=.4$
(3,3) $w=.4$
(3,2) $w=.9$
(1,3) $w=.1$
(2,3) $w=.2$
(3,2) $w=.9$
(2,2) $w=.4$




(New) Particles:

(3,2)
(2,2)
(3,2)
(2,3)
(3,3)
(3,2)
(1,3)
(2,3)
(3,2)
(3,2)




Recap: Particle Filtering


- Particles: track samples of states rather than an explicit distribution

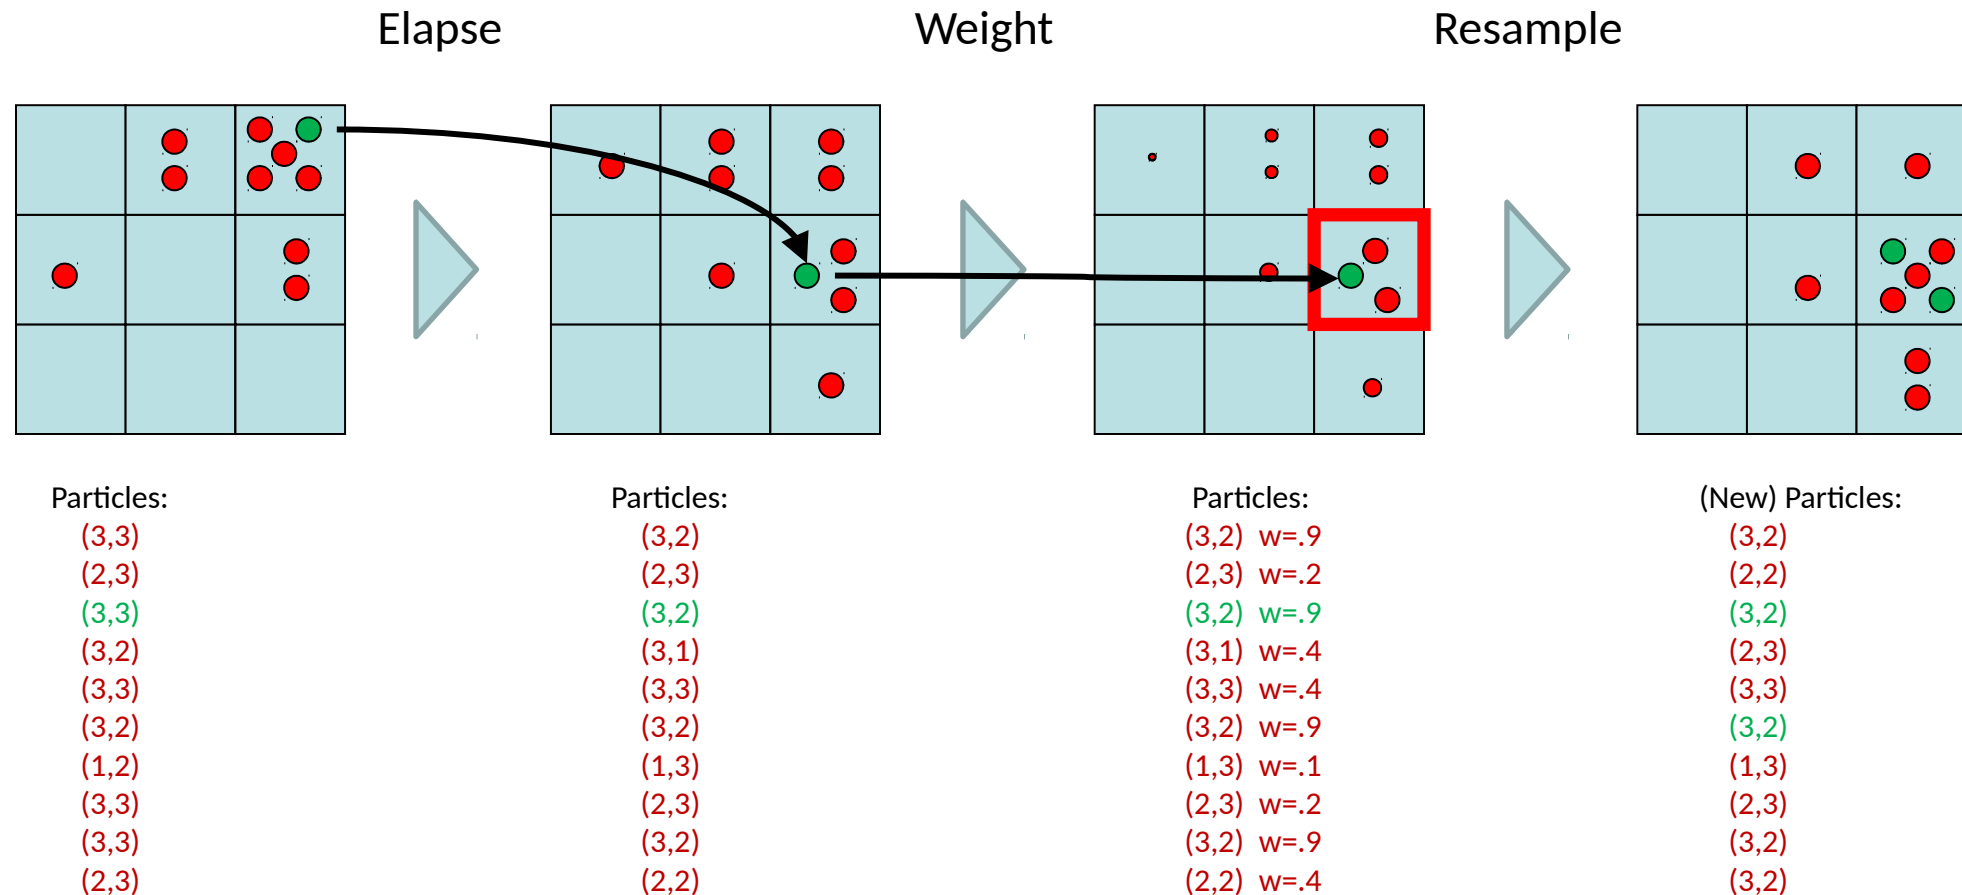

Video of Demo – Moderate Number of Particles

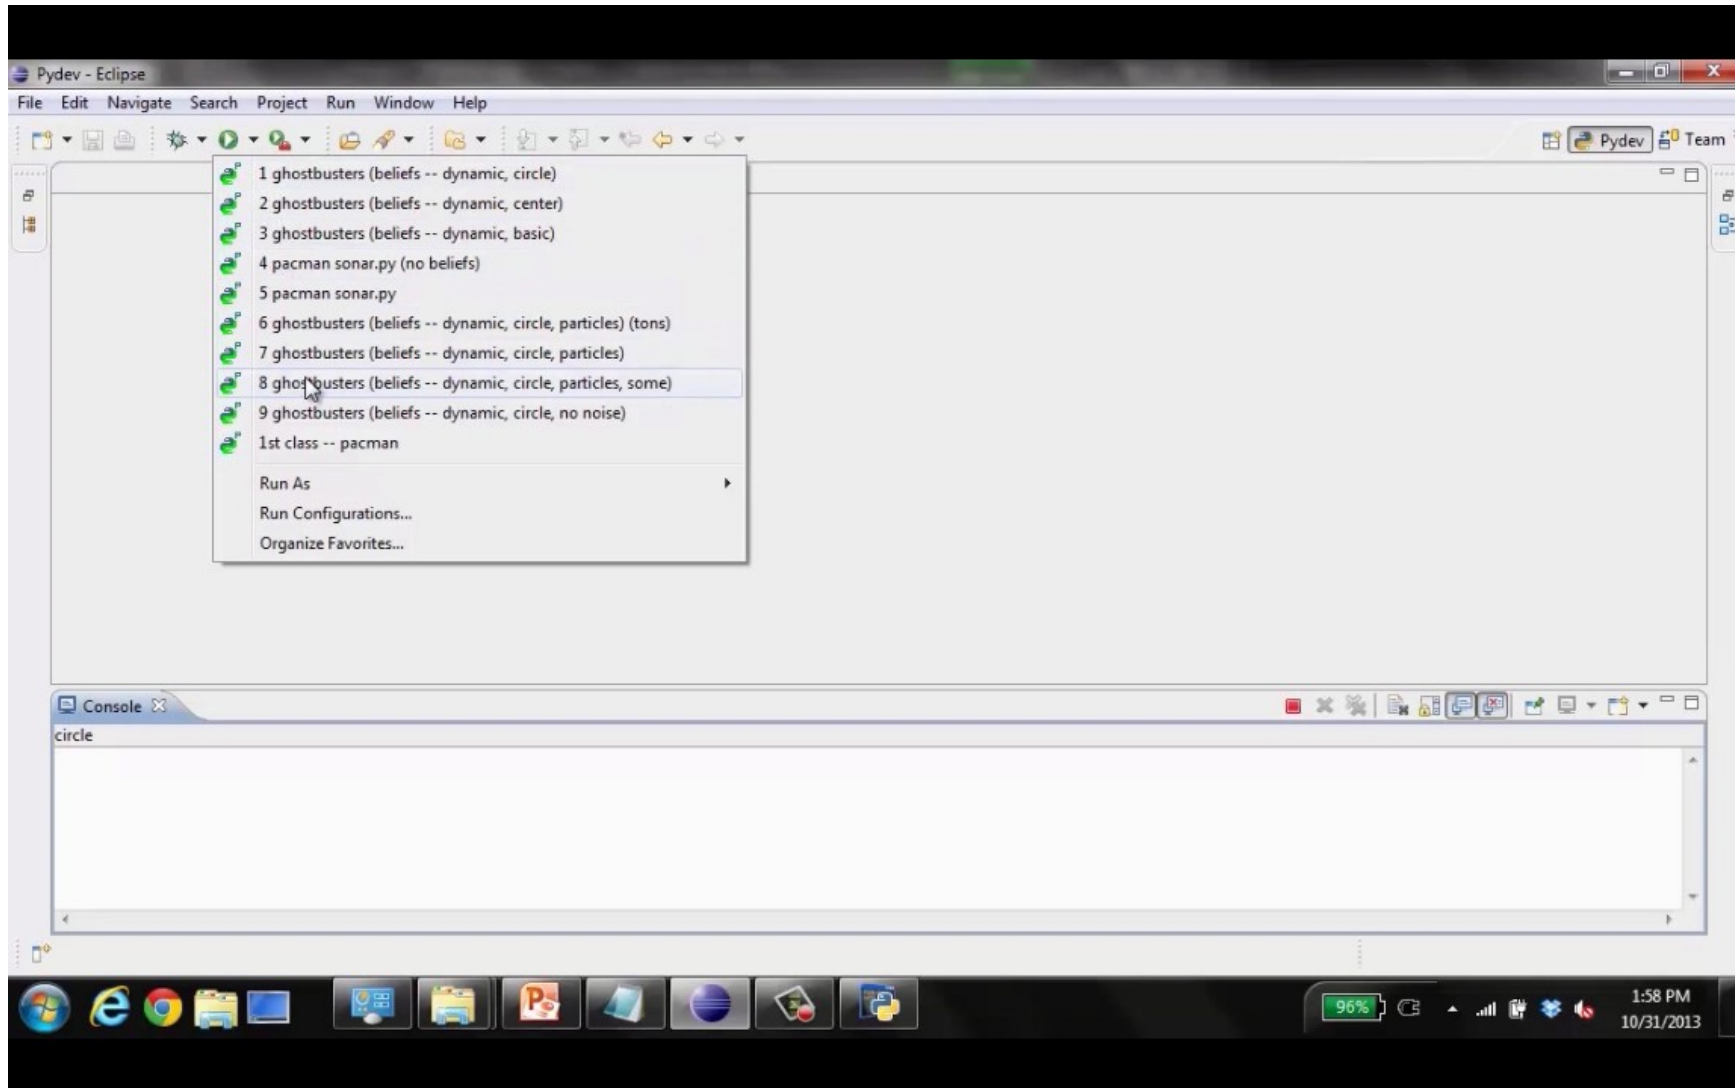

Video of Demo – One Particle


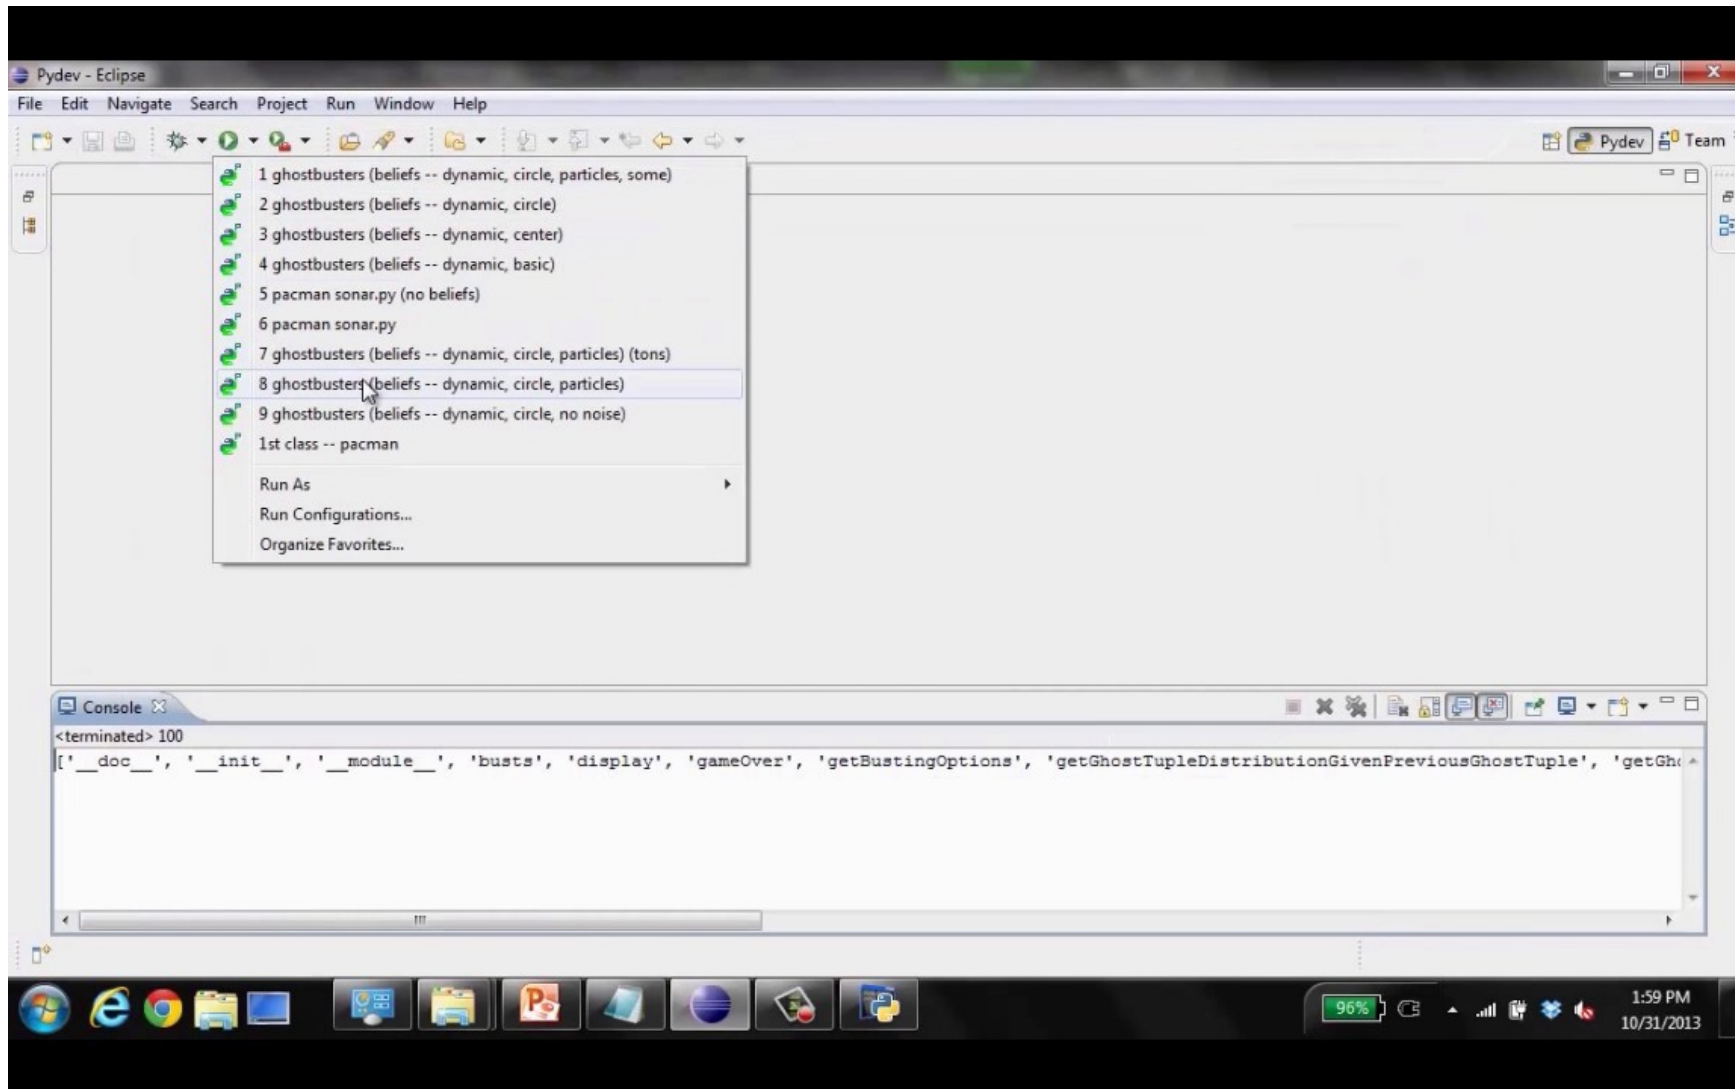


Video of Demo – Huge Number of Particles



Robot Localization

- In robot localization:
 - We know the map, but not the robot's position
 - Observations may be vectors of range finder readings
 - State space and readings are typically continuous (works basically like a very fine grid) and so we cannot store $B(X)$
 - Particle filtering is a main technique

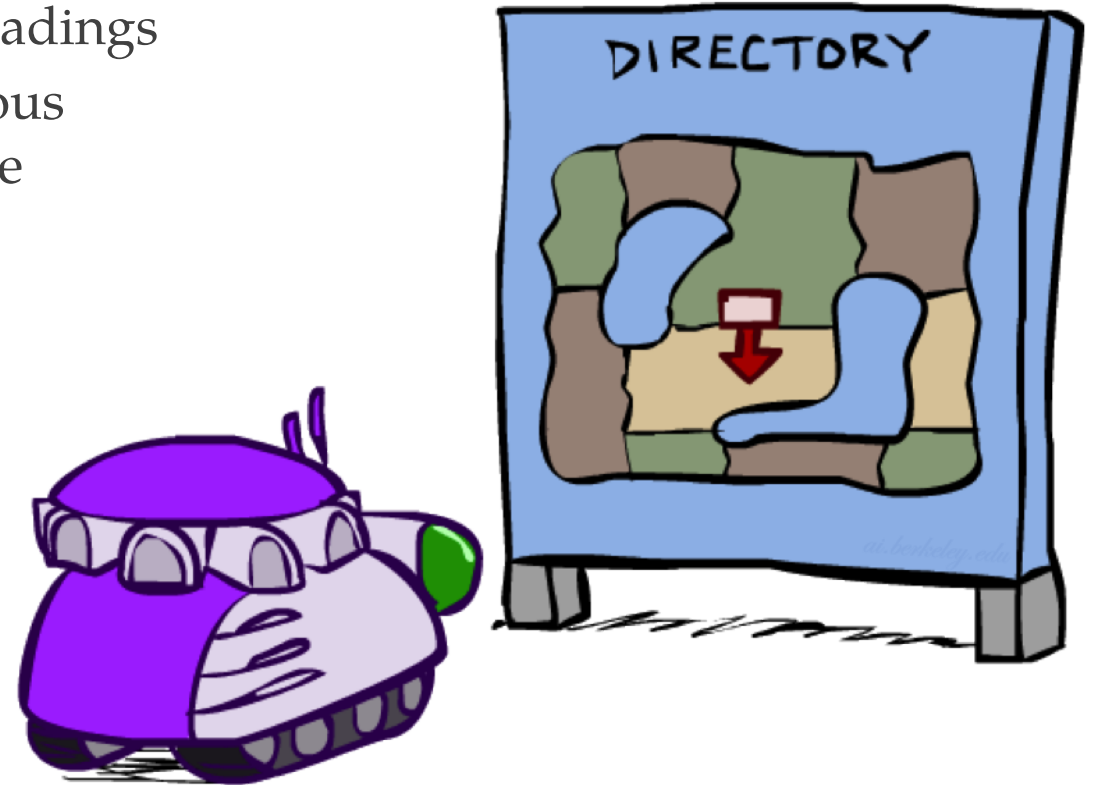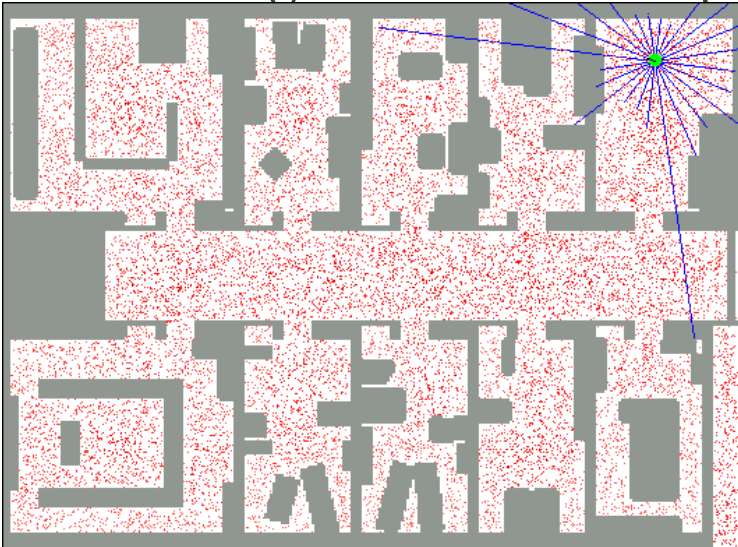


Particle Filter Localization (Sonar)



**Global localization with
sonar sensors**


40000

Particle Filter Localization (Laser)

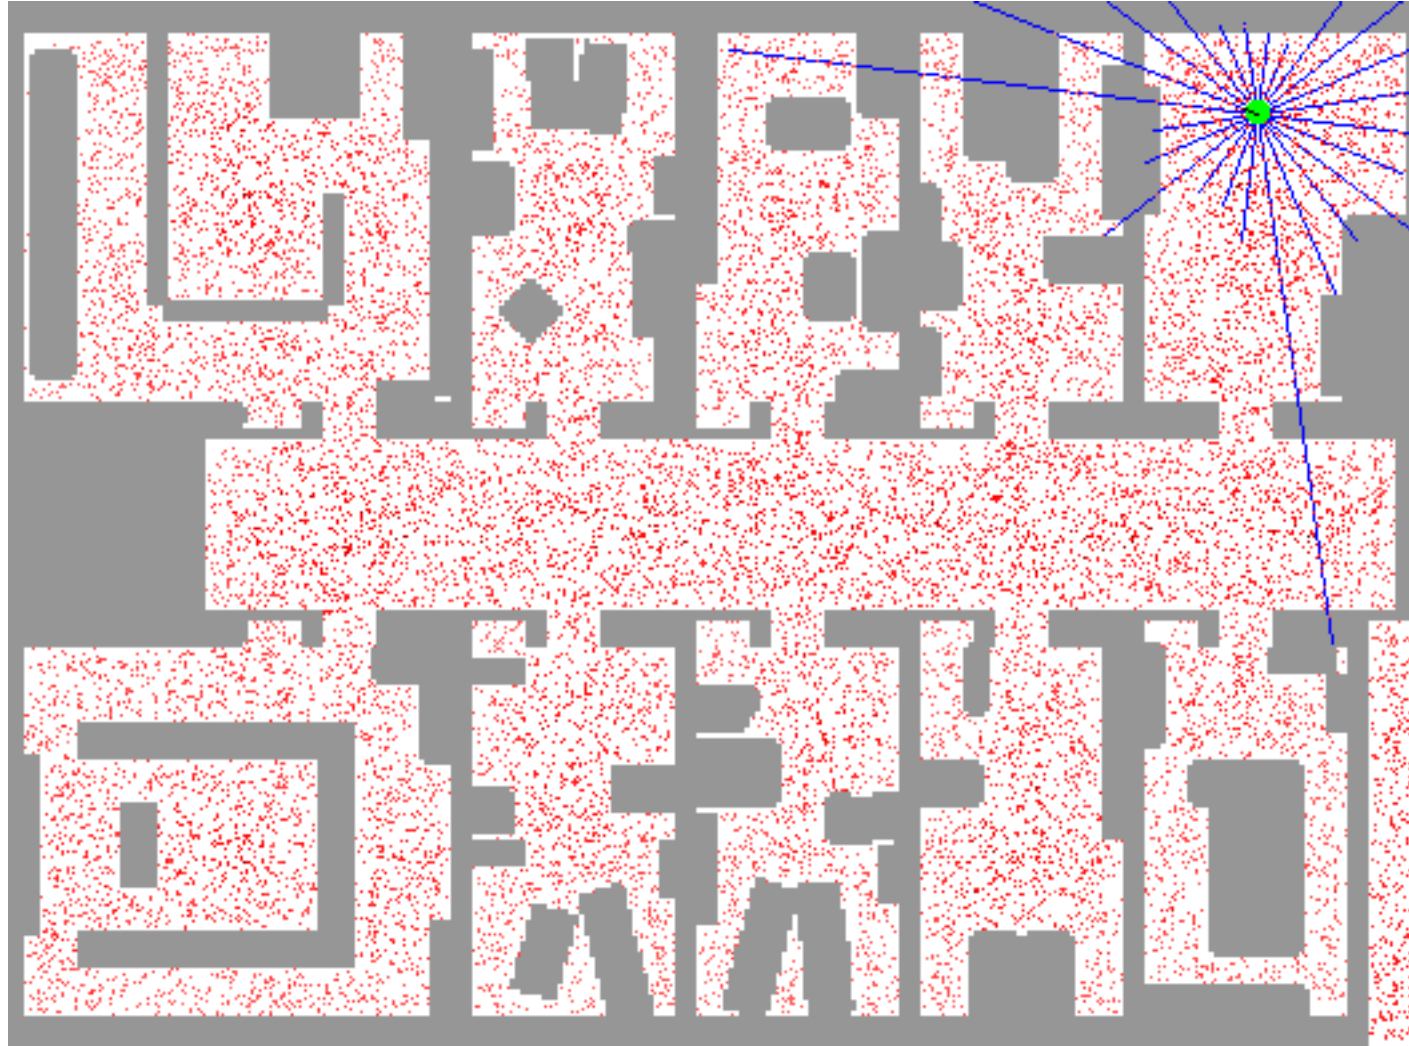


Robot Mapping

- SLAM: Simultaneous Localization And Mapping
 - We do not know the map or our location
 - State consists of position AND map!
 - Main techniques: Kalman filtering (Gaussian HMMs) and particle methods

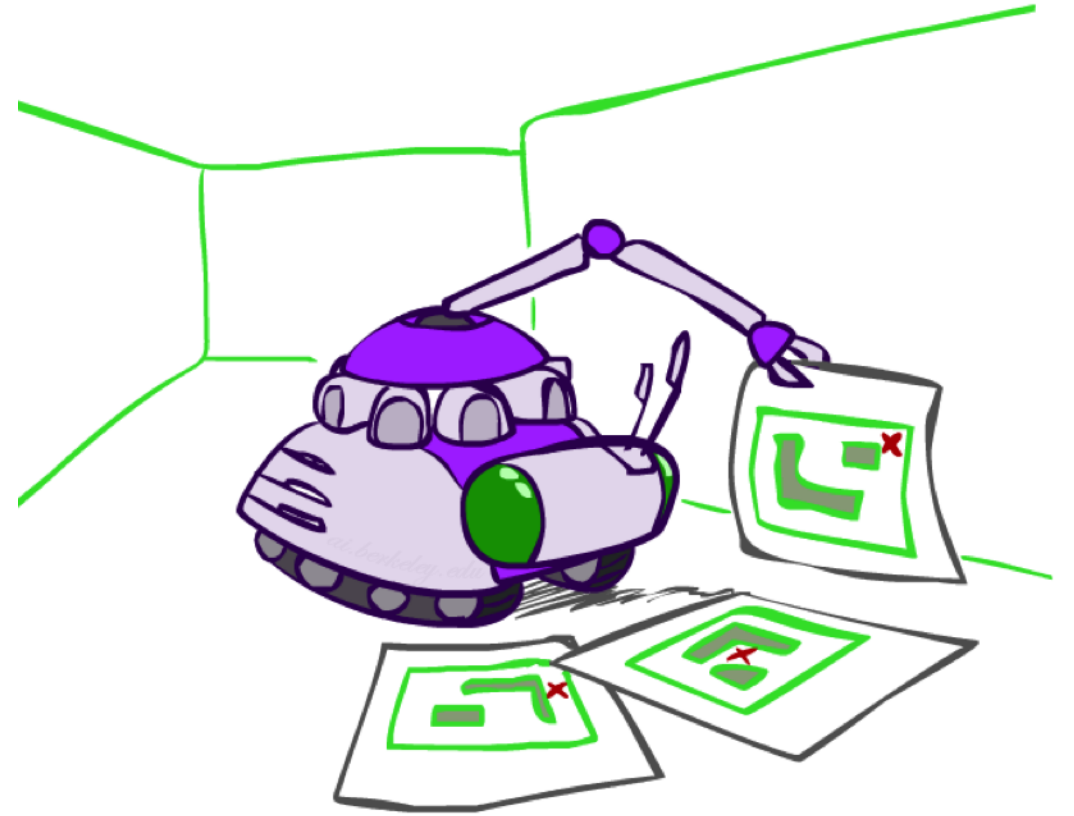

Particle Filter SLAM – Video 1



Particle Filter SLAM – Video 2

