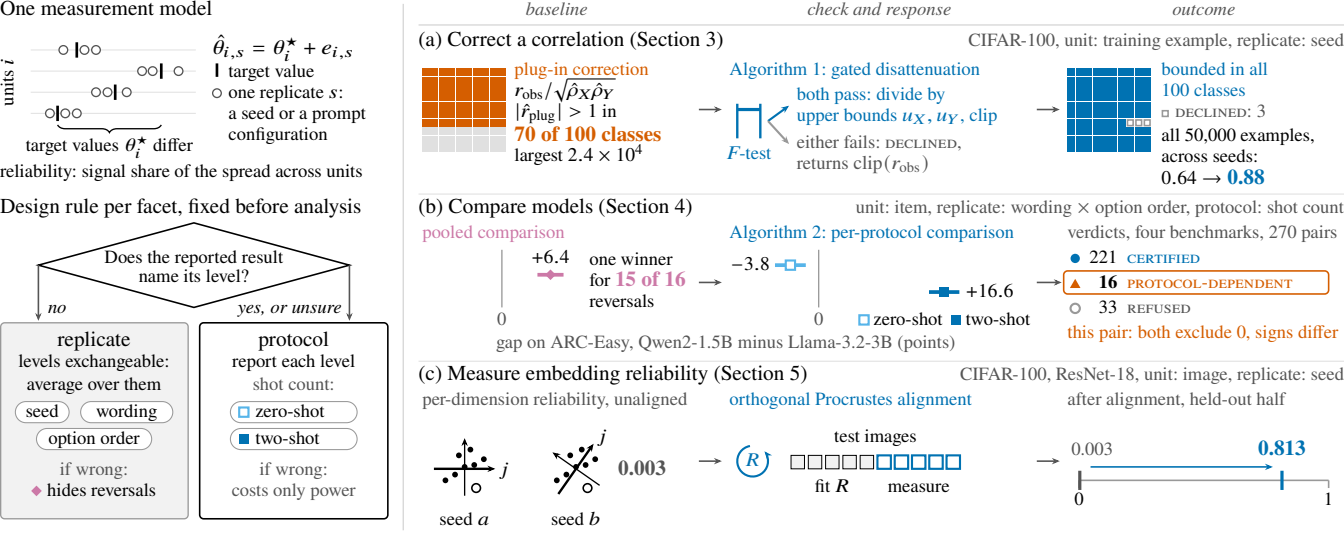

One measurement model
units i
target values $\theta_i^\star$ differ
$\hat{\theta}_{i,s} = \theta_i^\star + e_{i,s}$
target value
one replicate s: a seed or a prompt configuration
reliability: signal share of the spread across units
Design rule per facet, fixed before analysis
Does the reported result name its level?
no
yes, or unsure
replicate
levels exchangeable: average over them
seed
wording
option order
if wrong:
hides reversals
protocol
report each level
shot count:
zero-shot
two-shot
if wrong:
costs only power
baseline
check and response
outcome
(a) Correct a correlation (Section 3)
CIFAR-100, unit: training example, replicate: seed
plug-in correction
$r_{\text{obs}}/\sqrt{\hat{\rho}_X\hat{\rho}_Y}$
$|\hat{r}_{\text{plug}}| > 1$ in
70 of 100 classes
largest 2.4×10^4
Algorithm 1: gated disattenuation
both pass: divide by upper bounds u_X, u_Y, clip
either fails: DECLINED, returns clip(r_{obs})
F-test
bounded in all 100 classes
DECLINED: 3
all 50,000 examples, across seeds:
0.64 → 0.88
(b) Compare models (Section 4)
unit: item, replicate: wording × option order, protocol: shot count
pooled comparison
+6.4
one winner for 15 of 16 reversals
Algorithm 2: per-protocol comparison
−3.8
+16.6
zero-shot
two-shot
0
0
gap on ARC-Easy, Qwen2-1.5B minus Llama-3.2-3B (points)
verdicts, four benchmarks, 270 pairs
221 CERTIFIED
16 PROTOCOL-DEPENDENT
33 REFUSED
this pair: both exclude 0, signs differ
(c) Measure embedding reliability (Section 5)
CIFAR-100, ResNet-18, unit: image, replicate: seed
per-dimension reliability, unaligned
orthogonal Procrustes alignment
after alignment, held-out half
seed a
seed b
0.003
R
test images
fit R
measure
0.003
0.813
0
1