

Embody4D: A Generalist 4D World Model for Embodied AI

Peiyan Tu^{1,2*}, Hanxin Zhu^{3*}, Jingwen Sun^{3,2}, Shaojie Ren^{4,2}, Cong Wang^{4,2},
Jiayi Luo^{5,2}, Xiaoqian Cheng^{3,2}, and Zhibo Chen^{3,2†}

¹ Zhejiang University

² Beijing Zhongguancun Academy

³ University of Science and Technology of China

⁴ Institute of automation, Chinese academy of science

⁵ Beijing University of Aeronautics and Astronautics

Webpage: <https://peiyan.tu.github.io/Embody4D/page.html>

Abstract. World models have made significant progress in modeling dynamic environments; however, most embodied world models are still restricted to 2D representations, lacking the comprehensive multi-view information essential for embodied spatial reasoning. Bridging this gap is non-trivial, primarily due to challenges from severe scarcity of paired multi-view data, the difficulty of maintaining spatiotemporal consistency in generated 3D geometries, and the tendency to hallucinate manipulation details. To address these challenges, we propose Embody4D, a dedicated video-to-video world model for embodied scenarios, capable of synthesizing arbitrary novel views from a monocular video. First, to tackle data scarcity, we introduce a 3D-aware compositional synthesis pipeline to curate a heterogeneous dataset compositing cross-embodiment robotic arms with diverse backgrounds, guaranteeing broad generalization. Second, to enforce geometric stability, we devise an adaptive noise injection strategy; by leveraging confidence disparities across image regions, this method selectively regularizes the diffusion process to ensure strict spatiotemporal consistency. Finally, to guarantee manipulation fidelity, we incorporate an interaction-aware attention mechanism that explicitly attends to the robotic interaction regions. Extensive experiments demonstrate that Embody4D achieves state-of-the-art performance, serving as a robust world model that synthesizes high-fidelity, view-consistent videos to empower downstream robotic planning and learning.

Keywords: World Model · 4D Generation · Embodied AI

1 Introduction

With the rapid advancement of generative models [17, 37], world models are assuming an increasingly pivotal role in the domain of embodied intelligence. By modeling dynamic environments [2], world models facilitate data synthesis [29, 40], policy generation [9, 24, 42], and policy validation [38], thereby establishing a critical foundation for empowering downstream manipulation and

Please take the grapes
out of the bowl.



2D world Model



4D world Model

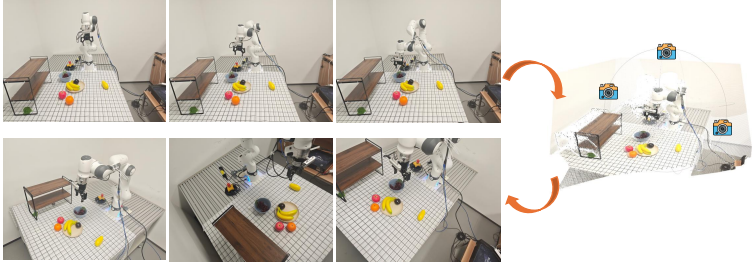


Fig. 1: Introducing 4D World Model. Multiview information is crucial for embodied manipulation and planning, and there is an urgent need for embodied multiview 4D world models to provide comprehensive spatial environmental representations for downstream tasks.

reasoning tasks [27]. However, while the physical world is inherently three-dimensional, most existing world models remain confined to 2D pixel space [13]. This limitation results in impoverished spatial representations, depriving models of the embodied spatial reasoning and comprehensive multi-view information essential for downstream manipulation [20].

To empower world models with spatial intelligence [47], it is imperative to achieve dimensional lifting, as shown in Fig. 1: inferring dynamic, multi-view (4D) [3] representations from monocular embodied videos (2D). Nevertheless, bridging 2D-to-4D gap in embodied scene generation remains a formidable challenge, primarily obstructed by three fundamental bottlenecks: **Severe Data Scarcity**, there is an extreme dearth of paired, multi-view embodied datasets [34, 55], particularly for dynamic sequences that encompass diverse manipulator morphologies and global viewpoints. **Spatiotemporal Inconsistency**, existing paradigms struggle to maintain 3D geometric and temporal coherence across viewpoint transitions [18, 51], frequently yielding severe visual artifacts. **Distortion of Fine-Grained Manipulation**, when synthesizing novel views of complex dynamic interactions, generative models are prone to hallucinating critical physical details [10, 60], such as precise contact points and object deformations. This compromises the physical plausibility of the generated scenes, severely limiting their utility for downstream embodied tasks.

To tackle these challenges, we introduce Embody4D, a video-to-video world model for embodied scenarios capable of synthesizing arbitrary novel views from monocular input. We first establish a **compositional 4D embodied data synthesis** pipeline to composite 30 cross-morphology manipulators from the MuJoCo Menagerie [46] with diverse real-world backgrounds. This heterogeneous data construction significantly enhances Embody4D’s generalization capabilities. To stabilize the generative process, we devise a **confidence-aware adaptive noise injection** strategy. This strategy evaluates the reliability of dynamic point clouds projected onto the target view and selectively applies adaptive noise to the diffusion process, ensuring strict spatiotemporal coherence and crisp textures

during viewpoint transitions. To further guarantee the fidelity of complex interactions, we introduce an **interaction-aware attention** mechanism that leverages segmentation-based motion biases to decouple manipulation dynamics from the background [48], thereby preserving the structural integrity of interacting entities. Finally, extensive experiments across diverse benchmarks demonstrate that Embody4D achieves state-of-the-art performance. Furthermore, real-world robotic evaluations confirm that our model functions as a robust data engine, generating view-consistent video data that significantly bolsters the performance of downstream robotic planning and policy acquisition.

In summary, our key contributions can be concluded as follows:

- We propose Embody4D, a novel 4D world model that synthesizes arbitrary novel views from monocular embodied videos, providing comprehensive multi-view representations.
- We develop a compositional synthesis pipeline that combines cross-morphology manipulators with real-world backgrounds to create a diverse dataset, addressing data scarcity.
- We design a confidence-aware adaptive noise injection strategy that modulates noise intensity based on regional confidence levels, ensuring rigorous spatiotemporal consistency.
- We introduce an interaction-aware attention mechanism using motion inductive biases to prioritize dynamic regions, preserving the physical fidelity of complex manipulations.
- We achieve SOTA performance across benchmarks and demonstrate Embody4D’s effectiveness in empowering downstream robotic planning and policy learning. (Our code and models will be made publicly available at [github](https://github.com).)

2 Related Works

2.1 4D Generation

Video-to-video 4D generation aims to synthesize temporally and spatially consistent dynamic 3D scenes from monocular videos, providing comprehensive environmental representations for embodied intelligence and content creation [39]. Nevertheless, the advancement of this domain is significantly bottlenecked by the severe scarcity of training data. [30, 53]. Early approaches [56] like DimensionX [44] employs LoRA fine-tuning to extend single-view videos into multi-view sequences but lacks the capability for precise viewpoint control. To mitigate data and camera control limitations, recent “warp-then-inpaint” paradigms [36], represented by Trajectory Crafter [58], construct pseudo-4D data with camera information from monocular videos to serve as generation conditions. Conversely, ReCamMaster [4] tackles these issues by synthesizing 4D data via game engines and optimizing the camera information injection mechanism. Inspired by these advancements, to address the scarcity of 4D data, we leverage the MuJoCo simulator to construct a dataset exhibiting high 4D consistency across diverse scenes and robotic arm morphologies. Furthermore, we adopt and refine the “warp-then-inpaint” paradigm to achieve enhanced generation quality.

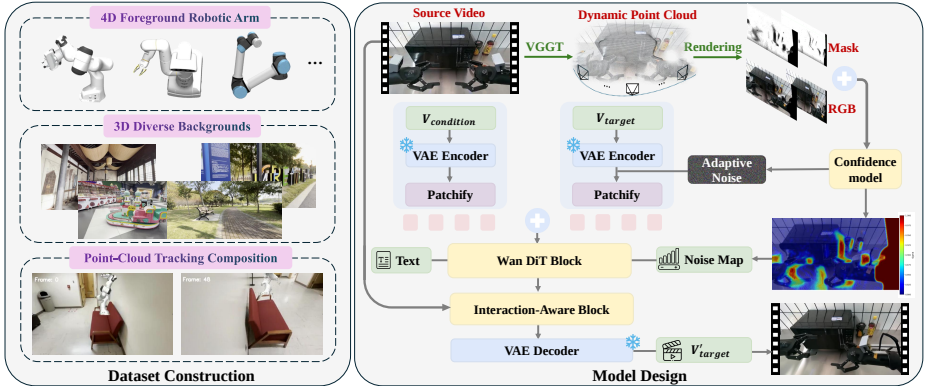


Fig. 2: Overview of Embody4D. We construct paired embodied training videos in 3D via compositional synthesis and process them with a “warp-then-inpaint” architecture. The source video is reconstructed into a point cloud and projected to the target view to produce warped RGB plus occupancy masks; these are concatenated and passed to a confidence module that adaptively injects different noise levels. Finally, a backbone model with an interaction-aware block outputs the target-view video with highly consistent manipulation details.

2.2 Embodied World Models

World modeling stands as a cornerstone of robotics, endowing systems with the capacity to comprehend, encode, and forecast the evolution of dynamic scenes [11]. As the core of interactive environment construction, 3D and 4D generation techniques are critical for bridging the gap between perception and decision-making, synthesizing high-fidelity dynamic scenes for embodied planning [28].

Most existing embodied world models are confined to single-view video prediction [63]. While recent studies acknowledge the necessity of multi-view perception and support generating synchronized head and wrist views [26, 33, 57], they typically rely on fixed multi-view reference frames during inference, thus falling short of flexible, arbitrary viewpoint generation. Furthermore, representative works in 4D embodied world modeling, such as TesserAct [61], primarily focus on augmenting single-view generation with depth and normal maps for point cloud reconstruction. It fails to fully exploit the potential of 4D models for novel view completion and is severely restricted by limited robotic arm diversity. In this work, we present a novel embodied 4D generation model with exceptional generalization across diverse robotic arm morphologies. It is capable of directly synthesizing embodied videos from arbitrary viewpoints given a monocular video, providing robust support for downstream planning tasks.

3 Preliminaries: Flow Matching Framework

Flow Matching [32] provides a simulation-free approach for training continuous normalizing flows to model high-dimensional data distributions [14]. Unlike diffusion-based methods that implicitly define the generative process via

stochastic noise removal, Flow Matching explicitly regresses a vector field that transports a simple prior distribution p_0 (e.g., Gaussian noise) to the complex data distribution p_1 (e.g., video latents) via an Ordinary Differential Equation (ODE) [43]. Specifically, the Rectified Flow formulation [35,49], which constructs the transport path as a straight line. By minimizing the curvature of the generative trajectory, this formulation allows for stable and efficient coupling between noise and data.

Formally, let $\mathbf{x}_1$ denote the target video latent representation and $\mathbf{x}_0 \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ be the initial noise drawn from a standard Gaussian distribution. The forward process is defined as a linear interpolation between noise and data:

$$\mathbf{x}_t = t\mathbf{x}_1 + (1 - t)\mathbf{x}_0, \quad t \in [0, 1], \quad (1)$$

where t represents the continuous timestep. This linear formulation implies a constant ground-truth velocity field $\mathbf{v}_t$ over time:

$$\mathbf{v}_t = \frac{d\mathbf{x}_t}{dt} = \mathbf{x}_1 - \mathbf{x}_0. \quad (2)$$

A neural network $u_\theta(\mathbf{x}_t, t, \mathbf{c})$ [41], conditioned on context $\mathbf{c}$ (e.g., text embeddings), is parameterized to regress this velocity field. The training objective minimizes the expected mean squared error between the predicted and ground-truth velocity:

$$\mathcal{L}_{\text{FM}}(\theta) = \mathbb{E}_{t \sim p(t), \mathbf{x}_0, \mathbf{x}_1} \left[\|u_\theta(\mathbf{x}_t, t, \mathbf{c}) - \mathbf{v}_t\|_2^2 \right]. \quad (3)$$

Minimizing this objective aligns the learned vector field with the straight-line path between $\mathbf{x}_0$ and $\mathbf{x}_1$, which theoretically guarantees efficient sampling and improved temporal consistency in video generation tasks.

4 Methodology

4.1 Compositional 4D Embodied Data Synthesis

Current 4D generation is bottlenecked by data scarcity [39], particularly the absence of global multi-view observations in the embodied domain. Existing datasets are largely confined to static head and dynamic wrist perspectives [7, 45], which are inadequate for robust generation. Moreover, the homogeneity of robotic arms in these datasets severely limits cross-embodiment generalization.

To overcome this limitation and enable generalized 4D generation for multiple robotic manipulators, we present a simple yet effective strategy for embodied 4D data composition. Specifically, as shown in Fig. 2 (left), we first selected 30 embodied models from the MuJoCo Menagerie [59], covering humanoid robots, single-arm, dual-arm manipulators, and small grippers. For foreground generation, we controlled the models within the MuJoCo environment to execute random movements within a defined range, starting from their default poses. The background data was constructed from the DL3DV dataset [31] using a

random sampling strategy: image pairs were initially filtered from fixed-interval candidates by minimizing camera translation, and subsequently refined using GPT-4o [1] to verify center visibility in subsequent frames, ensuring high temporal consistency. To ensure high-fidelity 4D consistency, we configure dual virtual cameras in MuJoCo that rigorously align with the extrinsic parameters of background image pairs sourced from DL3DV, capturing the full motion of the robotic arm to obtain view-consistent foreground-background data. For the primary reference view, the robotic arm can be composited into the background with arbitrary rotation and scaling. In addition, for the second view, a more sophisticated compositing strategy is required to strictly maintain 4D consistency with the reference view. Figure To ensure geometric consistency between the synthesized foreground and the real-world background, we employ a **3D anchor tracking** strategy. Specifically, we leverage the VGGT model [50] to reconstruct the scene geometry and obtain per-pixel depth maps. To robustly determine the robotic arm’s position in the target viewpoint (the second perspective), we employ a multi-frame consensus approach. Let $\mathcal{I}_{src}$ denote the first 49 frames of the source video. We randomly sample a subset of indices $\mathcal{S} \subset \mathcal{I}_{src}$ with $|\mathcal{S}| = 5$.

For each sampled frame $k \in \mathcal{S}$, we retrieve the depth z_k of the robotic arm’s center $\mathbf{u}_k$ and lift it to 3D space using the intrinsic matrix $\mathbf{K}$:

$$\mathbf{P}_k = z_k \mathbf{K}^{-1} \tilde{\mathbf{u}}_k, \quad (4)$$

where $\tilde{\mathbf{u}}_k$ is the homogeneous coordinate. We then directly obtain the robotic arm’s position in the rendered coordinate system of VGGT by applying the relative camera ego-motion $(\mathbf{R}, \mathbf{T})$:

$$\mathbf{P}_{k \rightarrow t'} = \mathbf{R} \mathbf{P}_k + \mathbf{T}. \quad (5)$$

To mitigate depth estimation noise, we compute the centroid of these transformed points to yield a robust 3D anchor $\bar{\mathbf{P}}_{t'}$ in the target view:

$$\bar{\mathbf{P}}_{t'} = \frac{1}{|\mathcal{S}|} \sum_{k \in \mathcal{S}} \mathbf{P}_{k \rightarrow t'}. \quad (6)$$

Finally, we project this 3D centroid $\bar{\mathbf{P}}_{t'}$ back onto the 2D image plane using the camera intrinsic matrix to obtain the precise center coordinate $\mathbf{u}_{t'}$ for the target frame:

$$\tilde{\mathbf{u}}_{t'} \sim \mathbf{K} \bar{\mathbf{P}}_{t'}. \quad (7)$$

The resulting $\mathbf{u}_{t'}$ serves as the geometric anchor for aligning the robotic arm in the new perspective.

4.2 Confidence-aware Adaptive Noise Injection Strategy

Most existing 4D generation methods overlook the inherent spatial variations in reliability when applying priors warped from reconstructed dynamic point clouds (from source to target views) [36, 58, 62]. In low-confidence regions, such as occlusions and boundaries, over-constraining the model with inaccurate warp priors

encodes flawed spatial mappings, creating persistent artifacts that compromise the restorative capacity of the generation process. Conversely, in high-confidence visible regions, the uniform sampling process of standard diffusion models introduces unnecessary stochastic fluctuations, which degrades sharp textures and rigid structures, thereby undermining consistency.

To address this, we introduce a confidence-aware adaptive noise injection optimization mechanism that performs spatial scheduling based on the reliability of different warped regions. Specifically, it applies lower noise levels to high-confidence areas to ensure texture locking, while injecting higher noise into low-confidence regions to grant greater generative freedom. Through this confidence-driven differentiated processing, we successfully balance the structural authenticity of the robotic arm with the overall continuity of the visual generation.

Firstly, we introduce a lightweight confidence estimation module designed to capture an accurate confidence distribution. The module operates on two inputs obtained via point cloud reprojection: the warped latent features $\mathbf{Z}_{\text{warp}}$ and the geometric mask $\mathbf{M}_{\text{geo}}$. To mitigate the boundary information loss caused by naive resizing, as well as the domain gap introduced when encoding binary masks using an RGB-trained VAE, we employ a network f to synthesize a continuous, multi-channel confidence map $\mathbf{C}$:

$$\mathbf{C} = f(\mathbf{Z}_{\text{warp}}, \mathbf{M}_{\text{geo}}). \quad (8)$$

Given the confidence map $\mathbf{C}$, we apply spatially adaptive initial noise with varying intensities across regions of different confidence levels. Specifically, we define the location-dependent spatial noise schedule as:

$$\boldsymbol{\Sigma}_t = [\sigma_{\text{low}} + \mathbf{C} \odot (\sigma_{\text{high}} - \sigma_{\text{low}})] \cdot t, \quad (9)$$

where σ_{low} and σ_{high} control the flow behavior: σ_{low} allows maximum stochasticity in low-confidence (unknown) regions to encourage generative diversity, while σ_{high} enforces minimum noise in high-confidence (known) regions to preserve structural fidelity.

Building upon the foundational Flow Matching formulation defined in Sec. 3, we construct the flow state $\mathbf{x}_t$ as a convex combination of the clean target $\mathbf{x}_1$ and Gaussian noise $\mathbf{x}_0$:

$$\mathbf{x}_t = (1 - \boldsymbol{\Sigma}_t) \odot \mathbf{x}_0 + \boldsymbol{\Sigma}_t \odot \mathbf{x}_1, \quad \text{where } \mathbf{x}_0 \sim \mathcal{N}(\mathbf{0}, \mathbf{I}). \quad (10)$$

We optimize the flow matching backbone $\mathbf{v}_\theta$ to regress the vector field conditioned on the flow state $\mathbf{x}_t$, time step t , and the adaptive confidence map $\mathbf{m}$. The supervision is driven by a spatially modulated target velocity, defined as $\mathbf{v}_{\text{target}} = \mathbf{x}_1 - \mathbf{x}_0$. To simultaneously refine confidence estimation and guide trajectory generation, we formulate the total objective as a joint optimization of the flow matching error and a feature-level auxiliary loss:

$$\begin{aligned} \mathcal{L}_{\text{aux}} &= \lambda_1 \|\mathbf{C} - \text{resize}(\mathbf{M}_{\text{geo}})\|_2^2 + \lambda_2 \|\mathbf{C} - |\mathcal{E}(\mathbf{x}_{\text{gt}}) - \mathcal{E}(\mathbf{x}_{\text{warp}})|\|_2^2, \\ \mathcal{L} &= \mathbb{E}_{t \sim p(t), \boldsymbol{\Sigma}_t, \mathbf{x}_0, \mathbf{x}_1, \mathbf{x}_{\text{warp}}, \mathbf{c}} [\|\mathbf{v}_{\theta, t} - \mathbf{v}_{\text{target}}\|_2^2] + \mathcal{L}_{\text{aux}}, \end{aligned} \quad (11)$$

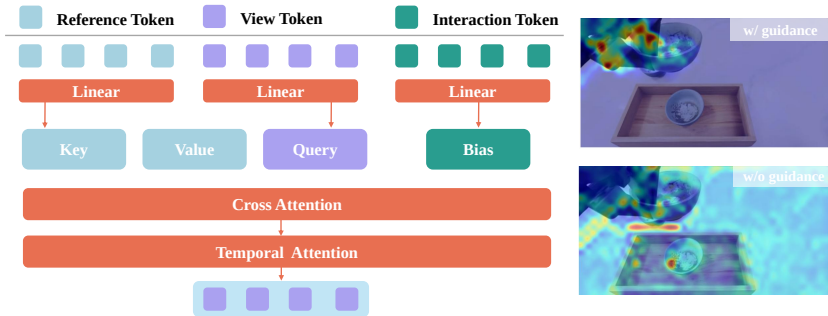


Fig. 3: Interaction-Aware Block. This module projects Q, K, V and interaction biases via linear layers. The bias, derived from foreground masks, is injected into the guided path to prioritize manipulation regions, ensuring geometric consistency across viewpoint changes (qualitative comparison in heatmaps).

where $\mathcal{E}(\cdot)$ denotes a pre-trained feature encoder from the Wan model and $\text{resize}(\cdot)$ refers to bilinear interpolation. The auxiliary loss $\mathcal{L}_{\text{aux}}$ establishes a critical equilibrium between pixel-level geometric consistency and feature-level alignment within the VAE-encoded latent space, where λ_1 and λ_2 are learnable coefficients optimized during training. Through this unified end-to-end optimization, the model successfully internalizes the confidence estimation capability, enabling it to adaptively modulate noise injection levels. This synergy ensures an optimal generative balance, preserving high-fidelity structural details while maintaining the restorative flexibility necessary for visual synthesis.

4.3 Embodied Interaction-Aware Attention

For the task of embodied 4D generation, the dynamic evolution of the robotic arm and interacting objects constitutes the core of visual semantics. To address the geometric distortions prone to occurring in high dynamic regions during novel view synthesis, we propose a **Embodied Interaction-Aware Attention** tailored for embodied settings. Moving beyond traditional approaches that process global features indiscriminately, this module introduces segmentation models as an explicit motion inductive bias to enforce the attention mechanism to redistribute attention specifically toward the high-dynamic interaction regions [5]. This strategy effectively decouples the interaction foreground from background noise and anchors the synthesis in motion priors, thereby preserving the spatiotemporal integrity of interaction entities across drastic viewpoint transformations.

To compensate for the absence of object manipulation in our synthetic data, we incorporate a monocular robotic manipulation dataset and construct pseudo-4D pairs via a warp-then-inpaint pipeline. We adopt an adaptive strategy for foreground mask extraction. For simulation or stable sequences, we utilize MemFlow [12] to estimate optical flow. Conversely, for real-world footage where camera jitter introduces noise, we leverage SAM3 [8] for robust video object

segmentation. Both approaches ensure the generation of temporally consistent masks that encompass the robotic arm and manipulated objects. These foreground masks trace the spatiotemporal trajectory of both the robotic arm and the manipulated objects, preserving their geometric consistency. This explicitly indicates which regions of the reference video the model should focus on during generation. For our synthetic data, the arm foreground is directly accessible from the rendered scenes, providing clear supervision on the motion-relevant regions.

Upon extracting the interaction region masks, we enhance the perception of critical robotic manipulation components by reshaping the distribution of attention maps. This explicitly steers the model’s focus toward these regions, ensuring geometric consistency under dynamic interaction states. As illustrated in Fig. 3, we translate the extracted spatiotemporal interaction priors into an explicit inductive bias. Given the query $\mathbf{Q}$ derived from the synthesized features, along with the key $\mathbf{K}$ and value $\mathbf{V}$ from the reference features. Specifically, we decompose the attention mechanism into two parallel paths: a global context path and an interaction-guided path. The global path serves as a foundational context representation to maintain background consistency, employing standard scaled dot-product attention without spatial bias. We denote its output features as $\mathbf{O}_{\text{global}}$:

$$\mathbf{O}_{\text{global}} = \text{Softmax} \left(\frac{\mathbf{Q}\mathbf{K}^\top}{\sqrt{d_k}} \right) \mathbf{V}, \quad (12)$$

where d_k denotes the feature dimension. Simultaneously, to enhance the modeling of manipulation regions, the interaction-guided path introduces a boost bias matrix $\mathbf{B}$ derived from the embodied foreground mask $\mathbf{M}$. By applying a strength factor λ , we explicitly inject high response values into the attention map to capture fine-grained motion dynamics:

$$\mathbf{B}_{i,j} = \begin{cases} \lambda, & \text{if } \mathbf{M}_{i,j} = 1 \\ 0, & \text{otherwise} \end{cases} \quad (13)$$

Consequently, we obtain the guided output $\mathbf{O}_{\text{guided}}$:

$$\mathbf{O}_{\text{guided}} = \text{Softmax} \left(\frac{\mathbf{Q}\mathbf{K}^\top}{\sqrt{d_k}} + \mathbf{B} \right) \mathbf{V}. \quad (14)$$

Finally, we integrate these two paths using a curriculum learning strategy. A dynamic coefficient α governs the fusion, allowing the model to progressively shift focus from global structure to embodied interaction details during training, thereby effectively preserving the geometric integrity of manipulated entities:

$$\mathbf{O} = (1 - \alpha) \cdot \mathbf{O}_{\text{global}} + \alpha \cdot \mathbf{O}_{\text{guided}}. \quad (15)$$

5 Experiments

5.1 Experimental Setups

Dataset. To train this model, we initially utilize a curated dataset of 23K 4D samples synthesized via foreground-background composition, enabling the model

to learn diverse robotic arm morphologies and enhancing its 4D consistency. Subsequently, we leverage 24K monocular embodied data uniformly sampled from five datasets (AGIBOT [7], Rh20t [15], Robset [6], Bc-z [23], and Interndata-A1 [45]) to learn real-world robotic arm interactive operations.

We evaluate our method on a test set of 120 monocular videos, consisting of 70 samples synthesized via our composition-based approach to include diverse robotic arms, and 50 real-world samples curated from various open-source datasets. Each video contains 49 frames with a resolution of 384×672 .

Implementation. We fine-tune Embody4d based on the pretrained Wan2.1-T2V-1.3B [49] architecture. During training, the frame resolution is fixed at 384×672 , and the video length is set to 49 frames. Both training stages use a batch size of 4 and are conducted on 8 A100 GPUs. We apply vgg1 [50] as the reconstruction foundation model for estimating camera parameters and depth maps. Please refer to the supplementary material for more details.

Baselines and Metrics. For a fair comparison, we evaluate our approach against several state-of-the-art baselines, including camera-controlled video generation models and point cloud-rendered multi-view generation models, i.e., TrajectoryCrafter [58], ReCamMaster [4], Ex-4D [19], and Reangle-A-Video [25].

For video generation evaluation, we strictly follow the VBench [21] protocol, reporting scores across multiple dimensions: Subject Consistency, Background Consistency, Temporal Flickering, Motion Smoothness, and Imaging Quality. In addition, we evaluated the Visual Quality metric on the Q-Align [54] benchmark. Furthermore, to assess the practical utility of our generated data, we conduct real-robot experiments. Specifically, we use videos generated by different models to fine-tune the current state-of-the-art $\pi_{0.5}$ VLA policy [16, 22]. The final grasping success rate on the real robot is used as the primary metric to quantify generation quality through downstream task performance. For real-world experiments, we compare our method with two strong generative baselines, TrajectoryCrafter and ReCamMaster, which achieve relatively high visual quality among existing methods.

5.2 Comparison With Other Methods

Qualitative results. We first compare the visual quality of our method with existing baselines in Fig. 4, where the last column presents the novel-view videos generated by our approach. The results show that ReCamMaster often produces noticeable artifacts and geometric distortions when the viewpoint changes significantly, as the viewpoint transformation is driven solely by camera extrinsic parameters without leveraging geometric priors from source video point clouds. Both Reangle-A-Video and Ex-4D rely on LoRA-based fine-tuning during training, which may result in incomplete hole filling and degraded visual quality in challenging regions. In addition, the previous state-of-the-art TrajectoryCrafter exhibits limitations in fine-grained embodied scenes, frequently generating hallucinated structures in robotic arms and grippers. In contrast, our method generates high-fidelity novel-view embodied videos with strong 4D consistency, demonstrating clear advantages over prior approaches.

Table 1: Quantitative comparisons. **Bold:** Best. Underline: Second Best. Our method consistently outperforms previous solutions on both VBench and Q-Align

Method	VBench $\uparrow$					Q-Align $\uparrow$
	Subject	Background	Temporal	Motion	Imaging	Visual Quality
ReCamMaster [4]	0.8981	0.8976	<u>0.9717</u>	0.9841	0.5914	3.4938
Ex-4D [19]	0.8088	0.8906	0.9213	0.9742	0.5732	2.8585
Reangle-A-Video [25]	0.9152	0.9224	0.9711	0.9879	<u>0.6437</u>	3.6916
TrajectoryCrafter [58]	<u>0.9202</u>	<u>0.9388</u>	0.9714	<u>0.9911</u>	0.6257	<u>3.8954</u>
Ours	0.9477	0.9408	0.9751	0.9945	0.6994	3.9970



Fig. 4: Qualitative comparisons of novel view video synthesis. Our method generates high-fidelity, plausible embodied manipulation videos, outperforming baseline approaches in both structural consistency and visual quality.


Quantitative comparison. As demonstrated in Tab. 1, our method establishes a new state-of-the-art across all evaluated metrics. By significantly surpassing the baselines, our approach exhibits remarkable robustness in modeling complex robotic manipulations. These quantitative gains further confirm our model’s capacity to synthesize high-fidelity videos from arbitrary novel views, offering superior visual realism and temporal stability compared to competing methods.

5.3 Ablation Study

Ablations of Embody4d. To systematically evaluate the contribution of each module within Embody4D, we conducted ablation studies on two core architectural components: the confidence-aware adaptive noise injection mechanism and the interaction-aware attention module. As illustrated in Fig. 5, the confidence-aware strategy dynamically modulates noise intensity based on the reliability

Table 2: Ablation study on video generation quality metrics.

Method		PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	FVD $\downarrow$
Baseline		24.0918	0.7662	0.1393	42.0877
Ours w/o comp data		24.7220	0.7772	0.1313	37.8929
Ours w/o noise injection		24.2291	0.7818	0.1370	41.9482
Ours w/o interaction attention		24.8134	0.7819	0.1336	37.1168
Ours full		24.8936	0.7976	0.1187	36.8274

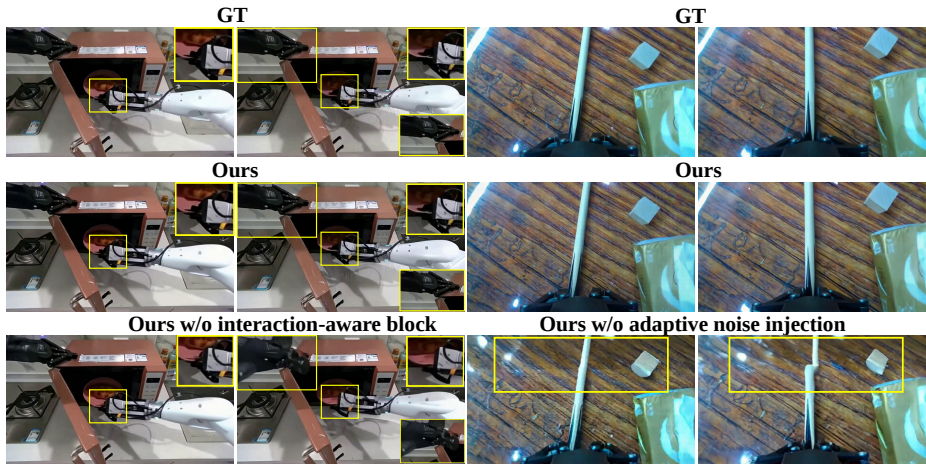**Fig. 5: Qualitative comparisons of the ablations.** Results of ablation on embodied interaction-aware attention and confidence-aware adaptive noise injection strategy.

of spatial regions. This approach preserves fine-grained structural details in high-confidence areas while ensuring seamless geometric and textural transitions, thereby significantly enhancing the spatio-temporal consistency and visual quality of the synthesized videos. Furthermore, the interaction-aware attention mechanism introduces a spatial bias focused on manipulation zones, directing the model to prioritize critical robot-object interactions. This ensures superior fidelity in delicate manipulation regions and strengthens the physical plausibility of complex scenarios. Quantitative results in Tab. 2 further demonstrate that these two modules synergistically bolster the stability of Embody4D, enabling the synthesis of highly realistic 4D robotic interaction videos with consistent multi-view structures.

Ablation on the training data. The dataset curation strategy represents another key contribution of our work, where the model is trained on a hybrid dataset comprising open-source monocular embodied data and compositionally constructed diverse robotic embodied data. To validate its effectiveness, we conducted an ablation study comparing models trained with and without the compositionally constructed data. Qualitative results in Fig. 6 demonstrate that the model lacking diverse robotic data struggles to generalize to unseen robotic struc-

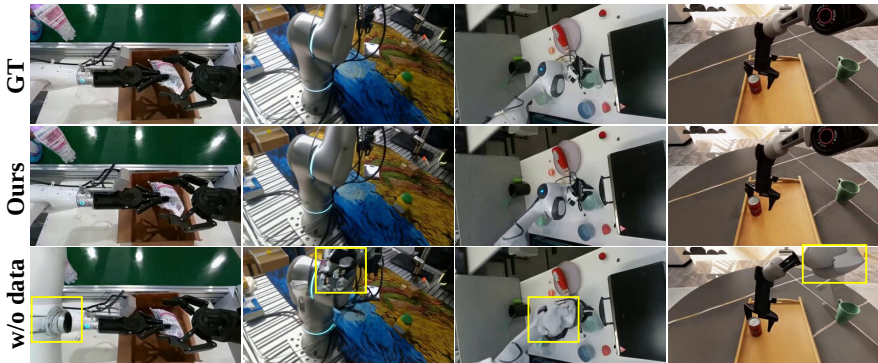


Fig. 6: Ablation on the compositional training data. Comparison between our full model and a variant trained without compositional data. The yellow boxes show that our strategy is key to mitigating geometric distortions and ensuring generalization across diverse robotic morphologies.

tures, frequently producing implausible geometric hallucinations in occluded regions. Conversely, our hybrid training strategy enables the model to internalize robust structural priors, allowing it to synthesize physically consistent robotic poses across various morphologies while maintaining a motion distribution that aligns with the source video. The quantitative results in Tab. 2 further substantiate that this curated diversity is essential for achieving strong generalization in complex manipulation scenarios.

5.4 real-world embodied application

An embodied world model can serve as a data engine of embodied training data [26, 52]. We posit the hypothesis that a 4D embodied world model can augment multi-view perception for real-world robot deployment. To substantiate this hypothesis, we augment a monocular dataset using Embody4D together with Recammaster and TrajectoryCrafter, and train the current state-of-the-art VLA policy, $\pi_{0.5}$ [22], on the augmented dataset. We then compare its performance against a counterpart trained on real data.

Specifically, we design tabletop manipulation tasks using a Franka Research 3 (FR3) arm equipped with a Robotiq 2F-85 gripper. Two fixed external cam-

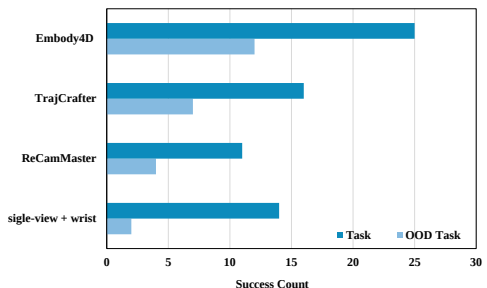


Fig. 7: Comparison of successful novel-view synthesis counts under four experimental settings on seen tasks and OOD unseen tasks

Table 3: Real-world embodied experiments on FR3 with $\pi_{0.5}$ Droid. Each task has 10 trials with randomized object positions. Tasks: T1-T3 (seen), T4-T5 (unseen).

Task	Baselines			Ours Embody4D
	Single-view with wrist	ReCamMaster [4]	TrajCrafter [58]	
T1 (Grapes→Bowl)	5/10	4/10	6/10	8/10
T2 (Grapes→Plate)	5/10	5/10	6/10	8/10
T3 (Mangoes→Bowl)	4/10	2/10	4/10	9/10
T4 (Lemons→Bowl)	1/10	2/10	0/10	6/10
T5 (Bananas→Plate)	1/10	2/10	7/10	6/10
Success Rate (SR)	32%	30%	46%	74%

eras are used, and a wrist-mounted camera is available. We collect 100 human demonstration trajectories for training and compare four training variants: (1) a single-view baseline trained with one external camera, (2) Embody4D-based augmentation that synthesizes an additional view to train a two-view policy, (3) ReCamMaster-based augmentation, and (4) TrajectoryCrafter-based augmentation. We evaluate the resulting policies on five pick-and-place tasks, each with 10 trials under randomized object placements. The first three tasks are seen during training, while the remaining two are held out as unseen (OOD) tasks. We report the grasping success rate over 50 trials per model in Tab. 3. In contrast, as shown in Fig. 7, Embody4D achieves superior performance, reaching a task success rate of 74% and demonstrating exceptional out-of-distribution (OOD) generalization. Compared to the experiments in the main text that omit the wrist-view, these results prove that even when the model relies heavily on the wrist-mounted camera, the addition of an enhanced third-person view remains crucial. This further validates that our novel-view generation approach can serve as an effective data engine for downstream tasks, providing a new paradigm for 4D world models in embodied AI, particularly demonstrating strong generalization capabilities on OOD tasks. (More real-world embodied experiments are provided in the supplementary materials.)

6 Conclusion

In this work, we have presented Embody4D, a novel video-to-video 4D world model designed for Embodied AI that enables the synthesis of arbitrary novel views from monocular videos. To tackle severe data scarcity, We introduce a compositional synthesis pipeline to composite diverse robotic manipulators with real-world backgrounds, fostering broad generalization. Furthermore, we devise a confidence-aware adaptive noise injection strategy that modulates noise intensity based on regional confidence levels, thereby ensuring rigorous geometric and temporal consistency. Moreover, we incorporate an interaction-aware attention mechanism guided by motion priors, which effectively preserves the physical

integrity of complex robotic interactions. Finally, extensive experiments demonstrate that Embody4D achieves state-of-the-art performance, while real-world evaluations confirm its efficacy in empowering downstream robotic planning and policy learning.

References

1. Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F.L., Almeida, D., Altenschmidt, J., Altman, S., Anadkat, S., et al.: Gpt-4 technical report. arXiv preprint arXiv:2303.08774 (2023)
2. Assran, M., Bardes, A., Fan, D., Garrido, Q., Howes, R., Muckley, M., Rizvi, A., Roberts, C., Sinha, K., Zhohus, A., et al.: V-jepa 2: Self-supervised video models enable understanding, prediction and planning. arXiv preprint arXiv:2506.09985 (2025)
3. Bahmani, S., Skorokhodov, I., Rong, V., Wetzstein, G., Guibas, L., Wonka, P., Tulyakov, S., Park, J.J., Tagliasacchi, A., Lindell, D.B.: 4d-fy: Text-to-4d generation using hybrid score distillation sampling. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 7996–8006 (2024)
4. Bai, J., Xia, M., Fu, X., Wang, X., Mu, L., Cao, J., Liu, Z., Hu, H., Bai, X., Wan, P., et al.: Recammaster: Camera-controlled generative rendering from a single video. arXiv preprint arXiv:2503.11647 (2025)
5. Balaji, Y., Nah, S., Huang, X., Vahdat, A., Song, J., Zhang, Q., Kreis, K., Aitala, M., Aila, T., Laine, S., et al.: ediff-i: Text-to-image diffusion models with an ensemble of expert denoisers. arXiv preprint arXiv:2211.01324 (2022)
6. Bharadhwaj, H., Vakil, J., Sharma, M., Gupta, A., Tulsiani, S., Kumar, V.: Roboaagent: Generalization and efficiency in robot manipulation via semantic augmentations and action chunking. In: 2024 IEEE International Conference on Robotics and Automation (ICRA). pp. 4788–4795. IEEE (2024)
7. Bu, Q., Cai, J., Chen, L., Cui, X., Ding, Y., Feng, S., Gao, S., He, X., Hu, X., Huang, X., et al.: Agibot world colosseum: A large-scale manipulation platform for scalable and intelligent embodied systems. arXiv preprint arXiv:2503.06669 (2025)
8. Carion, N., Gustafson, L., Hu, Y.T., Debnath, S., Hu, R., Suris, D., Ryali, C., Alwala, K.V., Khedr, H., Huang, A., et al.: Sam 3: Segment anything with concepts. arXiv preprint arXiv:2511.16719 (2025)
9. Chen, B., Zhang, T., Geng, H., Song, K., Zhang, C., Li, P., Freeman, W.T., Malik, J., Abbeel, P., Tedrake, R., et al.: Large video planner enables generalizable robot control. arXiv preprint arXiv:2512.15840 (2025)
10. Deng, T., Pan, Y., Yuan, S., Li, D., Wang, C., Li, M., Chen, L., Xie, L., Wang, D., Wang, J., et al.: What is the best 3d scene representation for robotics? from geometric to foundation models. arXiv preprint arXiv:2512.03422 (2025)
11. Ding, J., Zhang, Y., Shang, Y., Zhang, Y., Zong, Z., Feng, J., Yuan, Y., Su, H., Li, N., Sukienik, N., et al.: Understanding world or predicting future? a comprehensive survey of world models. ACM Computing Surveys **58**(3), 1–38 (2025)
12. Dong, Q., Fu, Y.: Memflow: Optical flow estimation and prediction with memory. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 19068–19078 (2024)
13. Duan, H., Yu, H.X., Chen, S., Fei-Fei, L., Wu, J.: Worldscore: A unified evaluation benchmark for world generation. arXiv preprint arXiv:2504.00983 (2025)

14. Esser, P., Kulal, S., Blattmann, A., Entezari, R., Müller, J., Saini, H., Levi, Y., Lorenz, D., Sauer, A., Boesel, F., et al.: Scaling rectified flow transformers for high-resolution image synthesis. In: Forty-first international conference on machine learning (2024)
15. Fang, H.S., Fang, H., Tang, Z., Liu, J., Wang, C., Wang, J., Zhu, H., Lu, C.: Rh20t: A comprehensive robotic dataset for learning diverse skills in one-shot. arXiv preprint arXiv:2307.00595 (2023)
16. Haddadin, S., Parusel, S., Johannsmeier, L., Golz, S., Gabl, S., Walch, F., Sabaghian, M., Jähne, C., Hausperger, L., Haddadin, S.: The franka emika robot: A reference platform for robotics research and education. *IEEE robotics & automation magazine* **29**(2), 46–64 (2022)
17. Hong, W., Ding, M., Zheng, W., Liu, X., Tang, J.: Cogvideo: Large-scale pretraining for text-to-video generation via transformers. arXiv preprint arXiv:2205.15868 (2022)
18. Hong, Y., Lee, S., Chung, H., Ye, J.C.: Inversecrafter: Efficient video recapture as a latent domain inverse problem. arXiv preprint arXiv:2512.05672 (2025)
19. Hu, T., Peng, H., Liu, X., Ma, Y.: Ex-4d: Extreme viewpoint 4d video synthesis via depth watertight mesh. arXiv preprint arXiv:2506.05554 (2025)
20. Huang, W., Chao, Y.W., Mousavian, A., Liu, M.Y., Fox, D., Mo, K., Fei-Fei, L.: Pointworld: Scaling 3d world models for in-the-wild robotic manipulation. arXiv preprint arXiv:2601.03782 (2026)
21. Huang, Z., He, Y., Yu, J., Zhang, F., Si, C., Jiang, Y., Zhang, Y., Wu, T., Jin, Q., Chanpaisit, N., et al.: Vbench: Comprehensive benchmark suite for video generative models. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 21807–21818 (2024)
22. Intelligence, P., Black, K., Brown, N., Darpinian, J., Dhabalia, K., Driess, D., Esmail, A., Equi, M., Finn, C., Fusai, N., et al.: : a vision-language-action model with open-world generalization. 0.5: a vision-language-action model with open-world generalization (2025)
23. Jang, E., Irpan, A., Khansari, M., Kappler, D., Ebert, F., Lynch, C., Levine, S., Finn, C.: Bc-z: Zero-shot task generalization with robotic imitation learning. In: conference on Robot Learning. pp. 991–1002. PMLR (2022)
24. Jang, J., Ye, S., Lin, Z., Xiang, J., Bjorck, J., Fang, Y., Hu, F., Huang, S., Kundalia, K., Lin, Y.C., et al.: Dreamgen: Unlocking generalization in robot learning through video world models. arXiv preprint arXiv:2505.12705 (2025)
25. Jeong, H., Lee, S., Ye, J.C.: Reangle-a-video: 4d video generation as video-to-video translation. arXiv preprint arXiv:2503.09151 (2025)
26. Jiang, Y., Chen, S., Huang, S., Chen, L., Zhou, P., Liao, Y., He, X., Liu, C., Li, H., Yao, M., et al.: Enerverse-ac: Envisioning embodied environments with action condition. arXiv preprint arXiv:2505.09723 (2025)
27. Kim, M.J., Pertsch, K., Karamcheti, S., Xiao, T., Balakrishna, A., Nair, S., Rafailov, R., Foster, E., Lam, G., Sanketi, P., et al.: Openvla: An open-source vision-language-action model. arXiv preprint arXiv:2406.09246 (2024)
28. Kong, L., Yang, W., Mei, J., Liu, Y., Liang, A., Zhu, D., Lu, D., Yin, W., Hu, X., Jia, M., et al.: 3d and 4d world modeling: A survey. arXiv preprint arXiv:2509.07996 (2025)
29. Kwon, J., Buchman, E.: Cosmos whitepaper. *A Netw. Distrib. Ledgers* **27**(1-32), 24 (2019)
30. Li, X., Zhang, Q., Kang, D., Cheng, W., Gao, Y., Zhang, J., Liang, Z., Liao, J., Cao, Y.P., Shan, Y.: Advances in 3d generation: A survey. arXiv preprint arXiv:2401.17807 (2024)

31. Ling, L., Sheng, Y., Tu, Z., Zhao, W., Xin, C., Wan, K., Yu, L., Guo, Q., Yu, Z., Lu, Y., et al.: D13dv-10k: A large-scale scene dataset for deep learning-based 3d vision. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 22160–22169 (2024)
32. Lipman, Y., Chen, R.T., Ben-Hamu, H., Nickel, M., Le, M.: Flow matching for generative modeling. *arXiv preprint arXiv:2210.02747* (2022)
33. Liu, L., Wang, X., Zhao, G., Li, K., Qin, W., Qiu, J., Zhu, Z., Huang, G., Su, Z.: Robotransfer: Geometry-consistent video diffusion for robotic visual policy transfer. *arXiv preprint arXiv:2505.23171* (2025)
34. Liu, T., Huang, Z., Chen, Z., Wang, G., Hu, S., Shen, L., Sun, H., Cao, Z., Li, W., Liu, Z.: Free4d: Tuning-free 4d scene generation with spatial-temporal consistency. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. pp. 25571–25582 (2025)
35. Liu, X., Gong, C., Liu, Q.: Flow straight and fast: Learning to generate and transfer data with rectified flow. *arXiv preprint arXiv:2209.03003* (2022)
36. Lu, D., Liang, A., Huang, T., Fu, X., Zhao, Y., Ma, B., Pan, L., Yin, W., Kong, L., Ooi, W.T., et al.: See4d: Pose-free 4d generation via auto-regressive video inpainting. *arXiv preprint arXiv:2510.26796* (2025)
37. Lu, Y., Luo, W., Tu, P., Li, H., Zhu, H., Yu, Z., Wang, X., Chen, X., Peng, X., Li, X., et al.: 4dworldbench: A comprehensive evaluation framework for 3d/4d world generation models. *arXiv preprint arXiv:2511.19836* (2025)
38. Mei, Z., Yin, T., Shorinwa, O., Badithela, A., Zheng, Z., Bruno, J., Bland, M., Zha, L., Hancock, A., Fisac, J.F., et al.: Video generation models in robotics-applications, research challenges, future directions. *arXiv preprint arXiv:2601.07823* (2026)
39. Miao, Q., Li, K., Quan, J., Min, Z., Ma, S., Xu, Y., Yang, Y., Liu, P., Luo, Y.: Advances in 4d generation: A survey. *arXiv preprint arXiv:2503.14501* (2025)
40. Nie, C., Wang, G., Lie, Z., Wang, H.: Ermv: Editing 4d robotic multi-view images to enhance embodied agents. *arXiv preprint arXiv:2507.17462* (2025)
41. Peebles, W., Xie, S.: Scalable diffusion models with transformers. In: *Proceedings of the IEEE/CVF international conference on computer vision*. pp. 4195–4205 (2023)
42. Shen, Y., Wei, F., Du, Z., Liang, Y., Lu, Y., Yang, J., Zheng, N., Guo, B.: Videovla: Video generators can be generalizable robot manipulators. *arXiv preprint arXiv:2512.06963* (2025)
43. Song, Y., Sohl-Dickstein, J., Kingma, D.P., Kumar, A., Ermon, S., Poole, B.: Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456* (2020)
44. Sun, W., Chen, S., Liu, F., Chen, Z., Duan, Y., Zhang, J., Wang, Y.: Dimensionx: Create any 3d and 4d scenes from a single image with controllable video diffusion. *arXiv preprint arXiv:2411.04928* (2024)
45. Tian, Y., Yang, Y., Xie, Y., Cai, Z., Shi, X., Gao, N., Liu, H., Jiang, X., Qiu, Z., Yuan, F., et al.: Interndata-a1: Pioneering high-fidelity synthetic data for pre-training generalist policy. *arXiv preprint arXiv:2511.16651* (2025)
46. Todorov, E., Erez, T., Tassa, Y.: Mujoco: A physics engine for model-based control. In: *2012 IEEE/RSJ international conference on intelligent robots and systems*. pp. 5026–5033. IEEE (2012)
47. Tu, P., He, T., Yang, Z., Zhu, Z.: A mmw radar indoor mapping method based on transfer learning. In: *2023 IEEE 3rd International Conference on Computer Communication and Artificial Intelligence (CCAI)*. pp. 331–335. IEEE (2023)

48. Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, Ł., Polosukhin, I.: Attention is all you need. *Advances in neural information processing systems* **30** (2017)
49. Wan, T., Wang, A., Ai, B., Wen, B., Mao, C., Xie, C.W., Chen, D., Yu, F., Zhao, H., Yang, J., et al.: Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314* (2025)
50. Wang, J., Chen, M., Karaev, N., Vedaldi, A., Rupprecht, C., Novotny, D.: Vggt: Visual geometry grounded transformer. In: *Proceedings of the Computer Vision and Pattern Recognition Conference*. pp. 5294–5306 (2025)
51. Wang, Q., Zhao, Y., Shen, P., Li, J., Li, J.: Chronosobserver: Taming 4d world with hyperspace diffusion sampling. *arXiv preprint arXiv:2512.01481* (2025)
52. Wang, X., Liu, L., Cao, Y., Wu, R., Qin, W., Wang, D., Sui, W., Su, Z.: Embodiedgen: Towards a generative 3d world engine for embodied intelligence. *arXiv preprint arXiv:2506.10600* (2025)
53. Wen, B., Xie, H., Chen, Z., Hong, F., Liu, Z.: 3d scene generation: A survey. *arXiv preprint arXiv:2505.05474* (2025)
54. Wu, H., Zhang, Z., Zhang, W., Chen, C., Liao, L., Li, C., Gao, Y., Wang, A., Zhang, E., Sun, W., et al.: Q-align: Teaching llms for visual scoring via discrete text-defined levels. *arXiv preprint arXiv:2312.17090* (2023)
55. Wu, S., Fei, H., Yang, J., Li, X., Li, J., Zhang, H., Chua, T.s.: Learning 4d panoptic scene graph generation from rich 2d visual scene. In: *Proceedings of the Computer Vision and Pattern Recognition Conference*. pp. 24539–24549 (2025)
56. Xie, Y., Yao, C.H., Voleti, V., Jiang, H., Jampani, V.: Sv4d: Dynamic 3d content generation with multi-frame and multi-view consistency. *arXiv preprint arXiv:2407.17470* (2024)
57. Yang, X., Li, B., Xu, S., Wang, N., Ye, C., Chen, Z., Qin, M., Ding, Y., Zhu, Z., Jin, X., et al.: Orv: 4d occupancy-centric robot video generation. *arXiv preprint arXiv:2506.03079* (2025)
58. YU, M., Hu, W., Xing, J., Shan, Y.: Trajectorycrafter: Redirecting camera trajectory for monocular videos via diffusion models. *arXiv preprint arXiv:2503.05638* (2025)
59. Zakka, K., Tassa, Y., Contributors, M.M.: Mujoco menagerie: A collection of high-quality simulation models for mujoco. URL http://github.com/deepmind/mujoco_menagerie (2022)
60. Zhang, Y., Gao, Z., Li, S., Chen, L.H., Liu, K., Cheng, R., Lin, X., Liu, J., Li, Z., Feng, J., et al.: Robowheel: A data engine from real-world human demonstrations for cross-embodiment robotic learning. *arXiv preprint arXiv:2512.02729* (2025)
61. Zhen, H., Sun, Q., Zhang, H., Li, J., Zhou, S., Du, Y., Gan, C.: Tesseract: learning 4d embodied world models. *arXiv preprint arXiv:2504.20995* (2025)
62. Zhou, Y., Wang, Y., Zhou, J., Chang, W., Guo, H., Li, Z., Ma, K., Li, X., Wang, Y., Zhu, H., et al.: Omniworld: A multi-domain and multi-modal dataset for 4d world modeling. *arXiv preprint arXiv:2509.12201* (2025)
63. Zhu, F., Wu, H., Guo, S., Liu, Y., Cheang, C., Kong, T.: Irasim: A fine-grained world model for robot manipulation. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. pp. 9834–9844 (2025)

Appendix for Embody4D

A Real-world Embodied Experiments

In our real-world experiments, the input camera pose is illustrated in Fig. 9. The target output pose is defined by a 20° rightward rotation and a 30 cm forward translation relative to the input. We selected TrajCrafter [58] and ReCamMaster [4], the two top-performing models as baselines to generate videos from identical target viewpoints for a fair comparison. Our robotic manipulation setup employs a third-person view coupled with a wrist-mounted camera as the primary baseline. To evaluate performance improvements, we integrated novel-view data generated by Embody4D, TrajCrafter, and ReCamMaster into the training pipeline and measured their respective performance gains relative to the baseline. Consistent with the main text, our downstream model is the current state-of-the-art Vision-Language-Action model $\pi_{0.5}$. In addition, we collect one hundred human demonstration trajectories for training.

The experimental results are summarized in Tab. 4. ReCamMaster, designed for continuous camera motion via direct extrinsic control, struggles with motion instability when simulating the fixed camera poses required by our downstream tasks, leading to a performance decline. TrajCrafter also delivers sub-optimal performance in embodied scenarios, often suffering from visual artifacts and hallucinations, resulting in marginal improvements. Compared to the main text, these results represent experiments conducted without the wrist camera. From the Fig. 8 can be observed that incorporating a 4D generation model improves the manipulation and planning performance of downstream tasks, with particularly significant gains on OOD tasks. Embody4D achieves better generation quality than the other two baseline models. In contrast, ReCamMaster relies on camera extrinsic control, which can easily introduce camera jitter, thereby leading to a decline in performance. Additionally, our method supports scalability by integrating multiple third-person image sequences into the VGGT [50] pipeline, enabling a more comprehensive point cloud reconstruction that can be projected onto arbitrary target views for completion and novel view synthesis.

Table 4: Real-world embodied experiments on FR3 with $\pi_{0.5}$ Droid. Each task has 10 trials with randomized object positions. Tasks: T1-T3 (seen), T4-T5 (unseen).

Task		Baselines [4, 58]			Ours Embody4D
		Single-view	ReCamMaster	TrajCrafter	
T1 (Grapes→Bowl)		3/10	2/10	3/10	4/10
T2 (Grapes→Plate)		3/10	1/10	2/10	2/10
T3 (Mangoes→Bowl)		1/10	2/10	3/10	3/10
T4 (Lemons→Bowl)		2/10	1/10	2/10	3/10
T5 (Bananas→Plate)		0/10	0/10	0/10	2/10

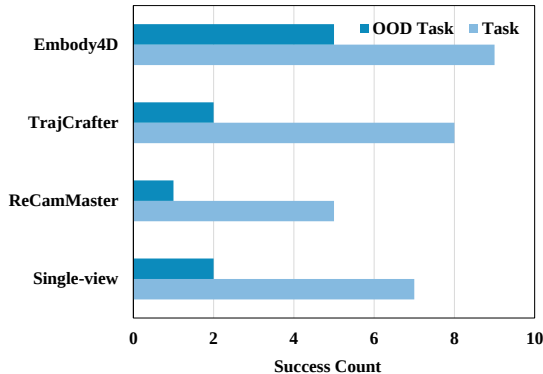


Fig. 8: Comparison of successful novel-view synthesis counts under four experimental settings on seen tasks and OOD unseen tasks

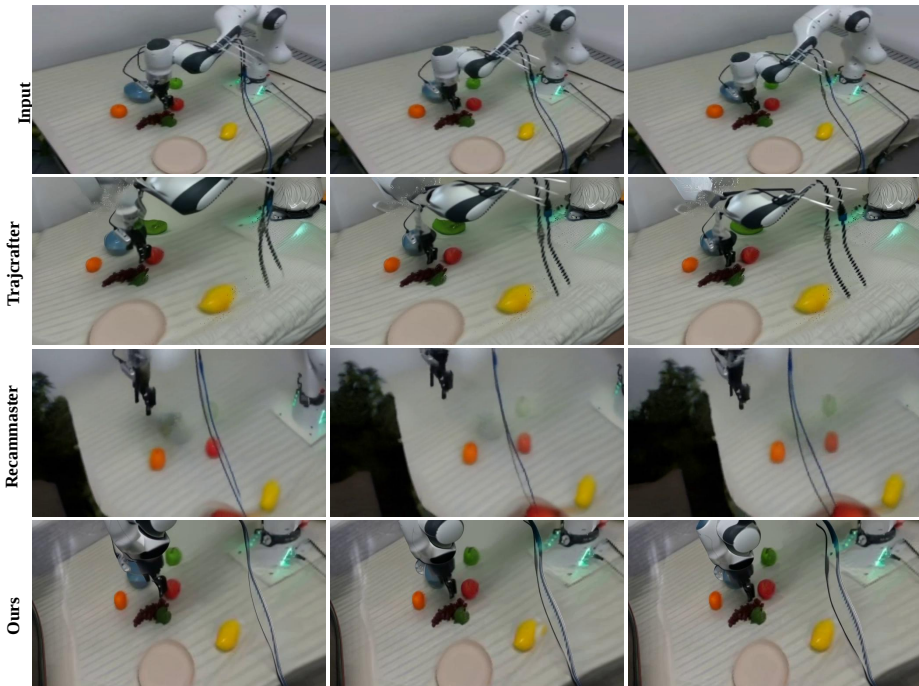


Fig. 9: Visualization results of real-world embodied experiments.

B More Experimental Details

B.1 Dataset Curation

When rendering the robotic arm foreground in the MuJoCo [46] simulation environment, we ensure that the simulated motion closely mimics real world dynam-

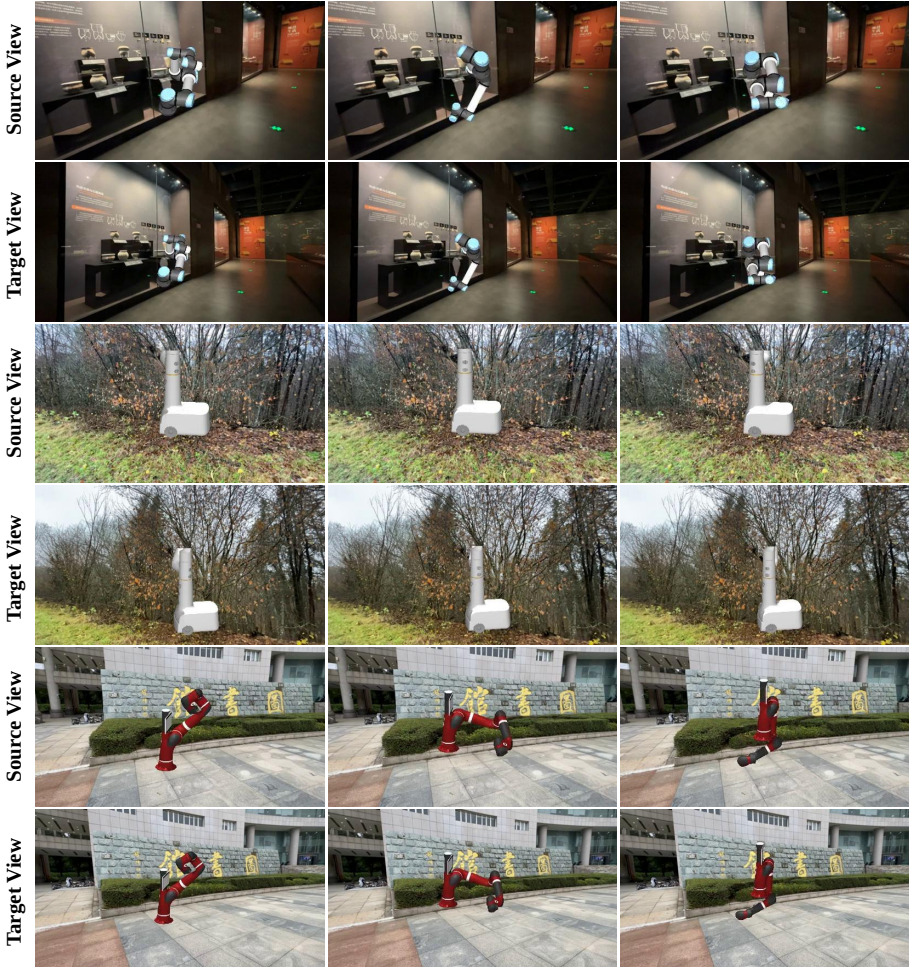


Fig. 10: Visualization results of compositional 4D embodied data, featuring 4D-consistent sequences with diverse robotic arm foregrounds and varied backgrounds.

ics by strictly constraining the movement magnitude. Specifically, each movement step size is set to one hundredth of the total range of motion for each joint. To maintain spatial consistency, the camera placement within the simulation environment must strictly adhere to the extrinsic parameters of the target backgrounds intended for compositing. This process necessitates a precise coordinate transformation to map the OpenGL coordinate system used in the DL3DV [31] dataset into the XML format required by MuJoCo, which is defined by specific values for distance as well as azimuth and elevation angles.

Our empirical evaluation demonstrated that employing 49 frame sequences with independent camera and background poses leads to suboptimal performance. The compounding motion of both the foreground robotic arm and the

background camera generates highly complex data that hinders the ability of the model to achieve convergence. To mitigate this issue, each data sample consists of two separate videos captured from two distinct and fixed camera poses. To prevent excessive parallax which might cause the robotic arm to drift out of the frame, we utilize the GPT-4o [1] model to evaluate and select background pairs that maintain a moderate level of parallax.

As illustrated in Fig. 10, our training pairs are annotated by concatenating the identifier of the robotic arm with a detailed background description to form the final text prompt. This composition based approach yields more precise labels than the direct annotation of the final composited video sequence. For this purpose, we employ the CogVLM2 Llama3 Caption model [17] as our primary labeling tool to ensure high quality descriptive metadata.

B.2 Acquisition of Interaction Priors

When utilizing the interaction-aware attention mechanism, it is first necessary to obtain a motion prior bias. For data captured in real world scenarios, camera movement often introduces a certain degree of jitter, which in turn leads to noise in the optical flow estimation [12]. In cases where the noise level is excessively high, we directly employ the Segment Anything Model 3 [8] to perform segmentation. The input prompt for this process is defined as “robot arm and objects”. As illustrated in Fig. 11, we provide several examples of the resulting optical flow estimations alongside the segmentation masks generated by the Segment Anything Model 3, all masks will be normalized to the range of 0 to 1 for calculations.

B.3 Training Implementation Details

We implement our Embody4D using the Wan2.1-T2V-1.3B diffusion transformer as the generative backbone. All parameters are fully fine-tuned in an end-to-end manner. During training, the frame resolution is fixed at 384×672 , with a sequence length of 49 frames.

We adopt a two-stage training strategy. In the first stage, the model is trained on our self-constructed combinatorial real-world 4D dataset to enhance temporal consistency. In the second stage, we freeze the interaction-aware blocks and utilize pseudo-4D data, generated by projecting interaction data onto arbitrary perspectives and back-projecting them to the initial view. This augmentation enables the model to generalize effectively to complex real-world interactions. Finally, all model parameters are fully fine-tuned in an end-to-end manner.

The training configurations are summarized as follows:

- **Stage 1:** Conducted for 33k iterations with a learning rate of 1×10^{-5} .
- **Stage 2:** Conducted for 66k iterations with a learning rate of 2×10^{-6} .

Both stages utilize a mini-batch size of 16 (2 per GPU) and are performed on 8 NVIDIA A100 GPUs. Furthermore, in our confidence-aware adaptive noise

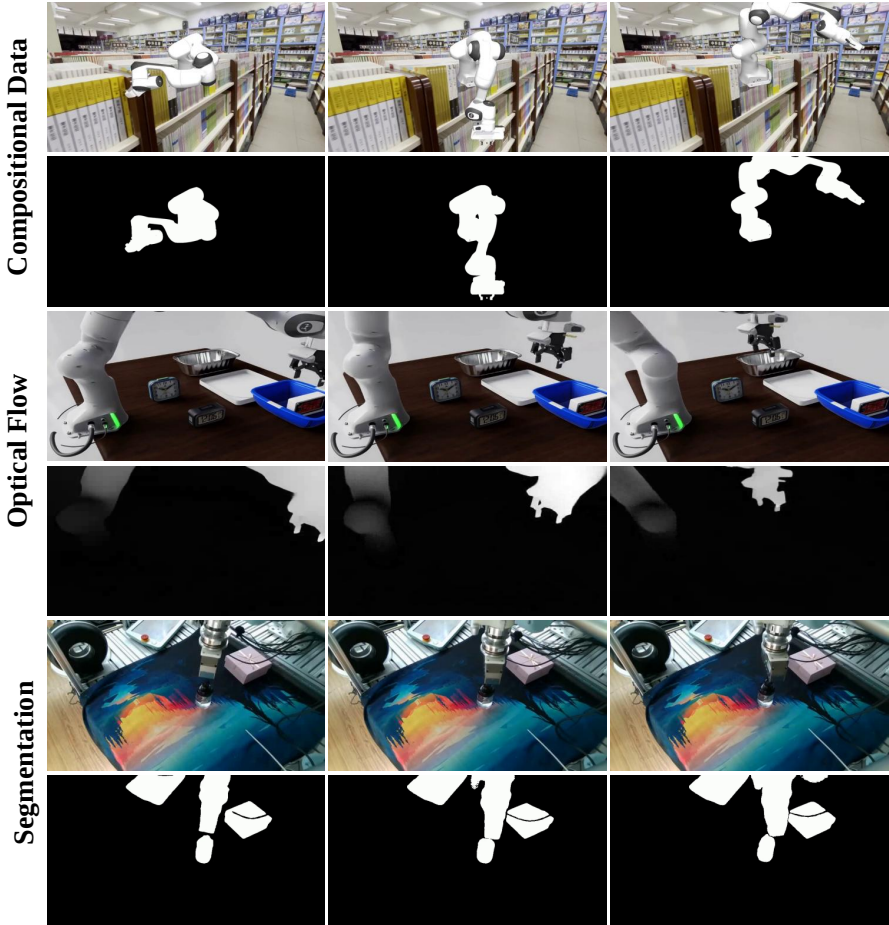


Fig. 11: Visualization of interaction motion priors. Showcasing three different foreground acquisition strategies: direct acquisition from compositional data, optical flow estimation, and video object segmentation.

injection strategy, we define the noise intensity parameters σ_{low} and σ_{high} to correspond to the confidence levels of the robotic arm’s state. Specifically, σ_{low} is set to 1.0 for regions with the lowest confidence, while σ_{high} is set to 0.85 for regions with the highest confidence.

C Supplementary Results

As shown in Fig. 12, Fig. 13, Fig. 14, and Fig. 15, we provide more experimental results and additional visual comparisons with the baseline method. These results highlight that our method achieves state-of-the-art quality, characterized

by fine-grained interaction details, high visual fidelity, and robust spatiotemporal consistency.

D Limitations and Future Works

While our approach demonstrates significant potential, several challenges remain. First, the inherent constraints of the generative model lead to degraded performance in scenes involving substantial viewpoint variations. Second, the current 4D generative paradigm relies heavily on temporal continuity; when simulating a fixed-view camera for downstream tasks, the model must synthesize the target viewpoint directly rather than transitioning smoothly from the initial frame. This spatiotemporal discontinuity often compromises generation quality. Finally, inference efficiency remains a bottleneck, as generating a sequence of 49 frames currently requires approximately two minutes, failing to meet the requirements for real-time deployment.

Future research should prioritize optimizing performance under extreme viewpoint shifts and fixed viewpoints while improving computational efficiency. Regarding model training, beyond the multi-view fine-tuning employed here, future work could incorporate large-scale multi-view data during pre-training. This would endow the Vision-Language-Action (VLA) model with superior cross-viewpoint generalization, enabling advanced spatial reasoning and manipulation planning capabilities for Embodied AI.

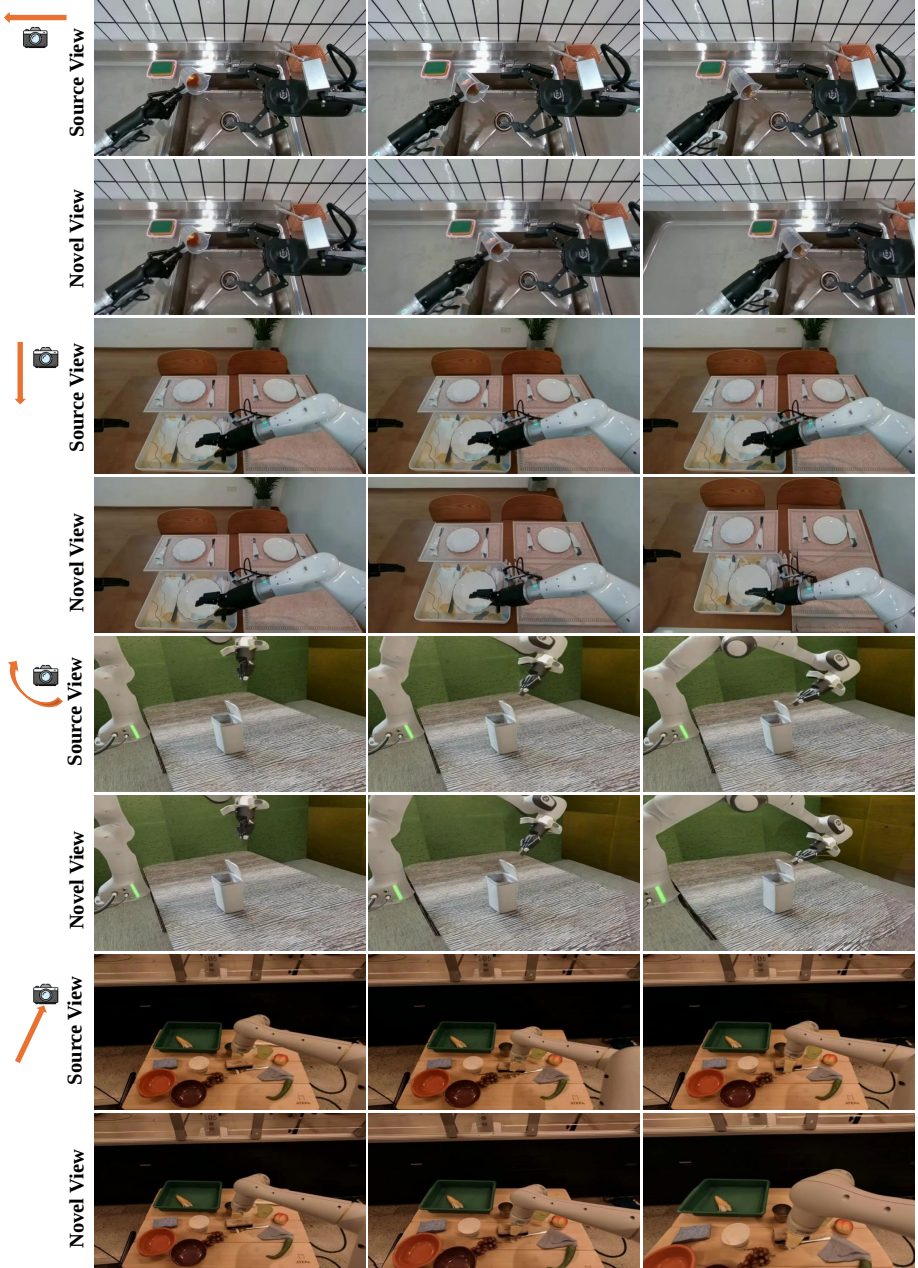


Fig. 12: Visualization results of Embody4D

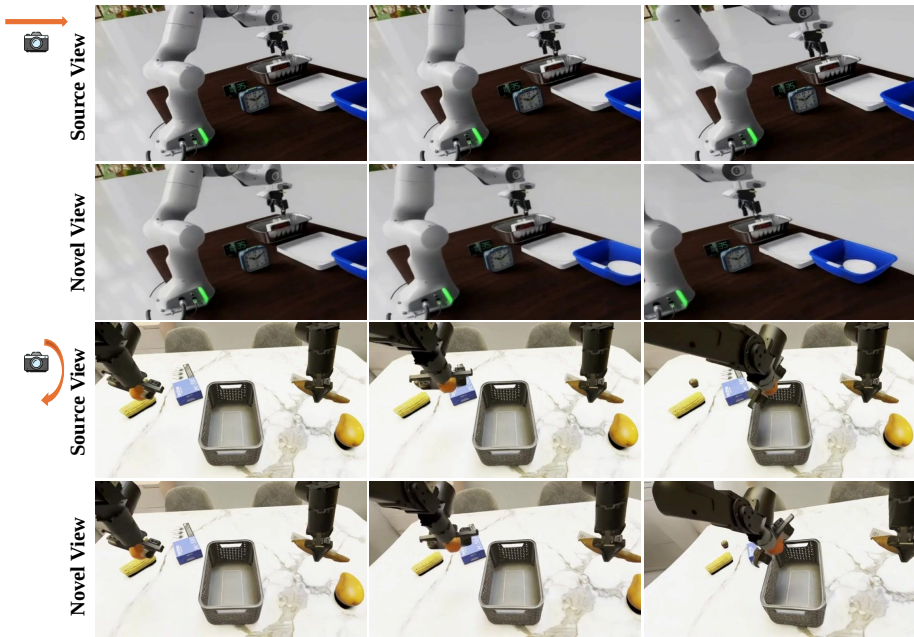


Fig. 13: Visualization results of Embody4D

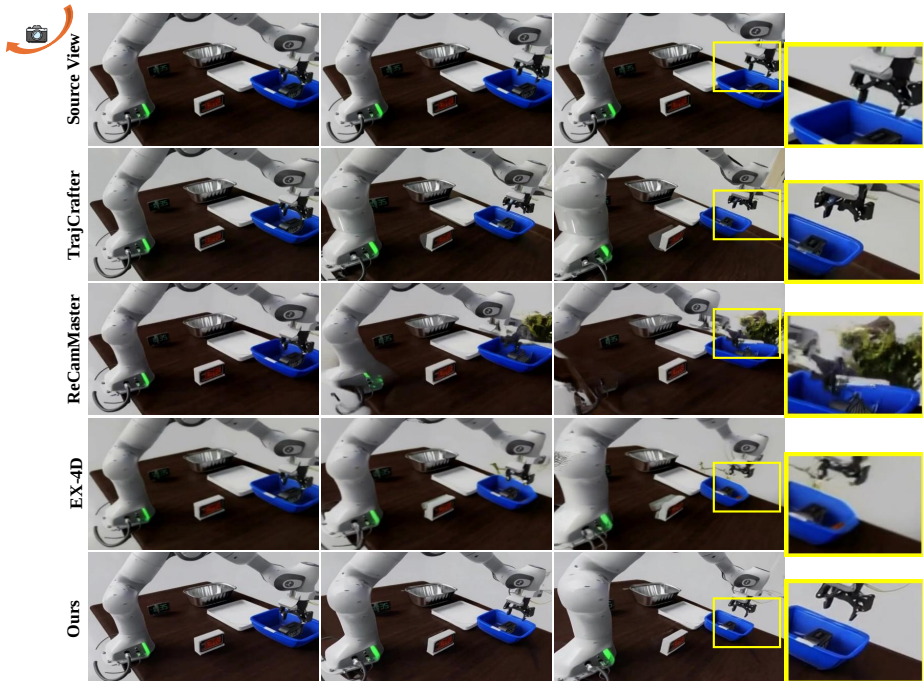


Fig. 14: Qualitative visualization results of our method and the baselines.

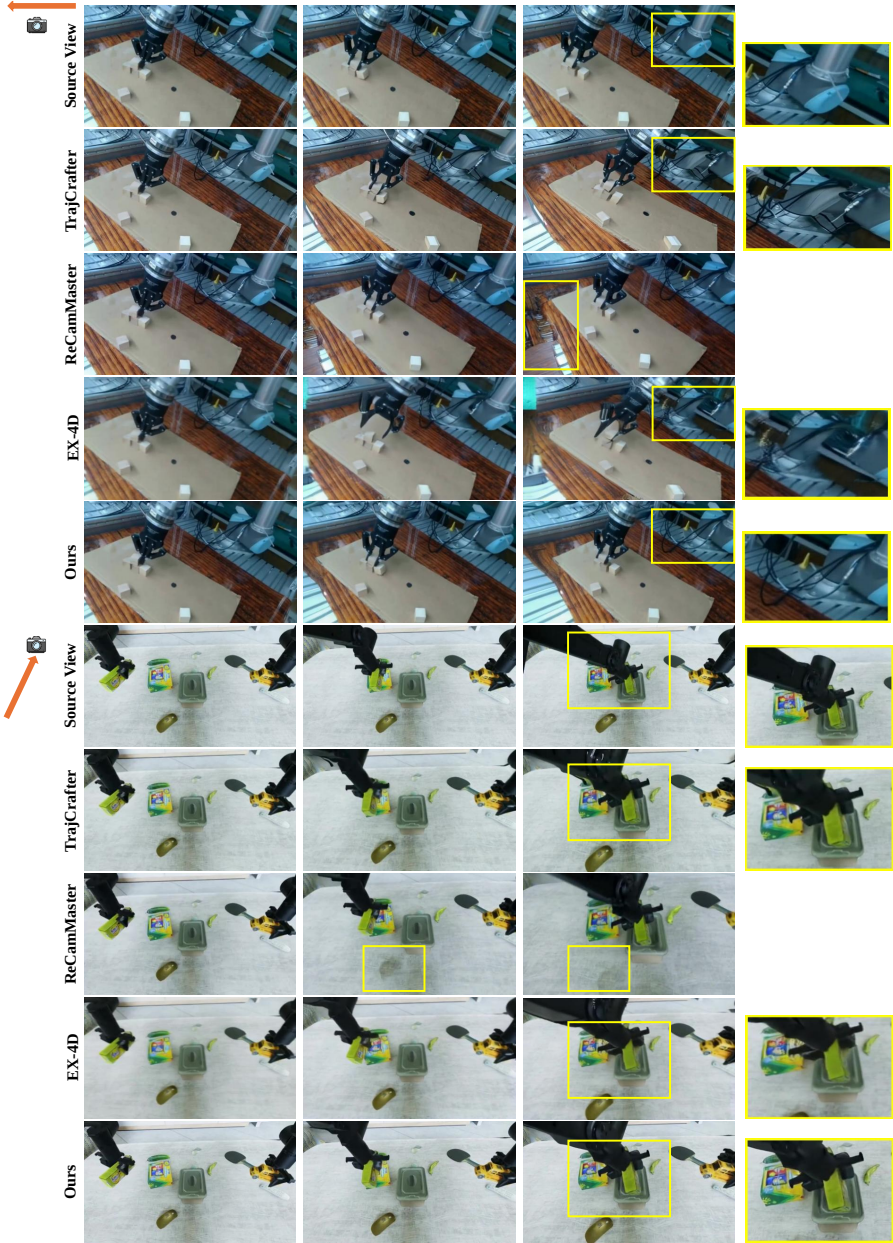


Fig. 15: Qualitative visualization results of our method and the baselines.