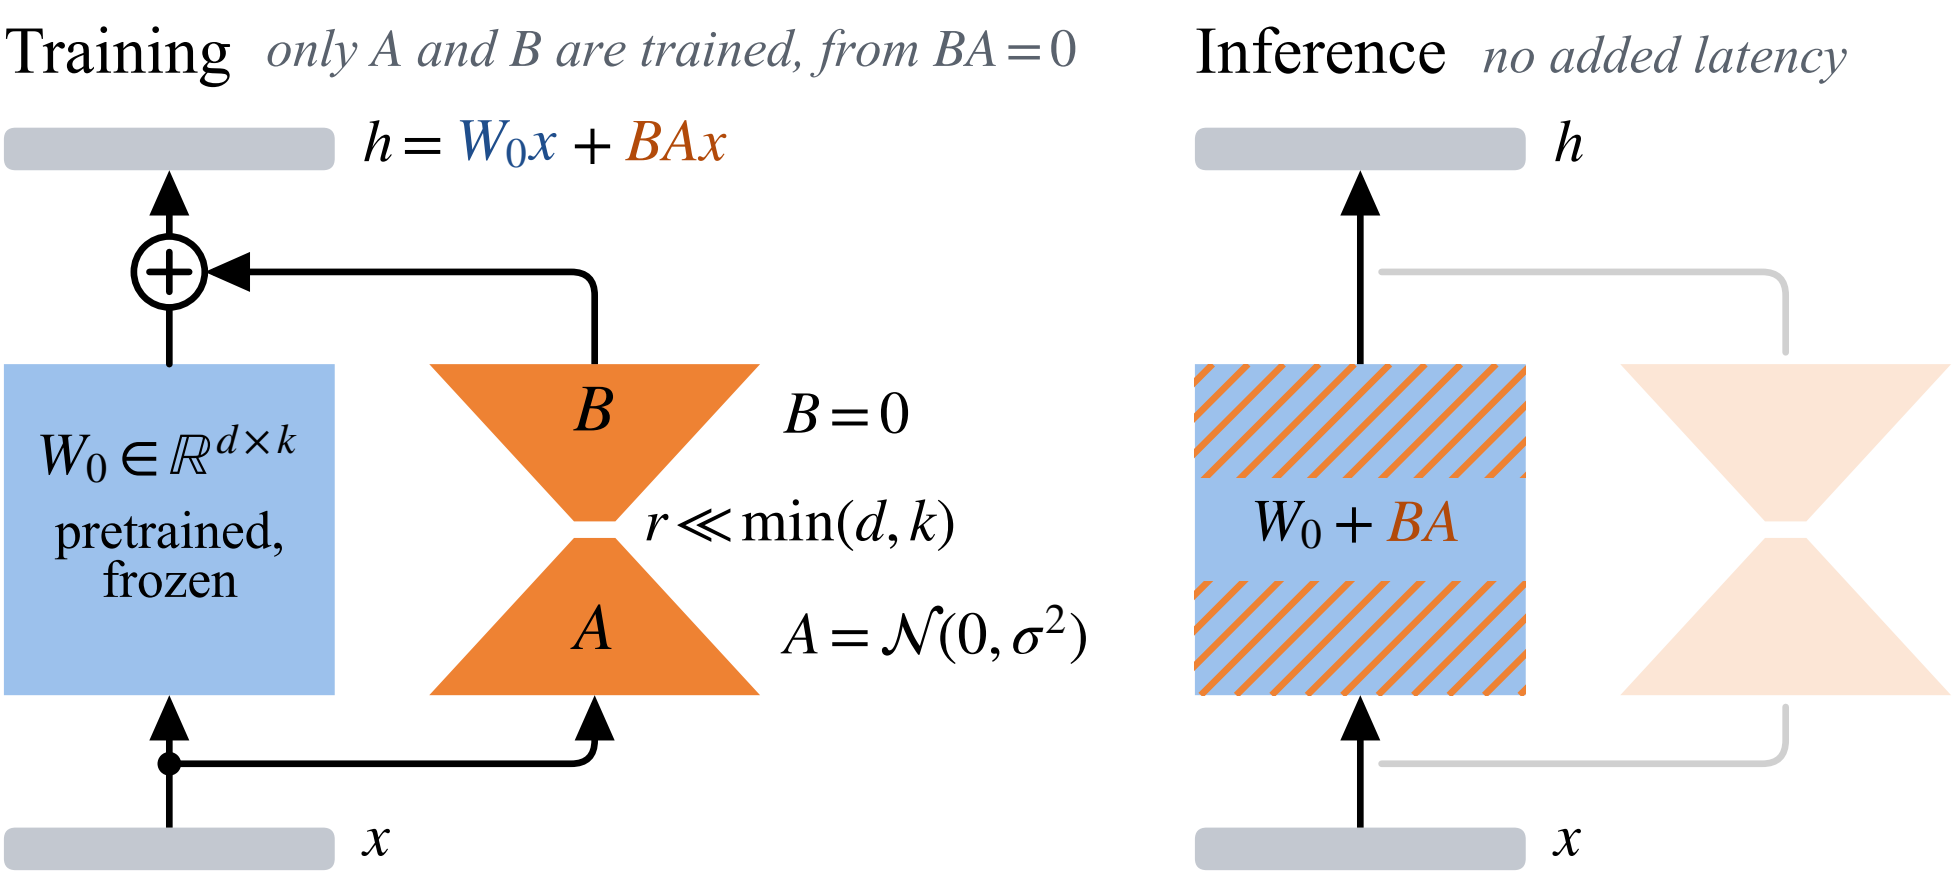
Training
only A and B are trained, from BA = 0
h = W0x + BAx
W0 ∈ ℝ^{d×k}
pretrained,
frozen
B
B = 0
r ≪ min(d, k)
A
A = 𝒩(0, σ²)
x
Inference
no added latency
h
W0 + BA
x