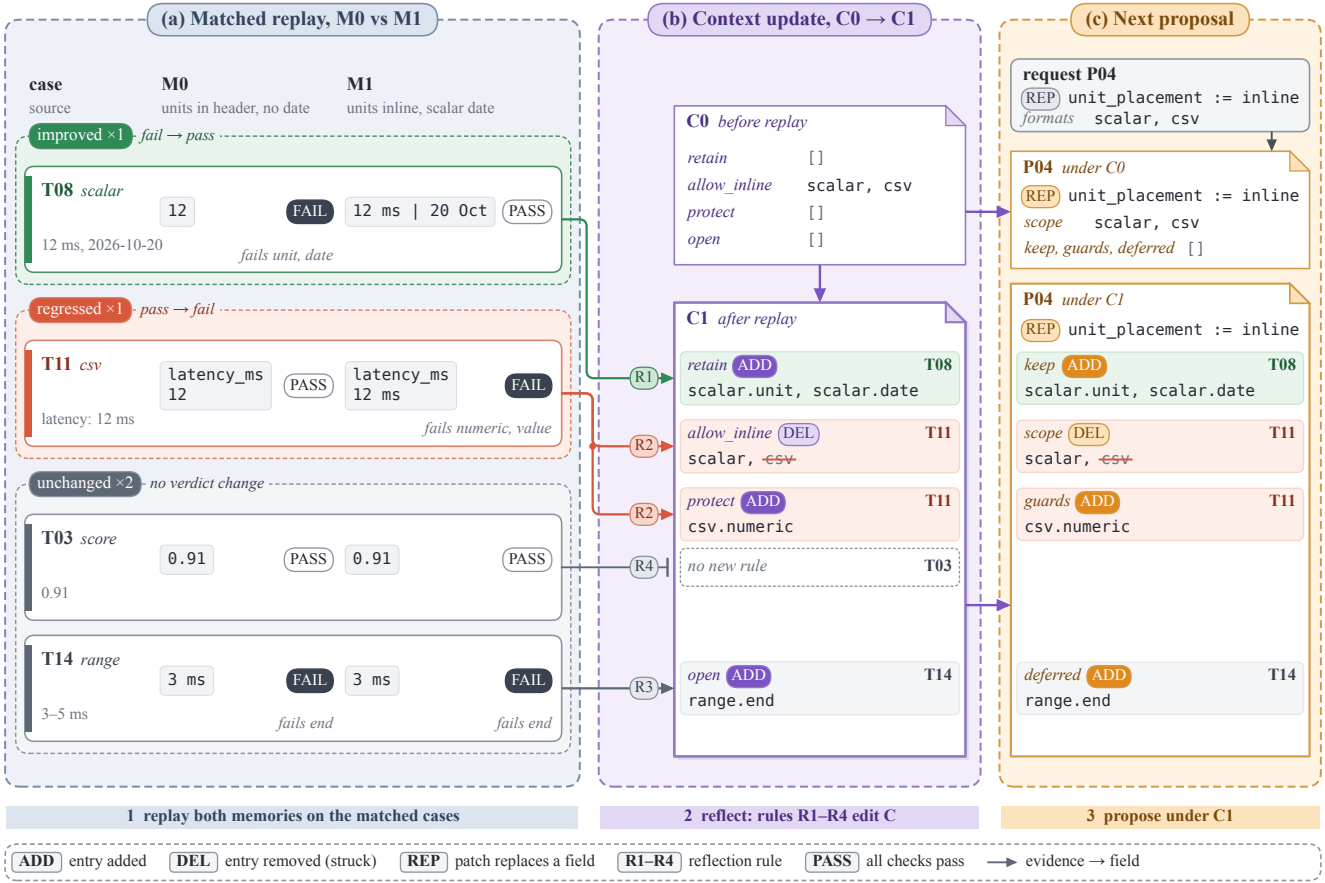

(a) Matched replay, M0 vs M1
case
source
M0
units in header, no date
M1
units inline, scalar date
improved ×1
fail → pass
T08 scalar
12
FAIL
12 ms | 20 Oct
PASS
12 ms, 2026-10-20
fails unit, date
regressed ×1
pass → fail
T11 csv
latency_ms
12
PASS
latency_ms
12 ms
FAIL
latency: 12 ms
fails numeric, value
unchanged ×2
no verdict change
T03 score
0.91
PASS
0.91
PASS
0.91
T14 range
3 ms
FAIL
3 ms
FAIL
3–5 ms
fails end
fails end
(b) Context update, C0 → C1
C0 before replay
retain []
allow_inline scalar, csv
protect []
open []
C1 after replay
R1
retain ADD T08
scalar.unit, scalar.date
R2
allow_inline DEL T11
scalar, csv
R2
protect ADD T11
csv.numeric
R4
no new rule T03
R3
open ADD T14
range.end
(c) Next proposal
request P04
REP unit_placement := inline
formats scalar, csv
P04 under C0
REP unit_placement := inline
scope scalar, csv
keep, guards, deferred []
P04 under C1
REP unit_placement := inline
keep ADD T08
scalar.unit, scalar.date
scope DEL T11
scalar, csv
guards ADD T11
csv.numeric
deferred ADD T14
range.end
1 replay both memories on the matched cases
2 reflect: rules R1–R4 edit C
3 propose under C1
ADD entry added
DEL entry removed (struck)
REP patch replaces a field
R1–R4 reflection rule
PASS all checks pass
evidence → field