

# **FreydCategories- ForCAP**

**Freyd categories - Formal (co)kernels for  
additive categories**

2020.05.17

17 May 2020

**Sebastian Posur**

**Martin Bies**

**Sebastian Posur**

Email: [sebastian.posur@uni-siegen.de](mailto:sebastian.posur@uni-siegen.de)

Homepage: <https://sebastianpos.github.io>

Address: Department Mathematik

Universität Siegen  
Walter-Flex-Straße 3  
57068 Siegen  
Germany

**Martin Bies**

Email: [martin.bies@alumni.uni-heidelberg.de](mailto:martin.bies@alumni.uni-heidelberg.de)

Homepage: <https://www.ulb.ac.be/sciences/ptm/pmif/people.html>

Address: Physique Théorique et Mathématique

Université Libre de Bruxelles  
Campus Plaine - CP 231  
Building NO - Level 6 - Office O.6.111  
1050 Brussels  
Belgium

# Contents

<b>1</b>	<b>Basic operations</b>	<b>5</b>
1.1	Weak kernel . . . . .	5
1.2	Weak cokernel . . . . .	7
1.3	Weak bi-fiber product . . . . .	9
1.4	Biased weak fiber product . . . . .	13
1.5	Weak bi-pushout . . . . .	16
1.6	Biased weak pushout . . . . .	19
1.7	Abelian constructions . . . . .	21
<b>2</b>	<b>Additive closure</b>	<b>24</b>
2.1	GAP Categories . . . . .	24
2.2	Constructors . . . . .	24
2.3	Attributes . . . . .	26
2.4	Operators . . . . .	27
<b>3</b>	<b>Adelman category</b>	<b>28</b>
3.1	GAP Categories . . . . .	28
3.2	Constructors . . . . .	29
3.3	Attributes and Properties . . . . .	30
<b>4</b>	<b>Category of rows</b>	<b>32</b>
4.1	GAP Categories . . . . .	32
<b>5</b>	<b>Example on category of rows</b>	<b>33</b>
5.1	Constructors of objects . . . . .	33
5.2	Constructors of morphisms . . . . .	33
5.3	A few categorical constructions for category of rows . . . . .	34
5.4	Simplifications . . . . .	39
<b>6</b>	<b>Category of columns</b>	<b>42</b>
6.1	GAP Categories . . . . .	42
<b>7</b>	<b>Example on category of columns</b>	<b>43</b>
7.1	Constructors of objects . . . . .	43
7.2	Constructors of morphisms . . . . .	43
7.3	A few categorical constructions for category of columns . . . . .	44

<b>8</b>	<b>Category of graded rows and category of graded columns</b>	<b>49</b>
8.1	Constructors . . . . .	49
8.2	Attributes . . . . .	50
8.3	GAP Categories . . . . .	51
8.4	Tools to simplify code . . . . .	52
<b>9</b>	<b>Cokernel image closure</b>	<b>55</b>
<b>10</b>	<b>Freyd category</b>	<b>56</b>
10.1	Internal Hom-Embedding . . . . .	56
10.2	Convenient methods for tensor products of freyd objects and morphisms . . . . .	56
<b>11</b>	<b>Examples and Tests</b>	<b>57</b>
11.1	Adelman 5 lemma . . . . .	57
11.2	Adelman category basics for category of rows . . . . .	58
11.3	Adelman category basics for for additive closure of algebroids . . . . .	59
11.4	Adelman category basics for category of columns . . . . .	60
11.5	Adelman category basics . . . . .	61
11.6	Adelman snake lemma . . . . .	62
11.7	Basics based on category of rows . . . . .	63
11.8	Basics of additive closure . . . . .	66
11.9	Basics based on category of columns . . . . .	67
11.10	Cokernel image closure in category of rows . . . . .	69
11.11	Cokernel image closure in category of columns . . . . .	71
11.12	Grade filtration . . . . .	72
11.13	Groups as categories . . . . .	74
11.14	Homomorphisms between f.p. functors based on category of rows . . . . .	74
11.15	Homomorphisms between f.p. functors based on category of columns . . . . .	75
11.16	Linear closure of categories . . . . .	75
11.17	Matrices over $\mathbb{Z}P\ K$ . . . . .	76
11.18	Matrices over $\mathbb{Z}G$ . . . . .	76
11.19	Prosets . . . . .	77
11.20	Quiver rows basicis . . . . .	78
11.21	Quiver rows over the integers . . . . .	80
11.22	Category of relations . . . . .	81
11.23	Rings as Ab-categories . . . . .	82
11.24	Snake lemma first proof . . . . .	83
11.25	Snake lemma second proof . . . . .	84
11.26	Subobject lattice . . . . .	85
11.27	Adelman category theorem . . . . .	85
<b>12</b>	<b>Linear closure of a category</b>	<b>86</b>
12.1	Functors . . . . .	86

<b>13</b>	<b>Examples on graded rows and columns</b>	<b>87</b>
13.1	Freyd category of graded rows . . . . .	87
13.2	Freyd category of graded columns . . . . .	94
13.3	Constructors of objects and reduction of degree lists . . . . .	101
13.4	Constructors of morphisms . . . . .	102
13.5	The GAP categories . . . . .	103
13.6	A few categorical constructions for graded rows . . . . .	103
13.7	A few categorical constructions for graded columns . . . . .	111
13.8	Additional examples on monoidal structure for graded rows . . . . .	119
13.9	Additional examples on monoidal structure for graded columns . . . . .	119
13.10	Examples to test Tools methods in graded rows/cols . . . . .	120
<b>14</b>	<b>Category of rows and columns over a field</b>	<b>122</b>
14.1	Abelian operations for rows . . . . .	122
<b>15</b>	<b>Example on tensor products in Freyd categories</b>	<b>125</b>
15.1	Tensor products for categories of rows . . . . .	125
15.2	Tensor products for categories of columns . . . . .	126
<b>16</b>	<b>The CAP category of graded module presentations for CAP by use of Freyd categories</b>	<b>127</b>
16.1	CAP categories . . . . .	127
16.2	The GAP categories for graded module presentations for CAP . . . . .	127
16.3	The GAP categories for graded module presentation morphisms for CAP . . . . .	128
	<b>Index</b>	<b>129</b>

# Chapter 1

## Basic operations

### 1.1 Weak kernel

For a given morphism  $\alpha : A \rightarrow B$ , a weak kernel of  $\alpha$  consists of three parts:

- an object  $K$ ,
- a morphism  $\iota : K \rightarrow A$  such that  $\alpha \circ \iota \sim_{K,B} 0$ ,
- a dependent function  $u$  mapping each morphism  $\tau : T \rightarrow A$  satisfying  $\alpha \circ \tau \sim_{T,B} 0$  to a morphism  $u(\tau) : T \rightarrow K$  such that  $\iota \circ u(\tau) \sim_{T,A} \tau$ .

The triple  $(K, \iota, u)$  is called a *weak kernel* of  $\alpha$ . We denote the object  $K$  of such a triple by  $\text{WeakKernelObject}(\alpha)$ . We say that the morphism  $u(\tau)$  is induced by the *universal property of the weak kernel*.



#### 1.1.1 WeakKernelObject (for IsCapCategoryMorphism)

▷ `WeakKernelObject(alpha)`

(attribute)

**Returns:** an object

The argument is a morphism  $\alpha$ . The output is the weak kernel  $K$  of  $\alpha$ .

#### 1.1.2 WeakKernelEmbedding (for IsCapCategoryMorphism)

▷ `WeakKernelEmbedding(alpha)`

(attribute)

**Returns:** a morphism in  $\text{Hom}(\text{WeakKernelObject}(\alpha), A)$

The argument is a morphism  $\alpha : A \rightarrow B$ . The output is the weak kernel embedding  $\iota : \text{WeakKernelObject}(\alpha) \rightarrow A$ .

### 1.1.3 WeakKernelEmbeddingWithGivenWeakKernelObject (for IsCapCategoryMorphism, IsCapCategoryObject)

▷ `WeakKernelEmbeddingWithGivenWeakKernelObject(alpha, K)` (operation)

**Returns:** a morphism in  $\text{Hom}(K, A)$

The arguments are a morphism  $\alpha : A \rightarrow B$  and an object  $K = \text{WeakKernelObject}(\alpha)$ . The output is the weak kernel embedding  $\iota : K \rightarrow A$ .

### 1.1.4 WeakKernelLift (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `WeakKernelLift(alpha, tau)` (operation)

**Returns:** a morphism in  $\text{Hom}(T, \text{WeakKernelObject}(\alpha))$

The arguments are a morphism  $\alpha : A \rightarrow B$  and a test morphism  $\tau : T \rightarrow A$  satisfying  $\alpha \circ \tau \sim_{T,B} 0$ . The output is the morphism  $u(\tau) : T \rightarrow \text{WeakKernelObject}(\alpha)$  given by the universal property of the weak kernel.

### 1.1.5 WeakKernelLiftWithGivenWeakKernelObject (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `WeakKernelLiftWithGivenWeakKernelObject(alpha, tau, K)` (operation)

**Returns:** a morphism in  $\text{Hom}(T, K)$

The arguments are a morphism  $\alpha : A \rightarrow B$ , a test morphism  $\tau : T \rightarrow A$  satisfying  $\alpha \circ \tau \sim_{T,B} 0$ , and an object  $K = \text{WeakKernelObject}(\alpha)$ . The output is the morphism  $u(\tau) : T \rightarrow K$  given by the universal property of the weak kernel.

### 1.1.6 AddWeakKernelObject (for IsCapCategory, IsFunction)

▷ `AddWeakKernelObject(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `WeakKernelObject`.  $F : \alpha \mapsto \text{WeakKernelObject}(\alpha)$ .

### 1.1.7 AddWeakKernelEmbedding (for IsCapCategory, IsFunction)

▷ `AddWeakKernelEmbedding(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `WeakKernelEmbedding`.  $F : \alpha \mapsto \iota$ .

### 1.1.8 AddWeakKernelEmbeddingWithGivenWeakKernelObject (for IsCapCategory, IsFunction)

▷ `AddWeakKernelEmbeddingWithGivenWeakKernelObject(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `WeakKernelEmbeddingWithGivenWeakKernelObject`.  $F : (\alpha, K) \mapsto \iota$ .

### 1.1.9 AddWeakKernelLift (for IsCapCategory, IsFunction)

▷ `AddWeakKernelLift(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `WeakKernelLift`.  $F : (\alpha, \tau) \mapsto u(\tau)$ .

### 1.1.10 AddWeakKernelLiftWithGivenWeakKernelObject (for IsCapCategory, IsFunction)

▷ `AddWeakKernelLiftWithGivenWeakKernelObject(C, F)` (operation)

**Returns:** nothing


The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `WeakKernelLiftWithGivenWeakKernelObject`.  $F : (\alpha, \tau, K) \mapsto u$ .

## 1.2 Weak cokernel

For a given morphism  $\alpha : A \rightarrow B$ , a weak cokernel of  $\alpha$  consists of three parts:

- an object  $K$ ,
- a morphism  $\varepsilon : B \rightarrow K$  such that  $\varepsilon \circ \alpha \sim_{A,K} 0$ ,
- a dependent function  $u$  mapping each  $\tau : B \rightarrow T$  satisfying  $\tau \circ \alpha \sim_{A,T} 0$  to a morphism  $u(\tau) : K \rightarrow T$  such that  $u(\tau) \circ \varepsilon \sim_{B,T} \tau$ .

The triple  $(K, \varepsilon, u)$  is called a *weak cokernel* of  $\alpha$ . We denote the object  $K$  of such a triple by `WeakCokernelObject( $\alpha$ )`. We say that the morphism  $u(\tau)$  is induced by the *universal property of the weak cokernel*.

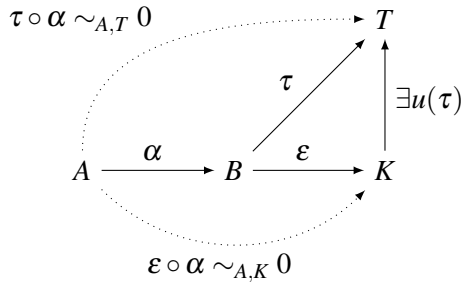

### 1.2.1 WeakCokernelObject (for IsCapCategoryMorphism)

▷ `WeakCokernelObject(alpha)` (attribute)

**Returns:** an object

The argument is a morphism  $\alpha : A \rightarrow B$ . The output is the weak cokernel  $K$  of  $\alpha$ .



### 1.2.2 WeakCokernelProjection (for IsCapCategoryMorphism)

▷ WeakCokernelProjection(alpha) (attribute)

**Returns:** a morphism in  $\text{Hom}(B, \text{WeakCokernelObject}(\alpha))$

The argument is a morphism  $\alpha : A \rightarrow B$ . The output is the weak cokernel projection  $\varepsilon : B \rightarrow \text{WeakCokernelObject}(\alpha)$ .

### 1.2.3 WeakCokernelProjectionWithGivenWeakCokernelObject (for IsCapCategoryMorphism, IsCapCategoryObject)

▷ WeakCokernelProjectionWithGivenWeakCokernelObject(alpha, K) (operation)

**Returns:** a morphism in  $\text{Hom}(B, K)$

The arguments are a morphism  $\alpha : A \rightarrow B$  and an object  $K = \text{WeakCokernelObject}(\alpha)$ . The output is the weak cokernel projection  $\varepsilon : B \rightarrow \text{WeakCokernelObject}(\alpha)$ .

### 1.2.4 WeakCokernelColift (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ WeakCokernelColift(alpha, tau) (operation)

**Returns:** a morphism in  $\text{Hom}(\text{WeakCokernelObject}(\alpha), T)$

The arguments are a morphism  $\alpha : A \rightarrow B$  and a test morphism  $\tau : B \rightarrow T$  satisfying  $\tau \circ \alpha \sim_{A,T} 0$ . The output is the morphism  $u(\tau) : \text{WeakCokernelObject}(\alpha) \rightarrow T$  given by the universal property of the weak cokernel.

### 1.2.5 WeakCokernelColiftWithGivenWeakCokernelObject (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ WeakCokernelColiftWithGivenWeakCokernelObject(alpha, tau, K) (operation)

**Returns:** a morphism in  $\text{Hom}(K, T)$

The arguments are a morphism  $\alpha : A \rightarrow B$ , a test morphism  $\tau : B \rightarrow T$  satisfying  $\tau \circ \alpha \sim_{A,T} 0$ , and an object  $K = \text{WeakCokernelObject}(\alpha)$ . The output is the morphism  $u(\tau) : K \rightarrow T$  given by the universal property of the weak cokernel.

### 1.2.6 AddWeakCokernelObject (for IsCapCategory, IsFunction)

▷ AddWeakCokernelObject(C, F) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakCokernelObject.  $F : \alpha \mapsto K$ .

### 1.2.7 AddWeakCokernelProjection (for IsCapCategory, IsFunction)

▷ AddWeakCokernelProjection(C, F) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakCokernelProjection.  $F : \alpha \mapsto \varepsilon$ .

### 1.2.8 AddWeakCokernelProjectionWithGivenWeakCokernelObject (for IsCapCategory, IsFunction)

▷ AddWeakCokernelProjectionWithGivenWeakCokernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakCokernelProjectionWithGivenWeakCokernelObject.  $F : (\alpha, K) \mapsto \varepsilon$ .

### 1.2.9 AddWeakCokernelColift (for IsCapCategory, IsFunction)

▷ AddWeakCokernelColift( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakCokernelColift.  $F : (\alpha, \tau) \mapsto u(\tau)$ .

### 1.2.10 AddWeakCokernelColiftWithGivenWeakCokernelObject (for IsCapCategory, IsFunction)

▷ AddWeakCokernelColiftWithGivenWeakCokernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakCokernelColiftWithGivenWeakCokernelObject.  $F : (\alpha, \tau, K) \mapsto u(\tau)$ .

## 1.3 Weak bi-fiber product

For a given pair of morphisms  $(\alpha : A \rightarrow B, \beta : C \rightarrow B)$ , a weak bi-fiber product of  $(\alpha, \beta)$  consists of three parts:

- an object  $P$ ,
- morphisms  $\pi_1 : P \rightarrow A, \pi_2 : P \rightarrow B$  such that  $\alpha \circ \pi_1 \sim_{P,B} \beta \circ \pi_2$ ,
- a dependent function  $u$  mapping each pair  $\tau = (\tau_1, \tau_2)$  of morphisms  $\tau_1 : T \rightarrow A, \tau_2 : T \rightarrow C$  with the property  $\alpha \circ \tau_1 \sim_{T,B} \beta \circ \tau_2$  to a morphism  $u(\tau) : T \rightarrow P$  such that  $\pi_1 \circ u(\tau) \sim_{A,T} \tau_1$  and  $\pi_2 \circ u(\tau) \sim_{C,T} \tau_2$ .

The quadrupel  $(P, \pi_1, \pi_2, u)$  is called a *weak bi-fiber product* of  $(\alpha, \beta)$ . We denote the object  $P$  of such a quadrupel by  $\text{WeakBiFiberProduct}(\alpha, \beta)$ . We say that the morphism  $u(\tau)$  is induced by the *universal property of the weak bi-fiber product*.



### 1.3.1 WeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ WeakBiFiberProduct(alpha, beta) (operation)

**Returns:** an object

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the weak bi-fiber product  $P$  of  $\alpha$  and  $\beta$ .

### 1.3.2 ProjectionInFirstFactorOfWeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ ProjectionInFirstFactorOfWeakBiFiberProduct(alpha, beta) (operation)

**Returns:** a morphism in  $\text{Hom}(P, A)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the first weak bi-fiber product projection  $\pi_1 : P \rightarrow A$ .

### 1.3.3 ProjectionInFirstFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ ProjectionInFirstFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct(alpha, beta, P) (operation)

**Returns:** a morphism in  $\text{Hom}(P, A)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$  and an object  $P = \text{WeakBiFiberProduct}(\alpha, \beta)$ . The output is the first weak bi-fiber product projection  $\pi_1 : P \rightarrow A$ .

### 1.3.4 ProjectionInSecondFactorOfWeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ ProjectionInSecondFactorOfWeakBiFiberProduct(alpha, beta) (operation)

**Returns:** a morphism in  $\text{Hom}(P, C)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the second weak bi-fiber product projection  $\pi_2 : P \rightarrow C$ .

### 1.3.5 ProjectionInSecondFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `ProjectionInSecondFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct(alpha, beta, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, C)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$  and an object  $P = \text{WeakBiFiberProduct}(\alpha, \beta)$ . The output is the second weak bi-fiber product projection  $\pi_2 : P \rightarrow C$ .

### 1.3.6 UniversalMorphismIntoWeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `UniversalMorphismIntoWeakBiFiberProduct(alpha, beta, tau_1, tau_2)` (operation)

**Returns:** a morphism in  $\text{Hom}(T, P)$

The arguments are four morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ ,  $\tau_1 : T \rightarrow A$ ,  $\tau_2 : T \rightarrow C$ . The output is the morphism  $u(\tau)$  induced by the universal property of the weak bi-fiber product  $P$  of  $\alpha$  and  $\beta$ .

### 1.3.7 UniversalMorphismIntoWeakBiFiberProductWithGivenWeakBiFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `UniversalMorphismIntoWeakBiFiberProductWithGivenWeakBiFiberProduct(alpha, beta, tau_1, tau_2, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(T, P)$

The arguments are four morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ ,  $\tau_1 : T \rightarrow A$ ,  $\tau_2 : T \rightarrow C$  and an object  $P = \text{WeakBiFiberProduct}(\alpha, \beta)$ . The output is the morphism  $u(\tau)$  induced by the universal property of the weak bi-fiber product  $P$ .

### 1.3.8 WeakBiFiberProductMorphismToDirectSum (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `WeakBiFiberProductMorphismToDirectSum(alpha, beta)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, A \oplus C)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the morphism  $P \rightarrow A \oplus C$  obtained from the two weak bi-fiber product projections  $\pi_1$  and  $\pi_2$  and the universal property of the direct sum.

### 1.3.9 AddWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ `AddWeakBiFiberProduct(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `WeakBiFiberProduct`.  $F : (\alpha, \beta) \mapsto P$

### 1.3.10 AddProjectionInFirstFactorOfWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ AddProjectionInFirstFactorOfWeakBiFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation ProjectionInFirstFactorOfWeakBiFiberProduct.  $F : (\alpha, \beta) \mapsto \pi_1$

### 1.3.11 AddProjectionInSecondFactorOfWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ AddProjectionInSecondFactorOfWeakBiFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation ProjectionInSecondFactorOfWeakBiFiberProduct.  $F : (\alpha, \beta) \mapsto \pi_2$

### 1.3.12 AddProjectionInFirstFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ AddProjectionInFirstFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation ProjectionInFirstFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct.

$F : (\alpha, \beta, P) \mapsto \pi_1$

### 1.3.13 AddProjectionInSecondFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ AddProjectionInSecondFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation ProjectionInSecondFactorOfWeakBiFiberProductWithGivenWeakBiFiberProduct.

$F : (\alpha, \beta, P) \mapsto \pi_2$

### 1.3.14 AddUniversalMorphismIntoWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ AddUniversalMorphismIntoWeakBiFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation UniversalMorphismIntoWeakBiFiberProduct.  $F : (\alpha, \beta, \tau_1, \tau_2) \mapsto u(\tau)$

### 1.3.15 AddUniversalMorphismIntoWeakBiFiberProductWithGivenWeakBiFiberProduct (for IsCapCategory, IsFunction)

▷ AddUniversalMorphismIntoWeakBiFiberProductWithGivenWeakBiFiberProduct( $C, F$ )  
(operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation UniversalMorphismIntoWeakBiFiberProductWithGivenWeakBiFiberProduct.  $F : (\alpha, \beta, \tau_1, \tau_2, P) \mapsto u(\tau)$

### 1.3.16 AddWeakBiFiberProductMorphismToDirectSum (for IsCapCategory, IsFunction)

▷ AddWeakBiFiberProductMorphismToDirectSum( $C, F$ )  
(operation)

**Returns:** nothing


The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakBiFiberProductMorphismToDirectSum.  $F : (\alpha, \beta) \mapsto \text{WeakBiFiberProductMorphismToDirectSum}(\alpha, \beta)$

## 1.4 Biased weak fiber product

For a given pair of morphisms  $(\alpha : A \rightarrow B, \beta : C \rightarrow B)$ , a biased weak fiber product of  $(\alpha, \beta)$  consists of three parts:

- an object  $P$ ,
- a morphism  $\pi : P \rightarrow A$  such that there exists a morphism  $\delta : P \rightarrow C$  such that  $\beta \circ \delta \sim_{P,B} \alpha \circ \pi$ ,
- a dependent function  $u$  mapping each  $\tau : T \rightarrow A$ , which admits a morphism  $\mu : T \rightarrow C$  with  $\beta \circ \mu \sim_{T,B} \alpha \circ \tau$ , to a morphism  $u(\tau) : T \rightarrow P$  such that  $\pi \circ u(\tau) \sim_{T,A} \tau$ .

The triple  $(P, \pi, u)$  is called a *biased weak fiber product* of  $(\alpha, \beta)$ . We denote the object  $P$  of such a triple by  $\text{BiasedWeakFiberProduct}(\alpha, \beta)$ . We say that the morphism  $u(\tau)$  is induced by the *universal property of the biased weak fiber product*.



#### 1.4.1 BiasedWeakFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ BiasedWeakFiberProduct(alpha, beta) (operation)

**Returns:** an object

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the biased weak fiber product  $P$  of  $\alpha$  and  $\beta$ .

#### 1.4.2 ProjectionOfBiasedWeakFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ ProjectionOfBiasedWeakFiberProduct(alpha, beta) (operation)

**Returns:** a morphism in  $\text{Hom}(P, A)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the biased weak fiber product projection  $\pi : P \rightarrow A$ .

#### 1.4.3 ProjectionOfBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ ProjectionOfBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct(alpha, beta, P) (operation)

**Returns:** a morphism in  $\text{Hom}(P, A)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ , and an object  $P = \text{BiasedWeakFiberProduct}(\alpha, \beta)$ . The output is the biased weak fiber product projection  $\pi : P \rightarrow A$ .

#### 1.4.4 UniversalMorphismIntoBiasedWeakFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ UniversalMorphismIntoBiasedWeakFiberProduct(alpha, beta, tau) (operation)

**Returns:** a morphism in  $\text{Hom}(T, P)$

The arguments are three morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ ,  $\tau : T \rightarrow A$ . The output is the morphism  $u(\tau)$  induced by the universal property of the biased weak fiber product  $P$  of  $\alpha$  and  $\beta$ .

#### 1.4.5 UniversalMorphismIntoBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ UniversalMorphismIntoBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct(alpha, beta, tau, P) (operation)

**Returns:** a morphism in  $\text{Hom}(T, P)$

The arguments are three morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ ,  $\tau : T \rightarrow A$  and an object  $P = \text{BiasedWeakFiberProduct}(\alpha, \beta)$ . The output is the morphism  $u(\tau)$  induced by the universal property of the biased weak fiber product  $P$  of  $\alpha$  and  $\beta$ .

#### 1.4.6 AddBiasedWeakFiberProduct (for IsCapCategory, IsFunction)

▷ AddBiasedWeakFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation BiasedWeakFiberProduct.  $F : (\alpha, \beta) \mapsto P$

#### 1.4.7 AddProjectionOfBiasedWeakFiberProduct (for IsCapCategory, IsFunction)

▷ AddProjectionOfBiasedWeakFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation ProjectionOfBiasedWeakFiberProduct.  $F : (\alpha, \beta) \mapsto \pi$

#### 1.4.8 AddProjectionOfBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct (for IsCapCategory, IsFunction)

▷ AddProjectionOfBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation ProjectionOfBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct.  $F : (\alpha, \beta, P) \mapsto \pi$

#### 1.4.9 AddUniversalMorphismIntoBiasedWeakFiberProduct (for IsCapCategory, IsFunction)

▷ AddUniversalMorphismIntoBiasedWeakFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation UniversalMorphismIntoBiasedWeakFiberProduct.  $F : (\alpha, \beta, \tau) \mapsto u(\tau)$

#### 1.4.10 AddUniversalMorphismIntoBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct (for IsCapCategory, IsFunction)

▷ AddUniversalMorphismIntoBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation UniversalMorphismIntoBiasedWeakFiberProductWithGivenBiasedWeakFiberProduct.  $F : (\alpha, \beta, \tau, P) \mapsto u(\tau)$



## 1.5 Weak bi-pushout

For a given pair of morphisms  $(\alpha : A \rightarrow B, \beta : A \rightarrow C)$ , a weak bi-pushout of  $(\alpha, \beta)$  consists of three parts:

- an object  $P$ ,
- morphisms  $\iota_1 : B \rightarrow P$ ,  $\iota_2 : C \rightarrow P$  such that  $\iota_1 \circ \alpha \sim_{A,P} \iota_2 \circ \beta$ ,
- a dependent function  $u$  mapping each pair  $\tau = (\tau_1, \tau_2)$  of morphisms  $\tau_1 : B \rightarrow T$ ,  $\tau_2 : C \rightarrow T$  with the property  $\tau_1 \circ \alpha \sim_{A,T} \tau_2 \circ \beta$  to a morphism  $u(\tau) : P \rightarrow T$  such that  $u(\tau) \circ \iota_1 \sim_{B,T} \tau_1$  and  $u(\tau) \circ \iota_2 \sim_{C,T} \tau_2$ .

The quadrupel  $(P, \iota_1, \iota_2, u)$  is called a *weak bi-pushout* of  $(\alpha, \beta)$ . We denote the object  $P$  of such a quadrupel by  $\text{WeakBiPushout}(\alpha, \beta)$ . We say that the morphism  $u(\tau)$  is induced by the *universal property of the weak bi-pushout*.



### 1.5.1 WeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `WeakBiPushout(alpha, beta)` (operation)

**Returns:** an object

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ . The output is the weak bi-pushout  $P$  of  $\alpha$  and  $\beta$ .

### 1.5.2 InjectionOfFirstCofactorOfWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `InjectionOfFirstCofactorOfWeakBiPushout(alpha, beta)` (operation)

**Returns:** a morphism in  $\text{Hom}(B, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ . The output is the first weak bi-pushout injection  $\iota_1 : B \rightarrow P$ .

### 1.5.3 InjectionOfSecondCofactorOfWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `InjectionOfSecondCofactorOfWeakBiPushout(alpha, beta)` (operation)

**Returns:** a morphism in  $\text{Hom}(C, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ . The output is the second weak bi-pushout injection  $\iota_2 : C \rightarrow P$ .

#### 1.5.4 InjectionOfFirstCofactorOfWeakBiPushoutWithGivenWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `InjectionOfFirstCofactorOfWeakBiPushoutWithGivenWeakBiPushout(alpha, beta, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(B, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$  and an object  $P = \text{WeakBiPushout}(\alpha, \beta)$ . The output is the first weak bi-pushout injection  $t_1 : B \rightarrow P$ .

#### 1.5.5 InjectionOfSecondCofactorOfWeakBiPushoutWithGivenWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `InjectionOfSecondCofactorOfWeakBiPushoutWithGivenWeakBiPushout(alpha, beta, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(C, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$  and an object  $P = \text{WeakBiPushout}(\alpha, \beta)$ . The output is the second weak bi-pushout injection  $t_2 : C \rightarrow P$ .

#### 1.5.6 UniversalMorphismFromWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `UniversalMorphismFromWeakBiPushout(alpha, beta, tau_1, tau_2)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, T)$

The arguments are four morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ ,  $\tau_1 : B \rightarrow T$ ,  $\tau_2 : C \rightarrow T$ . The output is the morphism  $u(\tau)$  induced by the universal property of the weak bi-pushout  $P$  of  $\alpha$  and  $\beta$ .

#### 1.5.7 UniversalMorphismFromWeakBiPushoutWithGivenWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `UniversalMorphismFromWeakBiPushoutWithGivenWeakBiPushout(alpha, beta, tau_1, tau_2, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, T)$

The arguments are four morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ ,  $\tau_1 : B \rightarrow T$ ,  $\tau_2 : C \rightarrow T$ , and an object  $P = \text{WeakBiPushout}(\alpha, \beta)$ . The output is the morphism  $u(\tau)$  induced by the universal property of the weak bi-pushout  $P$  of  $\alpha$  and  $\beta$ .

#### 1.5.8 DirectSumMorphismToWeakBiPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `DirectSumMorphismToWeakBiPushout(alpha, beta)` (operation)

**Returns:** a morphism in  $\text{Hom}(B \oplus C, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : C \rightarrow B$ . The output is the morphism  $B \oplus C \rightarrow P$  obtained from the two weak bi-fiber product injections  $t_1$  and  $t_2$  and the universal property of the direct sum.

### 1.5.9 AddWeakBiPushout (for IsCapCategory, IsFunction)

▷ AddWeakBiPushout( $C$ ,  $F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation WeakBiPushout.  $F : (\alpha, \beta) \mapsto P$

### 1.5.10 AddInjectionOfFirstCofactorOfWeakBiPushout (for IsCapCategory, IsFunction)

▷ AddInjectionOfFirstCofactorOfWeakBiPushout( $C$ ,  $F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation InjectionOfFirstCofactorOfWeakBiPushout.  $F : (\alpha, \beta) \mapsto \iota_1$

### 1.5.11 AddInjectionOfSecondCofactorOfWeakBiPushout (for IsCapCategory, IsFunction)

▷ AddInjectionOfSecondCofactorOfWeakBiPushout( $C$ ,  $F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation InjectionOfSecondCofactorOfWeakBiPushout.  $F : (\alpha, \beta) \mapsto \iota_2$

### 1.5.12 AddInjectionOfFirstCofactorOfWeakBiPushoutWithGivenWeakBiPushout (for IsCapCategory, IsFunction)

▷ AddInjectionOfFirstCofactorOfWeakBiPushoutWithGivenWeakBiPushout( $C$ ,  $F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation InjectionOfFirstCofactorOfWeakBiPushoutWithGivenWeakBiPushout.  $F : (\alpha, \beta, P) \mapsto \iota_1$

### 1.5.13 AddInjectionOfSecondCofactorOfWeakBiPushoutWithGivenWeakBiPushout (for IsCapCategory, IsFunction)

▷ AddInjectionOfSecondCofactorOfWeakBiPushoutWithGivenWeakBiPushout( $C$ ,  $F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation InjectionOfSecondCofactorOfWeakBiPushoutWithGivenWeakBiPushout.  $F : (\alpha, \beta, P) \mapsto \iota_2$

### 1.5.14 AddUniversalMorphismFromWeakBiPushout (for IsCapCategory, IsFunction)

▷ AddUniversalMorphismFromWeakBiPushout( $C$ ,  $F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `UniversalMorphismFromWeakBiPushout`.  $F : (\alpha, \beta, \tau_1, \tau_2) \mapsto u(\tau)$

### 1.5.15 AddUniversalMorphismFromWeakBiPushoutWithGivenWeakBiPushout (for IsCapCategory, IsFunction)

▷ `AddUniversalMorphismFromWeakBiPushoutWithGivenWeakBiPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `UniversalMorphismFromWeakBiPushoutWithGivenWeakBiPushout`.  $F : (\alpha, \beta, \tau_1, \tau_2, P) \mapsto u(\tau)$

### 1.5.16 AddDirectSumMorphismToWeakBiPushout (for IsCapCategory, IsFunction)

▷ `AddDirectSumMorphismToWeakBiPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `DirectSumMorphismToWeakBiPushout`.  $F : (\alpha, \beta) \mapsto \text{DirectSumMorphismToWeakBiPushout}(\alpha, \beta)$

## 1.6 Biased weak pushout

For a given pair of morphisms  $(\alpha : A \rightarrow B, \beta : A \rightarrow C)$ , a biased weak pushout of  $(\alpha, \beta)$  consists of three parts:

- an object  $P$ ,
- a morphism  $\iota : B \rightarrow P$  such that there exists a morphism  $\delta : C \rightarrow P$  such that  $\delta \circ \beta \sim_{A,P} \iota \circ \alpha$ ,
- a dependent function  $u$  mapping each  $\tau : B \rightarrow T$ , which admits a morphism  $\mu : C \rightarrow T$  with  $\mu \circ \beta \sim_{B,T} \tau \circ \alpha$ , to a morphism  $u(\tau) : P \rightarrow T$  such that  $u(\tau) \circ \iota \sim_{A,T} \tau$ .

The triple  $(P, \iota, u)$  is called a *biased weak pushout* of  $(\alpha, \beta)$ . We denote the object  $P$  of such a triple by `BiasedWeakPushout` $(\alpha, \beta)$ . We say that the morphism  $u(\tau)$  is induced by the *universal property of the biased weak pushout*.



### 1.6.1 BiasedWeakPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `BiasedWeakPushout(alpha, beta)` (operation)

**Returns:** an object

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ . The output is the biased weak pushout  $P$  of  $\alpha$  and  $\beta$ .

### 1.6.2 InjectionOfBiasedWeakPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `InjectionOfBiasedWeakPushout(alpha, beta)` (operation)

**Returns:** a morphism in  $\text{Hom}(B, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ . The output is the biased weak pushout injection  $\iota : B \rightarrow P$ .

### 1.6.3 InjectionOfBiasedWeakPushoutWithGivenBiasedWeakPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `InjectionOfBiasedWeakPushoutWithGivenBiasedWeakPushout(alpha, beta, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(B, P)$

The arguments are two morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$  and an object  $P = \text{BiasedWeakPushout}(\alpha, \beta)$ . The output is the biased weak pushout injection  $\iota : B \rightarrow P$ .

### 1.6.4 UniversalMorphismFromBiasedWeakPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ `UniversalMorphismFromBiasedWeakPushout(alpha, beta, tau)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, T)$

The arguments are three morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ ,  $\tau : B \rightarrow T$ . The output is the morphism  $u(\tau)$  induced by the universal property of the biased weak pushout  $P$  of  $\alpha$  and  $\beta$ .

### 1.6.5 UniversalMorphismFromBiasedWeakPushoutWithGivenBiasedWeakPushout (for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject)

▷ `UniversalMorphismFromBiasedWeakPushoutWithGivenBiasedWeakPushout(alpha, beta, tau, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, T)$

The arguments are three morphisms  $\alpha : A \rightarrow B$ ,  $\beta : A \rightarrow C$ ,  $\tau : B \rightarrow T$  and an object  $P = \text{BiasedWeakPushout}(\alpha, \beta)$ . The output is the morphism  $u(\tau)$  induced by the universal property of the biased weak pushout  $P$  of  $\alpha$  and  $\beta$ .

### 1.6.6 AddBiasedWeakPushout (for IsCapCategory, IsFunction)

▷ `AddBiasedWeakPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `BiasedWeakPushout`.  $F : (\alpha, \beta) \mapsto P$

### 1.6.7 AddInjectionOfBiasedWeakPushout (for IsCapCategory, IsFunction)

▷ `AddInjectionOfBiasedWeakPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `InjectionOfBiasedWeakPushout`.  $F : (\alpha, \beta) \mapsto \iota$

### 1.6.8 AddInjectionOfBiasedWeakPushoutWithGivenBiasedWeakPushout (for IsCapCategory, IsFunction)

▷ `AddInjectionOfBiasedWeakPushoutWithGivenBiasedWeakPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `InjectionOfBiasedWeakPushoutWithGivenBiasedWeakPushout`.  $F : (\alpha, \beta, P) \mapsto \iota$

### 1.6.9 AddUniversalMorphismFromBiasedWeakPushout (for IsCapCategory, IsFunction)

▷ `AddUniversalMorphismFromBiasedWeakPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `UniversalMorphismFromBiasedWeakPushout`.  $F : (\alpha, \beta, \tau) \mapsto u(\tau)$

### 1.6.10 AddUniversalMorphismFromBiasedWeakPushoutWithGivenBiasedWeakPushout (for IsCapCategory, IsFunction)

▷ `AddUniversalMorphismFromBiasedWeakPushoutWithGivenBiasedWeakPushout(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `UniversalMorphismFromBiasedWeakPushoutWithGivenBiasedWeakPushout`.  $F : (\alpha, \beta, \tau, P) \mapsto u(\tau)$

## 1.7 Abelian constructions

### 1.7.1 SomeProjectiveObjectForKernelObject (for IsCapCategoryMorphism)

▷ `SomeProjectiveObjectForKernelObject(alpha)` (attribute)

**Returns:** an object

The argument is a morphism  $\alpha$ . The output is the source of `EpimorphismFromSomeProjectiveObjectForKernelObject` applied to  $\alpha$ .

### 1.7.2 EpimorphismFromSomeProjectiveObjectForKernelObject (for IsCapCategory-Morphism)

▷ `EpimorphismFromSomeProjectiveObjectForKernelObject(alpha)` (attribute)

**Returns:** a morphism in  $\text{Hom}(P, \text{KernelObject}(\alpha))$

The argument is a morphism  $\alpha$ . The output is an epimorphism  $\pi : P \rightarrow \text{KernelObject}(\alpha)$  with  $P$  a projective object.

### 1.7.3 EpimorphismFromSomeProjectiveObjectForKernelObjectWithGivenSomeProjectiveObjectForKernelObject (for IsCapCategoryMorphism, IsCapCategoryObject)

▷ `EpimorphismFromSomeProjectiveObjectForKernelObjectWithGivenSomeProjectiveObjectForKernelObject(alpha, P)` (operation)

**Returns:** a morphism in  $\text{Hom}(P, \text{KernelObject}(\alpha))$

The arguments are a morphism  $\alpha$  and an object  $P = \text{SomeProjectiveObjectForKernelObject}(\alpha)$ . The output is an epimorphism  $\pi : P \rightarrow \text{KernelObject}(\alpha)$ .

### 1.7.4 SomeInjectiveObjectForCokernelObject (for IsCapCategoryMorphism)

▷ `SomeInjectiveObjectForCokernelObject(alpha)` (attribute)

**Returns:** an object

The argument is a morphism  $\alpha$ . The output is the range of `MonomorphismToSomeInjectiveObjectForCokernelObject` applied to  $\alpha$ .

### 1.7.5 MonomorphismToSomeInjectiveObjectForCokernelObject (for IsCapCategoryMorphism)

▷ `MonomorphismToSomeInjectiveObjectForCokernelObject(alpha)` (attribute)

**Returns:** a morphism in  $\text{Hom}(\text{CokernelObject}(\alpha), I)$

The argument is a morphism  $\alpha$ . The output is a monomorphism  $\iota : \text{CokernelObject}(\alpha) \rightarrow I$  with  $I$  an injective object.

### 1.7.6 MonomorphismToSomeInjectiveObjectForCokernelObjectWithGivenSomeInjectiveObjectForCokernelObject (for IsCapCategoryMorphism, IsCapCategoryObject)

▷ `MonomorphismToSomeInjectiveObjectForCokernelObjectWithGivenSomeInjectiveObjectForCokernelObject(alpha, I)` (operation)

**Returns:** a morphism in  $\text{Hom}(\text{CokernelObject}(\alpha), I)$

The arguments are a morphism  $\alpha$  and an object  $I = \text{SomeInjectiveObjectForCokernelObject}(\alpha)$ . The output is a monomorphism  $\iota : \text{CokernelObject}(\alpha) \rightarrow I$ .

### 1.7.7 AddSomeProjectiveObjectForKernelObject (for IsCapCategory, IsFunction)

▷ `AddSomeProjectiveObjectForKernelObject(C, F)` (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation `SomeProjectiveObjectForKernelObject`.  $F : \alpha \mapsto P$ .

### 1.7.8 AddSomeInjectiveObjectForCokernelObject (for IsCapCategory, IsFunction)

▷ AddSomeInjectiveObjectForCokernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation SomeInjectiveObjectForCokernelObject.  $F : \alpha \mapsto I$ .

### 1.7.9 AddEpimorphismFromSomeProjectiveObjectForKernelObject (for IsCapCategory, IsFunction)

▷ AddEpimorphismFromSomeProjectiveObjectForKernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation EpimorphismFromSomeProjectiveObjectForKernelObject.  $F : \alpha \mapsto \pi$ .

### 1.7.10 AddMonomorphismToSomeInjectiveObjectForCokernelObject (for IsCapCategory, IsFunction)

▷ AddMonomorphismToSomeInjectiveObjectForCokernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation MonomorphismToSomeInjectiveObjectForCokernelObject.  $F : \alpha \mapsto \iota$ .

### 1.7.11 AddEpimorphismFromSomeProjectiveObjectForKernelObjectWithGivenSomeProjectiveObject (for IsCapCategory, IsFunction)

▷ AddEpimorphismFromSomeProjectiveObjectForKernelObjectWithGivenSomeProjectiveObjectForKernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation EpimorphismFromSomeProjectiveObjectForKernelObjectWithGivenSomeProjectiveObjectForKernelObject.  $F : (\alpha, P) \mapsto \pi$ .

### 1.7.12 AddMonomorphismToSomeInjectiveObjectForCokernelObjectWithGivenSomeInjectiveObject (for IsCapCategory, IsFunction)

▷ AddMonomorphismToSomeInjectiveObjectForCokernelObjectWithGivenSomeInjectiveObjectForCokernelObject( $C, F$ ) (operation)

**Returns:** nothing

The arguments are a category  $C$  and a function  $F$ . This operation adds the given function  $F$  to the category for the basic operation MonomorphismToSomeInjectiveObjectForCokernelObjectWithGivenSomeInjectiveObjectForCokernelObject.  $F : (\alpha, I) \mapsto \iota$ .



## Chapter 2

# Additive closure

### 2.1 GAP Categories

#### 2.1.1 IsAdditiveClosureCategory (for IsCapCategory)

- ▷ `IsAdditiveClosureCategory(object)` (filter)  
**Returns:** true or false  
The GAP category of additive closures of Ab-categories.

#### 2.1.2 IsAdditiveClosureObject (for IsCapCategoryObject)

- ▷ `IsAdditiveClosureObject(object)` (filter)  
**Returns:** true or false  
The GAP category of objects in additive closures of Ab-categories.

#### 2.1.3 IsAdditiveClosureMorphism (for IsCapCategoryMorphism)

- ▷ `IsAdditiveClosureMorphism(object)` (filter)  
**Returns:** true or false  
The GAP category of morphisms in additive closures of Ab-categories.

### 2.2 Constructors

#### 2.2.1 AdditiveClosure (for IsCapCategory)

- ▷ `AdditiveClosure(C)` (attribute)  
**Returns:** the category  $C^\oplus$   
The argument is an Ab-category  $C$ . The output is its additive closure  $C^\oplus$ .

#### 2.2.2 AdditiveClosureObject (for IsList, IsAdditiveClosureCategory)

- ▷ `AdditiveClosureObject(L, C^\oplus\oplus)` (operation)  
**Returns:** an object in  $C^\oplus$   
The argument is a list of objects  $L = [A_1, \dots, A_n]$  in an Ab-category  $C$ . The output is the formal direct sum  $A_1 \oplus \dots \oplus A_n$  in the additive closure  $C^\oplus$ .

### 2.2.3 AsAdditiveClosureObject (for IsCapCategoryObject)

▷ `AsAdditiveClosureObject(A)` (attribute)

**Returns:** an object in  $C^\oplus$

The argument is an object  $A$  in an Ab-category  $C$ . The output is the image of  $A$  under the inclusion functor  $\iota : C \rightarrow C^\oplus$ .

### 2.2.4 AdditiveClosureMorphism (for IsAdditiveClosureObject, IsList, IsAdditiveClosureObject)

▷ `AdditiveClosureMorphism(A, M, B)` (operation)

**Returns:** a morphism in  $\text{Hom}_{C^\oplus}(A, B)$

The arguments are formal direct sums  $A = A_1 \oplus \dots \oplus A_m$ ,  $B = B_1 \oplus \dots \oplus B_n$  in some additive category  $C^\oplus$  and an  $m \times n$  matrix  $M := (\alpha_{ij} : A_i \rightarrow B_j)_{ij}$  for  $i = 1, \dots, m, j = 1, \dots, n$ . The output is the formal morphism between  $A$  and  $B$  that is defined by  $M$ .

### 2.2.5 AsAdditiveClosureMorphism (for IsCapCategoryMorphism)

▷ `AsAdditiveClosureMorphism(alpha)` (attribute)

**Returns:** a morphism in  $C^\oplus$

The argument is a morphism  $\alpha$  in an Ab-category  $C$ . The output is the image of  $\alpha$  under the inclusion functor  $\iota : C \rightarrow C^\oplus$ .

### 2.2.6 InclusionFunctorInAdditiveClosure (for IsCapCategory)

▷ `InclusionFunctorInAdditiveClosure(C)` (attribute)

**Returns:** a functor  $C \rightarrow C^\oplus$

The argument is an Ab-category  $C$ . The output is the inclusion functor  $\iota : C \rightarrow C^\oplus$ .

### 2.2.7 ExtendFunctorToAdditiveClosures (for IsCapFunctor)

▷ `ExtendFunctorToAdditiveClosures(F)` (attribute)

**Returns:** a functor  $C^\oplus \rightarrow D^\oplus$

The argument is a functor  $F : C \rightarrow D$ , and the output is the extension functor  $F^\oplus : C^\oplus \rightarrow D^\oplus$ .

### 2.2.8 ExtendFunctorWithAdditiveRangeToFunctorFromAdditiveClosureOfSource (for IsCapFunctor)

▷ `ExtendFunctorWithAdditiveRangeToFunctorFromAdditiveClosureOfSource(F)` (attribute)

**Returns:** a functor  $C^\oplus \rightarrow D$

The argument is a functor  $F : C \rightarrow D$ , where  $D$  is an additive category. The output is the extension functor  $F^\oplus : C^\oplus \rightarrow D$ .

### 2.2.9 ExtendFunctorToAdditiveClosureOfSource (for IsCapFunctor)

▷ `ExtendFunctorToAdditiveClosureOfSource(F)` (attribute)

**Returns:** a functor  $C^\oplus \rightarrow D^\oplus$  or  $C^\oplus \rightarrow D$

The argument is a functor  $F : C \rightarrow D$ . If  $D$  is not known to be an additive category, then return `ExtendFunctorToAdditiveClosures(F)`, otherwise return `ExtendFunctorWithAdditiveRangeToFunctorFromAdditiveClosureOfSource(F)`.

### 2.2.10 ExtendNaturalTransformationToAdditiveClosureOfSource (for IsCapNaturalTransformation)

▷ `ExtendNaturalTransformationToAdditiveClosureOfSource(eta)` (attribute)

**Returns:** a natural transformation from  $F^\oplus$  to  $G^\oplus$

The argument is a natural transformation  $\eta : (F : C \rightarrow D) \Rightarrow (G : C \rightarrow D)$  where  $D$  is an additive category. The output is the extension natural transformation  $\eta^\oplus : (F^\oplus : C^\oplus \rightarrow D) \rightarrow (G^\oplus : C^\oplus \rightarrow D)$ .

## 2.3 Attributes

### 2.3.1 UnderlyingCategory (for IsAdditiveClosureCategory)

▷ `UnderlyingCategory(A)` (attribute)

**Returns:** the category  $C$

The argument is some additive closure category  $A := C^\oplus$ . The output is  $C$ .

### 2.3.2 ObjectList (for IsAdditiveClosureObject)

▷ `ObjectList(A)` (attribute)

**Returns:** a list of the objects in  $C$

The argument is a formal direct sum  $A := A_1 \oplus \dots \oplus A_m$  in some additive closure category  $C^\oplus$ . The output is the list  $[A_1, \dots, A_m]$ .

### 2.3.3 MorphismMatrix (for IsAdditiveClosureMorphism)

▷ `MorphismMatrix(alpha)` (attribute)

**Returns:** a list of lists the morphisms in  $C$

The argument is a morphism  $\alpha : A \rightarrow B$  between formal direct sums in some additive closure category  $C^\oplus$ . The output is the defining matrix of  $\alpha$ .

### 2.3.4 NrRows (for IsAdditiveClosureMorphism)

▷ `NrRows(alpha)` (attribute)

**Returns:** a non-negative integer

The argument is a morphism  $\alpha : A \rightarrow B$  between formal direct sums. The output is the number of summands of the the source.

### 2.3.5 NrCols (for IsAdditiveClosureMorphism)

▷ `NrCols(alpha)` (attribute)

**Returns:** a non-negative integer

The argument is a morphism  $\alpha : A \rightarrow B$  between formal direct sums. The output is the number of summands of the the range.

## 2.4 Operators

### 2.4.1 $\backslash[\backslash]$ (for `IsAdditiveClosureObject`, `IsInt`)

▷  $\backslash[\backslash](A, i)$  (operation)

**Returns:** an object in  $C$

The arguments are a formal direct sum  $A$  in some additive category  $C^\oplus$  and an integers  $i$ . The output is the  $i$ 'th entry in `ObjectList(A)`.

### 2.4.2 $\backslash[\backslash]$ (for `IsAdditiveClosureMorphism`, `IsInt`)

▷  $\backslash[\backslash](\alpha, i)$  (operation)

**Returns:** a list of morphisms in  $C$

The arguments are morphism  $\alpha : A \rightarrow B$  between formal direct sums in some additive category  $C^\oplus$  and an integer  $i$ . The output is the  $i$ 'th entry in `MorphismMatrix( $\alpha$ )`.

### 2.4.3 $\backslash[\backslash]$ (for `IsAdditiveClosureMorphism`, `IsInt`, `IsInt`)

▷  $\backslash[\backslash](\alpha, i, j)$  (operation)

**Returns:** a morphism  $C$

The arguments are a morphism  $\alpha : A \rightarrow B$  between formal direct sums in some additive category  $C^\oplus$  and two integers  $i, j$ . The output is the  $(i, j)$ 'th entry in `MorphismMatrix( $\alpha$ )`.

### 2.4.4 $\backslash/$ (for `IsList`, `IsAdditiveClosureCategory`)

▷  $\backslash/(arg1, arg2)$  (operation)

The input is either a list of objects or list of lists of morphisms. The method delegates to either `AdditiveClosureObject` or `AdditiveClosureMorphism`.

### 2.4.5 $\backslash/$ (for `IsCapCategoryCell`, `IsAdditiveClosureCategory`)

▷  $\backslash/(arg1, arg2)$  (operation)

This is a convenience method for `AsAdditiveClosureObject` and `AsAdditiveClosureMorphism`.

## Chapter 3

# Adelman category

Let  $A$  be an additive category. The Adelman category of  $A$  is the free abelian category induced by  $A$ . An object  $x$  of the Adelman category of  $A$  consists of a composable pair  $(\rho : a \rightarrow b, \gamma : b \rightarrow c)$  in  $A$ . We call  $\rho$  the *relation morphism*, and  $\gamma$  the *corelation morphism* of  $x$ .

Given two objects  $x = (\rho : a \rightarrow b, \gamma : b \rightarrow c)$  and  $y = (\rho' : a' \rightarrow b', \gamma' : b' \rightarrow c')$ , a morphism  $\alpha$  from  $x$  to  $y$  in the Adelman category of  $A$  consists of a morphism  $\beta : b \rightarrow b'$ , called the *morphism datum*, that has to fit into some commutative diagram of the form

$$\begin{array}{ccccc}
 a & \xrightarrow{\rho} & b & \xrightarrow{\gamma} & c \\
 \omega \downarrow & & \downarrow \beta & & \downarrow \psi \\
 a' & \xrightarrow{\rho'} & b' & \xrightarrow{\gamma'} & c'
 \end{array}$$

Any such morphism  $\omega$  is called a *relation witness*, any such morphism  $\psi$  is called a *corelation witness*. Two morphisms between  $x$  and  $y$  with morphism data  $\beta$  and  $\beta'$  are congruent iff there exists  $\sigma_1 : b \rightarrow a'$  and  $\sigma_2 : c \rightarrow b'$  such that  $\beta - \beta' = \sigma_1 \cdot \rho' + \gamma \cdot \sigma_2$ . We call any such pair  $(\sigma_1, \sigma_2)$  a *witness pair* for  $\beta, \beta'$  being congruent.

### 3.1 GAP Categories

#### 3.1.1 IsAdelmanCategoryObject (for IsCapCategoryObject)

▷ `IsAdelmanCategoryObject(a)` (filter)

**Returns:** true or false

The GAP category of objects of an Adelman category. Every object of an Adelman category lies in this GAP category.

#### 3.1.2 IsAdelmanCategoryMorphism (for IsCapCategoryMorphism)

▷ `IsAdelmanCategoryMorphism(alpha)` (filter)

**Returns:** true or false

The GAP category of morphisms of an Adelman category. Every morphism of an Adelman category lies in this GAP category.

### 3.1.3 IsAdelmanCategory (for IsCapCategory)

▷ IsAdelmanCategory(*C*) (filter)

**Returns:** true or false

The GAP category of Adelman categories. Every CAP category which was created as an Adelman category lies in this GAP category.

## 3.2 Constructors

### 3.2.1 AdelmanCategory (for IsCapCategory)

▷ AdelmanCategory(*A*) (attribute)

**Returns:** a category

The argument is an additive CAP category *A*. The output is the Adelman category of *A*.

### 3.2.2 AdelmanCategoryObject (for IsCapCategoryMorphism, IsCapCategoryMorphism)

▷ AdelmanCategoryObject(*alpha*, *beta*) (operation)

**Returns:** an object

The arguments are two morphisms  $\alpha : a \rightarrow b$ ,  $\beta : b \rightarrow c$  of the same additive category *A*. The output is an object in the Adelman category of *A* whose relation morphism is  $\alpha$  and whose corelation morphism is  $\beta$ .

### 3.2.3 AdelmanCategoryMorphism (for IsAdelmanCategoryObject, IsCapCategoryMorphism, IsAdelmanCategoryObject)

▷ AdelmanCategoryMorphism(*x*, *alpha*, *y*) (operation)

**Returns:** a morphism in  $\text{Hom}(x, y)$

Let *A* be an additive category. The arguments are an object *x* in the Adelman category of *A*, a morphism  $\alpha : a \rightarrow b$  of *A*, and an object *y* in the Adelman category of *A*. The output is a morphism in the Adelman category of *A* whose morphism datum is given by  $\alpha$ .

### 3.2.4 AsAdelmanCategoryObject (for IsCapCategoryObject)

▷ AsAdelmanCategoryObject(*a*) (attribute)

**Returns:** an object

The argument is an object *a* of an additive category *A*. The output is an object in the Adelman category of *A* whose relation morphism is  $0 \rightarrow a$  and whose corelation morphism is  $a \rightarrow 0$ .

### 3.2.5 AsAdelmanCategoryMorphism (for IsCapCategoryMorphism)

▷ AsAdelmanCategoryMorphism(*alpha*) (attribute)

**Returns:** a morphism in  $\text{Hom}(x, y)$

The argument is a morphism  $\alpha : a \rightarrow b$  of an additive category *A*. The output is a morphism in the Adelman category of *A* whose source *x* is AsAdelmanCategoryObject(*a*), whose range *y* is AsAdelmanCategoryObject(*b*), and whose morphism datum is  $\alpha$ .

### 3.2.6 $\backslash/$ (for IsCapCategoryObject, IsAdelmanCategory)

▷  $\backslash/(a, C)$  (operation)

**Returns:** an object

This is a convenience method. The first argument is an object  $a$  which either lies in an additive category  $A$  (which was not created as a Freyd category) or in a Freyd category  $F$  of an underlying additive category  $A$ . The second argument is an Adelman category  $C$  of  $A$ . If  $a$  lies in  $A$  this method returns `AsAdelmanCategoryObject( a )`. If  $a$  lies in  $F$ , this method return an object in  $C$  whose relation morphism is the same as the relation morphism of  $a$ , and whose corelation morphism is 0.

### 3.2.7 $\backslash/$ (for IsCapCategoryMorphism, IsAdelmanCategory)

▷  $\backslash/(\alpha, C)$  (operation)

**Returns:** a morphism in  $\text{Hom}(x, y)$

This is a convenience method. The first argument is a morphism  $\alpha$  which lies in an additive category  $A$ . The second argument is an Adelman category  $C$  of  $A$ . This method returns `AsAdelmanCategoryMorphism( alpha )`. We set  $x = \text{AsAdelmanCategoryObject}(\text{Source}(\alpha))$  and  $y = \text{AsAdelmanCategoryObject}(\text{Range}(\alpha))$ .

## 3.3 Attributes and Properties

### 3.3.1 UnderlyingCategory (for IsAdelmanCategory)

▷ `UnderlyingCategory(C)` (attribute)

**Returns:** a category

The argument is an Adelman category  $C$ . The output is its underlying category  $A$  with which it was constructed.

### 3.3.2 RelationMorphism (for IsAdelmanCategoryObject)

▷ `RelationMorphism(x)` (attribute)

**Returns:** a morphism in  $\text{Hom}(a, b)$

The argument is an object  $x$  in an Adelman category. The output is its relation morphism  $\rho : a \rightarrow b$ .

### 3.3.3 CorelationMorphism (for IsAdelmanCategoryObject)

▷ `CorelationMorphism(x)` (attribute)

**Returns:** a morphism in  $\text{Hom}(b, c)$

The argument is an object  $x$  in an Adelman category. The output is its corelation morphism  $\gamma : b \rightarrow c$ .

### 3.3.4 MorphismDatum (for IsAdelmanCategoryMorphism)

▷ `MorphismDatum(alpha)` (attribute)

**Returns:** a morphism in  $\text{Hom}(b, b')$

The argument is a morphism  $\alpha$  in an Adelman category. The output is its morphism datum  $\beta : b \rightarrow b'$ .

### 3.3.5 RelationWitness (for IsAdelmanCategoryMorphism)

▷ `RelationWitness(alpha)` (attribute)

**Returns:** a morphism in  $\text{Hom}(a, a')$

The argument is a morphism  $\alpha$  in an Adelman category. The output is its relation witness  $\omega : a \rightarrow a'$ .

### 3.3.6 CorelationWitness (for IsAdelmanCategoryMorphism)

▷ `CorelationWitness(alpha)` (attribute)

**Returns:** a morphism in  $\text{Hom}(c, c')$

The argument is a morphism  $\alpha$  in an Adelman category. The output is its corelation witness  $\psi : c \rightarrow c'$ .

### 3.3.7 WitnessPairForBeingCongruentToZero (for IsAdelmanCategoryMorphism)

▷ `WitnessPairForBeingCongruentToZero(alpha)` (attribute)

**Returns:** a list of morphisms or `fail`

The argument is a morphism  $\alpha$  in an Adelman category. If  $\alpha$  is congruent to zero, the output is a witness pair. If  $\alpha$  is not congruent to zero, the output is `fail`.

### 3.3.8 IsSequenceAsAdelmanCategoryObject (for IsAdelmanCategoryObject)

▷ `IsSequenceAsAdelmanCategoryObject(x)` (property)

**Returns:** a boolean

The argument is an object  $x$  in an Adelman category. The output is `true` if the composition of its relation morphism and its corelation morphism yields zero. Otherwise, the output is `false`.



## Chapter 4

# Category of rows

### 4.1 GAP Categories

#### 4.1.1 IsCategoryOfRowsObject (for IsCapCategoryObject)

▷ `IsCategoryOfRowsObject(object)`

(filter)

**Returns:** true or false

The GAP category of objects in the category of rows over a ring  $R$ .

## Chapter 5

# Example on category of rows

### 5.1 Constructors of objects

Example

```
gap> S := HomalgRingOfIntegers();
Z
gap> rows := CategoryOfRows( S );
Rows( Z )
gap> obj1 := CategoryOfRowsObject( 2, rows );
<A row module over Z of rank 2>
gap> obj2 := CategoryOfRowsObject( 8, rows );
<A row module over Z of rank 8>
```

### 5.2 Constructors of morphisms

Example

```
gap> obj3 := CategoryOfRowsObject( 1, rows );
<A row module over Z of rank 1>
gap> IsWellDefined( obj1 );
true
gap> obj4 := CategoryOfRowsObject( 2, rows );
<A row module over Z of rank 2>
gap> mor := CategoryOfRowsMorphism( obj3, HomalgMatrix( [[1,2]], S ), obj4 );
<A morphism in Rows( Z )>
gap> IsWellDefined( mor );
true
```

Example

```
gap> Display( Source( mor ) );
A row module over Z of rank 1
gap> Display( Range( mor ) );
A row module over Z of rank 2
gap> Display( UnderlyingMatrix( mor ) );
[ [ 1, 2 ] ]
```

### 5.3 A few categorical constructions for category of rows

Example

```
gap> ZeroObject( rows );
<A row module over Z of rank 0>
gap> obj5 := CategoryOfRowsObject( 2, rows );
<A row module over Z of rank 2>
```

Example

```
gap> Display( ZeroMorphism( ZeroObject( rows ), obj5 ) );
A zero, split monomorphism in Rows( Z )

Source:
A row module over Z of rank 0

Matrix:
(an empty 0 x 2 matrix)

Range:
A row module over Z of rank 2
```

Example

```
gap> obj6 := CategoryOfRowsObject( 1, rows );
<A row module over Z of rank 1>
```

Example

```
gap> Display( IdentityMorphism( obj6 ) );
An identity morphism in Rows( Z )

Source:
A row module over Z of rank 1

Matrix:
[ [ 1 ] ]

Range:
A row module over Z of rank 1
```

Example

```
gap> directSum := DirectSum( [ obj5, obj6 ] );
<A row module over Z of rank 3>
```

Example

```
gap> Display( directSum );
A row module over Z of rank 3
```

Example

```
gap> i1 := InjectionOfCofactorOfDirectSum( [ obj5, obj6 ], 1 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( i1 );
A morphism in Rows( Z )

Source:
A row module over Z of rank 2
```

Matrix:  
 $\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}$

Range:  
 A row module over  $Z$  of rank 3

Example

```
gap> i2 := InjectionOfCofactorOfDirectSum( [ obj5, obj6 ], 2 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( i2 );
A morphism in Rows( Z )

Source:
A row module over Z of rank 1

Matrix:
 $\begin{bmatrix} 0 & 0 & 1 \end{bmatrix}$ 

Range:
A row module over Z of rank 3
```

Example

```
gap> proj1 := ProjectionInFactorOfDirectSum( [ obj5, obj6 ], 1 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( proj1 );
A morphism in Rows( Z )

Source:
A row module over Z of rank 3

Matrix:
 $\begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0 & 0 \end{bmatrix}$ 

Range:
A row module over Z of rank 2
```

Example

```
gap> proj2 := ProjectionInFactorOfDirectSum( [ obj5, obj6 ], 2 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( proj2 );
A morphism in Rows( Z )

Source:
A row module over Z of rank 3

Matrix:
 $\begin{bmatrix} 0 \end{bmatrix}$ ,
```

```
[ 0 ],
[ 1 ] ]
```

Range:

A row module over Z of rank 1

Example

```
gap> k := WeakKernelEmbedding( proj1 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( k );
A morphism in Rows( Z )

Source:
A row module over Z of rank 1

Matrix:
[ [ 0, 0, 1 ] ]

Range:
A row module over Z of rank 3
```

Example

```
gap> ck := WeakCokernelProjection( k );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( ck );
A morphism in Rows( Z )

Source:
A row module over Z of rank 3

Matrix:
[ [ 0, -1 ],
  [ 1, 0 ],
  [ 0, 0 ] ]

Range:
A row module over Z of rank 2
```

Example

```
gap> IsMonomorphism( k );
true
gap> IsEpimorphism( k );
false
gap> IsMonomorphism( ck );
false
gap> IsEpimorphism( ck );
true
gap> mor1 := CategoryOfRowsMorphism( obj5, HomalgMatrix( [[ 1 ], [ 2 ]], S ), obj6 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( mor1 );
A morphism in Rows( Z )
```

Source:  
A row module over  $\mathbb{Z}$  of rank 2

Matrix:  

$$\begin{bmatrix} 1 \\ 2 \end{bmatrix}$$

Range:  
A row module over  $\mathbb{Z}$  of rank 1

Example

```
gap> mor2 := IdentityMorphism( obj6 );
<An identity morphism in Rows( Z )>
```

Example

```
gap> Display( mor2 );
An identity morphism in Rows( Z )
```

Source:  
A row module over  $\mathbb{Z}$  of rank 1

Matrix:  

$$\begin{bmatrix} 1 \end{bmatrix}$$

Range:  
A row module over  $\mathbb{Z}$  of rank 1

Example

```
gap> lift := Lift( mor1, mor2 );
<A morphism in Rows( Z )>
```

Example

```
gap> Display( lift );
A morphism in Rows( Z )
```

Source:  
A row module over  $\mathbb{Z}$  of rank 2

Matrix:  

$$\begin{bmatrix} 1 \\ 2 \end{bmatrix}$$

Range:  
A row module over  $\mathbb{Z}$  of rank 1

Example

```
gap> source := CategoryOfRowsObject( 1, rows );
<A row module over Z of rank 1>
gap> range := CategoryOfRowsObject( 2, rows );
<A row module over Z of rank 2>
gap> mor := CategoryOfRowsMorphism( source, HomalgMatrix( [[ 2, 3 ]], S ), range );
<A morphism in Rows( Z )>
gap> colift := Colift( mor2, mor );
<A morphism in Rows( Z )>
```

## Example

```
gap> Display( colift );
A morphism in Rows( Z )

Source:
A row module over Z of rank 1

Matrix:
[ [ 2, 3 ] ]

Range:
A row module over Z of rank 2
```

## Example

```
gap> fp := WeakBiFiberProduct( mor1, mor2 );
<A row module over Z of rank 2>
gap> fp_proj := ProjectionOfBiasedWeakFiberProduct( mor1, mor2 );
<A morphism in Rows( Z )>
```

## Example

```
gap> Display( fp_proj );
A morphism in Rows( Z )

Source:
A row module over Z of rank 2

Matrix:
[ [ -2, 1 ],
  [ -1, 0 ] ]

Range:
A row module over Z of rank 2
```

## Example

```
gap> po := WeakBiPushout( mor, mor2 );
<A row module over Z of rank 2>
gap> inj_push := InjectionOfBiasedWeakPushout( mor, mor2 );
<A morphism in Rows( Z )>
```

## Example

```
gap> Display( inj_push );
A morphism in Rows( Z )

Source:
A row module over Z of rank 2

Matrix:
[ [ -3, 1 ],
  [ 2, -1 ] ]

Range:
A row module over Z of rank 2
```

## 5.4 Simplifications

Example

```
gap> R := HomalgRingOfIntegers();
gap> rows := CategoryOfRows( R );
gap> M := HomalgMatrix( [ [ 2, 2, 2 ], [ 3, 3, 3 ] ], 2, 3, R );
gap> alpha := AsCategoryOfRowsMorphism( M, rows );
gap> pi := PreCompose( [
>   SimplifySourceAndRange_IsoFromInputSource( alpha, infinity ),
>   SimplifySourceAndRange( alpha, infinity ),
>   SimplifySourceAndRange_IsoToInputRange( alpha, infinity ) ] );
gap> IsCongruentForMorphisms( pi, alpha );
true
gap> IsOne(
>   PreCompose( SimplifySourceAndRange_IsoFromInputSource( alpha, infinity ), SimplifySourceAndRange_IsoToInputRange( alpha, infinity ) );
> );
true
gap> IsOne(
>   PreCompose( SimplifySourceAndRange_IsoFromInputRange( alpha, infinity ), SimplifySourceAndRange_IsoToInputSource( alpha, infinity ) );
> );
true
gap> pi2 := PreCompose(
>   SimplifySource_IsoFromInputObject( alpha, infinity ),
>   SimplifySource( alpha, infinity )
> );
gap> IsCongruentForMorphisms( pi2, alpha );
true
gap> IsOne( PreCompose( SimplifySource_IsoFromInputObject( alpha, infinity ), SimplifySource_IsoToInputObject( alpha, infinity ) );
true
gap> pi3 := PreCompose(
>   SimplifyRange( alpha, infinity ),
>   SimplifyRange_IsoToInputObject( alpha, infinity )
> );
gap> IsCongruentForMorphisms( pi3, alpha );
true
gap> IsOne( PreCompose( SimplifyRange_IsoFromInputObject( alpha, infinity ), SimplifyRange_IsoToInputSource( alpha, infinity ) );
true
```

Example

```
gap> R := HomalgRingOfIntegers();
gap> cols := CategoryOfColumns( R );
gap> M := HomalgMatrix( [ [ 2, 2, 2 ], [ 3, 3, 3 ] ], 2, 3, R );
gap> alpha := AsCategoryOfColumnsMorphism( M, cols );
gap> pi := PreCompose( [
>   SimplifySourceAndRange_IsoFromInputSource( alpha, infinity ),
>   SimplifySourceAndRange( alpha, infinity ),
>   SimplifySourceAndRange_IsoToInputRange( alpha, infinity ) ] );
gap> IsCongruentForMorphisms( pi, alpha );
true
gap> IsOne(
>   PreCompose( SimplifySourceAndRange_IsoFromInputSource( alpha, infinity ), SimplifySourceAndRange_IsoToInputRange( alpha, infinity ) );
> );
true
gap> IsOne(
```



```

>   PreCompose( SimplifySourceAndRange_IsoFromInputRange( alpha, infinity ), SimplifySourceAndR
> );
true
gap> pi2 := PreCompose(
>   SimplifySource_IsoFromInputObject( alpha, infinity ),
>   SimplifySource( alpha, infinity )
> );;
gap> IsCongruentForMorphisms( pi2, alpha );
true
gap> IsOne( PreCompose( SimplifySource_IsoFromInputObject( alpha, infinity ), SimplifySource_IsoTo
true
gap> pi3 := PreCompose(
>   SimplifyRange( alpha, infinity ),
>   SimplifyRange_IsoToInputObject( alpha, infinity )
> );;
gap> IsCongruentForMorphisms( pi3, alpha );
true
gap> IsOne( PreCompose( SimplifyRange_IsoFromInputObject( alpha, infinity ), SimplifyRange_IsoTo
true

```

#### Example

```

gap> Qxyz := HomalgFieldOfRationalsInDefaultCAS( ) * "x,y,z";;
gap> A3 := RingOfDerivations( Qxyz, "Dx,Dy,Dz" );;
gap> M1 := HomalgMatrix( "[ \
> Dx \
> ]", 1, 1, A3 );;
gap> M2 := HomalgMatrix( "[ \
> Dx, \
> Dy \
> ]", 2, 1, A3 );;
gap> M3 := HomalgMatrix( "[ \
> Dx, \
> Dy, \
> Dz \
> ]", 3, 1, A3 );;
gap> M := DiagMat( [ M1, M2, M3 ] );;
gap> M := ShallowCopy( M );;
gap> SetIsMutableMatrix( M, true );;
gap> M[ 1, 2 ] := "1";;
gap> M[ 2, 3 ] := "1";;
gap> M[ 3, 3 ] := "1";;
gap> MakeImmutable( M );;
gap> tau1 := HomalgMatrix( "[ \
> 1, Dx, Dz, \
> 0, 0, 1, \
> 0, 1, Dy \
> ]", 3, 3, A3 );;
gap> tau2 := HomalgMatrix( "[ \
> 0, 1, Dz+x*y, \
> 0, 0, 1, \
> 1, Dz, x-y \
> ]", 3, 3, A3 );;
gap> tau3 := HomalgMatrix( "[ \

```

```

> 1, 0, 0, \
> 1, 1, 0, \
> 0, -1, 1 \
> ]", 3, 3, A3 );;
gap> tau := tau1 * tau2 * tau3;;
gap> M := M * tau;;
gap> rows := CategoryOfRows( A3 );;
gap> alpha := AsCategoryOfRowsMorphism( M, rows );;
gap> Mrows := FreydCategoryObject( alpha );;
gap> Srows := SimplifyObject( Mrows, infinity );;
gap> RankOfObject( Source( RelationMorphism( Srows ) ) );
4
gap> RankOfObject( Range( RelationMorphism( Srows ) ) );
2
gap> IsIsomorphism( SimplifyObject_IsoFromInputObject( Mrows, infinity ) );
true
gap> IsIsomorphism( SimplifyObject_IsoToInputObject( Mrows, infinity ) );
true

```

Computing the grade filtration:

Example

```

gap> mu1 := GradeFiltrationNthMonomorphism( Mrows, 1 );;
gap> IsZero( mu1 );
false
gap> IsMonomorphism( mu1 );
true
gap> mu2 := GradeFiltrationNthMonomorphism( Mrows, 2 );;
gap> IsZero( mu2 );
false
gap> IsMonomorphism( mu2 );
true
gap> mu3 := GradeFiltrationNthMonomorphism( Mrows, 3 );;
gap> IsZero( mu3 );
false
gap> IsMonomorphism( mu3 );
true
gap> mu4 := GradeFiltrationNthMonomorphism( Mrows, 4 );;
gap> IsZero( mu4 );
true

```

Example

```

gap> cols := CategoryOfColumns( A3 );;
gap> alpha := AsCategoryOfColumnsMorphism( M, cols );;
gap> Mcols := FreydCategoryObject( alpha );;
gap> Scols := SimplifyObject( Mcols, infinity );;
gap> RankOfObject( Source( RelationMorphism( Scols ) ) );
1
gap> RankOfObject( Range( RelationMorphism( Scols ) ) );
4
gap> IsIsomorphism( SimplifyObject_IsoFromInputObject( Mcols, infinity ) );
true
gap> IsIsomorphism( SimplifyObject_IsoToInputObject( Mcols, infinity ) );
true

```

## Chapter 6

# Category of columns

### 6.1 GAP Categories

#### 6.1.1 IsCategoryOfColumnsObject (for IsCapCategoryObject)

▷ `IsCategoryOfColumnsObject(object)`

(filter)

**Returns:** true or false

The GAP category of objects in the category of columns over a ring  $R$ .

## Chapter 7

# Example on category of columns

### 7.1 Constructors of objects

Example

```
gap> S := HomalgRingOfIntegers();
Z
gap> cols := CategoryOfColumns( S );
Columns( Z )
gap> obj1 := CategoryOfColumnsObject( 2, cols );
<A column module over Z of rank 2>
gap> obj2 := CategoryOfColumnsObject( 8, cols );
<A column module over Z of rank 8>
```

### 7.2 Constructors of morphisms

Example

```
gap> obj3 := CategoryOfColumnsObject( 1, cols );
<A column module over Z of rank 1>
gap> IsWellDefined( obj1 );
true
gap> obj4 := CategoryOfColumnsObject( 2, cols );
<A column module over Z of rank 2>
gap> mor := CategoryOfColumnsMorphism( obj3, HomalgMatrix( [[1],[2]], S ), obj4 );
<A morphism in Columns( Z )>
gap> IsWellDefined( mor );
true
```

Example

```
gap> Display( Source( mor ) );
A column module over Z of rank 1
gap> Display( Range( mor ) );
A column module over Z of rank 2
gap> Display( UnderlyingMatrix( mor ) );
[ [ 1 ],
  [ 2 ] ]
```

### 7.3 A few categorical constructions for category of columns

Example

```
gap> ZeroObject( cols );
<A column module over Z of rank 0>
gap> obj5 := CategoryOfColumnsObject( 2, cols );
<A column module over Z of rank 2>
```

Example

```
gap> Display( ZeroMorphism( ZeroObject( cols ), obj5 ) );
A zero, split monomorphism in Columns( Z )
```

Source:

A column module over Z of rank 0

Matrix:

(an empty 2 x 0 matrix)

Range:

A column module over Z of rank 2

Example

```
gap> obj6 := CategoryOfColumnsObject( 1, cols );
<A column module over Z of rank 1>
```

Example

```
gap> Display( IdentityMorphism( obj6 ) );
An identity morphism in Columns( Z )
```

Source:

A column module over Z of rank 1

Matrix:

[ [ 1 ] ]

Range:

A column module over Z of rank 1

Example

```
gap> directSum := DirectSum( [ obj5, obj6 ] );
<A column module over Z of rank 3>
```

Example

```
gap> Display( directSum );
A column module over Z of rank 3
```

Example

```
gap> i1 := InjectionOfCofactorOfDirectSum( [ obj5, obj6 ], 1 );
<A morphism in Columns( Z )>
```

Example

```
gap> Display( i1 );
A morphism in Columns( Z )
```

Source:

A column module over Z of rank 2

Matrix:  

$$\begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0 & 0 \end{bmatrix}$$

Range:  
 A column module over  $Z$  of rank 3

Example

```
gap> i2 := InjectionOfCofactorOfDirectSum( [ obj5, obj6 ], 2 );
<A morphism in Columns( Z )>
```

Example

```
gap> Display( i2 );
A morphism in Columns( Z )
```

Source:  
 A column module over  $Z$  of rank 1

Matrix:  

$$\begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$$

Range:  
 A column module over  $Z$  of rank 3

Example

```
gap> proj1 := ProjectionInFactorOfDirectSum( [ obj5, obj6 ], 1 );
<A morphism in Columns( Z )>
```

Example

```
gap> Display( proj1 );
A morphism in Columns( Z )
```

Source:  
 A column module over  $Z$  of rank 3

Matrix:  

$$\begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}$$

Range:  
 A column module over  $Z$  of rank 2

Example

```
gap> proj2 := ProjectionInFactorOfDirectSum( [ obj5, obj6 ], 2 );
<A morphism in Columns( Z )>
```

Example

```
gap> Display( proj2 );
A morphism in Columns( Z )
```

Source:  
 A column module over  $Z$  of rank 3

Matrix:  
 $\begin{bmatrix} 0 & 0 & 1 \end{bmatrix}$

Range:  
 A column module over  $\mathbb{Z}$  of rank 1

Example

```
gap> k := WeakKernelEmbedding( proj1 );
<A morphism in Columns( Z )>
```

Example

```
gap> Display( k );
A morphism in Columns( Z )

Source:
A column module over Z of rank 1

Matrix:
 $\begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix}$ 

Range:
A column module over Z of rank 3
```

Example

```
gap> ck := WeakCokernelProjection( k );
<A morphism in Columns( Z )>
```

Example

```
gap> Display( ck );
A morphism in Columns( Z )

Source:
A column module over Z of rank 3

Matrix:
 $\begin{bmatrix} 0 & 1 & 0 \\ -1 & 0 & 0 \end{bmatrix}$ 

Range:
A column module over Z of rank 2
```

Example

```
gap> IsMonomorphism( k );
true
gap> IsEpimorphism( k );
false
gap> IsMonomorphism( ck );
false
gap> IsEpimorphism( ck );
true
gap> mor1 := CategoryOfColumnsMorphism( obj5, HomalgMatrix( [[ 1, 2 ]], S ), obj6 );
<A morphism in Columns( Z )>
```

## Example

```
gap> Display( mor1 );
A morphism in Columns( Z )

Source:
A column module over Z of rank 2

Matrix:
[ [ 1, 2 ] ]

Range:
A column module over Z of rank 1
```

## Example

```
gap> mor2 := IdentityMorphism( obj6 );
<An identity morphism in Columns( Z )>
```

## Example

```
gap> Display( mor2 );
An identity morphism in Columns( Z )

Source:
A column module over Z of rank 1

Matrix:
[ [ 1 ] ]

Range:
A column module over Z of rank 1
```

## Example

```
gap> lift := Lift( mor1, mor2 );
<A morphism in Columns( Z )>
```

## Example

```
gap> Display( lift );
A morphism in Columns( Z )

Source:
A column module over Z of rank 2

Matrix:
[ [ 1, 2 ] ]

Range:
A column module over Z of rank 1
```

## Example

```
gap> source := CategoryOfColumnsObject( 1, cols );
<A column module over Z of rank 1>
gap> range := CategoryOfColumnsObject( 2, cols );
<A column module over Z of rank 2>
gap> mor := CategoryOfColumnsMorphism( source, HomalgMatrix( [[ 2 ], [ 3 ]], S ), range );
<A morphism in Columns( Z )>
gap> colift := Colift( mor2, mor );
<A morphism in Columns( Z )>
```



## Example

```
gap> Display( colift );
A morphism in Columns( Z )

Source:
A column module over Z of rank 1

Matrix:
[ [ 2 ],
  [ 3 ] ]

Range:
A column module over Z of rank 2
```

## Example

```
gap> fp := WeakBiFiberProduct( mor1, mor2 );
<A column module over Z of rank 2>
gap> fp_proj := ProjectionOfBiasedWeakFiberProduct( mor1, mor2 );
<A morphism in Columns( Z )>
```

## Example

```
gap> Display( fp_proj );
A morphism in Columns( Z )

Source:
A column module over Z of rank 2

Matrix:
[ [ -2, -1 ],
  [ 1, 0 ] ]

Range:
A column module over Z of rank 2
```

## Example

```
gap> po := WeakBiPushout( mor, mor2 );
<A column module over Z of rank 2>
gap> inj_push := InjectionOfBiasedWeakPushout( mor, mor2 );
<A morphism in Columns( Z )>
```

## Example

```
gap> Display( inj_push );
A morphism in Columns( Z )

Source:
A column module over Z of rank 2

Matrix:
[ [ -3, 2 ],
  [ 1, -1 ] ]

Range:
A column module over Z of rank 2
```

## Chapter 8

# Category of graded rows and category of graded columns

### 8.1 Constructors

#### 8.1.1 CategoryOfGradedColumns (for IsHomalgGradedRing)

▷ `CategoryOfGradedColumns( $R$ )` (attribute)

**Returns:** a category

The argument is a homalg graded ring  $R$ . The output is the category of graded columns over  $R$ .

#### 8.1.2 CategoryOfGradedRows (for IsHomalgGradedRing)

▷ `CategoryOfGradedRows( $R$ )` (attribute)

**Returns:** a category

The argument is a homalg graded ring  $R$ . The output is the category of graded rows over  $R$ .

#### 8.1.3 GradedRow (for IsList, IsHomalgGradedRing)

▷ `GradedRow( $degree\_list$ ,  $R$ )` (operation)

**Returns:** an object

The arguments are a list of degrees and a homalg graded ring  $R$ . The list of degrees must be of the form  $[ [d_1, n_1], [d_2, n_2], \dots ]$  where  $d_i$  are degrees, i.e. elements in the degree group of  $R$  and the  $n_i$  are non-negative integers. Currently there are two formats that are supported to enter the degrees. Either one can enter them as lists of integers, say  $d_1 = [1, 1, 0, 2]$ , or they can be entered as `Homalg_Module_Elements` of the degree group of  $R$ . In either case, the result is the graded row associated to the degrees  $d_i$  and their multiplicities  $n_i$ .

#### 8.1.4 GradedRow (for IsList, IsHomalgGradedRing, IsBool)

▷ `GradedRow( $degree\_list$ ,  $R$ )` (operation)

**Returns:** an object

As 'GradedRow', but the boolean (= third argument) allows to switch off checks on the input data. If this boolean is set to true, then the input checks are performed and otherwise they are not. Calling this constructor with 'false' is therefore suited for high performance applications.

### 8.1.5 GradedColumn (for IsList, IsHomalgGradedRing)

▷ `GradedColumn(degree_list, R)` (operation)

**Returns:** an object

The arguments are a list of degrees and a homalg graded ring  $R$ . The list of degrees must be of the form  $[[d_1, n_1], [d_2, n_2], \dots]$  where  $d_i$  are degrees, i.e. elements in the degree group of  $R$  and the  $n_i$  are non-negative integers. Currently there are two formats that are supported to enter the degrees. Either one can enter them as lists of integers, say  $d_1 = [1, 1, 0, 2]$ , or they can be entered as `Homalg_Module_Elements` of the degree group of  $R$ . In either case, the result is the graded column associated to the degrees  $d_i$  and their multiplicities  $n_i$ .

### 8.1.6 GradedColumn (for IsList, IsHomalgGradedRing, IsBool)

▷ `GradedColumn(degree_list, R)` (operation)

**Returns:** an object

As 'GradedColumn', but the boolean (= third argument) allows to switch off checks on the input data. If this boolean is set to true, then the input checks are performed and otherwise they are not. Calling this constructor with 'false' is therefore suited for high performance applications.

### 8.1.7 GradedRowOrColumnMorphism (for IsGradedRowOrColumn, IsHomalgMatrix, IsGradedRowOrColumn)

▷ `GradedRowOrColumnMorphism(S, M, T)` (operation)

**Returns:** a morphism in  $\text{Hom}(S, T)$

The arguments are an object  $S$  in the category of graded rows or columns over a homalg graded ring  $R$ , a homalg matrix  $M$  over  $R$  and another graded row or column  $T$  over  $R$ . The output is the morphism  $S \rightarrow T$  in the category of graded rows and columns over  $R$ , whose underlying matrix is given by  $M$ .

### 8.1.8 GradedRowOrColumnMorphism (for IsGradedRowOrColumn, IsHomalgMatrix, IsGradedRowOrColumn, IsBool)

▷ `GradedRowOrColumnMorphism(S, M, T)` (operation)

**Returns:** a morphism in  $\text{Hom}(S, T)$

As 'GradedRowOrColumnMorphism', but carries a fourth input parameter. If this boolean is set to false, then no checks on the input are performed. That option is therefore better suited for high performance applications.

## 8.2 Attributes

### 8.2.1 UnderlyingHomalgGradedRing (for IsGradedRowOrColumn)

▷ `UnderlyingHomalgGradedRing(A)` (attribute)

**Returns:** a homalg graded ring

The argument is a graded row or column  $A$  over a homalg graded ring  $R$ . The output is then the graded ring  $R$ .

### 8.2.2 DegreeList (for IsGradedRowOrColumn)

▷ `DegreeList(A)` (attribute)

**Returns:** a list

The argument is a graded row or column  $A$  over a homalg graded ring  $R$ . The output is the `degree_list` of this object. To handle `degree_lists` most easily, `degree_lists` are reduced whenever an object is added to the category. E.g. the input `degree_list [ [  $d_1$ , 1 ], [  $d_1$ , 1 ] ]` will be turned into `[ [  $d_1$ , 2 ] ]`.

### 8.2.3 RankOfObject (for IsGradedRowOrColumn)

▷ `RankOfObject(A)` (attribute)

**Returns:** an integer

The argument is a graded row or column over a homalg graded ring  $R$ . The output is the rank of this module.

### 8.2.4 UnderlyingHomalgGradedRing (for IsGradedRowOrColumnMorphism)

▷ `UnderlyingHomalgGradedRing(alpha)` (attribute)

**Returns:** a homalg graded ring

The argument is a morphism  $\alpha$  in the category of graded rows or columns over a homalg graded ring  $R$ . The output is the homalg graded ring  $R$ .

### 8.2.5 UnderlyingHomalgMatrix (for IsGradedRowOrColumnMorphism)

▷ `UnderlyingHomalgMatrix(alpha)` (attribute)

**Returns:** a matrix over a homalg graded ring

The argument is a morphism  $\alpha$  in the category of graded rows or columns over a homalg graded ring  $R$ . The output is the underlying homalg matrix over  $R$ .

## 8.3 GAP Categories

### 8.3.1 IsGradedRowOrColumn (for IsCapCategoryObject)

▷ `IsGradedRowOrColumn(object)` (filter)

**Returns:** true or false

The GAP category of graded rows and columns over a graded ring  $R$ .

### 8.3.2 IsGradedRow (for IsGradedRowOrColumn)

▷ `IsGradedRow(object)` (filter)

**Returns:** true or false

The GAP category of graded rows over a graded ring  $R$ .

### 8.3.3 IsGradedColumn (for IsGradedRowOrColumn)

▷ `IsGradedColumn(object)` (filter)

**Returns:** true or false

The GAP category of graded columns over a graded ring  $R$ .

### 8.3.4 IsGradedRowOrColumnMorphism (for IsCapCategoryMorphism)

▷ IsGradedRowOrColumnMorphism(*object*) (filter)

**Returns:** true or false

The GAP category of morphisms of graded rows and columns over a graded ring  $R$ .

### 8.3.5 IsGradedRowMorphism (for IsGradedRowOrColumnMorphism)

▷ IsGradedRowMorphism(*object*) (filter)

**Returns:** true or false

The GAP category of morphisms of graded rows over a graded ring  $R$ .

### 8.3.6 IsGradedColumnMorphism (for IsGradedRowOrColumnMorphism)

▷ IsGradedColumnMorphism(*object*) (filter)

**Returns:** true or false

The GAP category of morphisms of graded columns over a graded ring  $R$ .

## 8.4 Tools to simplify code

### 8.4.1 DeduceMapFromMatrixAndRangeForGradedRows (for IsHomalgMatrix, IsGradedRow)

▷ DeduceMapFromMatrixAndRangeForGradedRows( $m$ ,  $R$ ) (operation)

**Returns:** a morphism

The argument is a homalg\_matrix  $m$  and a graded row  $R$ . We then consider the module map induced from  $m$  with range  $R$ . This operation then deduces the source of this map and returns the map in the category of graded rows if the degrees of the source are uniquely determined.

### 8.4.2 DeduceSomeMapFromMatrixAndRangeForGradedRows (for IsHomalgMatrix, IsGradedRow)

▷ DeduceSomeMapFromMatrixAndRangeForGradedRows( $m$ ,  $R$ ) (operation)

**Returns:** a morphism

The argument is a homalg\_matrix  $m$  and a graded row  $R$ . This operation deduces the source of some map with matrix  $m$  and range  $R$  and returns the map in the category of graded rows.

### 8.4.3 DeduceMapFromMatrixAndSourceForGradedRows (for IsHomalgMatrix, IsGradedRow)

▷ DeduceMapFromMatrixAndSourceForGradedRows( $m$ ,  $S$ ) (operation)

**Returns:** a morphism

The argument is a homalg\_matrix  $m$  and a graded row  $S$ . We then consider the module map induced from  $m$  with source  $S$ . This operation then deduces the range of this map and returns the map in the category of graded rows if the degrees of the range are uniquely determined.

#### 8.4.4 DeduceSomeMapFromMatrixAndSourceForGradedRows (for IsHomalgMatrix, IsGradedRow)

▷ `DeduceSomeMapFromMatrixAndSourceForGradedRows( $m$ ,  $S$ )` (operation)

**Returns:** a morphism

The argument is a `homalg_matrix`  $m$  and a graded row  $S$ . This operation deduces the range of some map with matrix  $m$  and source  $S$  and returns the map in the category of graded rows.

#### 8.4.5 DeduceMapFromMatrixAndRangeForGradedCols (for IsHomalgMatrix, IsGradedColumn)

▷ `DeduceMapFromMatrixAndRangeForGradedCols( $m$ ,  $R$ )` (operation)

**Returns:** a morphism

The argument is a `homalg_matrix`  $m$  and a graded column  $R$ . We then consider the module map induced from  $m$  with range  $R$ . This operation then deduces the source of this map and returns the map in the category of graded columns if the degrees of the source are uniquely determined.

#### 8.4.6 DeduceSomeMapFromMatrixAndRangeForGradedCols (for IsHomalgMatrix, IsGradedColumn)

▷ `DeduceSomeMapFromMatrixAndRangeForGradedCols( $m$ ,  $R$ )` (operation)

**Returns:** a morphism

The argument is a `homalg_matrix`  $m$  and a graded column  $R$ . This operation deduces the source of some map with matrix  $m$  and range  $R$  and returns the map in the category of graded columns.

#### 8.4.7 DeduceMapFromMatrixAndSourceForGradedCols (for IsHomalgMatrix, IsGradedColumn)

▷ `DeduceMapFromMatrixAndSourceForGradedCols( $m$ ,  $S$ )` (operation)

**Returns:** a morphism

The argument is a `homalg_matrix`  $m$  and a graded column  $S$ . We then consider the module map induced from  $m$  with source  $S$ . This operation then deduces the range of this map and returns the map in the category of graded columns if the degrees of the range are uniquely determined.

#### 8.4.8 DeduceSomeMapFromMatrixAndSourceForGradedCols (for IsHomalgMatrix, IsGradedColumn)

▷ `DeduceSomeMapFromMatrixAndSourceForGradedCols( $m$ ,  $S$ )` (operation)

**Returns:** a morphism

The argument is a `homalg_matrix`  $m$  and a graded column  $S$ . This operation deduces the range of some map with matrix  $m$  and source  $S$  and returns the map in the category of graded columns.

#### 8.4.9 UnzipDegreeList (for IsGradedRowOrColumn)

▷ `UnzipDegreeList( $S$ )` (operation)

**Returns:** a list

Given a graded row or column  $S$ , the degrees are stored in compact form. For example, the degrees `[ 1, 1, 1, 1 ]` is stored internally as `[ 1, 4 ]`. The second argument is thus the multiplicity with which

three degree 1 appears. Still, it can be useful at times to also go in the opposite direction, i.e. to take the compact form [ #! 1, 4 ] and turn it into [ 1, 1, 1, 1 ]. This is performed by this operation and the obtained extended degree #! list is returned.

## **Chapter 9**

# **Cokernel image closure**



# Chapter 10

## Freyd category

### 10.1 Internal Hom-Embedding

#### 10.1.1 INTERNAL\_HOM\_EMBEDDING (for IsFreydCategoryObject, IsFreydCategoryObject)

▷ INTERNAL\_HOM\_EMBEDDING(*objects*, *a*, *b*) (operation)

**Returns:** a (mono)morphism

The arguments are two objects *a* and *b* of a Freyd category. Assume that the relation morphism for *a* is  $\alpha: R_A \rightarrow A$ , then we have the exact sequence  $0 \rightarrow \underline{\text{Hom}}(a, b) \rightarrow \underline{\text{Hom}}(A, b) \rightarrow \underline{\text{Hom}}(R_A, b)$ . The embedding of  $\underline{\text{Hom}}(a, b)$  into  $\underline{\text{Hom}}(A, b)$  is the internal Hom-embedding. This method returns this very map.

### 10.2 Convenient methods for tensor products of freyd objects and morphisms

#### 10.2.1 \\* (for IsFreydCategoryObject, IsFreydCategoryObject)

▷ \\*(*arg1*, *arg2*) (operation)

#### 10.2.2 \^ (for IsFreydCategoryObject, IsInt)

▷ \^(*arg1*, *arg2*) (operation)

#### 10.2.3 \\* (for IsFreydCategoryMorphism, IsFreydCategoryMorphism)

▷ \\*(*arg1*, *arg2*) (operation)

#### 10.2.4 \^ (for IsFreydCategoryMorphism, IsInt)

▷ \^(*arg1*, *arg2*) (operation)

# Chapter 11

## Examples and Tests

### 11.1 Adelman 5 lemma

Example

```
gap> quiver := RightQuiver( "Q(8)[a:1->2,b:2->3,c:3->4,d:3->5,e:4->6,f:5->6,g:6->7,h:7->8]" );;
gap> QQ := HomalgFieldOfRationals();;
gap> A := PathAlgebra( QQ, quiver );;
gap> B := QuotientOfPathAlgebra( A,
> [
>   A.ce - A.df,
>   A.abd,
>   A.egh,
>   A.bc,
>   A.fg,
>   A.ab #since d is supposed to be a mono
> ] );;
gap> QRowsB := QuiverRowsDescentToZDefinedByBasisPaths( B );;
gap> Adel := AdelmanCategory( QRowsB );;
gap> a := B.a/QRowsB/Adel;;
gap> b := B.b/QRowsB/Adel;;
gap> c := B.c/QRowsB/Adel;;
gap> d := B.d/QRowsB/Adel;;
gap> e := B.e/QRowsB/Adel;;
gap> f := B.f/QRowsB/Adel;;
gap> g := B.g/QRowsB/Adel;;
gap> h := B.h/QRowsB/Adel;;
gap> l := CokernelProjection( a );;
gap> k := CokernelColift( a, PreCompose( b, d ) );;
gap> i := KernelEmbedding( h );;
gap> j := KernelLift( h, PreCompose( e, g ) );;
gap> Kd := KernelObject( d );;
gap> Hbc := HomologyObject( b, c );;
gap> Hcj := HomologyObject( c, j );;
gap> Hkf := HomologyObject( k, f );;
gap> Hfg := HomologyObject( f, g );;
gap> L := [ Kd, Hbc, Hcj, Hkf, Hfg ];;
gap> K := KernelObject( e );;
gap> test_func := MembershipFunctionSerreSubcategoryGeneratedByObjects( L, Adel );;
Warning: the provided function returns either true or fail!
```

```

gap> C := FullSubcategoryByMembershipFunction( Adel, test_func );
gap> Serre := Adel/C;;
gap> K := K/Serre;;
gap> IsZero( K );
true

```

## 11.2 Adelman category basics for category of rows

Example

```

gap> R := HomalgRingOfIntegers();
gap> rows := CategoryOfRows( R );
gap> adelman := AdelmanCategory( rows );
gap> obj1 := CategoryOfRowsObject( 1, rows );
gap> obj2 := CategoryOfRowsObject( 2, rows );
gap> id := IdentityMorphism( obj2 );
gap> alpha := CategoryOfRowsMorphism( obj1, HomalgMatrix( [ [ 1, 2 ] ], 1, 2, R ), obj2 );
gap> beta := CategoryOfRowsMorphism( obj2, HomalgMatrix( [ [ 1, 2 ], [ 3, 4 ] ], 2, 2, R ), obj2 );
gap> gamma := CategoryOfRowsMorphism( obj2, HomalgMatrix( [ [ 1, 3 ], [ 3, 4 ] ], 2, 2, R ), obj2 );
gap> obj1_a := AsAdelmanCategoryObject( obj1 );
gap> obj2_a := AsAdelmanCategoryObject( obj2 );
gap> m := AsAdelmanCategoryMorphism( beta );
gap> n := AsAdelmanCategoryMorphism( gamma );
gap> IsWellDefined( m );
true
gap> IsCongruentForMorphisms( PreCompose( m, n ), PreCompose( n, m ) );
false
gap> IsCongruentForMorphisms( SubtractionForMorphisms( m, m ), ZeroMorphism( obj2_a, obj2_a ) );
true
gap> IsCongruentForMorphisms( ZeroObjectFunctorial( adelman ),
>                               PreCompose( UniversalMorphismFromZeroObject( obj1_a ), UniversalMorphismFromZeroObject( obj2_a ) );
>                               );
true
gap> d := [ obj1_a, obj2_a ];
gap> pi1 := ProjectionInFactorOfDirectSum( d, 1 );
gap> pi2 := ProjectionInFactorOfDirectSum( d, 2 );
gap> id := IdentityMorphism( DirectSum( d ) );
gap> iota1 := InjectionOfCofactorOfDirectSum( d, 1 );
gap> iota2 := InjectionOfCofactorOfDirectSum( d, 2 );
gap> IsCongruentForMorphisms( PreCompose( pi1, iota1 ) + PreCompose( pi2, iota2 ), id );
true
gap> IsCongruentForMorphisms( UniversalMorphismIntoDirectSum( d, [ pi1, pi2 ] ), id );
true
gap> IsCongruentForMorphisms( UniversalMorphismFromDirectSum( d, [ iota1, iota2 ] ), id );
true
gap> c := CokernelProjection( m );
gap> c2 := CokernelProjection( c );
gap> IsCongruentForMorphisms( c2, ZeroMorphism( Source( c2 ), Range( c2 ) ) );
true
gap> IsWellDefined( CokernelProjection( m ) );
true
gap> IsCongruentForMorphisms( CokernelColift( m, CokernelProjection( m ) ), IdentityMorphism( CokernelColift( m, CokernelProjection( m ) ) );
true

```

```

gap> k := KernelEmbedding( c );;
gap> IsZeroForMorphisms( PreCompose( k, c ) );
true
gap> IsCongruentForMorphisms( Kernellift( m, KernelEmbedding( m ) ), IdentityMorphism( KernelObj
true

```

### 11.3 Adelman category basics for additive closure of algebroids

Example

```

gap> quiver := RightQuiver( "Q(9)[a:1->2,b:2->3,c:1->4,d:2->5,e:3->6,f:4->5,g:5->6,h:4->7,i:5->8,
gap> kQ := PathAlgebra( HomalgFieldOfRationals(), quiver );;
gap> Aoid := Algebroid( kQ, [ kQ.ad - kQ.cf,
>                               kQ.dg - kQ.be,
>                               kQ.( "fi" ) - kQ.hk,
>                               kQ.gj - kQ.il,
>                               kQ.mk + kQ.bn - kQ.di ] );;
gap> mm := SetOfGeneratingMorphisms( Aoid );;
gap> CapCategorySwitchLogicOff( Aoid );;
gap> Acat := AdditiveClosure( Aoid );;
gap> a := AsAdditiveClosureMorphism( mm[1] );;
gap> b := AsAdditiveClosureMorphism( mm[2] );;
gap> c := AsAdditiveClosureMorphism( mm[3] );;
gap> d := AsAdditiveClosureMorphism( mm[4] );;
gap> e := AsAdditiveClosureMorphism( mm[5] );;
gap> f := AsAdditiveClosureMorphism( mm[6] );;
gap> g := AsAdditiveClosureMorphism( mm[7] );;
gap> h := AsAdditiveClosureMorphism( mm[8] );;
gap> i := AsAdditiveClosureMorphism( mm[9] );;
gap> j := AsAdditiveClosureMorphism( mm[10] );;
gap> k := AsAdditiveClosureMorphism( mm[11] );;
gap> l := AsAdditiveClosureMorphism( mm[12] );;
gap> m := AsAdditiveClosureMorphism( mm[13] );;
gap> n := AsAdditiveClosureMorphism( mm[14] );;
gap> Adel := AdelmanCategory( Acat );;
gap> A := AdelmanCategoryObject( a, b );;
gap> B := AdelmanCategoryObject( f, g );;
gap> alpha := AdelmanCategoryMorphism( A, d, B );;
gap> IsWellDefined( alpha );
true
gap> IsWellDefined( KernelEmbedding( alpha ) );
true
gap> IsWellDefined( CokernelProjection( alpha ) );
true
gap> T := AdelmanCategoryObject( k, l );;
gap> tau := AdelmanCategoryMorphism( B, i, T );;
gap> IsZeroForMorphisms( PreCompose( alpha, tau ) );
true
gap> colift := CokernelColift( alpha, tau );;
gap> IsWellDefined( colift );
true
gap> IsCongruentForMorphisms( PreCompose( CokernelProjection( alpha ), colift ), tau );
true

```

```

gap> lift := KernelLift( tau, alpha );;
gap> IsWellDefined( lift );
true
gap> IsCongruentForMorphisms( PreCompose( lift, KernelEmbedding( tau ) ), alpha );
true
gap> IsCongruentForMorphisms( ColiftAlongEpimorphism( CokernelProjection( alpha ), tau ), colift );
true
gap> IsCongruentForMorphisms( LiftAlongMonomorphism( KernelEmbedding( tau ), alpha ), lift );
true

```

## 11.4 Adelman category basics for category of columns

Example

```

gap> R := HomalgRingOfIntegers();;
gap> cols := CategoryOfColumns( R );;
gap> adelman := AdelmanCategory( cols );;
gap> obj1 := CategoryOfColumnsObject( 1, cols );;
gap> obj2 := CategoryOfColumnsObject( 2, cols );;
gap> id := IdentityMorphism( obj2 );;
gap> alpha := CategoryOfColumnsMorphism( obj1, HomalgMatrix( [ [ 1 ], [ 2 ] ], 1, 2, R ), obj2 );;
gap> beta := CategoryOfColumnsMorphism( obj2, HomalgMatrix( [ [ 1, 3 ], [ 2, 4 ] ], 2, 2, R ), obj2 );;
gap> gamma := CategoryOfColumnsMorphism( obj2, HomalgMatrix( [ [ 1, 3 ], [ 3, 4 ] ], 2, 2, R ), obj2 );;
gap> obj1_a := AsAdelmanCategoryObject( obj1 );;
gap> obj2_a := AsAdelmanCategoryObject( obj2 );;
gap> m := AsAdelmanCategoryMorphism( beta );;
gap> n := AsAdelmanCategoryMorphism( gamma );;
gap> IsWellDefined( m );
true
gap> IsCongruentForMorphisms( PreCompose( m, n ), PreCompose( n, m ) );
false
gap> IsCongruentForMorphisms( SubtractionForMorphisms( m, m ), ZeroMorphism( obj2_a, obj2_a ) );
true
gap> IsCongruentForMorphisms( ZeroObjectFunctorial( adelman ),
>                               PreCompose( UniversalMorphismFromZeroObject( obj1_a ), UniversalMorphismFromZeroObject( obj2_a ) );
>                               );
true
gap> d := [ obj1_a, obj2_a ];;
gap> pi1 := ProjectionInFactorOfDirectSum( d, 1 );;
gap> pi2 := ProjectionInFactorOfDirectSum( d, 2 );;
gap> id := IdentityMorphism( DirectSum( d ) );;
gap> iota1 := InjectionOfCofactorOfDirectSum( d, 1 );;
gap> iota2 := InjectionOfCofactorOfDirectSum( d, 2 );;
gap> IsCongruentForMorphisms( PreCompose( pi1, iota1 ) + PreCompose( pi2, iota2 ), id );
true
gap> IsCongruentForMorphisms( UniversalMorphismIntoDirectSum( d, [ pi1, pi2 ] ), id );
true
gap> IsCongruentForMorphisms( UniversalMorphismFromDirectSum( d, [ iota1, iota2 ] ), id );
true
gap> c := CokernelProjection( m );;
gap> c2 := CokernelProjection( c );;
gap> IsCongruentForMorphisms( c2, ZeroMorphism( Source( c2 ), Range( c2 ) ) );
true

```

```

gap> IsWellDefined( CokernelProjection( m ) );
true
gap> IsCongruentForMorphisms( CokernelColift( m, CokernelProjection( m ) ), IdentityMorphism( CokernelObj ) );
true
gap> k := KernelEmbedding( c );
gap> IsZeroForMorphisms( PreCompose( k, c ) );
true
gap> IsCongruentForMorphisms( KernelLift( m, KernelEmbedding( m ) ), IdentityMorphism( KernelObj ) );
true

```

## 11.5 Adelman category basics

Example

```

gap> quiver := RightQuiver( "Q(3)[a:1->2,b:1->2,c:2->3]" );
gap> kQ := PathAlgebra( HomalgFieldOfRationals(), quiver );
gap> Aoid := Algebroid( kQ );
gap> SetIsProjective( DistinguishedObjectOfHomomorphismStructure( Aoid ), true );
gap> mm := SetOfGeneratingMorphisms( Aoid );
gap> CapCategorySwitchLogicOff( Aoid );
gap> Acat := AdditiveClosure( Aoid );
gap> a := AsAdditiveClosureMorphism( mm[1] );
gap> b := AsAdditiveClosureMorphism( mm[2] );
gap> c := AsAdditiveClosureMorphism( mm[3] );
gap> a := AsAdelmanCategoryMorphism( a );
gap> b := AsAdelmanCategoryMorphism( b );
gap> c := AsAdelmanCategoryMorphism( c );
gap> A := Source( a );
gap> B := Range( a );
gap> C := Range( c );
gap> HomomorphismStructureOnObjects( A, C );
gap> HomomorphismStructureOnMorphisms( IdentityMorphism( A ), c );
gap> mor := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( a );
gap> int := InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( A, B, mor );
gap> IsCongruentForMorphisms( int, a );
true

```

Example

```

gap> R := HomalgRingOfIntegers();
gap> RowsR := CategoryOfRows( R );
gap> one := AsCategoryOfRowsMorphism( HomalgMatrix( [ [ 1 ] ], 1, 1, R ), RowsR );
gap> two := AsCategoryOfRowsMorphism( HomalgMatrix( [ [ 2 ] ], 1, 1, R ), RowsR );
gap> four := AsCategoryOfRowsMorphism( HomalgMatrix( [ [ 4 ] ], 1, 1, R ), RowsR );
gap> source := AdelmanCategoryObject( two, two );
gap> range := AdelmanCategoryObject( two, four );
gap> mor := AdelmanCategoryMorphism( source, one, range );
gap> IsZero( mor );
false
gap> emb := EmbeddingFunctorIntoFreydCategory( RowsR );
gap> ind := AdelmanCategoryFunctorInducedByUniversalProperty( emb );
gap> IsZero( ApplyFunctor( ind, mor ) );
true
gap> M := FreydCategoryObject( AsCategoryOfRowsMorphism( HomalgMatrix( [ [ 2, 2 ], [ 4, 4, 6 ] ], 2, 2, R ), RowsR ), RowsR );
gap> as_tensor := EmbeddingFunctorOfFreydCategoryIntoAdelmanCategory( RowsR );

```

```

gap> Mt := ApplyFunctor( as_tensor, M );;
gap> lsat := LeftSatelliteAsEndofunctorOfAdelmanCategory( RowsR );;
gap> rsat := RightSatelliteAsEndofunctorOfAdelmanCategory( RowsR );;
gap> torsion := ApplyFunctor( ind, ( ApplyFunctor( rsat, ApplyFunctor( lsat, Mt ) ) ) );;
gap> unit := UnitOfSatelliteAdjunctionOfAdelmanCategory( RowsR );;
gap> IsZero( ApplyNaturalTransformation( unit, Mt ) );
true
gap> counit := CounitOfSatelliteAdjunctionOfAdelmanCategory( RowsR );;
gap> t := ApplyNaturalTransformation( counit, Mt );;

```

## 11.6 Adelman snake lemma

Example

```

gap> DeactivateDefaultCaching();
gap> SwitchGeneralizedMorphismStandard( "span" );;
gap> snake_quiver := RightQuiver( "Q(6)[a:1->2,b:2->3,c:3->4]" );;
gap> kQ := PathAlgebra( HomalgFieldOfRationals(), snake_quiver );;
gap> Aoid := Algebroid( kQ, [ kQ.abc ] );;
gap> CapCategorySwitchLogicOff( Aoid );;
gap> m := SetOfGeneratingMorphisms( Aoid );;
gap> a := m[1];;
gap> b := m[2];;
gap> c := m[3];;
gap> add := AdditiveClosure( Aoid );;
gap> DisableInputSanityChecks( add );;
gap> adelman := AdelmanCategory( add );;
gap> a := AsAdditiveClosureMorphism( a );;
gap> b := AsAdditiveClosureMorphism( b );;
gap> c := AsAdditiveClosureMorphism( c );;
gap> aa := AsAdelmanCategoryMorphism( a );;
gap> bb := AsAdelmanCategoryMorphism( b );;
gap> cc := AsAdelmanCategoryMorphism( c );;
gap> dd := CokernelProjection( aa );;
gap> ee := CokernelColift( aa, PreCompose( bb, cc ) );;
gap> ff := KernelEmbedding( ee );;
gap> gg := KernelEmbedding( cc );;
gap> hh := KernelLift( cc, PreCompose( aa, bb ) );;
gap> ii := CokernelProjection( hh );;
gap> fff := AsGeneralizedMorphism( ff );;
gap> ddd := AsGeneralizedMorphism( dd );;
gap> bbb := AsGeneralizedMorphism( bb );;
gap> ggg := AsGeneralizedMorphism( gg );;
gap> iii := AsGeneralizedMorphism( ii );;
gap> p := PreCompose( [ fff, PseudoInverse( ddd ), bbb, PseudoInverse( ggg ), iii ] );;
gap> IsHonest( p );
true
gap> jj := KernelObjectFunctorial( bb, dd, ee );;
gap> pp := HonestRepresentative( p );;
gap> comp := PreCompose( jj, pp );;
gap> IsZero( comp );
true

```

## Example

```

gap> SwitchGeneralizedMorphismStandard( "cospan" );;
gap> snake_quiver := RightQuiver( "Q(6)[a:1->2,b:2->3,c:3->4]" );;
gap> QQ := HomalgFieldOfRationals();;
gap> A := PathAlgebra( QQ, snake_quiver );;
gap> A := QuotientOfPathAlgebra( A, [ A.abc ] );;
gap> QRowsA := QuiverRows( A );;
gap> SetIsProjective( DistinguishedObjectOfHomomorphismStructure( QRowsA ), true );;
gap> a := AsQuiverRowsMorphism( A.a, QRowsA );;
gap> b := AsQuiverRowsMorphism( A.b, QRowsA );;
gap> c := AsQuiverRowsMorphism( A.c, QRowsA );;
gap> aa := AsAdelmanCategoryMorphism( a );;
gap> bb := AsAdelmanCategoryMorphism( b );;
gap> cc := AsAdelmanCategoryMorphism( c );;
gap> dd := CokernelProjection( aa );;
gap> ee := CokernelColift( aa, PreCompose( bb, cc ) );;
gap> ff := KernelEmbedding( ee );;
gap> gg := KernelEmbedding( cc );;
gap> hh := KernelLift( cc, PreCompose( aa, bb ) );;
gap> ii := CokernelProjection( hh );;
gap> fff := AsGeneralizedMorphism( ff );;
gap> ddd := AsGeneralizedMorphism( dd );;
gap> bbb := AsGeneralizedMorphism( bb );;
gap> ggg := AsGeneralizedMorphism( gg );;
gap> iii := AsGeneralizedMorphism( ii );;
gap> p := PreCompose( [ fff, PseudoInverse( ddd ), bbb, PseudoInverse( ggg ), iii ] );;
gap> IsHonest( p );
true
gap> jj := KernelObjectFunctorial( bb, dd, ee );;
gap> kk := CokernelObjectFunctorial( hh, gg, bb );;
gap> pp := HonestRepresentative( p );;
gap> comp := PreCompose( jj, pp );;
gap> IsZero( comp );
true
gap> comp := PreCompose( pp, kk );;
gap> IsZero( comp );
true
gap> homology := function( alpha, beta ) return CokernelObject( LiftAlongMonomorphism( KernelEmbedding( alpha ), beta ) );;
gap> IsZero( homology( jj, pp ) );
true
gap> IsZero( homology( pp, kk ) );
true

```

## 11.7 Basics based on category of rows

## Example

```

gap> R := HomalgRingOfIntegers();;
gap> cat := CategoryOfRows( R );;
gap> obj1 := CategoryOfRowsObject( 1, cat );;
gap> obj2 := CategoryOfRowsObject( 2, cat );;
gap> id := IdentityMorphism( obj2 );;
gap> alpha := CategoryOfRowsMorphism( obj1, HomalgMatrix( [ [ 1, 2 ] ], 1, 2, R ), obj2 );;

```



```

gap> beta := CategoryOfRowsMorphism( obj2, HomalgMatrix( [ [ 1, 2 ], [ 3, 4 ] ], 2, 2, R ), obj2
gap> comp := PreCompose( alpha, beta );;
gap> IsZero( comp );;
gap> zero := ZeroMorphism( obj1, obj2 );;
gap> IsZero( zero );;
gap> ZeroObject( cat );;
gap> UniversalMorphismIntoZeroObject( obj2 );;
gap> UniversalMorphismFromZeroObject( obj1 );;
gap> DirectSum( obj1, obj2 );;
gap> DirectSumFunctorial( [ alpha, beta, id ] );;
gap> ProjectionInFactorOfDirectSum( [ obj2, obj1, obj2 ], 3 );;
gap> UniversalMorphismIntoDirectSum( [ alpha, alpha, alpha ] );;
gap> InjectionOfCofactorOfDirectSum( [ obj2, obj2, obj1 ], 2 );;
gap> gamma := CategoryOfRowsMorphism( obj2, HomalgMatrix( [ [ 1, 1 ], [ 1, 1 ] ], 2, 2, R ), obj2
gap> IsColiftable( beta, gamma );
true
gap> IsColiftable( gamma, beta );
false
gap> ProjectionInFirstFactorOfWeakBiFiberProduct( gamma, gamma );;
gap> ProjectionInFirstFactorOfWeakBiFiberProduct( gamma, ZeroMorphism( Range( gamma ), Range( gamma
gap> lift_arg_1 := PreCompose( ProjectionInFirstFactorOfWeakBiFiberProduct( gamma, gamma + gamma
gap> lift_arg_2 := gamma + gamma;;
gap> IsLiftable( lift_arg_1, lift_arg_2 );;
gap> Lift( lift_arg_1, lift_arg_2 );;
gap> pi1 := ProjectionInFirstFactorOfWeakBiFiberProduct( alpha, beta );;
gap> pi2 := ProjectionInSecondFactorOfWeakBiFiberProduct( alpha, beta );;
gap> IsEqualForMorphisms( PreCompose( pi1, alpha ), PreCompose( pi2, beta ) );;
gap> inj1 := InjectionOfFirstCofactorOfWeakBiPushout( gamma + gamma, gamma );;
gap> inj2 := InjectionOfSecondCofactorOfWeakBiPushout( gamma + gamma, gamma );;
gap> IsEqualForMorphisms( PreCompose( gamma + gamma, inj1 ), PreCompose( gamma, inj2 ) );;
gap> WeakKernelLift( WeakCokernelProjection( gamma ), gamma );;
gap> pi1 := InjectionOfFirstCofactorOfWeakBiPushout( alpha, alpha );;
gap> pi2 := InjectionOfSecondCofactorOfWeakBiPushout( alpha, alpha );;
gap> UniversalMorphismFromWeakBiPushout( alpha, alpha, pi1, pi2 );;
gap> ## Freyd categories
> freyd := FreydCategory( cat );;
gap> IsAbelianCategory( freyd );;
gap> obj_gamma := FreydCategoryObject( gamma );;
gap> f := FreydCategoryMorphism( obj_gamma, gamma, obj_gamma );;
gap> witness := MorphismWitness( f );;
gap> g := FreydCategoryMorphism( obj_gamma, ZeroMorphism( obj2, obj2 ), obj_gamma );;
gap> IsCongruentForMorphisms( f, g );;
gap> c := PreCompose( f, f );;
gap> s := g + g;;
gap> a := CategoryOfRowsMorphism( obj1, HomalgMatrix( [ [ 2 ] ], 1, 1, R ), obj1 );;
gap> Z2 := FreydCategoryObject( a );;
gap> id := IdentityMorphism( Z2 );;
gap> z := id + id + id;;
gap> d := DirectSumFunctorial( [ z, z, z ] );;
gap> pr2 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );;
gap> pr3 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 3 );;
gap> UniversalMorphismIntoDirectSum( [ pr3, pr2 ] );;

```

```

gap> inj1 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 1 );;
gap> inj2 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );;
gap> UniversalMorphismFromDirectSum( [ inj2, inj1 ] );;
gap> ZFree := obj1/freyd;;
gap> id := IdentityMorphism( ZFree );;
gap> z := id + id;;
gap> CokernelProjection( z );;
gap> CokernelColift( z, CokernelProjection( z ) );;
gap> S := HomalgFieldOfRationalsInSingular() * "x,y,z";;
gap> Rows_S := CategoryOfRows( S );;
gap> S3 := CategoryOfRowsObject( 3, Rows_S );;
gap> S1 := CategoryOfRowsObject( 1, Rows_S );;
gap> mor := CategoryOfRowsMorphism( S3, HomalgMatrix( "[x,y,z]", 3, 1, S ), S1 );;
gap> biased_w := CategoryOfRowsMorphism( S3, HomalgMatrix( "[x,0,0,0,x,0,0,0,x]", 3, 3, S ), S3 );;
gap> biased_h := CategoryOfRowsMorphism( S3, HomalgMatrix( "[x*y, x*z, y^2]", 3, 3, S ), S3 );;
gap> BiasedWeakFiberProduct( biased_h, biased_w );;
gap> ProjectionOfBiasedWeakFiberProduct( biased_h, biased_w );;
gap> IsCongruentForMorphisms(
>   PreCompose( UniversalMorphismIntoBiasedWeakFiberProduct( biased_h, biased_w, biased_h ), Pro
>   biased_h
> );
true
gap> IsCongruentForMorphisms(
>   PreCompose( InjectionOfBiasedWeakPushout( biased_h, biased_w ), UniversalMorphismFromBiasedWe
>   biased_h
> );
true
gap> k := FreydCategoryObject( mor );;
gap> w := EpimorphismFromSomeProjectiveObjectForKernelObject( UniversalMorphismIntoZeroObject( k
gap> k := KernelEmbedding( w );;
gap> ColiftAlongEpimorphism( CokernelProjection( k ), CokernelProjection( k ) );;
gap> ## Homomorphism structures
> a := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( gamma );;
gap> IsCongruentForMorphisms( InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMo
gap> a := ZeroObjectFunctorial( cat );;
gap> IsCongruentForMorphisms( InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMo
gap> Z4 := FreydCategoryObject( AsCategoryOfRowsMorphism( HomalgMatrix( "[4]", 1, 1, R ), cat ) );
gap> Z3 := FreydCategoryObject( AsCategoryOfRowsMorphism( HomalgMatrix( "[3]", 1, 1, R ), cat ) );
gap> HomomorphismStructureOnObjects( Z4, Z2 );;
gap> HomomorphismStructureOnObjects( Z4, Z4 );;
gap> HomomorphismStructureOnObjects( Z2, Z4 );;
gap> HomomorphismStructureOnObjects( Z3, Z4 );;
gap> HomomorphismStructureOnMorphisms( IdentityMorphism( DirectSum( Z4, Z2, Z3 ) ), -IdentityMorp
gap> ## Lifts
> S2 := CategoryOfRowsObject( 2, Rows_S );;
gap> S4 := CategoryOfRowsObject( 4, Rows_S );;
gap> S1_freyd := AsFreydCategoryObject( S1 );;
gap> S2_freyd := AsFreydCategoryObject( S2 );;
gap> S3_freyd := AsFreydCategoryObject( S3 );;
gap> S4_freyd := AsFreydCategoryObject( S4 );;
gap> lift := FreydCategoryMorphism( S1_freyd, CategoryOfRowsMorphism( S1, HomalgMatrix( "[x]", 1,
gap> gamma := FreydCategoryMorphism( S1_freyd, CategoryOfRowsMorphism( S1, HomalgMatrix( "[y]", 1,

```

```

gap> alpha := PreCompose( lift, gamma );
gap> IsLiftable( alpha, gamma );
true
gap> Lift( alpha, gamma );
gap> IsColiftable( lift, alpha );
true
gap> IsCongruentForMorphisms( PreCompose( lift, Colift( lift, alpha ) ), alpha );
true
gap> lift := FreydCategoryMorphism( S2_freyd, CategoryOfRowsMorphism( S2, HomalgMatrix( "[x,y,z,x]" ) );
gap> gamma := FreydCategoryMorphism( S3_freyd, CategoryOfRowsMorphism( S3, HomalgMatrix( "[x,y,z,x]" ) );
gap> alpha := PreCompose( lift, gamma );
gap> Lift( alpha, gamma );
gap> Colift( lift, alpha );
gap> IsCongruentForMorphisms( PreCompose( lift, Colift( lift, alpha ) ), alpha );
gap> interpretation := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( lift, alpha );
gap> IsCongruentForMorphisms( gamma,
> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( gamma ), Range( gamma ) );
gap> ## Opposite
> HomomorphismStructureOnObjects( Opposite( Z4 ), Opposite( Z2 ) );
gap> HomomorphismStructureOnObjects( Z2, Z4 );
gap> interpretation := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( lift, alpha );
gap> IsCongruentForMorphisms( Opposite( gamma ),
> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( Opposite( gamma ) ), Range( Opposite( gamma ) ) );
true

```

## 11.8 Basics of additive closure

Example

```

gap> ## Algebroid
> snake_quiver := RightQuiver( "Q(6)[a:1->2,b:2->3,c:1->4,d:2->5,e:3->6,f:4->5,g:5->6]" );
gap> kQ := PathAlgebra( HomalgFieldOfRationalsInSingular(), snake_quiver );
gap> A := kQ / [ kQ.ad - kQ.cf, kQ.dg - kQ.be, kQ.ab, kQ.fg ];
gap> Aoid := Algebroid( kQ, [ kQ.ad - kQ.cf, kQ.dg - kQ.be, kQ.ab, kQ.fg ] );
gap> s := SetOfObjects( Aoid );
gap> m := SetOfGeneratingMorphisms( Aoid );
gap> interpretation := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( lift, alpha );
gap> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( m[3] ), Range( m[3] ) );
gap> ## additive closure
> add := AdditiveClosure( Aoid );
gap> obj1 := AdditiveClosureObject( [ s[1], s[2] ], add );
gap> mor := AdditiveClosureMorphism( obj1, [ IdentityMorphism( s[1] ), ZeroMorphism( s[1], s[2] ) ] );
gap> IsWellDefined( mor );
gap> IsCongruentForMorphisms( PreCompose( mor, mor ), IdentityMorphism( obj1 ) );
gap> obj2 := AdditiveClosureObject( [ s[3], s[3] ], add );
gap> id := IdentityMorphism( obj2 );
gap> objs1 := AdditiveClosureObject( [ s[1] ], add );
gap> objs2 := AdditiveClosureObject( [ s[2] ], add );
gap> ids1 := IdentityMorphism( objs1 );
gap> ids2 := IdentityMorphism( objs2 );
gap> HomomorphismStructureOnMorphisms( DirectSumFunctorial( [ ids1, ids2 ] ), ids1 );
gap> interpretation := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( lift, alpha );
gap> IsCongruentForMorphisms(

```

```

> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( mor ), Range( mor ) );
> mor );
gap> a := AsAdditiveClosureMorphism( m[1] );
gap> b := AsAdditiveClosureMorphism( m[2] );
gap> c := AsAdditiveClosureMorphism( m[3] );
gap> d := AsAdditiveClosureMorphism( m[4] );
gap> e := AsAdditiveClosureMorphism( m[5] );
gap> f := AsAdditiveClosureMorphism( m[6] );
gap> g := AsAdditiveClosureMorphism( m[7] );
gap> l := Lift( PreCompose( a, d ), f );
gap> IsCongruentForMorphisms( PreCompose( l, f ), PreCompose( a, d ) );
true
gap> l := Colift( c, PreCompose( a, d ) );
gap> IsCongruentForMorphisms( PreCompose( c, l ), PreCompose( a, d ) );
true

```

## 11.9 Basics based on category of columns

Example

```

gap> R := HomalgRingOfIntegers();
gap> cat := CategoryOfColumns( R );
gap> obj1 := CategoryOfColumnsObject( 1, cat );
gap> obj2 := CategoryOfColumnsObject( 2, cat );
gap> id := IdentityMorphism( obj2 );
gap> alpha := CategoryOfColumnsMorphism( obj1, HomalgMatrix( [ [ 1 ], [ 2 ] ], 1, 2, R ), obj2 );
gap> beta := CategoryOfColumnsMorphism( obj2, HomalgMatrix( [ [ 1, 2 ], [ 3, 4 ] ], 2, 2, R ), obj1 );
gap> comp := PreCompose( alpha, beta );
gap> IsZero( comp );
gap> zero := ZeroMorphism( obj1, obj2 );
gap> IsZero( zero );
gap> ZeroObject( cat );
gap> UniversalMorphismIntoZeroObject( obj2 );
gap> UniversalMorphismFromZeroObject( obj1 );
gap> DirectSum( obj1, obj2 );
gap> DirectSumFunctorial( [ alpha, beta, id ] );
gap> ProjectionInFactorOfDirectSum( [ obj2, obj1, obj2 ], 3 );
gap> UniversalMorphismIntoDirectSum( [ alpha, alpha, alpha ] );
gap> InjectionOfCofactorOfDirectSum( [ obj2, obj2, obj1 ], 2 );
gap> gamma := CategoryOfColumnsMorphism( obj2, HomalgMatrix( [ [ 1, 1 ], [ 1, 1 ] ], 2, 2, R ), obj1 );
gap> IsColiftable( beta, gamma );
false
gap> IsColiftable( gamma, beta );
false
gap> ProjectionInFirstFactorOfWeakBiFiberProduct( gamma, gamma );
gap> ProjectionInFirstFactorOfWeakBiFiberProduct( gamma, ZeroMorphism( Range( gamma ), Range( gamma ) ) );
gap> lift_arg_1 := PreCompose( ProjectionInFirstFactorOfWeakBiFiberProduct( gamma, gamma + gamma ), gamma );
gap> lift_arg_2 := gamma + gamma;
gap> IsLiftable( lift_arg_1, lift_arg_2 );
gap> Lift( lift_arg_1, lift_arg_2 );
gap> pi1 := ProjectionInFirstFactorOfWeakBiFiberProduct( alpha, beta );
gap> pi2 := ProjectionInSecondFactorOfWeakBiFiberProduct( alpha, beta );
gap> IsEqualForMorphisms( PreCompose( pi1, alpha ), PreCompose( pi2, beta ) );

```

```

gap> inj1 := InjectionOfFirstCofactorOfWeakBiPushout( gamma + gamma, gamma );;
gap> inj2 := InjectionOfSecondCofactorOfWeakBiPushout( gamma + gamma, gamma );;
gap> IsEqualForMorphisms( PreCompose( gamma + gamma, inj1 ), PreCompose( gamma, inj2 ) );;
gap> WeakKernelLift( WeakCokernelProjection( gamma ), gamma );;
gap> pi1 := InjectionOfFirstCofactorOfWeakBiPushout( alpha, alpha );;
gap> pi2 := InjectionOfSecondCofactorOfWeakBiPushout( alpha, alpha );;
gap> UniversalMorphismFromWeakBiPushout( alpha, alpha, pi1, pi2 );;
gap> ## Freyd categories
> freyd := FreydCategory( cat );;
gap> IsAbelianCategory( freyd );;
gap> obj_gamma := FreydCategoryObject( gamma );;
gap> f := FreydCategoryMorphism( obj_gamma, gamma, obj_gamma );;
gap> witness := MorphismWitness( f );;
gap> g := FreydCategoryMorphism( obj_gamma, ZeroMorphism( obj2, obj2 ), obj_gamma );;
gap> IsCongruentForMorphisms( f, g );;
gap> c := PreCompose( f, f );;
gap> s := g + g;;
gap> a := CategoryOfColumnsMorphism( obj1, HomalgMatrix( [ [ 2 ] ], 1, 1, R ), obj1 );;
gap> Z2 := FreydCategoryObject( a );;
gap> id := IdentityMorphism( Z2 );;
gap> z := id + id + id;;
gap> d := DirectSumFunctorial( [ z, z, z ] );;
gap> pr2 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );;
gap> pr3 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 3 );;
gap> UniversalMorphismIntoDirectSum( [ pr3, pr2 ] );;
gap> inj1 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 1 );;
gap> inj2 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );;
gap> UniversalMorphismFromDirectSum( [ inj2, inj1 ] );;
gap> ZFree := AsFreydCategoryObject( obj1 );;
gap> id := IdentityMorphism( ZFree );;
gap> z := id + id;;
gap> CokernelProjection( z );;
gap> CokernelColift( z, CokernelProjection( z ) );;
gap> S := HomalgFieldOfRationalsInSingular() * "x,y,z";;
gap> Cols_S := CategoryOfColumns( S );;
gap> S3 := CategoryOfColumnsObject( 3, Cols_S );;
gap> S1 := CategoryOfColumnsObject( 1, Cols_S );;
gap> mor := CategoryOfColumnsMorphism( S3, HomalgMatrix( "[x,y,z]", 1, 3, S ), S1 );;
gap> biased_w := CategoryOfColumnsMorphism( S3, HomalgMatrix( "[x,0,0,0,x,0,0,0,x]", 3, 3, S ), S3 );;
gap> biased_h := CategoryOfColumnsMorphism( S3, HomalgMatrix( "[x*y, x*z, y^2]", 3, 3, S ), S3 );;
gap> BiasedWeakFiberProduct( biased_h, biased_w );;
gap> ProjectionOfBiasedWeakFiberProduct( biased_h, biased_w );;
gap> IsCongruentForMorphisms(
>   PreCompose( UniversalMorphismIntoBiasedWeakFiberProduct( biased_h, biased_w, biased_h ), Pro
>   biased_h
> );
true
gap> IsCongruentForMorphisms(
>   PreCompose( InjectionOfBiasedWeakPushout( biased_h, biased_w ), UniversalMorphismFromBiasedWe
>   biased_h
> );
true

```

```

gap> k := FreydCategoryObject( mor );;
gap> w := EpimorphismFromSomeProjectiveObjectForKernelObject( UniversalMorphismIntoZeroObject( k );;
gap> k := KernelEmbedding( w );;
gap> ColiftAlongEpimorphism( CokernelProjection( k ), CokernelProjection( k ) );;
gap> ## Homomorphism structures
> a := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( gamma );;
gap> IsCongruentForMorphisms( InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( a );;
gap> a := ZeroObjectFunctorial( cat );;
gap> IsCongruentForMorphisms( InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( a );;
gap> Z4 := FreydCategoryObject( AsCategoryOfColumnsMorphism( HomalgMatrix( "[4]", 1, 1, R ), cat );;
gap> Z3 := FreydCategoryObject( AsCategoryOfColumnsMorphism( HomalgMatrix( "[3]", 1, 1, R ), cat );;
gap> HomomorphismStructureOnObjects( Z4, Z2 );;
gap> HomomorphismStructureOnObjects( Z4, Z4 );;
gap> HomomorphismStructureOnObjects( Z2, Z4 );;
gap> HomomorphismStructureOnObjects( Z3, Z4 );;
gap> HomomorphismStructureOnMorphisms( IdentityMorphism( DirectSum( Z4, Z2, Z3 ) ), -IdentityMorphism( Z4, Z2, Z3 ) );;
gap> ## Lifts
> S2 := CategoryOfColumnsObject( 2, Cols_S );;
gap> S4 := CategoryOfColumnsObject( 4, Cols_S );;
gap> S1_freyd := AsFreydCategoryObject( S1 );;
gap> S2_freyd := AsFreydCategoryObject( S2 );;
gap> S3_freyd := AsFreydCategoryObject( S3 );;
gap> S4_freyd := AsFreydCategoryObject( S4 );;
gap> lift := FreydCategoryMorphism( S1_freyd, CategoryOfColumnsMorphism( S1, HomalgMatrix( "[x]", 1, 1, R ) );;
gap> gamma := FreydCategoryMorphism( S1_freyd, CategoryOfColumnsMorphism( S1, HomalgMatrix( "[y]", 1, 1, R ) );;
gap> alpha := PreCompose( lift, gamma );;
gap> Lift( alpha, gamma );;
gap> Colift( lift, alpha );;
gap> IsCongruentForMorphisms( PreCompose( lift, Colift( lift, alpha ) ), alpha );;
gap> lift := FreydCategoryMorphism( S2_freyd, CategoryOfColumnsMorphism( S2, HomalgMatrix( "[x]", 1, 1, R ) );;
gap> gamma := FreydCategoryMorphism( S3_freyd, CategoryOfColumnsMorphism( S3, HomalgMatrix( "[x]", 1, 1, R ) );;
gap> alpha := PreCompose( lift, gamma );;
gap> Lift( alpha, gamma );;
gap> Colift( lift, alpha );;
gap> IsCongruentForMorphisms( PreCompose( lift, Colift( lift, alpha ) ), alpha );;
gap> interpretation := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( gamma );;
gap> IsCongruentForMorphisms( gamma,
> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( gamma ), Range( gamma ) );;
gap> ## Opposite
> HomomorphismStructureOnObjects( Opposite( Z4 ), Opposite( Z2 ) );;
gap> HomomorphismStructureOnObjects( Z2, Z4 );;
gap> interpretation := InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( gamma );;
gap> IsCongruentForMorphisms( Opposite( gamma ),
> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( Opposite( gamma ) ), Range( Opposite( gamma ) ) );;
true

```

## 11.10 Cokernel image closure in category of rows

### Example

```

gap> R := HomalgFieldOfRationalsInSingular() * "x,y,z";;
gap> RowsR := CategoryOfRows( R );;
gap> m := AsCategoryOfRowsMorphism(

```

```

> HomalgMatrix( "[[x],[y],[z]]", 3, 1, R ), RowsR
> );;
gap> mu := AsCokernelImageClosureMorphism( m );;
gap> C := CokernelObject( mu );;
gap> C2 := AsFinitelyPresentedCokernelImageClosureObject( m );;
gap> IsEqualForObjects( C, C2 );
true
gap> n := AsCategoryOfRowsMorphism(
> HomalgMatrix( "[[x,y],[y^2,z]]", 2, 2, R ), RowsR
> );;
gap> nu := AsCokernelImageClosureMorphism( n );;
gap> nu2 := PreCompose( nu, nu );;
gap> IsWellDefined( nu2 );
true
gap> IsCongruentForMorphisms( nu, nu2 );
false
gap> nu + nu;;
gap> nu2 - nu;;
gap> cat := CapCategory( nu );;
gap> ZeroObject( cat );;
gap> ZeroMorphism( Source( nu ), Source( mu ) );;
gap> UniversalMorphismIntoZeroObject( Source( nu ) );;
gap> UniversalMorphismFromZeroObject( Source( nu ) );;
gap> S := Source( mu );;
gap> DirectSum( [S, S, S] );;
gap> DirectSumFunctorial( [ nu2, nu ] );;
gap> UniversalMorphismIntoDirectSum( [ nu, nu ] );;
gap> UniversalMorphismFromDirectSum( [ nu, nu ] );;
gap> ProjectionInFactorOfDirectSum( [ S, S, S ], 2 );;
gap> InjectionOfCofactorOfDirectSum( [ S, S, S, S ], 4 );;
gap> CokernelColift( nu, CokernelProjection( nu ) );;
gap> IsCongruentForMorphisms( nu, PreCompose( CostrictionToImage( nu ), ImageEmbedding( nu ) ) );;
true
gap> u := UniversalMorphismFromImage( nu, [ nu, IdentityMorphism( Range( nu ) ) ] );;
gap> IsWellDefined( u );
true
gap> IsCongruentForMorphisms( nu, PreCompose( CostrictionToImage( nu ), u ) );
true
gap> IsCongruentForMorphisms( u, ImageEmbedding( nu ) );
true
gap> kernel := KernelObject( mu );;
gap> emb := KernelEmbedding( mu );;
gap> p := PreCompose( EpimorphismFromSomeProjectiveObject( kernel ), KernelEmbedding( mu ) );;
gap> KernelLift( mu, p );;
gap> LiftAlongMonomorphism( emb, p );;
gap> I_to_A := FunctorCokernelImageClosureToFreydCategory( RowsR );;
gap> A_to_I := FunctorFreydCategoryToCokernelImageClosure( RowsR );;
gap> ApplyFunctor( I_to_A, kernel );;
gap> ApplyFunctor( A_to_I, ApplyFunctor( I_to_A, kernel ) );;
gap> nu := NaturalIsomorphismFromIdentityToFinitePresentationOfCokernelImageClosureObject( RowsR
gap> mu := NaturalIsomorphismFromFinitePresentationOfCokernelImageClosureObjectToIdentity( RowsR
gap> IsCongruentForMorphisms(

```

```

> IdentityMorphism( kernel ),
> PreCompose( ApplyNaturalTransformation( nu, kernel ), ApplyNaturalTransformation( mu, kernel ) );
> );
true

```

## 11.11 Cokernel image closure in category of columns

Example

```

gap> R := HomalgFieldOfRationalsInSingular() * "x,y,z";;
gap> ColsR := CategoryOfColumns( R );;
gap> m := AsCategoryOfColumnsMorphism(
> HomalgMatrix( "[[x],[y],[z]]", 1, 3, R ), ColsR
> );;
gap> mu := AsCokernelImageClosureMorphism( m );;
gap> C := CokernelObject( mu );;
gap> C2 := AsFinitelyPresentedCokernelImageClosureObject( m );;
gap> IsEqualForObjects( C, C2 );
true
gap> n := AsCategoryOfColumnsMorphism(
> HomalgMatrix( "[[x,y],[y^2,z]]", 2, 2, R ), ColsR
> );;
gap> nu := AsCokernelImageClosureMorphism( n );;
gap> nu2 := PreCompose( nu, nu );;
gap> IsWellDefined( nu2 );
true
gap> IsCongruentForMorphisms( nu, nu2 );
false
gap> nu + nu;;
gap> nu2 - nu;;
gap> cat := CapCategory( nu );;
gap> ZeroObject( cat );;
gap> ZeroMorphism( Source( nu ), Source( mu ) );;
gap> UniversalMorphismIntoZeroObject( Source( nu ) );;
gap> UniversalMorphismFromZeroObject( Source( nu ) );;
gap> S := Source( mu );;
gap> DirectSum( [S, S, S] );;
gap> DirectSumFunctorial( [ nu2, nu ] );;
gap> UniversalMorphismIntoDirectSum( [ nu, nu ] );;
gap> UniversalMorphismFromDirectSum( [ nu, nu ] );;
gap> ProjectionInFactorOfDirectSum( [ S, S, S ], 2 );;
gap> InjectionOfCofactorOfDirectSum( [ S, S, S ], 4 );;
gap> CokernelColift( nu, CokernelProjection( nu ) );;
gap> IsCongruentForMorphisms( nu, PreCompose( CostrictionToImage( nu ), ImageEmbedding( nu ) ) );
true
gap> u := UniversalMorphismFromImage( nu, [ nu, IdentityMorphism( Range( nu ) ) ] );;
gap> IsWellDefined( u );
true
gap> IsCongruentForMorphisms( nu, PreCompose( CostrictionToImage( nu ), u ) );
true
gap> IsCongruentForMorphisms( u, ImageEmbedding( nu ) );
true
gap> kernel := KernelObject( mu );;

```



```

gap> emb := KernelEmbedding( mu );;
gap> p := PreCompose( EpimorphismFromSomeProjectiveObject( kernel ), KernelEmbedding( mu ) );;
gap> Kernellift( mu, p );;
gap> LiftAlongMonomorphism( emb, p );;
gap> I_to_A := FunctorCokernelImageClosureToFreydCategory( ColsR );;
gap> A_to_I := FunctorFreydCategoryToCokernelImageClosure( ColsR );;
gap> ApplyFunctor( I_to_A, kernel );;
gap> ApplyFunctor( A_to_I, ApplyFunctor( I_to_A, kernel ) );;
gap> nu := NaturalIsomorphismFromIdentityToFinitePresentationOfCokernelImageClosureObject( ColsR
gap> mu := NaturalIsomorphismFromFinitePresentationOfCokernelImageClosureObjectToIdentity( ColsR
gap> IsCongruentForMorphisms(
>   IdentityMorphism( kernel ),
>   PreCompose( ApplyNaturalTransformation( nu, kernel ), ApplyNaturalTransformation( mu, kerne
> );
true

```

## 11.12 Grade filtration

The sequence of modules computed via satellites behaves in a way that is not understood in the case when the ring is not Auslander regular.

Example

```

gap> R := HomalgFieldOfRationalsInSingular() * "x,y";;
gap> R := R/"x*y"/"x^2";;
gap> RowsR := CategoryOfRows( R );;
gap> Freyd := FreydCategory( RowsR );;
gap> mat := HomalgMatrix( "[x,y]", 1, 2, R );;
gap> M := mat/Freyd;;
gap> mu1 := GradeFiltrationNthMonomorphism( M, 1 );;
gap> IsMonomorphism( mu1 );
true
gap> IsZero( mu1 );
false
gap> IsEpimorphism( mu1 );
false
gap> mu2 := GradeFiltrationNthMonomorphism( M, 2 );;
gap> IsIsomorphism( mu2 );
true
gap> IsZero( mu2 );
false
gap> mu3 := GradeFiltrationNthMonomorphism( M, 3 );;
gap> IsIsomorphism( mu3 );
true
gap> IsZero( mu3 );
false
gap> mu4 := GradeFiltrationNthMonomorphism( M, 4 );;
gap> IsMonomorphism( mu4 );
false
gap> IsEpimorphism( mu4 );
true
gap> IsZero( mu4 );
false

```

## Example

```

gap> Qxyz := HomalgFieldOfRationalsInDefaultCAS( ) * "x,y,z";
gap> wmat := HomalgMatrix( "[ \
> x*y, y*z, z, 0, 0, \
> x^3*z,x^2*z^2,0, x*z^2, -z^2, \
> x^4, x^3*z, 0, x^2*z, -x*z, \
> 0, 0, x*y, -y^2, x^2-1,\
> 0, 0, x^2*z, -x*y*z, y*z, \
> 0, 0, x^2*y-x^2,-x*y^2+x*y,y^2-y \
> ]", 6, 5, Qxyz );;
gap> RowsR := CategoryOfRows( Qxyz );;
gap> Freyd := FreydCategory( RowsR );;
gap> Adel := AdelmanCategory( RowsR );;
gap> M := wmat/Freyd;;

```

We compute the grade sequence of functors (it turns out that on the level of functors, we don't get monos)

## Example

```

gap> M_tor := M/Adel;;
gap> Mu1 := GradeFiltrationNthNaturalTransformationComponent( M_tor, 1 );;
gap> IsZero( Mu1 );
false
gap> IsMonomorphism( Mu1 );
true
gap> Mu2 := GradeFiltrationNthNaturalTransformationComponent( M_tor, 2 );;
gap> IsZero( Mu2 );
false
gap> IsMonomorphism( Mu2 );
false
gap> Mu3 := GradeFiltrationNthNaturalTransformationComponent( M_tor, 3 );;
gap> IsZero( Mu3 );
false
gap> IsMonomorphism( Mu3 );
false
gap> Mu4 := GradeFiltrationNthNaturalTransformationComponent( M_tor, 4 );;
gap> IsZero( Mu4 );
true

```

We compute the grade sequence of modules (here, we really get monos and thus a filtration)

## Example

```

gap> mu1 := GradeFiltrationNthMonomorphism( M, 1 );;
gap> IsZero( mu1 );
false
gap> IsMonomorphism( mu1 );
true
gap> mu2 := GradeFiltrationNthMonomorphism( M, 2 );;
gap> IsZero( mu2 );
false
gap> IsMonomorphism( mu2 );
true
gap> mu3 := GradeFiltrationNthMonomorphism( M, 3 );;
gap> IsZero( mu3 );

```

```

false
gap> IsMonomorphism( mu3 );
true
gap> mu4 := GradeFiltrationNthMonomorphism( M, 4 );;
gap> IsZero( mu4 );
true

```

### 11.13 Groups as categories

Example

```

gap> G := SymmetricGroup( 3 );;
gap> CG := GroupAsCategory( G );;
#I method installed for IsAutomorphism matches more than one declaration
#I method installed for IsSplitEpimorphism matches more than one declaration
#I method installed for IsSplitMonomorphism matches more than one declaration
gap> u := GroupAsCategoryUniqueObject( CG );;
gap> alpha := GroupAsCategoryMorphism( (1,2,3), CG );;
gap> alpha * Inverse( alpha ) = IdentityMorphism( u );
true
gap> beta := GroupAsCategoryMorphism( (1,2,3,5), CG );;
gap> IsWellDefined( beta );
false
gap> gamma := GroupAsCategoryMorphism( (1,3), CG );;
gap> IsWellDefined( gamma );
true
gap> Lift( alpha, gamma ) * gamma = alpha;
true
gap> alpha * Colift( alpha, gamma ) = gamma;
true
gap> Length( HomomorphismStructureOnObjects( u, u ) ) = Size( G );
true
gap> InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism(
>   u,u,
>   PreCompose(
>     InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( alpha ), Hom
>   )
> )
> =
> gamma * alpha * Inverse( gamma );
true
gap> x := (2,3)/CG;;
gap> id := ()/CG;;
gap> IsIdenticalObj( x * x, id );
true

```

### 11.14 Homomorphisms between f.p. functors based on category of rows

Example

```

gap> R := HomalgFieldOfRationalsInSingular() * "x,y,z";;
gap> Rows_R := CategoryOfRows( R );;
gap> R1 := CategoryOfRowsObject( 1, Rows_R );;

```

```

gap> R3 := CategoryOfRowsObject( 3, Rows_R );;
gap> alpha := CategoryOfRowsMorphism( R3, HomalgMatrix( "[x,y,z]", 3, 1, R ), R1 );;
gap> M := FreydCategoryObject( alpha );;
gap> c0 := CovariantExtAsFreydCategoryObject( M, 0 );;
gap> c1 := CovariantExtAsFreydCategoryObject( M, 1 );;
gap> c2 := CovariantExtAsFreydCategoryObject( M, 2 );;
gap> IsZeroForObjects( HomomorphismStructureOnObjects( c0, c2 ) ); # = Ext^2( M, M )
false

```

## 11.15 Homomorphisms between f.p. functors based on category of columns

Example

```

gap> R := HomalgFieldOfRationalsInSingular() * "x,y,z";;
gap> Cols_R := CategoryOfColumns( R );;
gap> R1 := CategoryOfColumnsObject( 1, Cols_R );;
gap> R3 := CategoryOfColumnsObject( 3, Cols_R );;
gap> alpha := CategoryOfColumnsMorphism( R3, HomalgMatrix( "[x,y,z]", 1, 3, R ), R1 );;
gap> M := FreydCategoryObject( alpha );;
gap> c0 := CovariantExtAsFreydCategoryObject( M, 0 );;
gap> c1 := CovariantExtAsFreydCategoryObject( M, 1 );;
gap> c2 := CovariantExtAsFreydCategoryObject( M, 2 );;
gap> IsZeroForObjects( HomomorphismStructureOnObjects( c0, c2 ) ); # = Ext^2( M, M )
false

```

## 11.16 Linear closure of categories

Example

```

gap> G := SymmetricGroup( 3 );;
gap> CG := GroupAsCategory( G );;
#I method installed for IsAutomorphism matches more than one declaration
#I method installed for IsSplitEpimorphism matches more than one declaration
#I method installed for IsSplitMonomorphism matches more than one declaration
gap> compare_func := function( g, h ) return UnderlyingGroupElement( g ) < UnderlyingGroupElement( h );;
gap> ZZ := HomalgRingOfIntegers();;
gap> ZCG := LinearClosure( ZZ, CG, compare_func );;
gap> u := GroupAsCategoryUniqueObject( CG );;
gap> g := GroupAsCategoryMorphism( (1,2,3), CG );;
gap> h := GroupAsCategoryMorphism( (1,2), CG );;
gap> v := LinearClosureObject( ZCG, u );;
gap> elem1 := LinearClosureMorphism( v, [ 1, 2, 3, 4, 5, 6 ], [ g, h, g, h, g, h ], v );;
gap> elem2 := LinearClosureMorphism( v, [ 1, 2, 3, 4, 5, 6 ], [ h, g, h, g, h, g ], v );;
gap> # for i in [ 1 .. 10^6 ] do LinearClosureMorphism( v, [ 1, 2, 3, 4, 5, 6 ], [ g, h, g, h, g, h ], v );;
gap> elem := LinearClosureMorphism( v, [ 0, 0, 0, 0, 0, 0 ], [ g, h, g, h, g, h ], v );;
gap> a := (1,2)/CG/ZCG;;
gap> b := (2,3)/CG/ZCG;;
gap> IsIsomorphism( a + b );
false
gap> Lift( a + b, a ) * a = a + b;
true

```

```
gap> IsLiftable( a + b, -2*a ); ## over Q this is liftable
false
```

## 11.17 Matrices over $\mathbb{Z}P_K$

Example

```
gap> #Incidence matrix of our proset
> K := [ [1, 1, 1], [0, 1, 1], [0, 1, 1] ];;
gap> #Construction of a tower of categories
> CP_K := ProSetAsCategory( K );;
#I method installed for IsSplitEpimorphism matches more than one declaration
#I method installed for IsSplitMonomorphism matches more than one declaration
gap> ZZ := HomalgRingOfIntegers( );
gap> ZP_K := LinearClosure( ZZ, CP_K, ReturnTrue );
gap> RowsP_K := AdditiveClosure( ZP_K );
gap> a := ProSetAsCategoryObject( 1, CP_K );
gap> b := ProSetAsCategoryObject( 2, CP_K );
gap> c := ProSetAsCategoryObject( 3, CP_K );
gap> #Three random objects in the additive closure
> #Such that there exists morphisms from A->B and B->C:
> rand_coef := List( [ 1 .. 5 ], i -> Random( [ 2 .. 20 ] ) );
gap> A1 := List( [ 1 .. rand_coef[ 1 ] ], i -> a );
gap> A2 := List( [ 1 .. rand_coef[ 2 ] ], i -> b );
gap> A := Concatenation( A1, A2 );
gap> B1 := List( [ 1 .. rand_coef[ 3 ] ], i -> b );
gap> B2 := List( [ 1 .. rand_coef[ 4 ] ], i -> c );
gap> B := Concatenation( B1, B2 );
gap> C := List( [ 1 .. rand_coef[ 5 ] ], i -> c );
gap> #A random lifting problem over ZP_K
> MA_B := List( [ 1 .. rand_coef[ 1 ] + rand_coef[ 2 ] ], i ->
>               List( [ 1 .. rand_coef[ 3 ] + rand_coef[ 4 ] ], j ->
>                   LinearClosureMorphism( LinearClosureObject( A[i], ZP_K ), [Random( [ -20 .. 20
>                   )
>               )];
gap> alpha := MA_B/RowsP_K;;
gap> MB_C := List( [ 1 .. rand_coef[ 3 ] + rand_coef[ 4 ] ], i ->
>               List( [ 1 .. rand_coef[ 5 ] ], j ->
>                   LinearClosureMorphism( LinearClosureObject( B[i], ZP_K ), [Random( [ -20 .. 20
>                   )
>               )];
gap> beta := MB_C/RowsP_K;;
gap> gamma := PreCompose( alpha, beta );
gap> lift := Lift( gamma, beta );
gap> PreCompose(lift, beta) = gamma;
true
```

## 11.18 Matrices over $\mathbb{Z}G$

Construction of a tower of categories

## Example

```
gap> G := SymmetricGroup( 3 );;
gap> CG := GroupAsCategory( G );;
#I method installed for IsAutomorphism matches more than one declaration
#I method installed for IsSplitEpimorphism matches more than one declaration
#I method installed for IsSplitMonomorphism matches more than one declaration
gap> ZZ := HomalgRingOfIntegers( );;
gap> ZCG := LinearClosure( ZZ, CG );;
gap> RowsG := AdditiveClosure( ZCG );;
```

## Construction of elements

## Example

```
gap> a := (1,2)/CG/ZCG;;
gap> b := (2,3)/CG/ZCG;;
gap> e := ()/CG/ZCG;;
gap> omega := [ [ a - e ], [ b - e ] ]/RowsG;;
gap> u := GroupAsCategoryUniqueObject( CG );;
gap> v := LinearClosureObject( ZCG, u );;
gap> u := AsAdditiveClosureObject( v );;
gap> HomStructure( u, omega );;
```

## A random lifting problem over ZG

## Example

```
gap> elem := Elements( G );;
gap> elem := List( elem, x -> x/CG/ZCG );;
gap> rand_elem := function() local coeffs; coeffs := List( [ 1 .. 6 ], i -> Random( [ -20 .. 20 ] );;
gap> mat10_11 := List( [ 1 .. 10 ], i ->
>   List( [ 1 .. 11 ], j ->
>     rand_elem()
>   )
> );;
gap> mat11_12 := List( [ 1 .. 11 ], i ->
>   List( [ 1 .. 12 ], j ->
>     rand_elem()
>   )
> );;
gap> alpha := mat10_11/RowsG;;
gap> beta := mat11_12/RowsG;;
gap> gamma := PreCompose( alpha, beta );;
gap> lift := Lift( gamma, beta );;
gap> PreCompose( lift, beta ) = gamma;
true
```

## 11.19 Prosets

## Example

```
gap> K := [ [1, 1, 1], [0, 1, 1], [0, 1, 1] ];;
gap> L := [ [1, 1, 0], [0, 1, 1], [0, 0, 1] ];;
gap> P_K := ProSetAsCategory(K);;
#I method installed for IsSplitEpimorphism matches more than one declaration
#I method installed for IsSplitMonomorphism matches more than one declaration
gap> #ProSetAsCategory(L);
```

```

gap> a := 1/P_K;;
gap> b := ProSetAsCategoryObject(2, P_K);;
gap> c := ProSetAsCategoryObject(3, P_K);;
gap> d := ProSetAsCategoryObject(4, P_K);;
gap> delta := ProSetAsCategoryMorphism(b, a);;
gap> IsWellDefined(a);
true
gap> IsWellDefined(d);
false
gap> IsWellDefined(delta);
false
gap> alpha := ProSetAsCategoryMorphism(a, b);;
gap> beta := ProSetAsCategoryMorphism(b, c);;
gap> gamma := ProSetAsCategoryMorphism(a, c);;
gap> gamma = PreCompose(alpha, beta);
true
gap> id_a := IdentityMorphism(a);;
gap> IsWellDefined(Inverse(alpha));
false
gap> beta*Inverse(beta) = IdentityMorphism(b);
true
gap> alpha = Lift(gamma, beta);
true
gap> fail = Lift(beta, gamma);
true
gap> Colift(alpha, gamma) = beta;
true
gap> alpha = HomStructure(a, b, HomStructure(alpha));
true

```

## 11.20 Quiver rows bascis

Example

```

gap> ## quiver without relations
> QQ := HomalgFieldOfRationals();;
gap> quiver := RightQuiver( "Q(3)[a:1->2,b:1->2,c:2->3]" );;
gap> Av := Vertices( quiver );;
gap> A := PathAlgebra( QQ, quiver );;
gap> a := BasisPaths( CanonicalBasis( A ) );;
gap> a := List( a, p -> PathAsAlgebraElement( A, p ) );;
gap> zA := Zero( A );;
gap> QRowsA := QuiverRows( A );;
gap> mat := [ [ a[1], zA ], [ zA, a[6] ], [ a[1], zA ] ];;
gap> obj1 := QuiverRowsObject( [ [ Av[1], 1 ], [ Av[2], 1 ], [ Av[1], 1 ] ], QRowsA );;
gap> obj2 := QuiverRowsObject( [ [ Av[1], 1 ], [ Av[3], 1 ] ], QRowsA );;
gap> alpha := QuiverRowsMorphism( obj1, mat, obj2 );;
gap> obj3 := QuiverRowsObject( [ [ Av[2], 1 ] ], QRowsA );;
gap> mat := [ [ a[4] ], [ zA ] ];;
gap> beta := QuiverRowsMorphism( obj2, mat, obj3 );;
gap> pre := PreCompose( alpha, beta );;
gap> IsWellDefined( PreCompose( alpha, beta ) );
true

```

```

gap> IsZeroForMorphisms( pre );
false
gap> ze := ZeroMorphism( Source( pre ), Range( pre ) );
gap> IsCongruentForMorphisms( pre + ze, pre );
true
gap> IsCongruentForMorphisms( pre + pre, pre );
false
gap> IsZeroForMorphisms( pre - pre );
true
gap> IsCongruentForMorphisms(
>   PreCompose(
>     UniversalMorphismFromZeroObject( obj1 ),
>     UniversalMorphismIntoZeroObject( obj1 )
>   ),
>   IdentityMorphism( ZeroObject( QRowsA ) )
> );
true
gap> NrSummands( DirectSum( List( [ 1 .. 1000 ], i -> obj1 ) ) ) = 1000 * NrSummands( obj1 );
true
gap> L := [ obj1, obj2, obj3 ];
gap> pi := List( [ 1,2,3 ], i -> ProjectionInFactorOfDirectSum( L, i ) );
gap> iota := List( [ 1,2,3 ], i -> InjectionOfCofactorOfDirectSum( L, i ) );
gap> ForAll( [1,2,3], i ->
>   IsCongruentForMorphisms(
>     PreCompose( iota[i], pi[i] ),
>     IdentityMorphism( L[i] )
>   )
> );
true
gap> IsZeroForMorphisms( PreCompose( iota[2], pi[1] ) );
true
gap> IsCongruentForMorphisms(
>   UniversalMorphismIntoDirectSum( L, pi ),
>   IdentityMorphism( DirectSum( L ) )
> );
true
gap> IsCongruentForMorphisms(
>   UniversalMorphismFromDirectSum( L, iota ),
>   IdentityMorphism( DirectSum( L ) )
> );
true
gap> IsCongruentForMorphisms(
>   InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( obj1, obj2,
>     InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( alpha )
>   ),
>   alpha
> );
true
gap> ## quiver with relations
> quiver := RightQuiver(
>   "Q(8)[a:1->5,b:2->6,c:3->7,d:4->8,e:1->2,f:2->3,g:3->4,h:5->6,i:6->7,j:7->8]"
> );

```



```

gap> Bv := Vertices( quiver );;
gap> QQ := HomalgFieldOfRationals();;
gap> kQ := PathAlgebra( QQ, quiver );;
gap> B := QuotientOfPathAlgebra( kQ,
> [
>   kQ.e * kQ.f, kQ.f * kQ.g,
>   kQ.h * kQ.i, kQ.i * kQ.j,
>   kQ.e * kQ.b - kQ.a * kQ.h,
>   kQ.f * kQ.c - kQ.b * kQ.i,
>   kQ.g * kQ.d - kQ.c * kQ.j ]
> );;
gap> b := BasisPaths( CanonicalBasis( B ) );;
gap> QRowsB := QuiverRows( B );;
gap> obj := QuiverRowsObject( [ [ Bv[1], 2 ], [ Bv[1], 4 ], [ Bv[1], 4 ], [ Bv[1], 6 ] ], QRowsB
gap> IsWellDefined( obj );
true
gap> IdentityMorphism( obj );;

```

## 11.21 Quiver rows over the integers

### Well-defined morphisms

#### Example

```

gap> QQ := HomalgFieldOfRationals();;
gap> snake_quiver := RightQuiver( "Q(4)[a:1->2,b:2->3,c:3->4]" );;
gap> vertices := Vertices( snake_quiver );;
gap> A := PathAlgebra( QQ, snake_quiver );;
gap> A := QuotientOfPathAlgebra( A, [ A.abc ] );;
gap> QRowsA := QuiverRowsDescentToZDefinedByBasisPaths( A );;
gap> v1 := AsQuiverRowsObject( vertices[1], QRowsA );;
gap> v2 := AsQuiverRowsObject( vertices[2], QRowsA );;
gap> mat := [ [ 1/2*A.a ] ];;
gap> x := QuiverRowsMorphism( v1, mat, v2 );;
gap> IsWellDefined( x );
false
gap> mat := [ [ 2*A.a ] ];;
gap> x := QuiverRowsMorphism( v1, mat, v2 );;
gap> IsWellDefined( x );
true

```

### Snake lemma over the integers

#### Example

```

gap> a := AsQuiverRowsMorphism( A.a, QRowsA );;
gap> b := AsQuiverRowsMorphism( A.b, QRowsA );;
gap> c := AsQuiverRowsMorphism( A.c, QRowsA );;
gap> aa := AsAdelmanCategoryMorphism( a );;
gap> bb := AsAdelmanCategoryMorphism( b );;
gap> cc := AsAdelmanCategoryMorphism( c );;
gap> dd := CokernelProjection( aa );;
gap> ee := CokernelColift( aa, PreCompose( bb, cc ) );;
gap> ff := KernelEmbedding( ee );;
gap> gg := KernelEmbedding( cc );;

```

```

gap> hh := KernelLift( cc, PreCompose( aa, bb ) );;
gap> ii := CokernelProjection( hh );;
gap> fff := AsGeneralizedMorphism( ff );;
gap> ddd := AsGeneralizedMorphism( dd );;
gap> bbb := AsGeneralizedMorphism( bb );;
gap> ggg := AsGeneralizedMorphism( gg );;
gap> iii := AsGeneralizedMorphism( ii );;
gap> p := PreCompose( [ fff, PseudoInverse( ddd ), bbb, PseudoInverse( ggg ), iii ] );;
gap> IsHonest( p );
true
gap> jj := KernelObjectFunctorial( bb, dd, ee );;
gap> kk := CokernelObjectFunctorial( hh, gg, bb );;
gap> pp := HonestRepresentative( p );;
gap> comp := PreCompose( jj, pp );;
gap> IsZero( comp );
true
gap> comp := PreCompose( pp, kk );;
gap> IsZero( comp );
true
gap> homology := function( alpha, beta ) return CokernelObject( LiftAlongMonomorphism( KernelEmbedding( alpha ), beta ) );;
gap> IsZero( homology( jj, pp ) );
true
gap> IsZero( homology( pp, kk ) );
true

```

## Phenomena over the integers

### Example

```

gap> quiver := RightQuiver( "Q(2)[a:1->2]" );;
gap> vertices := Vertices( quiver );;
gap> B := PathAlgebra( QQ, quiver );;
gap> QRowsB := QuiverRows( B );;
gap> QRowsB_overZ := QuiverRowsDescentToZDefinedByBasisPaths( B );;
gap> a := AsQuiverRowsMorphism( B.a, QRowsB );;
gap> a_Z := AsQuiverRowsMorphism( B.a, QRowsB_overZ );;
gap> aa := AsAdelmanCategoryMorphism( a );;
gap> aa_Z := AsAdelmanCategoryMorphism( a_Z );;
gap> bb := aa + aa;;
gap> bb_Z := aa_Z + aa_Z;;
gap> K1 := KernelEmbedding( bb );;
gap> K2 := KernelEmbedding( aa );;
gap> IsEqualAsSubobjects( K1, K2 );
true
gap> K1_Z := KernelEmbedding( bb_Z );;
gap> K2_Z := KernelEmbedding( aa_Z );;
gap> IsEqualAsSubobjects( K1_Z, K2_Z );
false

```

## 11.22 Category of relations

### Example

```

gap> F := HomalgRingOfIntegers( 3 );;
gap> vec := CategoryOfRows( F );;

```

```

gap> rel := RelCategory( vec );;
gap> A := 1/vec/rel;;
gap> id := IdentityMorphism( A );;
gap> IsWellDefined( id );
true
gap> alpha := HomalgMatrix( "[ 1, 2 ]", 2, 1, F )/vec;;
gap> alpha_rel := alpha/rel;;
gap> alpha_rel_inv := rel/alpha;;
gap> beta := PreCompose( alpha_rel_inv, alpha_rel );;
gap> IsCongruentForMorphisms( beta, id );
true
gap> IsEqualForMorphisms( beta, id );
false
gap> R := HomalgFieldOfRationalsInSingular() * "t";;
gap> t := IndeterminatesOfPolynomialRing( R )[1];;
gap> cocycle := function( a, b, c ) local e; e := CostrictionToImage( UniversalMorphismIntoDirectSum( a, b, c ) ); return e; end;;
gap> T := TwistedLinearClosure( R, rel, cocycle );;
gap> gamma := beta/T;;
gap> delta := ZeroMorphism( 1/vec, 1/vec )/rel/T;;
gap> IsZero( 3*gamma - 3*gamma );
true
gap> IsCongruentForMorphisms( delta, gamma );
false
gap> beta := PreCompose( alpha_rel_inv/T, alpha_rel/T );;
gap> IsZero( beta - t * IdentityMorphism( Range( alpha_rel/T ) ) );
true
gap> IsZero( ( gamma * delta ) * gamma - gamma * ( delta * gamma ) );
true

```

## 11.23 Rings as Ab-categories

Example

```

gap> CR := RingAsCategory( Integers );;
gap> u := RingAsCategoryUniqueObject( CR );;
gap> alpha := 2 / CR;
<2>
gap> IsOne( alpha );
false
gap> IsZero( alpha );
false
gap> alpha * alpha;
<4>
gap> -alpha;
<-2>
gap> IsZero( alpha + AdditiveInverse( alpha ) );
true
gap> beta := RingAsCategoryMorphism( 1/2, CR );;
gap> IsWellDefined( beta );
false
gap> gamma := IdentityMorphism( u );
<1>
gap> IsOne( gamma );

```

```

true
gap> delta := ZeroMorphism( u, u );
<0>
gap> IsZero( delta );
true

```

## 11.24 Snake lemma first proof

Example

```

gap> DeactivateDefaultCaching();
gap> SwitchGeneralizedMorphismStandard( "cospan" );;
gap> snake_quiver := RightQuiver( "Q(6)[a:1->2,b:2->3,c:1->4,d:2->5,e:3->6,f:4->5,g:5->6]" );;
gap> kQ := PathAlgebra( HomalgFieldOfRationals(), snake_quiver );;
gap> Aoid := Algebroid( kQ, [ kQ.ad - kQ.cf, kQ.dg - kQ.be, kQ.ab, kQ.fg ] );;
gap> m := SetOfGeneratingMorphisms( Aoid );;
gap> a := m[1];;
gap> b := m[2];;
gap> c := m[3];;
gap> d := m[4];;
gap> e := m[5];;
gap> f := m[6];;
gap> g := m[7];;
gap> cat := Aoid;;
gap> CapCategorySwitchLogicOff( cat );;
gap> DisableInputSanityChecks( cat );;
gap> cat := AdditiveClosure( cat );;
gap> DisableInputSanityChecks( cat );;
gap> cat := Opposite( cat );;
gap> DisableInputSanityChecks( cat );;
gap> CapCategorySwitchLogicOff( cat );;
gap> CapCategorySwitchLogicOff( Opposite( cat ) );;
gap> cat := FreydCategory( cat );;
gap> CapCategorySwitchLogicOff( cat );;
gap> cat := Opposite( cat );;
gap> CapCategorySwitchLogicOff( cat );;
gap> af := AsMorphismInFreeAbelianCategory( m[1] );;
gap> bf := AsMorphismInFreeAbelianCategory( m[2] );;
gap> cf := AsMorphismInFreeAbelianCategory( m[3] );;
gap> df := AsMorphismInFreeAbelianCategory( m[4] );;
gap> ef := AsMorphismInFreeAbelianCategory( m[5] );;
gap> ff := AsMorphismInFreeAbelianCategory( m[6] );;
gap> gf := AsMorphismInFreeAbelianCategory( m[7] );;
gap> bn := CokernelProjection( af );;
gap> en := CokernelColift( af, PreCompose( df, gf ) );;
gap> fn := KernelEmbedding( gf );;
gap> cn := KernelLift( gf, PreCompose( af, df ) );;
gap> ke := KernelEmbedding( en );;
gap> co := CokernelProjection( cn );;
gap> gk := AsGeneralizedMorphism( ke );;
gap> gb := AsGeneralizedMorphism( bn );;
gap> gd := AsGeneralizedMorphism( df );;
gap> gf := AsGeneralizedMorphism( fn );;

```

```

gap> gc := AsGeneralizedMorphism( co );;
gap> DirectSumFunctorial( [ af, af ] );;
gap> IsZero( PreCompose( ke, en ) );;
gap> timestart := Runtimes().user_time;;
gap> p := PreCompose( [ gk, PseudoInverse( gb ) ] );;
gap> p2 := PreCompose( p, gd );;
gap> p3:= PreCompose( p2, PseudoInverse( gf ) );;
gap> p4:= PreCompose( p3, gc );;
gap> IsHonest( p );
false
gap> IsHonest( p2 );
false
gap> IsHonest( p3 );
false
gap> IsHonest( p4 );
true
gap> timeend := Runtimes().user_time - timestart;;
gap> h := HonestRepresentative( p4 );;

```

## 11.25 Snake lemma second proof

Example

```

gap> DeactivateDefaultCaching();
gap> SwitchGeneralizedMorphismStandard( "cospan" );;
gap> snake_quiver := RightQuiver( "Q(6)[a:1->2,b:2->3,c:3->4]" );;
gap> kQ := PathAlgebra( HomalgFieldOfRationals(), snake_quiver );;
gap> Aoid := Algebroid( kQ, [ kQ.abc ] );;
gap> m := SetOfGeneratingMorphisms( Aoid );;
gap> a := m[1];;
gap> b := m[2];;
gap> c := m[3];;
gap> cat := Aoid;;
gap> CapCategorySwitchLogicOff( cat );;
gap> DisableInputSanityChecks( cat );;
gap> cat := AdditiveClosure( cat );;
gap> DisableInputSanityChecks( cat );;
gap> cat := Opposite( cat );;
gap> DisableInputSanityChecks( cat );;
gap> CapCategorySwitchLogicOff( cat );;
gap> CapCategorySwitchLogicOff( Opposite( cat ) );;
gap> cat := FreydCategory( cat );;
gap> CapCategorySwitchLogicOff( cat );;
gap> cat := Opposite( cat );;
gap> CapCategorySwitchLogicOff( cat );;
gap> a := AsMorphismInFreeAbelianCategory( a );;
gap> b := AsMorphismInFreeAbelianCategory( b );;
gap> c := AsMorphismInFreeAbelianCategory( c );;
gap> coker_a := CokernelProjection( a );;
gap> colift := CokernelColift( a, PreCompose( b, c ) );;
gap> ker_c := KernelEmbedding( c );;
gap> lift := KernelLift( c, PreCompose( a, b ) );;
gap> p := PreCompose( [

```

```

> AsGeneralizedMorphism( KernelEmbedding( colift ) ),
> GeneralizedInverse( coker_a ),
> AsGeneralizedMorphism( b ),
> GeneralizedInverse( ker_c ),
> AsGeneralizedMorphism( CokernelProjection( lift ) )
> ] );;
gap> IsHonest( p );
true

```

## 11.26 Subobject lattice

We compute the number of the generic subobject lattice generated by 2 independent subobjects  $y, z$  and one subobject  $x$  of  $y$ .

Example

```

gap> ReadPackage( "FreydCategoriesForCAP", "examples/SubobjectLatticeFunctions.g" );;
gap> quiver := RightQuiver( "Q(4)[a:1->2,b:2->3,c:1->4]" );;
gap> QQ := HomalgFieldOfRationals();;
gap> B := PathAlgebra( QQ, quiver );;
gap> RowsB := QuiverRowsDescentToZDefinedByBasisPaths( B : overhead := false );;
gap> Adel := AdelmanCategory( RowsB : overhead := false );;
gap> a := B.a/RowsB/Adel;;
gap> b := B.b/RowsB/Adel;;
gap> c := B.c/RowsB/Adel;;
gap> x := KernelEmbedding( a );;
gap> y := KernelEmbedding( PreCompose( a, b ) );;
gap> z := KernelEmbedding( c );;
gap> gens := [ x, y, z ];;
gap> Size( GenerateSubobjects( gens ) );
8

```

## 11.27 Adelman category theorem

Example

```

gap> quiver := RightQuiver( "Q(9)[a:1->2,b:3->2]" );;
gap> kQ := PathAlgebra( HomalgFieldOfRationals(), quiver );;
gap> Aoid := Algebroid( kQ );;
gap> mm := SetOfGeneratingMorphisms( Aoid );;
gap> CapCategorySwitchLogicOff( Aoid );;
gap> Acat := AdditiveClosure( Aoid );;
gap> a := AsAdditiveClosureMorphism( mm[1] );;
gap> b := AsAdditiveClosureMorphism( mm[2] );;
gap> a := AsAdelmanCategoryMorphism( a );;
gap> b := AsAdelmanCategoryMorphism( b );;
gap> pi1 := ProjectionInFactorOfFiberProduct( [ a, b ], 1 );;
gap> pi2 := ProjectionInFactorOfFiberProduct( [ a, b ], 1 );;
gap> c := CokernelColift( pi1, PreCompose( a, CokernelProjection( b ) ) );;
gap> IsMonomorphism( c );
true

```

## Chapter 12

# Linear closure of a category

### 12.1 Functors

#### 12.1.1 `ExtendFunctorToLinearClosureOfSource` (for `IsCapFunctor`, `IsLinearClosure`, `IsFunction`)

▷ `ExtendFunctorToLinearClosureOfSource(F, linear_closure, ring_map)` (operation)

The arguments are a functor  $F: C \rightarrow D$ , some linear closure  $linear\_closure$  of  $C$  over some commutative ring  $S$  and a function  $ring\_map$ ; where  $D$  is a linear category over some commutative ring  $R$ . The  $ring\_map$  is a function that converts an element  $s$  in  $S$  to an element in  $R$ , such that  $ring\_map$  defines a ring homomorphism. The output is the linear extension functor of  $F$  from  $linear\_closure$  to  $D$ .

#### 12.1.2 `ExtendFunctorToLinearClosureOfSource` (for `IsCapFunctor`, `IsLinearClosure`)

▷ `ExtendFunctorToLinearClosureOfSource(F, linear_closure)` (operation)

The arguments are a functor  $F: C \rightarrow D$ , some linear closure  $linear\_closure$  of  $C$  over some commutative ring  $S$ ; where  $D$  is a linear category over  $S$ . The output is the linear extension functor of  $F$  from  $linear\_closure$  to  $D$ .

## Chapter 13

# Examples on graded rows and columns

### 13.1 Freyd category of graded rows

Example

```
gap> Q := HomalgFieldOfRationalsInSingular();
Q
gap> S := GradedRing( Q * "x_1, x_2, x_3, x_4" );
Q[x_1,x_2,x_3,x_4]
(weights: yet unset)
gap> SetWeightsOfIndeterminates( S, [[1,0],[1,0],[0,1],[0,1]] );

gap> cat := CategoryOfGradedRows( S );
Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
gap> obj1 := GradedRow( [ [[1,1],1] ], S );
<A graded row of rank 1>
gap> obj2 := GradedRow( [ [[1,1],2] ], S );
<A graded row of rank 2>
gap> gamma := GradedRowOrColumnMorphism( obj2,
> HomalgMatrix( [ [ 1, 1 ], [ 1, 1 ] ], 2, 2, S ), obj2 );
<A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> freyd := FreydCategory( cat );
Category of f.p. graded left modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
gap> IsAbelianCategory( freyd );
true
gap> obj_gamma := FreydCategoryObject( gamma );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> f := FreydCategoryMorphism( obj_gamma, gamma, obj_gamma );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> witness := MorphismWitness( f );
<A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
```

Example

```
gap> Display( witness );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
```



```
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

Matrix:
2,0,
2,0
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]
```

Example

```
gap> g := FreydCategoryMorphism( obj_gamma,
>                               ZeroMorphism( obj2, obj2 ), obj_gamma );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsCongruentForMorphisms( f, g );
true
gap> c := PreCompose( f, f );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
```

Example

```
gap> Display( c );
A morphism in Category of f.p. graded left modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

-----

Source:
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

Matrix:
1,1,
1,1
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]
```

```

-----

Morphism datum:
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

Matrix:
2,2,
2,2
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

-----

Range:
A morphism in Category of graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

Matrix:
1,1,
1,1
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

-----

```

#### Example

```

gap> s := g + g;
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> a := GradedRowOrColumnMorphism( obj1,
>                                     HomalgMatrix( [ [ 2 ] ], 1, 1, S ), obj1 );
<A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>

```

## Example

```
gap> Display( a );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]

Matrix:
2
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]
```

## Example

```
gap> Z2 := FreydCategoryObject( a );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
```

## Example

```
gap> Display( Z2 );
An object in Freyd( Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]))

Relation morphism:
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]

Matrix:
2
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]
```

## Example

```
gap> id := IdentityMorphism( Z2 );
<An identity morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> z := id + id + id;
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
```

```

gap> d := DirectSumFunctorial( [ z, z, z ] );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> pr2 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> pr3 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 3 );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> uni := UniversalMorphismIntoDirectSum( [ pr3, pr2 ] );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> inj1 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 1 );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> inj2 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> uni2 := UniversalMorphismFromDirectSum( [ inj2, inj1 ] );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> ZFree := AsFreydCategoryObject( obj1 );
<A projective object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>

```

Example

```

gap> Display( ZFree );
A projective object in Freyd( Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] ) )

Relation morphism:
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] ) of rank 0 and degrees:
[ ]

Matrix:
(an empty 0 x 1 matrix)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] ) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]

```

Example

```

gap> id := IdentityMorphism( ZFree );
<An identity morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> z := id + id;
<A morphism in Category of f.p. graded left modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>

```

```

gap> coker_proj := CokernelProjection( z );
<An epimorphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> cokernel_colift := CokernelColift( z, CokernelProjection( z ) );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> a := ZFree;
<A projective object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> b := obj_gamma;
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> c := TensorProductOnObjects( ZFree, obj_gamma );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> KaxbKxc := TensorProductOnObjects( TensorProductOnObjects( a, b ), c );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEqualForObjects( KaxbKxc, ZeroObject( freyd ) );
false
gap> tensor_product_morphism := TensorProductOnMorphisms( cokernel_colift, coker_proj );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEpimorphism( tensor_product_morphism );
true
gap> IsEqualForObjects( Source( tensor_product_morphism ), Range( tensor_product_morphism ) );
false
gap> unit := TensorUnit( freyd );
<An object in Category of f.p. graded left modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEqualForObjects( TensorProductOnObjects( a, unit ), a );
true
gap> axKbxcK := TensorProductOnObjects( a, TensorProductOnObjects( b, c ) );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> ass_left_to_right := AssociatorLeftToRightWithGivenTensorProducts( KaxbKxc, a, b, c, axKbxcK );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsIsomorphism( ass_left_to_right );
true
gap> ass_right_to_left := AssociatorLeftToRightWithGivenTensorProducts( axKbxcK, a, b, c, KaxbKxc );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsMonomorphism( ass_right_to_left );
true
gap> IsEpimorphism( ass_right_to_left );
true
gap> LeftUnitor( a );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> LeftUnitorInverse( axKbxcK );
<A morphism in Category of f.p. graded left modules over

```

```

Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> RightUnitor( b );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> RightUnitorInverse( TensorProductOnObjects( axKbxcK, axKbxcK ) );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> Braiding( axKbxcK, KaxbKxc );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> braiding := Braiding( a, b );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( braiding );
true
gap> hom := InternalHomOnObjects( axKbxcK, axKbxcK );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsZero( hom );
false
gap> free_mod1 := AsFreydCategoryObject( GradedRow( [ [[0,0],1] ], S ) );
<A projective object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> free_mod2 := AsFreydCategoryObject( GradedRow( [ [[1,1],1] ], S ) );
<A projective object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> hom2 := InternalHomOnObjects( free_mod1, free_mod2 );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsZero( hom2 );
false
gap> IsZero( Source( RelationMorphism( hom2 ) ) );
true
gap> Rank( Range( RelationMorphism( hom2 ) ) );
1
gap> hom3 := InternalHomOnObjects( free_mod2, free_mod1 );
<An object in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsZero( hom3 );
false
gap> InternalHomOnMorphisms( ass_left_to_right, ass_right_to_left );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> eval := EvaluationMorphism( a, b );
<A morphism in Category of f.p. graded left modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEpimorphism( eval );
true
gap> IsMonomorphism( eval );
true
gap> coeval := CoevaluationMorphism( a, b );
<A morphism in Category of f.p. graded left modules over

```

```

Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEpimorphism( coeval );
true
gap> IsMonomorphism( coeval );
true

```

## 13.2 Freyd category of graded columns

Example

```

gap> Q := HomalgFieldOfRationalsInSingular();
Q
gap> S := GradedRing( Q * "x_1, x_2, x_3, x_4" );
Q[x_1,x_2,x_3,x_4]
(weights: yet unset)
gap> SetWeightsOfIndeterminates( S, [[1,0],[1,0],[0,1],[0,1]] );

gap> cat := CategoryOfGradedColumns( S );
Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
gap> obj1 := GradedColumn( [ [[1,1],1] ], S );
<A graded column of rank 1>
gap> obj2 := GradedColumn( [ [[1,1],2] ], S );
<A graded column of rank 2>
gap> gamma := GradedRowOrColumnMorphism( obj2,
> HomalgMatrix( [ [ 1, 1 ], [ 1, 1 ] ], 2, 2, S ), obj2 );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> freyd := FreydCategory( cat );
Category of f.p. graded right modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
gap> IsAbelianCategory( freyd );
true
gap> obj_gamma := FreydCategoryObject( gamma );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> f := FreydCategoryMorphism( obj_gamma, gamma, obj_gamma );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> witness := MorphismWitness( f );
<A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>

```

Example

```

gap> Display( witness );
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

Matrix:

```

```
2,2,
0,0
(over a graded ring)
```

Range:

A graded column over  $Q[x_1, x_2, x_3, x_4]$  (with weights  
 $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ ) of rank 2 and degrees:  
 $\begin{bmatrix} (1, 1) & 2 \end{bmatrix}$

#### Example

```
gap> g := FreydCategoryMorphism( obj_gamma,
>                               ZeroMorphism( obj2, obj2 ), obj_gamma );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsCongruentForMorphisms( f, g );
true
gap> c := PreCompose( f, f );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
```

#### Example

```
gap> Display( c );
A morphism in Category of f.p. graded right modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

-----

Source:
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

Source:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

Matrix:
1,1,
1,1
(over a graded ring)

Range:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]

-----

Morphism datum:
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

Source:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )
```



```
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]
```

```
Matrix:
2,2,
2,2
(over a graded ring)
```

```
Range:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]
```

```
-----
```

```
Range:
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
```

```
Source:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]
```

```
Matrix:
1,1,
1,1
(over a graded ring)
```

```
Range:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 1 ), 2 ] ]
```

```
-----
```

#### Example

```
gap> s := g + g;
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> a := GradedRowOrColumnMorphism( obj1,
>                                     HomalgMatrix( [ [ 2 ] ], 1, 1, S ), obj1 );
<A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
```

#### Example

```
gap> Display( a );
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
```

Source:

```
A graded column over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]
```

Matrix:

2

(over a graded ring)

Range:

A graded column over  $Q[x_1, x_2, x_3, x_4]$

(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ ) of rank 1 and degrees:  
 $\begin{bmatrix} (1, 1) \\ 1 \end{bmatrix}$

Example

```
gap> Z2 := FreydCategoryObject( a );
```

<An object in Category of f.p. graded right modules over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )>

Example

```
gap> Display( Z2 );
```

An object in Freyd( Category of graded columns over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ ) )

Relation morphism:

A morphism in Category of graded columns over  $Q[x_1, x_2, x_3, x_4]$

(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )

Source:

A graded column over  $Q[x_1, x_2, x_3, x_4]$  (with weights

$\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ ) of rank 1 and degrees:  
 $\begin{bmatrix} (1, 1) \\ 1 \end{bmatrix}$

Matrix:

2

(over a graded ring)

Range:

A graded column over  $Q[x_1, x_2, x_3, x_4]$  (with weights

$\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ ) of rank 1 and degrees:  
 $\begin{bmatrix} (1, 1) \\ 1 \end{bmatrix}$

Example

```
gap> id := IdentityMorphism( Z2 );
```

<An identity morphism in Category of f.p. graded right modules over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )>

```
gap> z := id + id + id;
```

<A morphism in Category of f.p. graded right modules over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )>

```
gap> d := DirectSumFunctorial( [ z, z, z ] );
```

<A morphism in Category of f.p. graded right modules over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )>

```
gap> pr2 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );
```

<A morphism in Category of f.p. graded right modules over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )>

```
gap> pr3 := ProjectionInFactorOfDirectSum( [ Z2, Z2, Z2 ], 3 );
```

<A morphism in Category of f.p. graded right modules over

$Q[x_1, x_2, x_3, x_4]$  (with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )>

```

gap> uni := UniversalMorphismIntoDirectSum( [ pr3, pr2 ] );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> inj1 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 1 );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> inj2 := InjectionOfCofactorOfDirectSum( [ Z2, Z2, Z2 ], 2 );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> uni2 := UniversalMorphismFromDirectSum( [ inj2, inj1 ] );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> ZFree := AsFreydCategoryObject( obj1 );
<A projective object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>

```

Example

```

gap> Display( ZFree );
A projective object in Category of f.p. graded right modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

Relation morphism:
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] )

Source:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] ) of rank 0 and degrees:
[ ]

Matrix:
(an empty 1 x 0 matrix)

Range:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ] ) of rank 1 and degrees:
[ [ ( 1, 1 ), 1 ] ]

```

Example

```

gap> id := IdentityMorphism( ZFree );
<An identity morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> z := id + id;
<A morphism in Category of f.p. graded right modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> coker_proj := CokernelProjection( z );
<An epimorphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> cokernel_colift := CokernelColift( z, CokernelProjection( z ) );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> a := ZFree;
<A projective object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>

```

```

gap> b := obj_gamma;
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> c := TensorProductOnObjects( a, b );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> KaxbKxc := TensorProductOnObjects( TensorProductOnObjects( a, b ), c );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEqualForObjects( KaxbKxc, ZeroObject( freyd ) );
false
gap> tensor_product_morphism := TensorProductOnMorphisms( cokernel_colift, coker_proj );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEpimorphism( tensor_product_morphism );
true
gap> IsEqualForObjects( Source( tensor_product_morphism ), Range( tensor_product_morphism ) );
false
gap> unit := TensorUnit( freyd );
<An object in Category of f.p. graded right modules over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEqualForObjects( TensorProductOnObjects( a, unit ), a );
true
gap> axKbxcK := TensorProductOnObjects( a, TensorProductOnObjects( b, c ) );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> ass_left_to_right := AssociatorLeftToRightWithGivenTensorProducts( KaxbKxc, a, b, c, axKbxcK );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsIsomorphism( ass_left_to_right );
true
gap> ass_right_to_left := AssociatorLeftToRightWithGivenTensorProducts( axKbxcK, a, b, c, KaxbKxc );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsMonomorphism( ass_right_to_left );
true
gap> IsEpimorphism( ass_right_to_left );
true
gap> LeftUnitor( a );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> LeftUnitorInverse( axKbxcK );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> RightUnitor( b );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> RightUnitorInverse( TensorProductOnObjects( axKbxcK, axKbxcK ) );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> Braiding( axKbxcK, KaxbKxc );
<A morphism in Category of f.p. graded right modules over

```

```

Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> braiding := Braiding( a, b );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( braiding );
true
gap> hom := InternalHomOnObjects( axKbxcK, axKbxcK );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsZero( hom );
false
gap> free_mod1 := AsFreydCategoryObject( GradedColumn( [ [0,0],1] ], S );
<A projective object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> free_mod2 := AsFreydCategoryObject( GradedColumn( [ [1,1],1] ], S );
<A projective object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> hom2 := InternalHomOnObjects( free_mod1, free_mod2 );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsZero( hom2 );
false
gap> IsZero( Source( RelationMorphism( hom2 ) ) );
true
gap> Rank( Range( RelationMorphism( hom2 ) ) );
1
gap> hom3 := InternalHomOnObjects( free_mod2, free_mod1 );
<An object in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsZero( hom3 );
false
gap> InternalHomOnMorphisms( ass_left_to_right, ass_right_to_left );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> eval := EvaluationMorphism( a, b );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEpimorphism( eval );
true
gap> IsMonomorphism( eval );
true
gap> coeval := CoevaluationMorphism( a, b );
<A morphism in Category of f.p. graded right modules over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsEpimorphism( coeval );
true
gap> IsMonomorphism( coeval );
true

```

### 13.3 Constructors of objects and reduction of degree lists

Example

```

gap> Q := HomalgFieldOfRationalsInSingular();
Q
gap> S := GradedRing( Q * "x_1, x_2, x_3, x_4" );
Q[x_1,x_2,x_3,x_4]
(weights: yet unset)
gap> SetWeightsOfIndeterminates( S, [[1,0],[1,0],[0,1],[0,1]] );

gap> ObjectL := GradedRow( [ [[1,0],2] ], S );
<A graded row of rank 2>
gap> DegreeList( ObjectL );
[ [ ( 1, 0 ), 2 ] ]
gap> Object2L := GradedRow( [ [[1,0],2],
> [[1,0],3],[[0,1],2],[[1,0],1] ], S );
<A graded row of rank 8>
gap> DegreeList( Object2L );
[ [ ( 1, 0 ), 5 ], [ ( 0, 1 ), 2 ], [ ( 1, 0 ), 1 ] ]
gap> UnzipDegreeList( Object2L );
[ ( 1, 0 ), ( 1, 0 ), ( 1, 0 ), ( 1, 0 ), ( 1, 0 ), ( 0, 1 ), ( 0, 1 ), ( 1, 0 ) ]
gap> ObjectR := GradedColumn( [ [[1,0],2] ], S );
<A graded column of rank 2>
gap> DegreeList( ObjectR );
[ [ ( 1, 0 ), 2 ] ]
gap> Object2R := GradedColumn( [ [[1,0],2],
> [[1,0],3],[[0,1],2],[[1,0],1] ], S );
<A graded column of rank 8>
gap> DegreeList( Object2R );
[ [ ( 1, 0 ), 5 ], [ ( 0, 1 ), 2 ], [ ( 1, 0 ), 1 ] ]
gap> UnzipDegreeList( Object2R );
[ ( 1, 0 ), ( 1, 0 ), ( 1, 0 ), ( 1, 0 ), ( 1, 0 ), ( 0, 1 ), ( 0, 1 ), ( 1, 0 ) ]
gap> S2 := GradedRing( Q * "x" );
gap> SetWeightsOfIndeterminates( S2, [ 1 ] );
gap> IsWellDefined( GradedRow( [ [ [ 1 ], 1 ] ], S2 ) );
true
gap> IsWellDefined( GradedColumn( [ [ [ 1 ], 1 ] ], S2 ) );
true

```

Whenever the object constructor is called, it tries to simplify the given degree list. To this end it checks if subsequent degree group elements match. If so, their multiplicities are added. So, as in the example above we have:

$$[(1,0),2],[(1,0),3],[(0,1),2],[(1,0),1] \mapsto [(1,0),5],[(0,1),2],[(1,0),1]$$

Note that, even though there are two occurrences of  $(1,0)$  in the final degree list, we do not simplify further. The reason for this is as follows. Assume that we have a map of graded rows

$$\varphi: A \rightarrow B$$

given by a homogeneous matrix  $M$  and that we want to compute the weak kernel embedding of this mapping. To this end we first compute the row syzygies of  $M$ . Let us call the corresponding matrix  $N$ .

Then we deduce the degree list of the weak kernel object from  $N$  and from the graded row  $A$ . Once this degree list is known, we would call the object constructor. If this object constructor summarised all (and not only subsequent) occurrences of one degree element in the degree list, then in order to make sure that the weak kernel embedding is a mapping of graded rows, the rows of the matrix  $N$  would have to be shuffled. The latter we do not wish to perform.

Note that the 'IsEqualForObjects' methods returns true whenever the degree lists of two graded rows/columns are identical. So in particular it returns false, if the degree lists are mere permutations of one another. Here is an example.

Example

```
gap> Object2LShuffle := GradedRow( [ [[0,1],1],
>      [[1,0],2],[[0,1],1],[[1,0],4] ], S );
<A graded row of rank 8>
gap> IsEqualForObjects( Object2L, Object2LShuffle );
false
gap> Object2RShuffle := GradedColumn( [ [[0,1],1],
>      [[1,0],2],[[0,1],1],[[1,0],4] ], S );
<A graded column of rank 8>
gap> IsEqualForObjects( Object2R, Object2RShuffle );
false
```

## 13.4 Constructors of morphisms

Example

```
gap> Q1L := GradedRow( [ [[0,0],1] ], S );
<A graded row of rank 1>
gap> IsWellDefined( Q1L );
true
gap> Q2L := GradedRow( [ [[1,0],2] ], S );
<A graded row of rank 2>
gap> m1L := GradedRowOrColumnMorphism(
>      Q1L, HomalgMatrix( ["x_1","x_2"], S ), Q2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m1L );
true
```

Example

```
gap> Display( Source( m1L ) );
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ 0, 1 ] ]
gap> Display( Range( m1L ) );
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
gap> Display( UnderlyingHomalgMatrix( m1L ) );
x_1,x_2
(over a graded ring)
```

Example

```
gap> Q1R := GradedColumn( [ [[0,0],1] ], S );
<A graded column of rank 1>
```

```

gap> IsWellDefined( Q1R );
true
gap> Q2R := GradedColumn( [ [[1,0],2] ], S );
<A graded column of rank 2>
gap> m1R := GradedRowOrColumnMorphism(
>      Q1R, HomalgMatrix( ["x_1"],["x_2"], S ), Q2R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m1R );
true

```

Example

```

gap> Display( Source( m1R ) );
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 1 and degrees:
[ [ 0, 1 ] ]
gap> Display( Range( m1R ) );
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
gap> Display( UnderlyingHomalgMatrix( m1R ) );
x_1,
x_2
(over a graded ring)

```

## 13.5 The GAP categories

Example

```

gap> categoryL := CapCategory( Q1L );
Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
gap> categoryR := CapCategory( Q1R );
Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

```

## 13.6 A few categorical constructions for graded rows

Example

```

gap> ZeroObject( categoryL );
<A graded row of rank 0>
gap> 01L := GradedRow( [ [-1,0],2] ], S );
<A graded row of rank 2>

```

Example

```

gap> Display( ZeroMorphism( ZeroObject( categoryL ), 01L ) );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 0 and degrees:

```



[ ]

Matrix:

(an empty 0 x 2 matrix)

Range:

A graded row over  $Q[x_1, x_2, x_3, x_4]$

(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

of rank 2 and degrees:

[ [ ( -1, 0 ), 2 ] ]

Example

```
gap> O2L := GradedRow( [ [[0,0],1] ], S );
<A graded row of rank 1>
gap> obj3L := GradedRow( [ [[-1,0],1] ], S );
<A graded row of rank 1>
```

Example

```
gap> Display( IdentityMorphism( O2L ) );
A morphism in Category of graded rows over  $Q[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
```

Source:

A graded row over  $Q[x_1, x_2, x_3, x_4]$

(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

of rank 1 and degrees:

[ [ 0, 1 ] ]

Matrix:

1

(over a graded ring)

Range:

A graded row over  $Q[x_1, x_2, x_3, x_4]$

(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

of rank 1 and degrees:

[ [ 0, 1 ] ]

Example

```
gap> IsWellDefined( IdentityMorphism( Q2L ) );
true
gap> directSumL := DirectSum( [ O1L, O2L ] );
<A graded row of rank 3>
```

Example

```
gap> Display( directSumL );
A graded row over  $Q[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 3 and degrees:
[ [ ( -1, 0 ), 2 ], [ 0, 1 ] ]
```

Example

```
gap> i1L := InjectionOfCofactorOfDirectSum( [ O1L, O2L ], 1 );
<A morphism in Category of graded rows over
 $Q[x_1, x_2, x_3, x_4]$  (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( i1L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( i1L ) );
1,0,0,
0,1,0
(over a graded ring)
```

Example

```
gap> i2L := InjectionOfCofactorOfDirectSum( [ 01L, 02L ], 2 );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( i2L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( i2L ) );
0,0,1
(over a graded ring)
```

Example

```
gap> proj1L := ProjectionInFactorOfDirectSum( [ 01L, 02L ], 1 );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( proj1L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( proj1L ) );
1,0,
0,1,
0,0
(over a graded ring)
```

Example

```
gap> proj2L := ProjectionInFactorOfDirectSum( [ 01L, 02L ], 2 );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( proj2L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( proj2L ) );
0,
0,
1
(over a graded ring)
```

Example

```
gap> kL := WeakKernelEmbedding( proj1L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( kL );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( kL ) );
0,0,1
(over a graded ring)
```

## Example

```
gap> ckL := WeakCokernelProjection( kL );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( ckL );
true
```

## Example

```
gap> Display( UnderlyingHomalgMatrix( ckL ) );
1,0,
0,1,
0,0
(over a graded ring)
```

## Example

```
gap> IsMonomorphism( kL );
true
gap> IsEpimorphism( kL );
false
gap> IsMonomorphism( ckL );
false
gap> IsEpimorphism( ckL );
true
gap> m1L := GradedRowOrColumnMorphism( 01L,
> HomalgMatrix( [[ "x_1" ], [ "x_2" ] ], S ), 02L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m1L );
true
gap> m2L := IdentityMorphism( 02L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m2L );
true
gap> obj1L := GradedRow( [ [0,0],1], [[-1,0],1], S );
<A graded row of rank 2>
gap> m1L := GradedRowOrColumnMorphism( obj1L,
> HomalgMatrix( [[ 1 ], [ "x_2" ] ], S ), 02L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m1L );
true
gap> m3L := GradedRowOrColumnMorphism( obj3L,
> HomalgMatrix( [[ "x_1" ] ], S ), 02L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m3L );
true
gap> liftL := Lift( m3L, m1L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( liftL );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( liftL ) );
x_1, 0
(over a graded ring)
```

Example

```
gap> O3L := GradedRow( [ [1,0],2 ] , S );
<A graded row of rank 2>
gap> morL := GradedRowOrColumnMorphism(
>      O2L, HomalgMatrix( [ [ "x_1, x_2" ] ], S ), O3L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( morL );
true
gap> coliftL := Colift( m2L, morL );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( coliftL );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( coliftL ) );
x_1,x_2
(over a graded ring)
```

Example

```
gap> fpL := WeakBiFiberProduct( m1L, m2L );
<A graded row of rank 2>
gap> fp_proj1L := ProjectionInFirstFactorOfWeakBiFiberProduct( m1L, m2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( fp_proj1L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( fp_proj1L ) );
1,0,
0,1
(over a graded ring)
```

Example

```
gap> fp_proj2L := ProjectionInSecondFactorOfWeakBiFiberProduct( m1L, m2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( fp_proj2L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( fp_proj2L ) );
1,
x_2
(over a graded ring)
```

Example

```
gap> BiasedWeakFiberProduct( m1L, m2L );
<A graded row of rank 2>
```

```
gap> pbwfprow := ProjectionOfBiasedWeakFiberProduct( m1L, m2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( pbwfprow );
true
```

Example

```
gap> Display( pbwfprow );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ 0, 1 ], [ ( -1, 0 ), 1 ] ]

Matrix:
1,0,
0,1
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ 0, 1 ], [ ( -1, 0 ), 1 ] ]
```

Example

```
gap> poL := WeakBiPushout( morL, m2L );
<A graded row of rank 2>
gap> inj1L := InjectionOfFirstCofactorOfWeakBiPushout( morL, m2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( inj1L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( inj1L ) );
1,0,
0,1
(over a graded ring)
```

Example

```
gap> inj2L := InjectionOfSecondCofactorOfWeakBiPushout( morL, m2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( inj2L );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( inj2L ) );
x_1,x_2
(over a graded ring)
```

## Example

```
gap> injectionL := InjectionOfBiasedWeakPushout( morL, m2L );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [0, 1 ] ])>
gap> IsWellDefined( injectionL );
true
```

## Example

```
gap> Display( injectionL );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]

Matrix:
1,0,
0,1
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
```

## Example

```
gap> tensorProductL := TensorProductOnObjects( O1L, O2L );
<A graded row of rank 2>
```

## Example

```
gap> Display( tensorProductL );
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( -1, 0 ), 2 ] ]
```

## Example

```
gap> tensorProductMorphismL := TensorProductOnMorphisms( m2L, morL );
<A morphism in Category of graded rows over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [0, 1 ] ])>
gap> IsWellDefined( tensorProductMorphismL );
true
```

## Example

```
gap> Display( tensorProductMorphismL );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 1 and degrees:
[ [ 0, 1 ] ]
```

```

Matrix:
x_1,x_2
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
gap> Display( DualOnObjects( TensorProductOnObjects( ObjectL, Object2L ) ) );
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 16 and degrees:
[ [ ( -2, 0 ), 5 ], [ ( -1, -1 ), 2 ], [ ( -2, 0 ), 6 ], [ ( -1, -1 ), 2 ],
[ ( -2, 0 ), 1 ] ]

```

Example

```

gap> IsWellDefined( DualOnMorphisms( m1L ) );
true

```

Example

```

gap> Display( DualOnMorphisms( m1L ) );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 1 and degrees:
[ [ 0, 1 ] ]

Matrix:
1,x_2
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ 0, 1 ], [ ( 1, 0 ), 1 ] ]

```

Example

```

gap> IsWellDefined( EvaluationForDualWithGivenTensorProduct( TensorProductOnObjects(
> DualOnObjects( ObjectL ), ObjectL ), ObjectL, TensorUnit( categoryL ) ) );
true

```

Example

```

gap> Display( EvaluationForDualWithGivenTensorProduct( TensorProductOnObjects(
> DualOnObjects( ObjectL ), ObjectL ), ObjectL, TensorUnit( categoryL ) ) );
A morphism in Category of graded rows over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded row over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 4 and degrees:

```

```

[ [ 0, 4 ] ]

Matrix:
1,
0,
0,
1
(over a graded ring)

Range:
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 1 and degrees:
[ [ 0, 1 ] ]
gap> Display( InternalHomOnObjects( ObjectL, ObjectL ) );
A graded row over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 4 and degrees:
[ [ 0, 4 ] ]

```

### 13.7 A few categorical constructions for graded columns

Example

```

gap> ZeroObject( categoryR );
<A graded column of rank 0>
gap> 01R := GradedColumn( [ [-1,0],2 ] , S );
<A graded column of rank 2>

```

Example

```

gap> Display( ZeroMorphism( ZeroObject( categoryR ), 01R ) );
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded column over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 0 and degrees:
[ ]

Matrix:
(an empty 2 x 0 matrix)

Range:
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( -1, 0 ), 2 ] ]

```

Example

```

gap> 02R := GradedColumn( [ [0,0],1 ] , S );
<A graded column of rank 1>
gap> obj3R := GradedColumn( [ [-1,0],1 ] , S );
<A graded column of rank 1>

```



## Example

```
gap> Display( IdentityMorphism( O2R ) );
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
```

Source:

A graded column over Q[x\_1,x\_2,x\_3,x\_4]  
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])  
of rank 1 and degrees:  
[ [ 0, 1 ] ]

Matrix:

1  
(over a graded ring)

Range:

A graded column over Q[x\_1,x\_2,x\_3,x\_4]  
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])  
of rank 1 and degrees:  
[ [ 0, 1 ] ]

## Example

```
gap> IsWellDefined( IdentityMorphism( Q2R ) );
true
gap> directSumR := DirectSum( [ O1R, O2R ] );
<A graded column of rank 3>
```

## Example

```
gap> Display( directSumR );
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 3 and degrees:
[ [ ( -1, 0 ), 2 ], [ 0, 1 ] ]
```

## Example

```
gap> i1R := InjectionOfCofactorOfDirectSum( [ O1R, O2R ], 1 );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( i1R );
true
```

## Example

```
gap> Display( UnderlyingHomalgMatrix( i1R ) );
1,0,
0,1,
0,0
(over a graded ring)
```

## Example

```
gap> i2R := InjectionOfCofactorOfDirectSum( [ O1R, O2R ], 2 );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( i2R );
true
```

## Example

```
gap> Display( UnderlyingHomalgMatrix( i2R ) );
0,
```

```
0,
1
(over a graded ring)
```

Example

```
gap> proj1R := ProjectionInFactorOfDirectSum( [ 01R, 02R ], 1 );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( proj1R );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( proj1R ) );
1,0,0,
0,1,0
(over a graded ring)
```

Example

```
gap> proj2R := ProjectionInFactorOfDirectSum( [ 01R, 02R ], 2 );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( proj2R );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( proj2R ) );
0,0,1
(over a graded ring)
```

Example

```
gap> kR := WeakKernelEmbedding( proj1R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( kR );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( kR ) );
0,
0,
1
(over a graded ring)
```

Example

```
gap> ckR := WeakCokernelProjection( kR );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( ckR );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( ckR ) );
1,0,0,
0,1,0
(over a graded ring)
```

## Example

```

gap> IsMonomorphism( kR );
true
gap> IsEpimorphism( kR );
false
gap> IsMonomorphism( ckR );
false
gap> IsEpimorphism( ckR );
true
gap> m1R := GradedRowOrColumnMorphism( 01R,
>      HomalgMatrix( [[ "x_1", "x_2" ]], S ), 02R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m1R );
true
gap> m2R := IdentityMorphism( 02R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m2R );
true
gap> obj1R := GradedColumn( [ [[0,0],1], [[-1,0],1] ], S );
<A graded column of rank 2>
gap> m1R := GradedRowOrColumnMorphism( obj1R,
>      HomalgMatrix( [ [ 1, "x_2" ] ], S ), 02R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m1R );
true
gap> m3R := GradedRowOrColumnMorphism( obj3R,
>      HomalgMatrix( [[ "x_1" ]], S ), 02R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( m3R );
true
gap> liftR := Lift( m3R, m1R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( liftR );
true

```

## Example

```

gap> Display( UnderlyingHomalgMatrix( liftR ) );
x_1,
0
(over a graded ring)

```

## Example

```

gap> 03R := GradedColumn( [ [[1,0],2] ], S );
<A graded column of rank 2>
gap> morR := GradedRowOrColumnMorphism(
>      02R, HomalgMatrix( [[ "x_1" ], [ "x_2" ] ], S ), 03R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( morR );

```

```

true
gap> coliftR := Colift( m2R, morR );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( coliftR );
true

```

— Example —

```

gap> Display( UnderlyingHomalgMatrix( coliftR ) );
x_1,
x_2
(over a graded ring)

```

— Example —

```

gap> fpR := WeakBiFiberProduct( m1R, m2R );
<A graded column of rank 2>
gap> fp_proj1R := ProjectionInFirstFactorOfWeakBiFiberProduct( m1R, m2R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( fp_proj1R );
true

```

— Example —

```

gap> Display( UnderlyingHomalgMatrix( fp_proj1R ) );
1,0,
0,1
(over a graded ring)

```

— Example —

```

gap> fp_proj2R := ProjectionInSecondFactorOfWeakBiFiberProduct( m1R, m2R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( fp_proj2R );
true

```

— Example —

```

gap> Display( UnderlyingHomalgMatrix( fp_proj2R ) );
1, x_2
(over a graded ring)

```

— Example —

```

gap> BiasedWeakFiberProduct( m1R, m2R );
<A graded column of rank 2>
gap> pbwfpcol := ProjectionOfBiasedWeakFiberProduct( m1R, m2R );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( pbwfpcol );
true

```

— Example —

```

gap> Display( pbwfpcol );
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded column over Q[x_1,x_2,x_3,x_4]

```

```
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ 0, 1 ], [ ( -1, 0 ), 1 ] ]
```

```
Matrix:
1,0,
0,1
(over a graded ring)
```

```
Range:
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ 0, 1 ], [ ( -1, 0 ), 1 ] ]
```

Example

```
gap> poR := WeakBiPushout( morR, m2R );
<A graded column of rank 2>
gap> inj1R := InjectionOfFirstCofactorOfWeakBiPushout( morR, m2R );
<A morphism in Category of graded columns over
 $\mathbb{Q}[x_1, x_2, x_3, x_4]$  (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( inj1R );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( inj1R ) );
1,0,
0,1
(over a graded ring)
```

Example

```
gap> inj2R := InjectionOfSecondCofactorOfWeakBiPushout( morR, m2R );
<A morphism in Category of graded columns over
 $\mathbb{Q}[x_1, x_2, x_3, x_4]$  (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( inj2R );
true
```

Example

```
gap> Display( UnderlyingHomalgMatrix( inj2R ) );
x_1,
x_2
(over a graded ring)
```

Example

```
gap> injectionR := InjectionOfBiasedWeakPushout( morR, m2R );
<A morphism in Category of graded columns over
 $\mathbb{Q}[x_1, x_2, x_3, x_4]$  (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( injectionR );
true
```

Example

```
gap> Display( injectionR );
A morphism in Category of graded columns over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
```

```
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
```

```
Matrix:
1,0,
0,1
(over a graded ring)
```

```
Range:
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
```

Example

```
gap> tensorProductR := TensorProductOnObjects( O1R, O2R );
<A graded column of rank 2>
```

Example

```
gap> Display( tensorProductR );
A graded column over Q[x_1,x_2,x_3,x_4] (with weights
[ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ]) of rank 2 and degrees:
[ [ ( -1, 0 ), 2 ] ]
```

Example

```
gap> tensorProductMorphismR := TensorProductOnMorphisms( m2R, morR );
<A morphism in Category of graded columns over
Q[x_1,x_2,x_3,x_4] (with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( tensorProductMorphismR );
true
```

Example

```
gap> Display( tensorProductMorphismR );
A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])

Source:
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 1 and degrees:
[ [ 0, 1 ] ]

Matrix:
x_1,
x_2
(over a graded ring)

Range:
A graded column over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 2 and degrees:
[ [ ( 1, 0 ), 2 ] ]
gap> Display( DualOnObjects( TensorProductOnObjects( ObjectR, Object2R ) ) );
```

```
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ ) of rank 16 and degrees:
 $\begin{bmatrix} (-2, 0), 5 \\ (-1, -1), 2 \\ (-2, 0), 6 \\ (-1, -1), 2 \\ (-2, 0), 1 \end{bmatrix}$ 
```

Example

```
gap> IsWellDefined( DualOnMorphisms( m1R ) );
true
```

Example

```
gap> Display( DualOnMorphisms( m1R ) );
A morphism in Category of graded columns over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )

Source:
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )
of rank 1 and degrees:
 $\begin{bmatrix} 0, 1 \end{bmatrix}$ 

Matrix:
1,
x_2
(over a graded ring)

Range:
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )
of rank 2 and degrees:
 $\begin{bmatrix} 0, 1 \\ (1, 0), 1 \end{bmatrix}$ 
```

Example

```
gap> IsWellDefined( EvaluationForDualWithGivenTensorProduct( TensorProductOnObjects(
> DualOnObjects( ObjectR ), ObjectR ), ObjectR, TensorUnit( categoryR ) ) );
true
```

Example

```
gap> Display( EvaluationForDualWithGivenTensorProduct( TensorProductOnObjects(
> DualOnObjects( ObjectR ), ObjectR ), ObjectR, TensorUnit( categoryR ) ) );
A morphism in Category of graded columns over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )

Source:
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )
of rank 4 and degrees:
 $\begin{bmatrix} 0, 4 \end{bmatrix}$ 

Matrix:
1,0,0,1
(over a graded ring)

Range:
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights  $\begin{bmatrix} 1 & 0 \\ 1 & 0 \\ 0 & 1 \\ 0 & 1 \end{bmatrix}$ )
```

```

of rank 1 and degrees:
[ [ 0, 1 ] ]
gap> Display( InternalHomOnObjects( ObjectR, ObjectR ) );
A graded column over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])
of rank 4 and degrees:
[ [ 0, 4 ] ]

```

### 13.8 Additional examples on monoidal structure for graded rows

Example

```

gap> aR := GradedRow( [ [ [1,0], 1 ] ], S );
<A graded row of rank 1>
gap> bR := ZeroObject( aR );
<A graded row of rank 0>
gap> coevR := CoevaluationForDual( bR );
<A morphism in Category of graded rows over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( coevR );
true
gap> evalR := EvaluationForDual( bR );
<A morphism in Category of graded rows over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( evalR );
true
gap> cR := GradedRow( [ [ [2,0], 1 ] ], S );
<A graded row of rank 1>
gap> aR_o_bR := TensorProductOnObjects( aR, bR );
<A graded row of rank 0>
gap> phiR := ZeroMorphism( aR_o_bR, cR );
<A morphism in Category of graded rows over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( phiR );
true
gap> tens_mor := TensorProductToInternalHomAdjunctionMap(aR,bR,phiR);
<A morphism in Category of graded rows over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( tens_mor );
true

```

### 13.9 Additional examples on monoidal structure for graded columns

Example

```

gap> aC := GradedColumn( [ [ [1,0], 1 ] ], S );
<A graded column of rank 1>
gap> bC := ZeroObject( aC );
<A graded column of rank 0>
gap> coevC := CoevaluationForDual( bC );
<A morphism in Category of graded columns over  $\mathbb{Q}[x_1, x_2, x_3, x_4]$ 
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( coevC );

```



```

true
gap> evalC := EvaluationForDual( bC );
<A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( evalC );
true
gap> cC := GradedColumn( [ [ [2,0], 1 ] ], S );
<A graded column of rank 1>
gap> aC_o_bC := TensorProductOnObjects( aC, bC );
<A graded column of rank 0>
gap> phiC := ZeroMorphism( aC_o_bC, cC );
<A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( phiC );
true
gap> tens_mor := TensorProductToInternalHomAdjunctionMap(aC,bC,phiC);
<A morphism in Category of graded columns over Q[x_1,x_2,x_3,x_4]
(with weights [ [ 1, 0 ], [ 1, 0 ], [ 0, 1 ], [ 0, 1 ] ])>
gap> IsWellDefined( tens_mor );
true

```

### 13.10 Examples to test Tools methods in graded rows/cols

Example

```

gap> S := GradedRing( Q * "x,y" );
Q[x,y]
(weights: yet unset)
gap> SetWeightsOfIndeterminates( S, [ 1, 1 ] );
gap> mat_1 := HomalgMatrix( "[ x, 0, 0, y ]", 2, 2, S );
<A 2 x 2 matrix over a graded ring>
gap> mat_2 := HomalgMatrix( "[ x, 0, 0, 0 ]", 2, 2, S );
<A 2 x 2 matrix over a graded ring>
gap> a := GradedRow( [ [ [ 1 ], 1 ], [ [ 2 ], 1 ] ], S );
<A graded row of rank 2>
gap> b := GradedColumn( [ [ [ 1 ], 1 ], [ [ 2 ], 1 ] ], S );
<A graded column of rank 2>
gap> map := DeduceMapFromMatrixAndRangeForGradedRows( mat_1, a );
<A morphism in Category of graded rows over Q[x,y] (with weights [ 1, 1 ])>
gap> some_map := DeduceSomeMapFromMatrixAndRangeForGradedRows( mat_1, a );
<A morphism in Category of graded rows over Q[x,y] (with weights [ 1, 1 ])>
gap> IsEqualForMorphisms( map, some_map );
true
gap> map := DeduceMapFromMatrixAndSourceForGradedRows( mat_1, a );
<A morphism in Category of graded rows over Q[x,y] (with weights [ 1, 1 ])>
gap> some_map := DeduceSomeMapFromMatrixAndSourceForGradedRows( mat_1, a );
<A morphism in Category of graded rows over Q[x,y] (with weights [ 1, 1 ])>
gap> IsEqualForMorphisms( map, some_map );
true
gap> some_map := DeduceSomeMapFromMatrixAndRangeForGradedRows( mat_2, a );
<A morphism in Category of graded rows over Q[x,y] (with weights [ 1, 1 ])>
gap> IsWellDefined( some_map );
true

```

```

gap> some_map := DeduceSomeMapFromMatrixAndSourceForGradedRows( mat_2, a );
<A morphism in Category of graded rows over Q[x,y] (with weights [ 1, 1 ])>
gap> IsWellDefined( some_map );
true
gap> map := DeduceMapFromMatrixAndRangeForGradedCols( mat_1, b );
<A morphism in Category of graded columns over Q[x,y] (with weights [ 1, 1 ])>
gap> some_map := DeduceSomeMapFromMatrixAndRangeForGradedCols( mat_1, b );
<A morphism in Category of graded columns over Q[x,y] (with weights [ 1, 1 ])>
gap> IsEqualForMorphisms( map, some_map );
true
gap> map := DeduceMapFromMatrixAndSourceForGradedCols( mat_1, b );
<A morphism in Category of graded columns over Q[x,y] (with weights [ 1, 1 ])>
gap> some_map := DeduceSomeMapFromMatrixAndSourceForGradedCols( mat_1, b );
<A morphism in Category of graded columns over Q[x,y] (with weights [ 1, 1 ])>
gap> IsEqualForMorphisms( map, some_map );
true
gap> some_map := DeduceSomeMapFromMatrixAndRangeForGradedCols( mat_2, b );
<A morphism in Category of graded columns over Q[x,y] (with weights [ 1, 1 ])>
gap> IsWellDefined( some_map );
true
gap> some_map := DeduceSomeMapFromMatrixAndSourceForGradedCols( mat_2, b );
<A morphism in Category of graded columns over Q[x,y] (with weights [ 1, 1 ])>
gap> IsWellDefined( some_map );
true

```

## Chapter 14

# Category of rows and columns over a field

### 14.1 Abelian operations for rows

Category of rows over a field

Example

```
gap> Q := HomalgFieldOfRationals();
gap> RowsQ := CategoryOfRows( Q );
gap> a := 3/RowsQ;;
gap> b := 4/RowsQ;;
gap> homalg_matrix := HomalgMatrix( [ [ 1, 0, 0, 0 ],
>                                     [ 0, 1, 0, -1 ],
>                                     [ -1, 0, 2, 1 ] ], 3, 4, Q );
gap> alpha := homalg_matrix/RowsQ;;
gap> homalg_matrix := HomalgMatrix( [ [ 1, 1, 0, 0 ],
>                                     [ 0, 1, 0, -1 ],
>                                     [ -1, 0, 2, 1 ] ], 3, 4, Q );
gap> beta := homalg_matrix/RowsQ;;
gap> IsWellDefined( CokernelObject( alpha ) );
true
gap> c := CokernelProjection( alpha );
gap> gamma := UniversalMorphismIntoDirectSum( [ c, c ] );
gap> colift := CokernelColift( alpha, gamma );
gap> IsEqualForMorphisms( PreCompose( c, colift ), gamma );
true
gap> FiberProduct( alpha, beta );
gap> F := FiberProduct( alpha, beta );
gap> IsWellDefined( F );
true
gap> IsWellDefined( ProjectionInFactorOfFiberProduct( [ alpha, beta ], 1 ) );
true
gap> IsWellDefined( Pushout( alpha, beta ) );
true
gap> i1 := InjectionOfCofactorOfPushout( [ alpha, beta ], 1 );
gap> i2 := InjectionOfCofactorOfPushout( [ alpha, beta ], 2 );
gap> u := UniversalMorphismFromDirectSum( [ b, b ], [ i1, i2 ] );
gap> KernelObjectFunctorial( u, IdentityMorphism( Source( u ) ), u ) = IdentityMorphism( 3/RowsQ );
true
gap> IsZero( CokernelObjectFunctorial( u, IdentityMorphism( Range( u ) ), u ) );
true
```

```

gap> DirectProductFunctorial( [ u, u ] ) = DirectSumFunctorial( [ u, u ] );
true
gap> CoproductFunctorial( [ u, u ] ) = DirectSumFunctorial( [ u, u ] );
true
gap> IsOne( FiberProductFunctorial( [ u, u ], [ IdentityMorphism( Source( u ) ), IdentityMorphism( Range( u ) ) ] ) );
true
gap> IsOne( PushoutFunctorial( [ u, u ], [ IdentityMorphism( Range( u ) ), IdentityMorphism( Source( u ) ) ] ) );
true
gap> IsCongruentForMorphisms( (1/2) * alpha, alpha * (1/2) );
true
gap> RankOfObject( HomomorphismStructureOnObjects( a, b ) ) = RankOfObject( a ) * RankOfObject( b );
true
gap> IsCongruentForMorphisms(
>   PreCompose( [ u, DualOnMorphisms( i1 ), DualOnMorphisms( alpha ) ] ),
>   InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( u ), Source( b ) ),
>   PreCompose(
>     InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( DualOnMorphisms( i1 ), DualOnMorphisms( alpha ) ),
>     HomomorphismStructureOnMorphisms( u, DualOnMorphisms( alpha ) )
>   )
> );
true

```

### Category of columns over a field

Example

```

gap> Q := HomalgFieldOfRationals();
gap> ColsQ := CategoryOfColumns( Q );
gap> a := 3/ColsQ;
gap> b := 4/ColsQ;
gap> homalg_matrix := HomalgMatrix( [ [ 1, 0, 0, 0 ],
>                                     [ 0, 1, 0, -1 ],
>                                     [ -1, 0, 2, 1 ] ], 3, 4, Q );
gap> homalg_matrix := TransposedMatrix( homalg_matrix );
gap> alpha := homalg_matrix/ColsQ;
gap> homalg_matrix := HomalgMatrix( [ [ 1, 1, 0, 0 ],
>                                     [ 0, 1, 0, -1 ],
>                                     [ -1, 0, 2, 1 ] ], 3, 4, Q );
gap> homalg_matrix := TransposedMatrix( homalg_matrix );
gap> beta := homalg_matrix/ColsQ;
gap> IsWellDefined( CokernelObject( alpha ) );
true
gap> c := CokernelProjection( alpha );
gap> gamma := UniversalMorphismIntoDirectSum( [ c, c ] );
gap> colift := CokernelColift( alpha, gamma );
gap> IsEqualForMorphisms( PreCompose( c, colift ), gamma );
true
gap> FiberProduct( alpha, beta );
gap> F := FiberProduct( alpha, beta );
gap> IsWellDefined( F );
true
gap> IsWellDefined( ProjectionInFactorOfFiberProduct( [ alpha, beta ], 1 ) );
true
gap> IsWellDefined( Pushout( alpha, beta ) );

```

```

true
gap> i1 := InjectionOfCofactorOfPushout( [ alpha, beta ], 1 );;
gap> i2 := InjectionOfCofactorOfPushout( [ alpha, beta ], 2 );;
gap> u := UniversalMorphismFromDirectSum( [ b, b ], [ i1, i2 ] );;
gap> KernelObjectFunctorial( u, IdentityMorphism( Source( u ) ), u ) = IdentityMorphism( 3/ColsQ
true
gap> IsZero( CokernelObjectFunctorial( u, IdentityMorphism( Range( u ) ), u ) );
true
gap> DirectProductFunctorial( [ u, u ] ) = DirectSumFunctorial( [ u, u ] );
true
gap> CoproductFunctorial( [ u, u ] ) = DirectSumFunctorial( [ u, u ] );
true
gap> IsOne( FiberProductFunctorial( [ u, u ], [ IdentityMorphism( Source( u ) ), IdentityMorphism
true
gap> IsOne( PushoutFunctorial( [ u, u ], [ IdentityMorphism( Range( u ) ), IdentityMorphism( Rang
true
gap> IsCongruentForMorphisms( (1/2) * alpha, alpha * (1/2) );
true
gap> RankOfObject( HomomorphismStructureOnObjects( a, b ) ) = RankOfObject( a ) * RankOfObject( b
true
gap> IsCongruentForMorphisms(
>   PreCompose( [ u, DualOnMorphisms( i1 ), DualOnMorphisms( alpha ) ] ),
>   InterpretMorphismFromDistinguishedObjectToHomomorphismStructureAsMorphism( Source( u ), Sou
>   PreCompose(
>       InterpretMorphismAsMorphismFromDistinguishedObjectToHomomorphismStructure( DualOnM
>       HomomorphismStructureOnMorphisms( u, DualOnMorphisms( alpha ) )
>   )
> )
> );
true

```

## Chapter 15

# Example on tensor products in Freyd categories

### 15.1 Tensor products for categories of rows

Example

```
gap> R := HomalgFieldOfRationalsInSingular() * "a,b,c,d,e,f,g,h,i,j";;
gap> C := CategoryOfRows( R );;
gap> T := TensorUnit( C );;
gap> IsWellDefined( T );
true
```

We test the naturality of the braiding.

Example

```
gap> R2 := DirectSum( T, T );;
gap> R3 := DirectSum( T, R2 );;
gap> R4 := DirectSum( R2, R2 );;
gap> alpha := CategoryOfRowsMorphism( T, HomalgMatrix( "[ a, b, c, d ]", 1, 4, R ), R4 );;
gap> beta := CategoryOfRowsMorphism( R2, HomalgMatrix( "[ e, f, g, h, i, j ]", 2, 3, R ), R3 );;
gap> IsCongruentForMorphisms(
>   PreCompose( Braiding( T, R2 ), TensorProductOnMorphisms( beta, alpha ) ),
>   PreCompose( TensorProductOnMorphisms( alpha, beta ), Braiding( R4, R3 ) )
> );
true
```

We compute the torsion part of a f.p. module with the help of the induced tensor structure on the Freyd category.

Example

```
gap> M := FreydCategoryObject( alpha );;
gap> mu := MorphismToBidual( M );;
gap> co := CoactionToImage( mu );;
gap> IsIsomorphism( co );
true
```

## 15.2 Tensor products for categories of columns

Example

```
gap> R := HomalgFieldOfRationalsInSingular() * "a,b,c,d,e,f,g,h,i,j";;
gap> C := CategoryOfColumns( R );;
gap> T := TensorUnit( C );;
gap> IsWellDefined( T );
true
```

We test the naturality of the braiding.

Example

```
gap> R2 := DirectSum( T, T );;
gap> R3 := DirectSum( T, R2 );;
gap> R4 := DirectSum( R2, R2 );;
gap> alpha := CategoryOfColumnsMorphism( T, HomalgMatrix( "[ a, b, c, d ]", 4, 1, R ), R4 );;
gap> beta := CategoryOfColumnsMorphism( R2, HomalgMatrix( "[ e, f, g, h, i, j ]", 3, 2, R ), R3 );;
gap> IsCongruentForMorphisms(
>   PreCompose( Braiding( T, R2 ), TensorProductOnMorphisms( beta, alpha ) ),
>   PreCompose( TensorProductOnMorphisms( alpha, beta ), Braiding( R4, R3 ) )
> );
true
```

We compute the torsion part of a f.p. module with the help of the induced tensor structure on the Freyd category.

Example

```
gap> M := FreydCategoryObject( alpha );;
gap> mu := MorphismToBidual( M );;
gap> co := CostrictionToImage( mu );;
gap> IsIsomorphism( co );
true
```

## Chapter 16

# The CAP category of graded module presentations for CAP by use of Freyd categories

### 16.1 CAP categories

#### 16.1.1 FpGradedLeftModules (for IsHomalgGradedRing)

▷ `FpGradedLeftModules( $S$ )` (attribute)

**Returns:** a `CapCategory`

Given a graded ring  $S$ , one can consider the category of f.p. graded left  $S$ -modules, which is captured by this attribute.

#### 16.1.2 FpGradedRightModules (for IsHomalgGradedRing)

▷ `FpGradedRightModules( $S$ )` (attribute)

**Returns:** a `CapCategory`

Given a graded ring  $S$ , one can consider the category of f.p. graded right  $S$ -modules, which is captured by this attribute.

### 16.2 The GAP categories for graded module presentations for CAP

#### 16.2.1 IsFpGradedLeftOrRightModulesObject (for IsFreydCategoryObject)

▷ `IsFpGradedLeftOrRightModulesObject( $object$ )` (filter)

**Returns:** true or false

The GAP category of graded left and right module presentations.

#### 16.2.2 IsFpGradedLeftModulesObject (for IsFpGradedLeftOrRightModulesObject)

▷ `IsFpGradedLeftModulesObject( $object$ )` (filter)

**Returns:** true or false

The GAP category of objects in the presentation category over the category of projective graded left modules.



### 16.2.3 IsFpGradedRightModulesObject (for IsFpGradedLeftOrRightModulesObject)

▷ IsFpGradedRightModulesObject(*object*) (filter)

**Returns:** true or false

The GAP category of objects in the presentation category over the category of projective graded right modules.

## 16.3 The GAP categories for graded module presentation morphisms for CAP

### 16.3.1 IsFpGradedLeftOrRightModulesMorphism (for IsFreydCategoryMorphism)

▷ IsFpGradedLeftOrRightModulesMorphism(*object*) (filter)

**Returns:** true or false

The GAP category of left or right module presentation morphisms

### 16.3.2 IsFpGradedLeftModulesMorphism (for IsFpGradedLeftOrRightModulesMorphism)

▷ IsFpGradedLeftModulesMorphism(*object*) (filter)

**Returns:** true or false

The GAP category of morphisms in the presentation category over the category of projective graded left modules.

### 16.3.3 IsFpGradedRightModulesMorphism (for IsFpGradedLeftOrRightModulesMorphism)

▷ IsFpGradedRightModulesMorphism(*object*) (filter)

**Returns:** true or false

The GAP category of morphisms in the presentation category over the category of projective graded right modules.

# Index

- AddBiasedWeakFiberProduct
  - for IsCapCategory, IsFunction, [15](#)
- AddBiasedWeakPushout
  - for IsCapCategory, IsFunction, [20](#)
- AddDirectSumMorphismToWeakBiPushout
  - for IsCapCategory, IsFunction, [19](#)
- AddEpimorphismFromSomeProjective-ObjectForKernelObject
  - for IsCapCategory, IsFunction, [23](#)
- AddEpimorphismFromSomeProjective-ObjectForKernelObjectWithGiven-SomeProjectiveObjectForKernel-Object
  - for IsCapCategory, IsFunction, [23](#)
- AddInjectionOfBiasedWeakPushout
  - for IsCapCategory, IsFunction, [21](#)
- AddInjectionOfBiasedWeakPushoutWith-GivenBiasedWeakPushout
  - for IsCapCategory, IsFunction, [21](#)
- AddInjectionOfFirstCofactorOfWeakBi-Pushout
  - for IsCapCategory, IsFunction, [18](#)
- AddInjectionOfFirstCofactorOfWeakBi-PushoutWithGivenWeakBiPushout
  - for IsCapCategory, IsFunction, [18](#)
- AddInjectionOfSecondCofactorOfWeakBi-Pushout
  - for IsCapCategory, IsFunction, [18](#)
- AddInjectionOfSecondCofactorOfWeakBi-PushoutWithGivenWeakBiPushout
  - for IsCapCategory, IsFunction, [18](#)
- AdditiveClosure
  - for IsCapCategory, [24](#)
- AdditiveClosureMorphism
  - for IsAdditiveClosureObject, IsList, IsAdditiveClosureObject, [25](#)
- AdditiveClosureObject
  - for IsList, IsAdditiveClosureCategory, [24](#)
- AddMonomorphismToSomeInjectiveObject-ForCokernelObject
  - for IsCapCategory, IsFunction, [23](#)
- AddMonomorphismToSomeInjectiveObject-ForCokernelObjectWithGiven-SomeInjectiveObjectForCokernel-Object
  - for IsCapCategory, IsFunction, [23](#)
- AddProjectionInFirstFactorOfWeakBi-FiberProduct
  - for IsCapCategory, IsFunction, [12](#)
- AddProjectionInFirstFactorOfWeakBi-FiberProductWithGivenWeakBi-FiberProduct
  - for IsCapCategory, IsFunction, [12](#)
- AddProjectionInSecondFactorOfWeakBi-FiberProduct
  - for IsCapCategory, IsFunction, [12](#)
- AddProjectionInSecondFactorOfWeakBi-FiberProductWithGivenWeakBi-FiberProduct
  - for IsCapCategory, IsFunction, [12](#)
- AddProjectionOfBiasedWeakFiberProduct
  - for IsCapCategory, IsFunction, [15](#)
- AddProjectionOfBiasedWeakFiberProduct-WithGivenBiasedWeakFiberProduct
  - for IsCapCategory, IsFunction, [15](#)
- AddSomeInjectiveObjectForCokernel-Object
  - for IsCapCategory, IsFunction, [23](#)
- AddSomeProjectiveObjectForKernelObject
  - for IsCapCategory, IsFunction, [22](#)
- AddUniversalMorphismFromBiasedWeak-Pushout
  - for IsCapCategory, IsFunction, [21](#)
- AddUniversalMorphismFromBiasedWeak-PushoutWithGivenBiasedWeak-Pushout

for IsCapCategory, IsFunction, [21](#)  
 AddUniversalMorphismFromWeakBiPushout  
   for IsCapCategory, IsFunction, [18](#)  
 AddUniversalMorphismFromWeakBiPushout-  
   WithGivenWeakBiPushout  
   for IsCapCategory, IsFunction, [19](#)  
 AddUniversalMorphismIntoBiasedWeak-  
   FiberProduct  
   for IsCapCategory, IsFunction, [15](#)  
 AddUniversalMorphismIntoBiasedWeak-  
   FiberProductWithGivenBiased-  
   WeakFiberProduct  
   for IsCapCategory, IsFunction, [15](#)  
 AddUniversalMorphismIntoWeakBiFiber-  
   Product  
   for IsCapCategory, IsFunction, [12](#)  
 AddUniversalMorphismIntoWeakBiFiber-  
   ProductWithGivenWeakBiFiber-  
   Product  
   for IsCapCategory, IsFunction, [13](#)  
 AddWeakBiFiberProduct  
   for IsCapCategory, IsFunction, [11](#)  
 AddWeakBiFiberProductMorphismTo-  
   DirectSum  
   for IsCapCategory, IsFunction, [13](#)  
 AddWeakBiPushout  
   for IsCapCategory, IsFunction, [18](#)  
 AddWeakCokernelColift  
   for IsCapCategory, IsFunction, [9](#)  
 AddWeakCokernelColiftWithGivenWeak-  
   CokernelObject  
   for IsCapCategory, IsFunction, [9](#)  
 AddWeakCokernelObject  
   for IsCapCategory, IsFunction, [8](#)  
 AddWeakCokernelProjection  
   for IsCapCategory, IsFunction, [8](#)  
 AddWeakCokernelProjectionWithGiven-  
   WeakCokernelObject  
   for IsCapCategory, IsFunction, [9](#)  
 AddWeakKernelEmbedding  
   for IsCapCategory, IsFunction, [6](#)  
 AddWeakKernelEmbeddingWithGivenWeak-  
   KernelObject  
   for IsCapCategory, IsFunction, [6](#)  
 AddWeakKernelLift  
   for IsCapCategory, IsFunction, [7](#)  
 AddWeakKernelLiftWithGivenWeakKernel-  
   Object  
   for IsCapCategory, IsFunction, [7](#)  
 AddWeakKernelObject  
   for IsCapCategory, IsFunction, [6](#)  
 AdelmanCategory  
   for IsCapCategory, [29](#)  
 AdelmanCategoryMorphism  
   for IsAdelmanCategoryObject, IsCapCate-  
   goryMorphism, IsAdelmanCategoryOb-  
   ject, [29](#)  
 AdelmanCategoryObject  
   for IsCapCategoryMorphism, IsCapCatego-  
   ryMorphism, [29](#)  
 AsAdditiveClosureMorphism  
   for IsCapCategoryMorphism, [25](#)  
 AsAdditiveClosureObject  
   for IsCapCategoryObject, [25](#)  
 AsAdelmanCategoryMorphism  
   for IsCapCategoryMorphism, [29](#)  
 AsAdelmanCategoryObject  
   for IsCapCategoryObject, [29](#)  
 BiasedWeakFiberProduct  
   for IsCapCategoryMorphism, IsCapCatego-  
   ryMorphism, [14](#)  
 BiasedWeakPushout  
   for IsCapCategoryMorphism, IsCapCatego-  
   ryMorphism, [20](#)  
 \\*  
   for IsFreydCategoryMorphism, IsFreydCate-  
   goryMorphism, [56](#)  
   for IsFreydCategoryObject, IsFreydCatego-  
   ryObject, [56](#)  
 \/  
   for IsCapCategoryCell, IsAdditiveClosure-  
   Category, [27](#)  
   for IsCapCategoryMorphism, IsAdelman-  
   Category, [30](#)  
   for IsCapCategoryObject, IsAdelmanCate-  
   gory, [30](#)  
   for IsList, IsAdditiveClosureCategory, [27](#)  
 \[\]  
   for IsAdditiveClosureMorphism, IsInt, [27](#)  
   for IsAdditiveClosureMorphism, IsInt, IsInt,  
   [27](#)  
   for IsAdditiveClosureObject, IsInt, [27](#)

- \~
  - for IsFreydCategoryMorphism, IsInt, [56](#)
  - for IsFreydCategoryObject, IsInt, [56](#)
- CategoryOfGradedColumns
  - for IsHomalgGradedRing, [49](#)
- CategoryOfGradedRows
  - for IsHomalgGradedRing, [49](#)
- CorelationMorphism
  - for IsAdelmanCategoryObject, [30](#)
- CorelationWitness
  - for IsAdelmanCategoryMorphism, [31](#)
- DeduceMapFromMatrixAndRangeForGraded-  
Cols
  - for IsHomalgMatrix, IsGradedColumn, [53](#)
- DeduceMapFromMatrixAndRangeForGraded-  
Rows
  - for IsHomalgMatrix, IsGradedRow, [52](#)
- DeduceMapFromMatrixAndSourceForGraded-  
Cols
  - for IsHomalgMatrix, IsGradedColumn, [53](#)
- DeduceMapFromMatrixAndSourceForGraded-  
Rows
  - for IsHomalgMatrix, IsGradedRow, [52](#)
- DeduceSomeMapFromMatrixAndRangeFor-  
GradedCols
  - for IsHomalgMatrix, IsGradedColumn, [53](#)
- DeduceSomeMapFromMatrixAndRangeFor-  
GradedRows
  - for IsHomalgMatrix, IsGradedRow, [52](#)
- DeduceSomeMapFromMatrixAndSourceFor-  
GradedCols
  - for IsHomalgMatrix, IsGradedColumn, [53](#)
- DeduceSomeMapFromMatrixAndSourceFor-  
GradedRows
  - for IsHomalgMatrix, IsGradedRow, [53](#)
- DegreeList
  - for IsGradedRowOrColumn, [51](#)
- DirectSumMorphismToWeakBiPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [17](#)
- EpimorphismFromSomeProjectiveObject-  
ForKernelObject
  - for IsCapCategoryMorphism, IsCapCategoryObject, [22](#)
- ExtendFunctorToAdditiveClosureOfSource
  - for IsCapFunctor, [25](#)
- ExtendFunctorToAdditiveClosures
  - for IsCapFunctor, [25](#)
- ExtendFunctorToLinearClosureOfSource
  - for IsCapFunctor, IsLinearClosure, [86](#)
  - for IsCapFunctor, IsLinearClosure, IsFunction, [86](#)
- ExtendFunctorWithAdditiveRangeTo-  
FunctorFromAdditiveClosureOf-  
Source
  - for IsCapFunctor, [25](#)
- ExtendNaturalTransformationToAdditive-  
ClosureOfSource
  - for IsCapNaturalTransformation, [26](#)
- FpGradedLeftModules
  - for IsHomalgGradedRing, [127](#)
- FpGradedRightModules
  - for IsHomalgGradedRing, [127](#)
- GradedColumn
  - for IsList, IsHomalgGradedRing, [50](#)
  - for IsList, IsHomalgGradedRing, IsBool, [50](#)
- GradedRow
  - for IsList, IsHomalgGradedRing, [49](#)
  - for IsList, IsHomalgGradedRing, IsBool, [49](#)
- GradedRowOrColumnMorphism
  - for IsGradedRowOrColumn, IsHomalgMatrix, IsGradedRowOrColumn, [50](#)
  - for IsGradedRowOrColumn, IsHomalgMatrix, IsGradedRowOrColumn, IsBool, [50](#)
- InclusionFunctorInAdditiveClosure
  - for IsCapCategory, [25](#)
- InjectionOfBiasedWeakPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [20](#)
- InjectionOfBiasedWeakPushoutWithGiven-  
BiasedWeakPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [20](#)

InjectionOfFirstCofactorOfWeakBi-  
   Pushout  
     for IsCapCategoryMorphism, IsCapCategoryMorphism, [16](#)  
 InjectionOfFirstCofactorOfWeakBi-  
   PushoutWithGivenWeakBiPushout  
     for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [17](#)  
 InjectionOfSecondCofactorOfWeakBi-  
   Pushout  
     for IsCapCategoryMorphism, IsCapCategoryMorphism, [16](#)  
 InjectionOfSecondCofactorOfWeakBi-  
   PushoutWithGivenWeakBiPushout  
     for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [17](#)  
 INTERNAL\_HOM\_EMBEDDING  
   for IsFreydCategoryObject, IsFreydCategoryObject, [56](#)  
 IsAdditiveClosureCategory  
   for IsCapCategory, [24](#)  
 IsAdditiveClosureMorphism  
   for IsCapCategoryMorphism, [24](#)  
 IsAdditiveClosureObject  
   for IsCapCategoryObject, [24](#)  
 IsAdelmanCategory  
   for IsCapCategory, [29](#)  
 IsAdelmanCategoryMorphism  
   for IsCapCategoryMorphism, [28](#)  
 IsAdelmanCategoryObject  
   for IsCapCategoryObject, [28](#)  
 IsCategoryOfColumnsObject  
   for IsCapCategoryObject, [42](#)  
 IsCategoryOfRowsObject  
   for IsCapCategoryObject, [32](#)  
 IsFpGradedLeftModulesMorphism  
   for IsFpGradedLeftOrRightModulesMorphism, [128](#)  
 IsFpGradedLeftModulesObject  
   for IsFpGradedLeftOrRightModulesObject, [127](#)  
 IsFpGradedLeftOrRightModulesMorphism  
   for IsFreydCategoryMorphism, [128](#)  
 IsFpGradedLeftOrRightModulesObject  
   for IsFreydCategoryObject, [127](#)  
 IsFpGradedRightModulesMorphism  
   for IsFpGradedLeftOrRightModulesMorphism, [128](#)  
 IsFpGradedRightModulesObject  
   for IsFpGradedLeftOrRightModulesObject, [128](#)  
 IsGradedColumn  
   for IsGradedRowOrColumn, [51](#)  
 IsGradedColumnMorphism  
   for IsGradedRowOrColumnMorphism, [52](#)  
 IsGradedRow  
   for IsGradedRowOrColumn, [51](#)  
 IsGradedRowMorphism  
   for IsGradedRowOrColumnMorphism, [52](#)  
 IsGradedRowOrColumn  
   for IsCapCategoryObject, [51](#)  
 IsGradedRowOrColumnMorphism  
   for IsCapCategoryMorphism, [52](#)  
 IsSequenceAsAdelmanCategoryObject  
   for IsAdelmanCategoryObject, [31](#)  
 MonomorphismToSomeInjectiveObjectFor-  
   CokernelObject  
   for IsCapCategoryMorphism, [22](#)  
 MonomorphismToSomeInjectiveObjectFor-  
   CokernelObjectWithGivenSome-  
   InjectiveObjectForCokernel-  
   Object  
   for IsCapCategoryMorphism, IsCapCategoryObject, [22](#)  
 MorphismDatum  
   for IsAdelmanCategoryMorphism, [30](#)  
 MorphismMatrix  
   for IsAdditiveClosureMorphism, [26](#)  
 NrCols  
   for IsAdditiveClosureMorphism, [26](#)  
 NrRows  
   for IsAdditiveClosureMorphism, [26](#)  
 ObjectList  
   for IsAdditiveClosureObject, [26](#)  
 ProjectionInFirstFactorOfWeakBiFiber-  
   Product  
   for IsCapCategoryMorphism, IsCapCategoryMorphism, [10](#)

- ProjectionInFirstFactorOfWeakBiFiber-ProductWithGivenWeakBiFiber-Product
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [10](#)
- ProjectionInSecondFactorOfWeakBiFiber-Product
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [10](#)
- ProjectionInSecondFactorOfWeakBiFiber-ProductWithGivenWeakBiFiber-Product
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [11](#)
- ProjectionOfBiasedWeakFiberProduct
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [14](#)
- ProjectionOfBiasedWeakFiberProduct-WithGivenBiasedWeakFiberProduct
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [14](#)
- RankOfObject
  - for IsGradedRowOrColumn, [51](#)
- RelationMorphism
  - for IsAdelmanCategoryObject, [30](#)
- RelationWitness
  - for IsAdelmanCategoryMorphism, [31](#)
- SomeInjectiveObjectForCokernelObject
  - for IsCapCategoryMorphism, [22](#)
- SomeProjectiveObjectForKernelObject
  - for IsCapCategoryMorphism, [21](#)
- UnderlyingCategory
  - for IsAdditiveClosureCategory, [26](#)
  - for IsAdelmanCategory, [30](#)
- UnderlyingHomalgGradedRing
  - for IsGradedRowOrColumn, [50](#)
  - for IsGradedRowOrColumnMorphism, [51](#)
- UnderlyingHomalgMatrix
  - for IsGradedRowOrColumnMorphism, [51](#)
- UniversalMorphismFromBiasedWeakPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, [20](#)
- UniversalMorphismFromBiasedWeak-PushoutWithGivenBiasedWeak-Pushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [20](#)
- UniversalMorphismFromWeakBiPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, [17](#)
- UniversalMorphismFromWeakBiPushout-WithGivenWeakBiPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [17](#)
- UniversalMorphismIntoBiasedWeakFiber-Product
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, [14](#)
- UniversalMorphismIntoBiasedWeakFiber-ProductWithGivenBiasedWeak-FiberProduct
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [14](#)
- UniversalMorphismIntoWeakBiFiber-Product
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, [11](#)
- UniversalMorphismIntoWeakBiFiber-ProductWithGivenWeakBiFiber-Product
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [11](#)
- UnzipDegreeList
  - for IsGradedRowOrColumn, [53](#)
- WeakBiFiberProduct
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [10](#)
- WeakBiFiberProductMorphismToDirectSum

- for IsCapCategoryMorphism, IsCapCategoryMorphism, [11](#)
- WeakBiPushout
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [16](#)
- WeakCokernelColift
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [8](#)
- WeakCokernelColiftWithGivenWeakCokernelObject
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [8](#)
- WeakCokernelObject
  - for IsCapCategoryMorphism, [7](#)
- WeakCokernelProjection
  - for IsCapCategoryMorphism, [8](#)
- WeakCokernelProjectionWithGivenWeakCokernelObject
  - for IsCapCategoryMorphism, IsCapCategoryObject, [8](#)
- WeakKernelEmbedding
  - for IsCapCategoryMorphism, [5](#)
- WeakKernelEmbeddingWithGivenWeakKernelObject
  - for IsCapCategoryMorphism, IsCapCategoryObject, [6](#)
- WeakKernelLift
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, [6](#)
- WeakKernelLiftWithGivenWeakKernelObject
  - for IsCapCategoryMorphism, IsCapCategoryMorphism, IsCapCategoryObject, [6](#)
- WeakKernelObject
  - for IsCapCategoryMorphism, [5](#)
- WitnessPairForBeingCongruentToZero
  - for IsAdelmanCategoryMorphism, [31](#)