



AI Meets Oracle Analytics



Žiga Vaupot



Oracle ACE
Pro

Director & Lead Analytics Consultant

Portorož, 28. 5. 2026




SmartQ


We master Data. Every kind of Data.




source
data



bulk
load



incremental
refresh

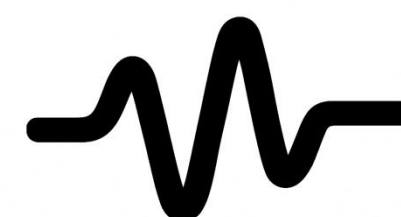

real-time
& streaming



data platform




analytics



machine learning
& artificial
intelligence

So far ... ML/AI & Oracle Analytics options

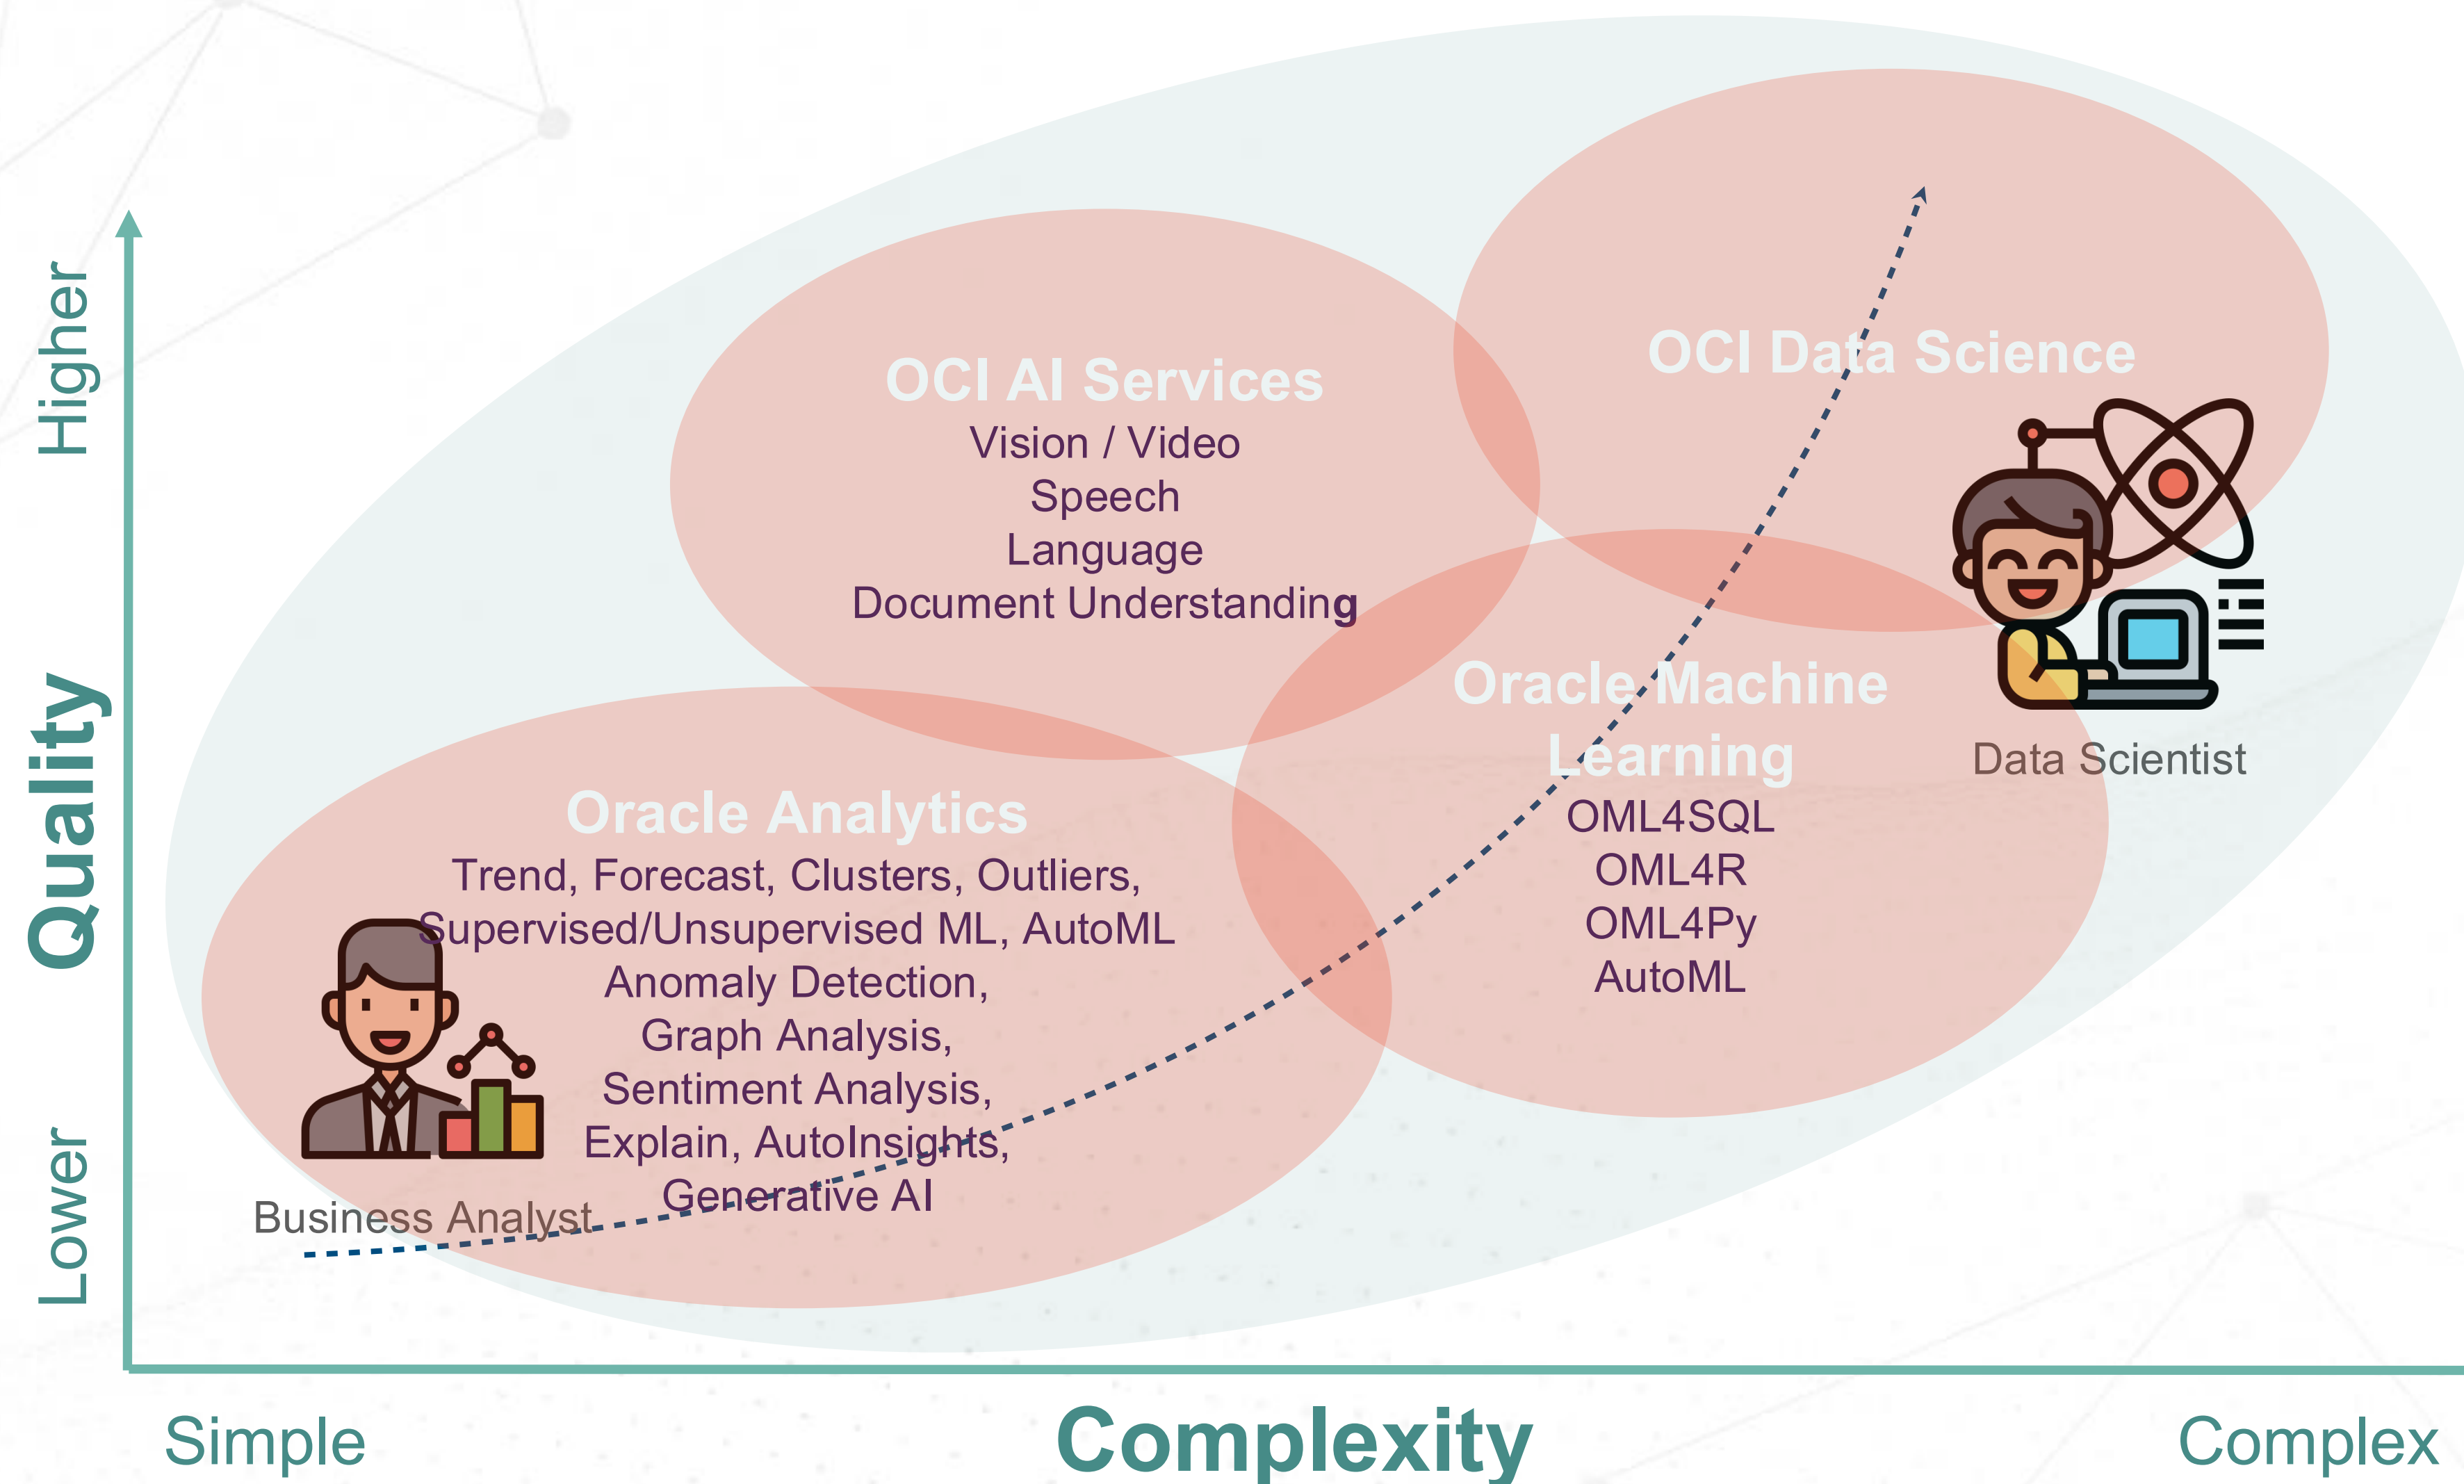

Today we'll focus on 3 things:

1. Use the Search Bar to find your Content ... and while doing it, talk to your Data
2. Understand how AI Assistant and AI Agents in Oracle Analytics work
3. How to set up and use OAC MCP Server



Ask BI

🔍 Show sales by region?



🔍 Press ENTER or click to search content for "Show sales by region?"

🔍📊 Press SHIFT+ENTER or click to visualize data using "Show sales by region?"

Visualize data using

A Region OA Boocamp Subject Area.D Geography

A Region Combined XLSX data

A Region Sales dataset - one xlsx

A Region SALES

Search (Ask BI) Bar

New AI Agent

SALES

Sales Data AI Agent

pivotViz-test2

marketing-list-2

marketing-list

Workbooks

[View all](#)

marketing-list-2

marketing-list

oenb-1

Fermentors Analysis

Similarity Analysis

Data Fragmentation
Example

Datasets

[View all](#)

 SALES

 pivotViz-test2

 marketing_list

 Fermentation Results

 Fermentation Results

 FERMENTERS_V110-V160

Preparing datasets for AI use

Settings

SALES

Dataset

Save

Close

General

Aliases

Data Elements

Search

Access

Developer

Settings

Scope

Last Run: Success : Tue May 12 2026

Check Now

Set up the index scope and schedule. You must save your settings in order to run the index.

Run Now

Index Dataset For

Assistants and Homepage Search

Languages

English

Indexing Schedule

When Dataset is refreshed

Start

Repeat every

1

Day

Define where indexed dataset can be used

... and language.

We can frequency of indexing and the schedule.



Preparing datasets for AI use: Settings

Defining scope

Define what gets indexed

Indexing metadata and Argument data with synonyms

Settings

Scope

Last Run: Success : Tue May 12 2026 [Check Now](#)

Select columns to index. You must save your settings in order to run the index.

Use Recommended Index Settings

Run Now

⚠ Sensitive Data

Indexed data is visible to all users with access to that column. For sensitive columns, enable Sensitive Data to restrict visibility to authorized users and their permissible data. This option adds runtime overhead and should be used only when necessary.


×

Attribute 26 columns	Index 26 of 2000 max	Sensitive Data	Index Type	Synonyms
Cust Number	☒	☐	Name & values ⌵	Customer ID × ID ×
Cust Name	☒	☐	Name & values ⌵	Customer Name × Name × Buyer ×
Cust Segment	☒	☐	Name & values ⌵	Customer Segment × segment ×
Cust Gender	☒	☐	Name & values ⌵	gender ×




Talking to your data

What is revenue by brand in 2023?

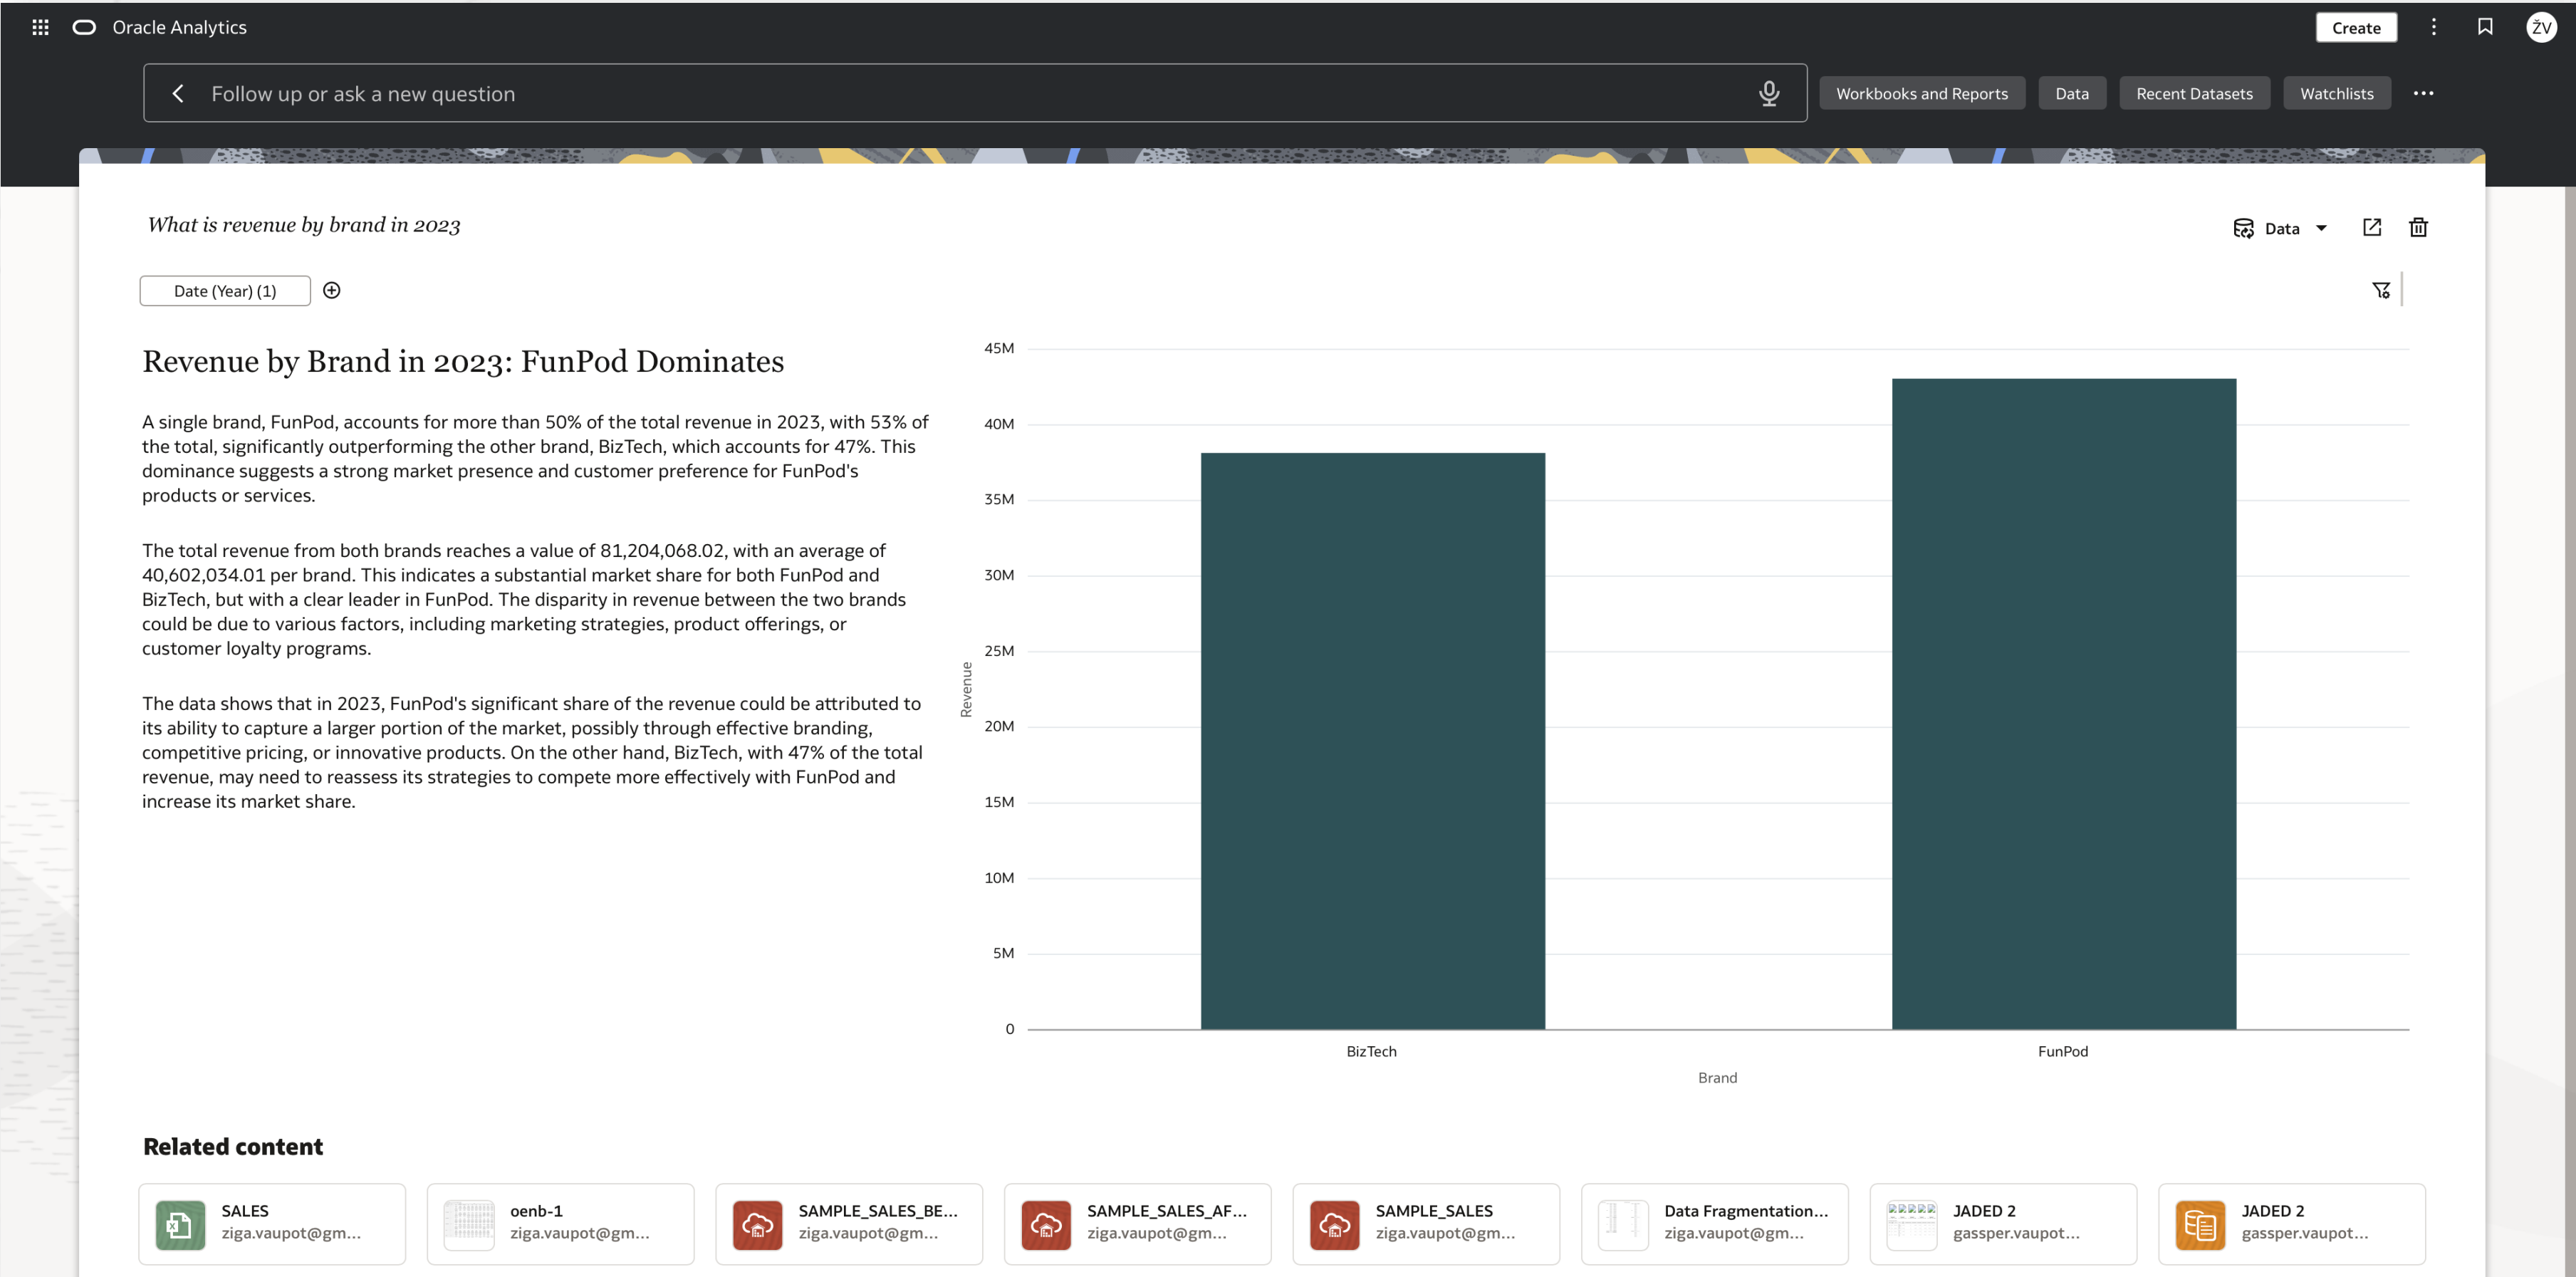


Talking to your data

Drill down into BizTech and show sales by LOB

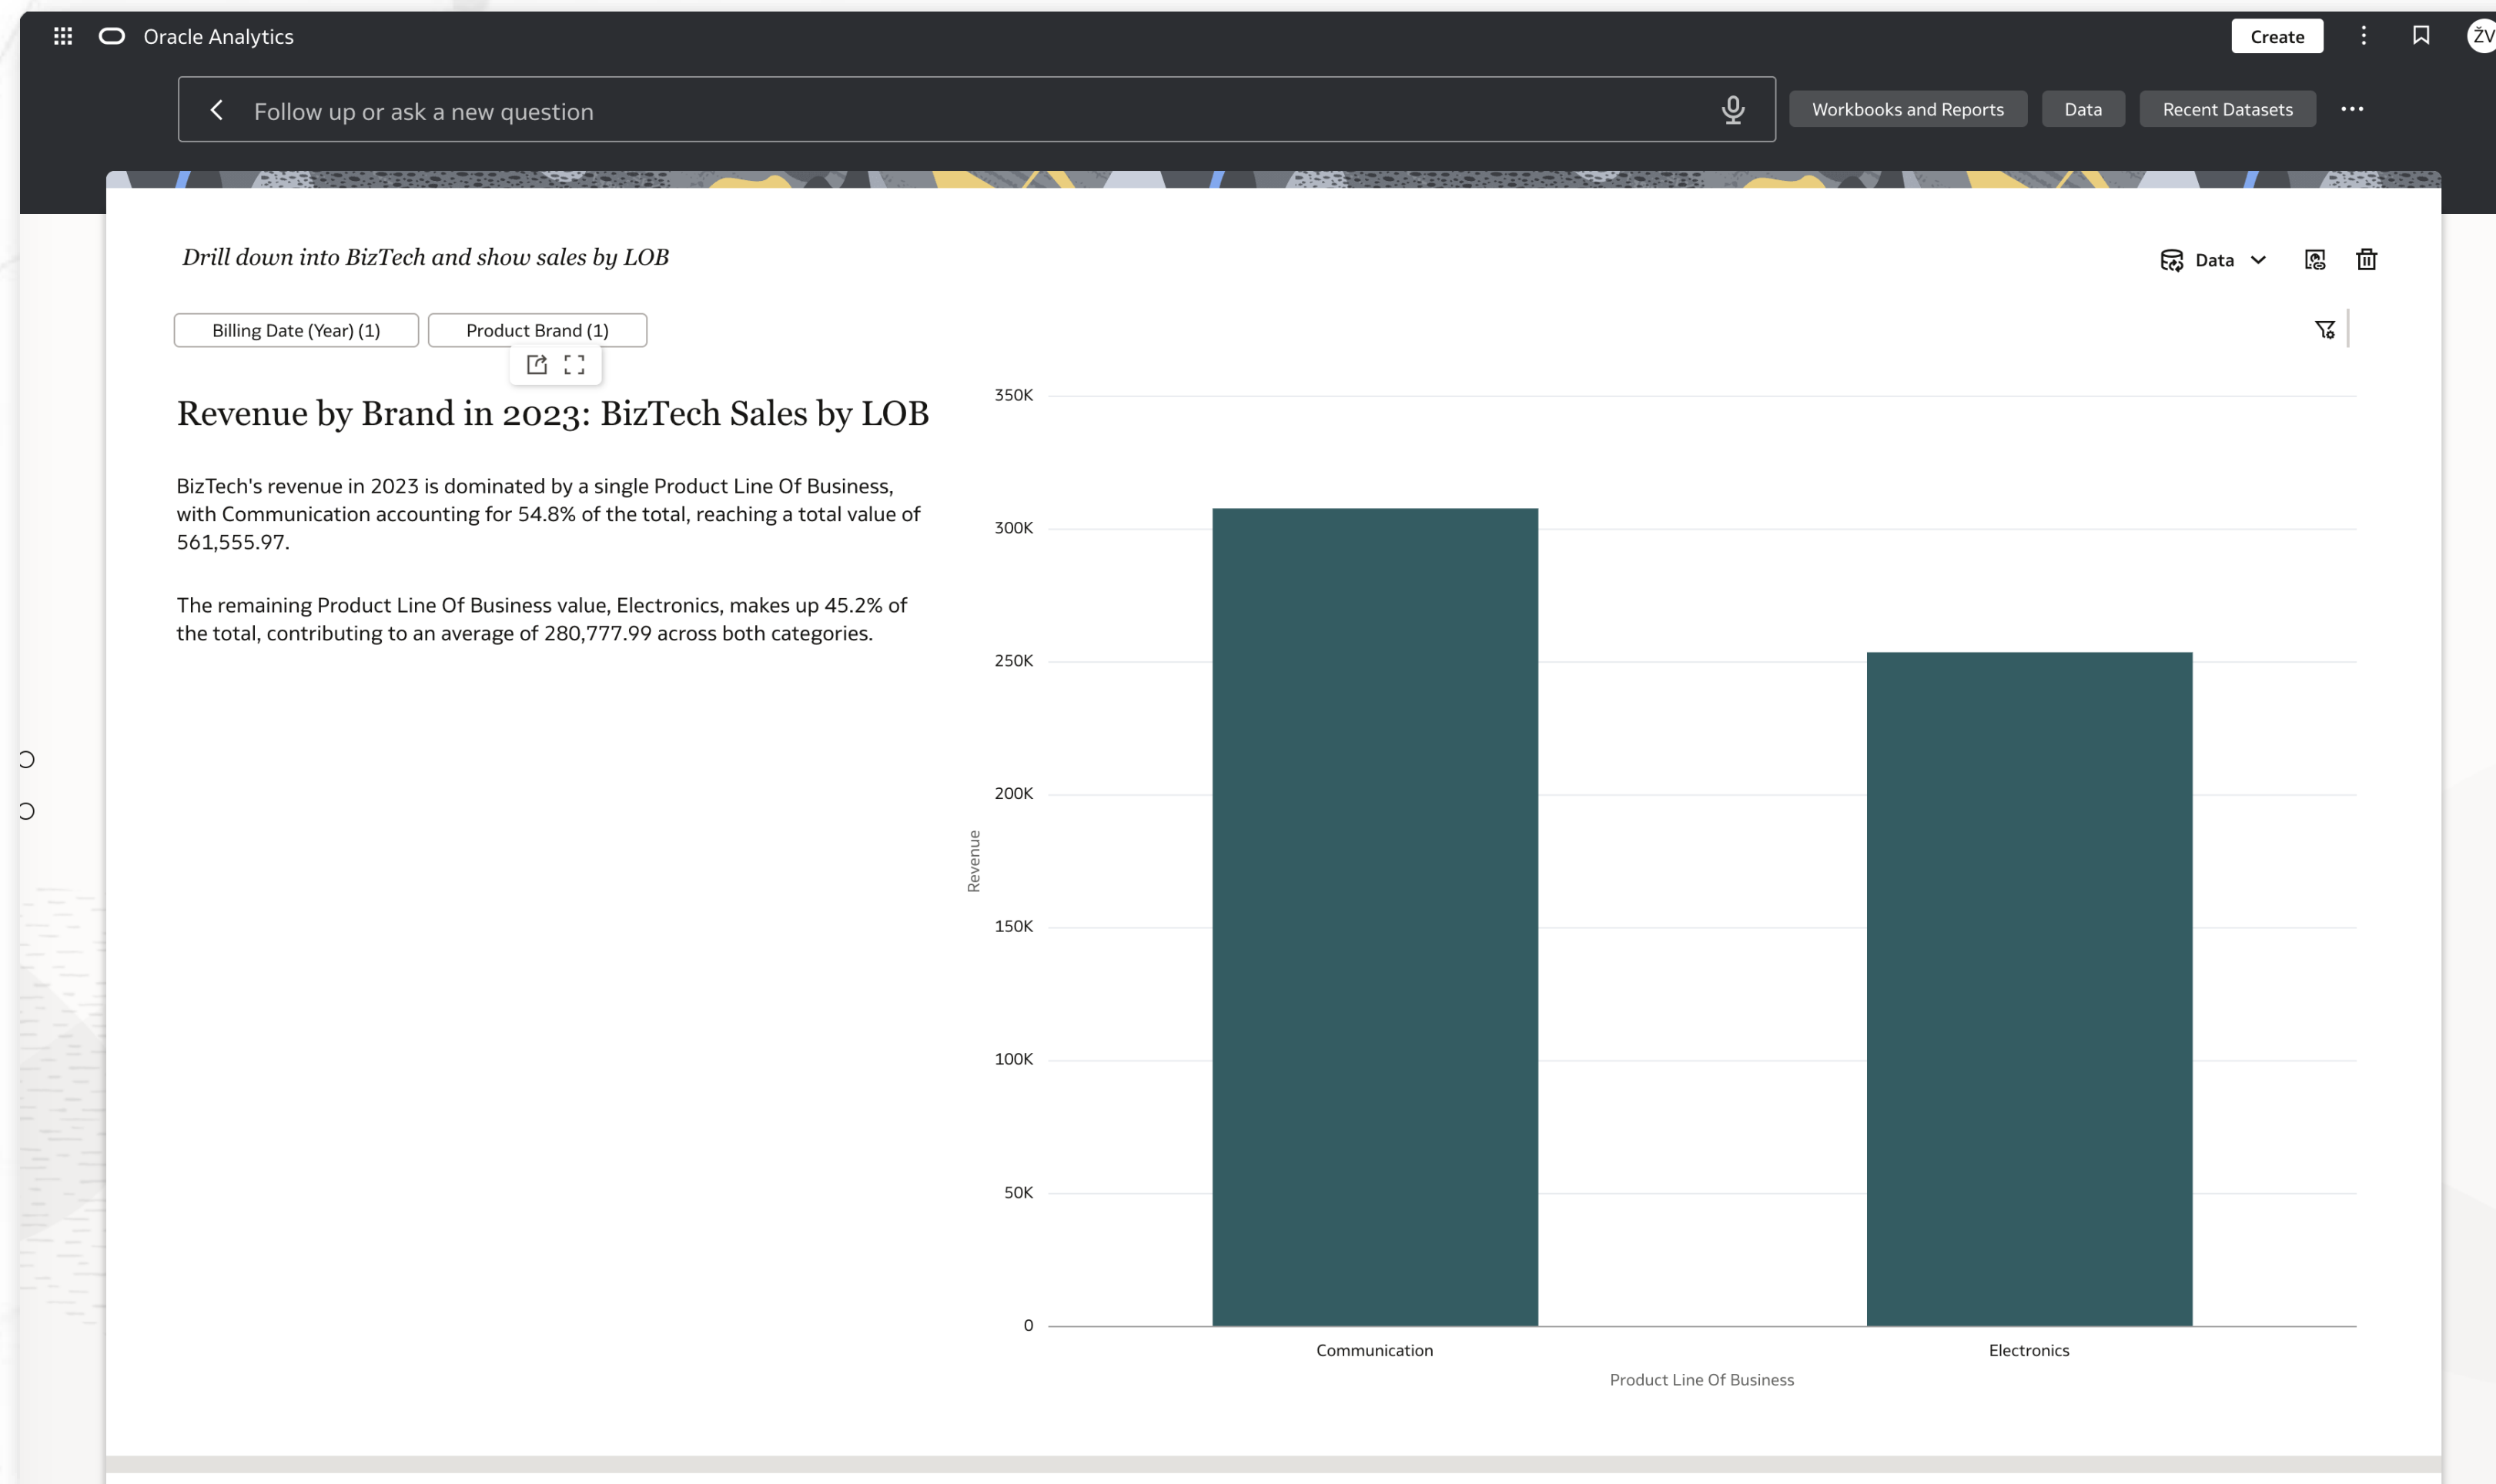

Talking to your data

Let's analyze Communication only and show sales and profit by region

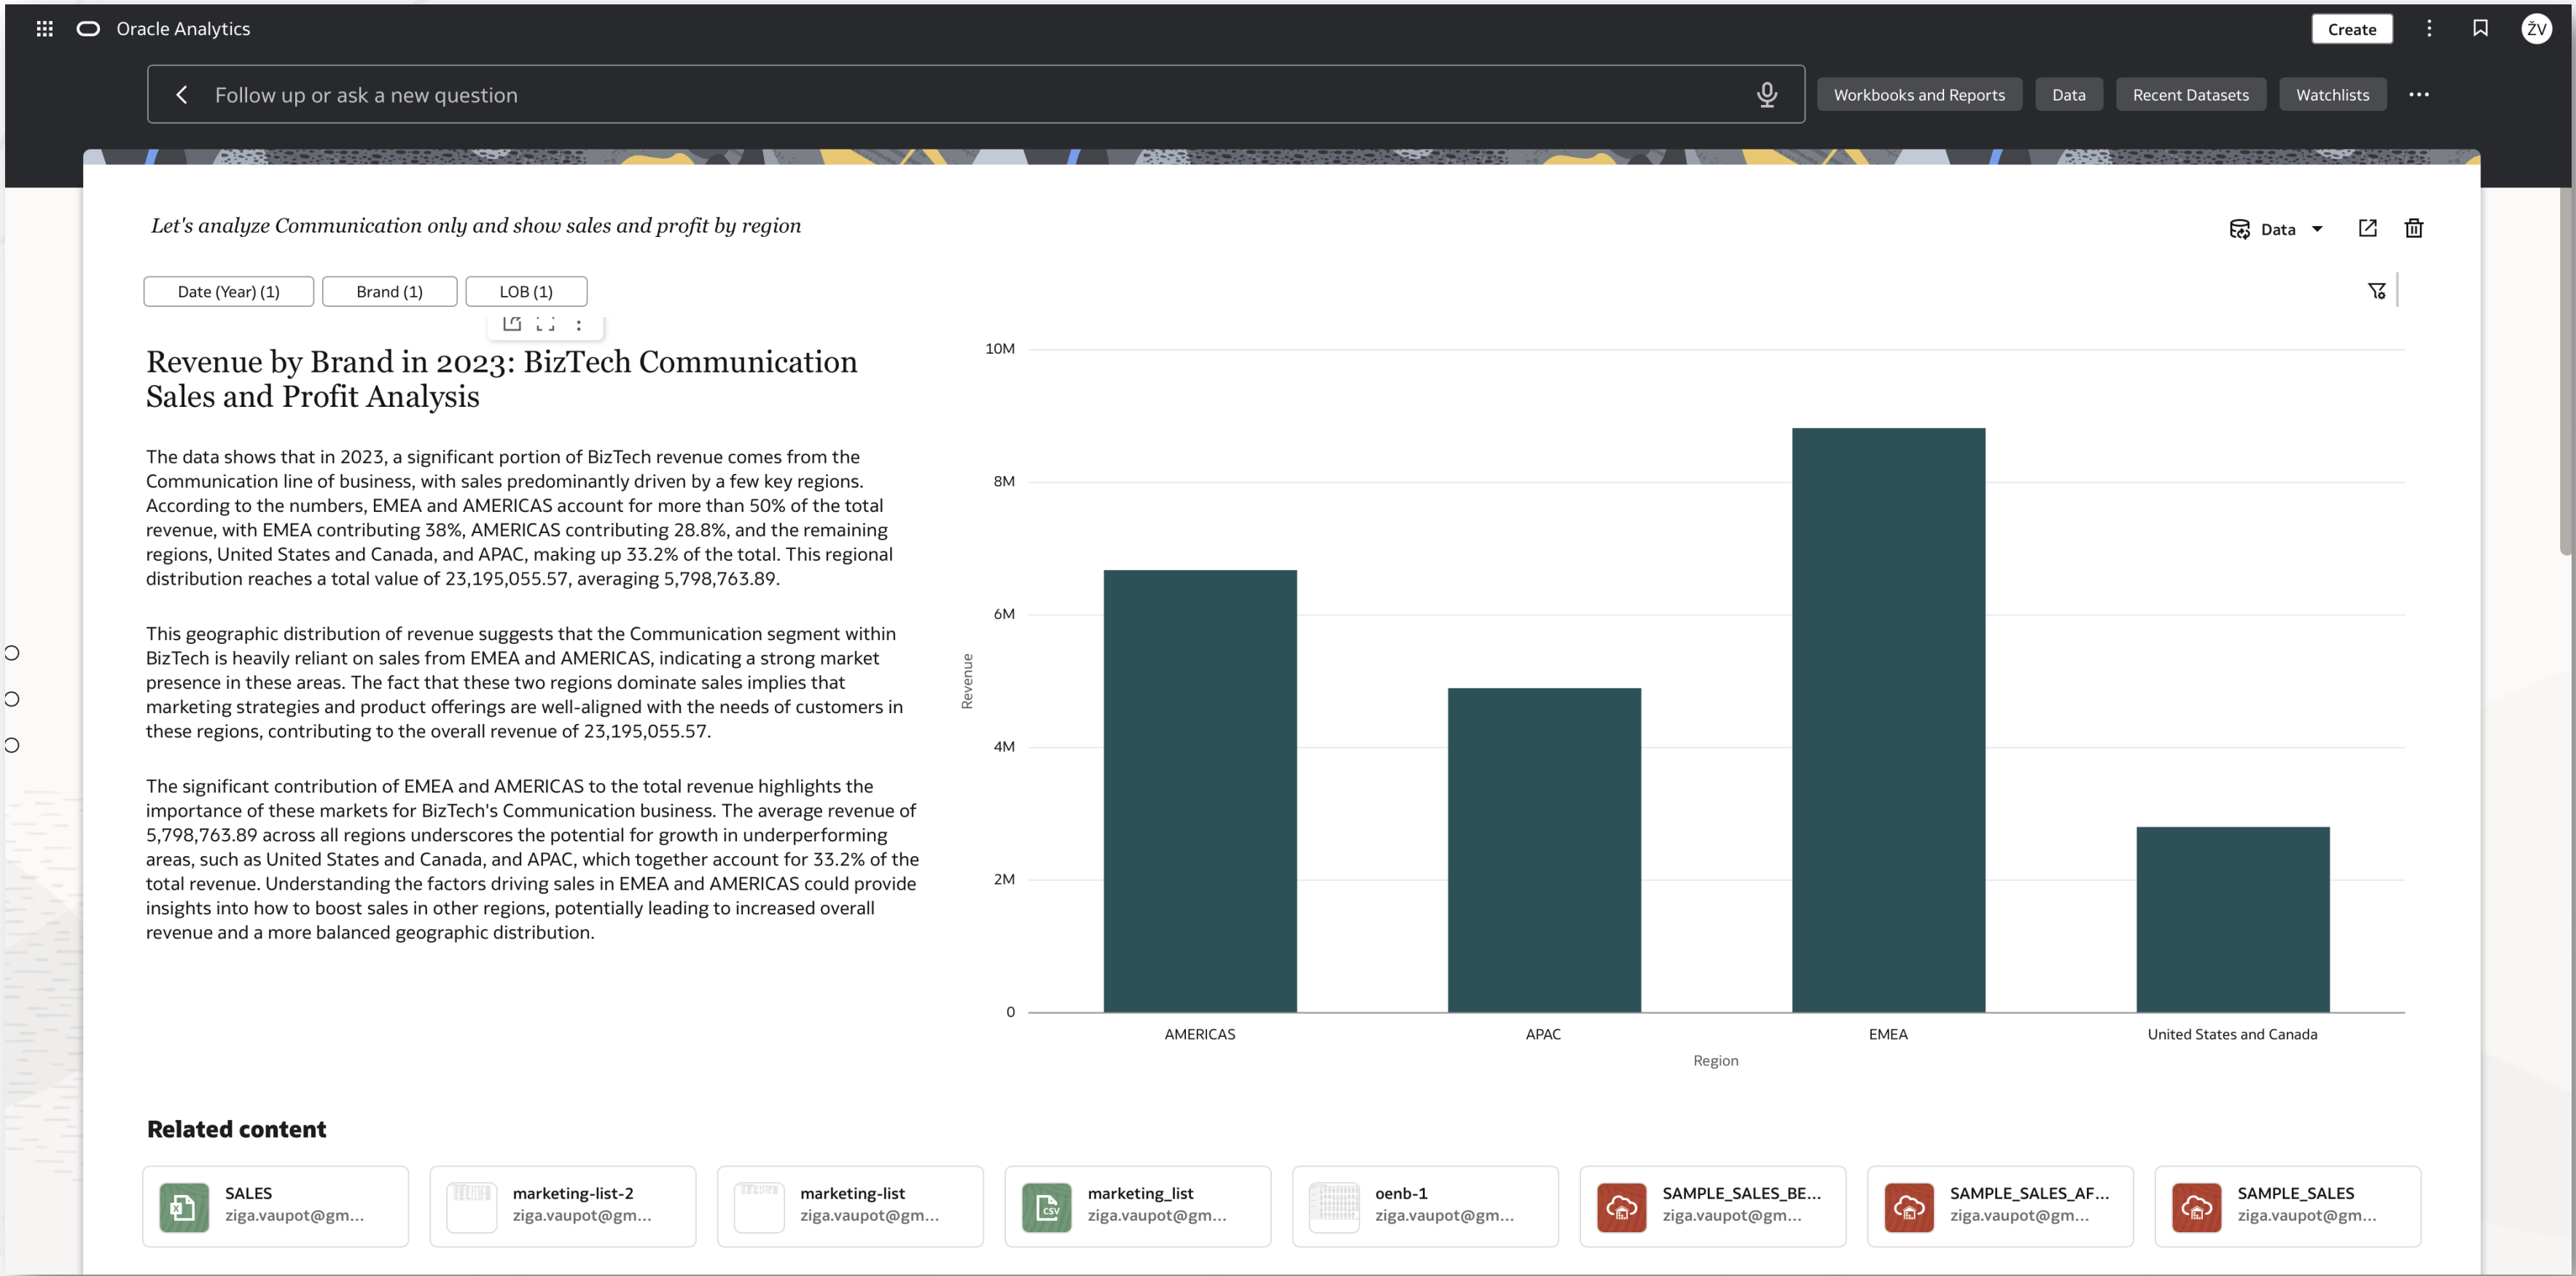

Talking to your data

Add Profit

Oracle Analytics

Create

Follow up or ask a new question

Workbooks and Reports

Data

Recent Datasets

Watchlists

Add profit

Date (Year) (1)

Brand (1)

LOB (1)

BizTech Revenue and Profit Analysis for 2023

The data shows that in 2023, BizTech, specifically the Communication line of business, achieved significant revenue. According to the charts, a few regions account for more than half of the total revenue, with EMEA and AMERICAS being the top performers, contributing 38% and 28.8%, respectively.

Profit analysis for the same period and business segment reveals a similar pattern. The data indicates that just a few regions, notably EMEA and United States and Canada, account for more than half of the total profit, with 25% and 25% respectively. This suggests that these regions are crucial for BizTech's profitability in the Communication sector.

Further examination of profit by region for 2023 in BizTech's Communication sector shows that EMEA and United States and Canada are again the dominant regions, contributing 25% and 25% to the total profit. This consistency across revenue and profit metrics underscores the importance of these regions to the company's financial performance in this business segment.

Revenue

23,195,055.57

Profit

364,549,052,361.45

Region	Revenue	Profit
AMERICAS	6,676,199.90	1,826,232,624.75
APAC	4,896,612.87	1,826,232,624.75
EMEA	8,819,025.64	1,826,232,624.75
United States and Canada	2,803,217.16	1,826,232,624.75

Revenue

Profit

AMERICAS

APAC

EMEA

United States and Canada

Related content

SALES

ziga.vaupot@gm...

marketing-list-2

ziga.vaupot@gm...

marketing-list

ziga.vaupot@gm...

marketing_list

ziga.vaupot@gm...

oenb-1

ziga.vaupot@gm...

SAMPLE_SALES_BE...

ziga.vaupot@gm...

SAMPLE_SALES_AF...


ziga.vaupot@gm...

SAMPLE_SALES

ziga.vaupot@gm...

Not just a single report, but dashboard containing various visualizations

Talking to your data

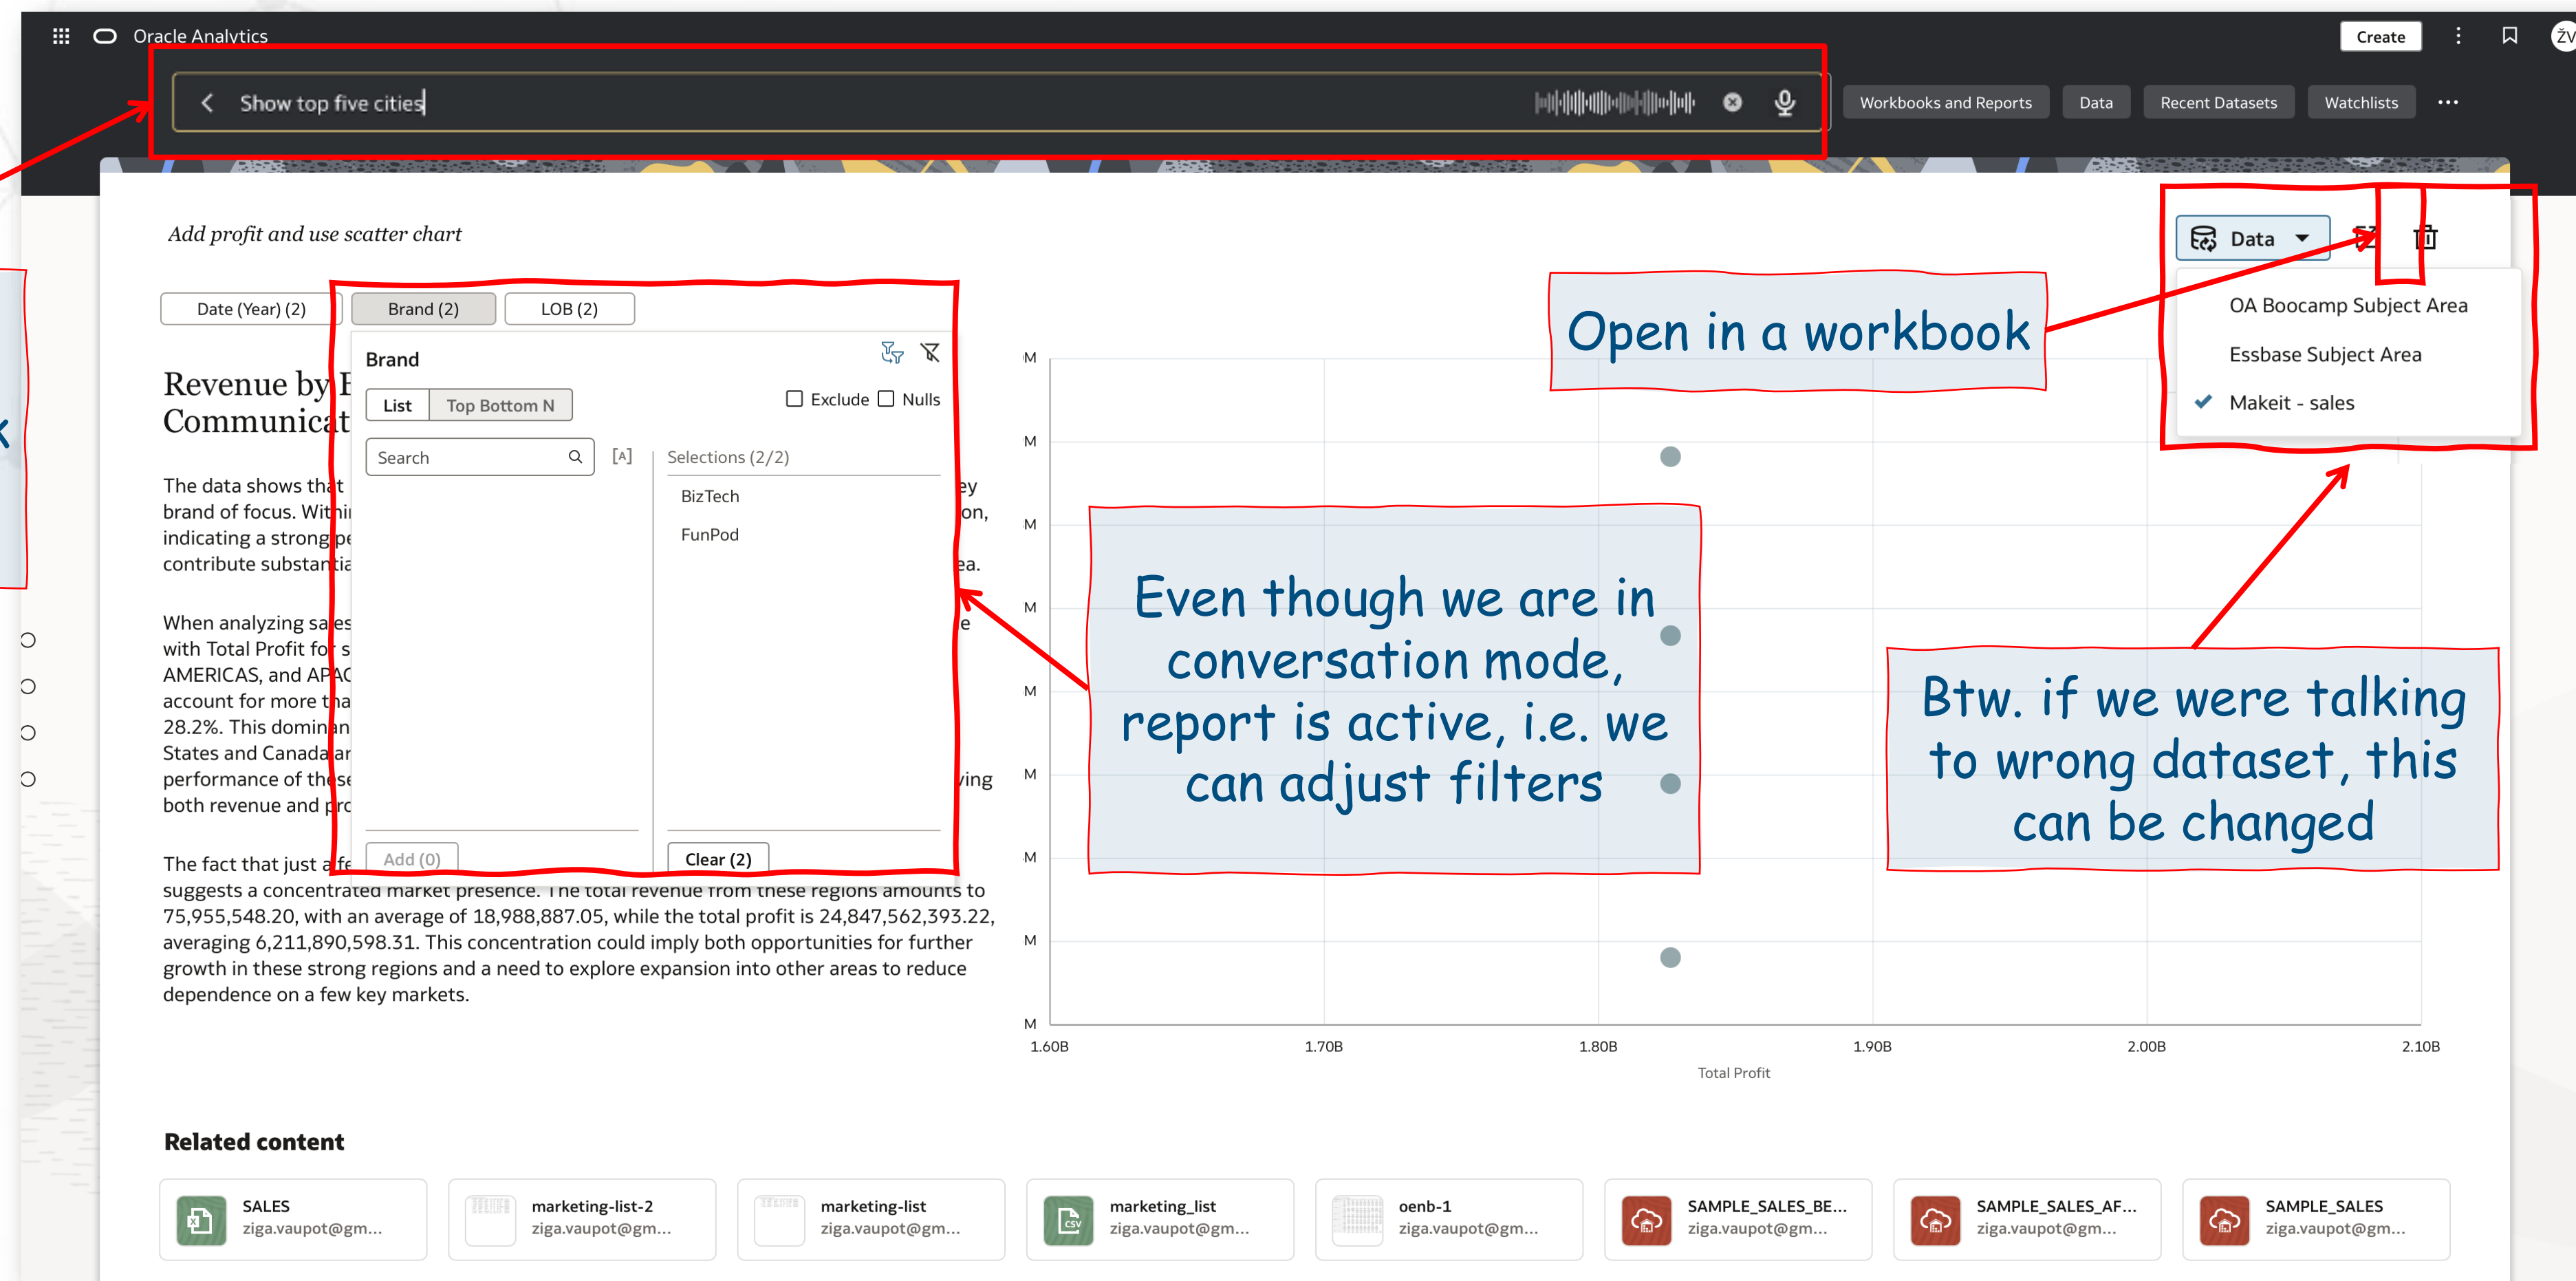


DEMO

Ask BI

AI Assistant & AI Agents

Ask BI-Like AI Assistant embedded in Workbook

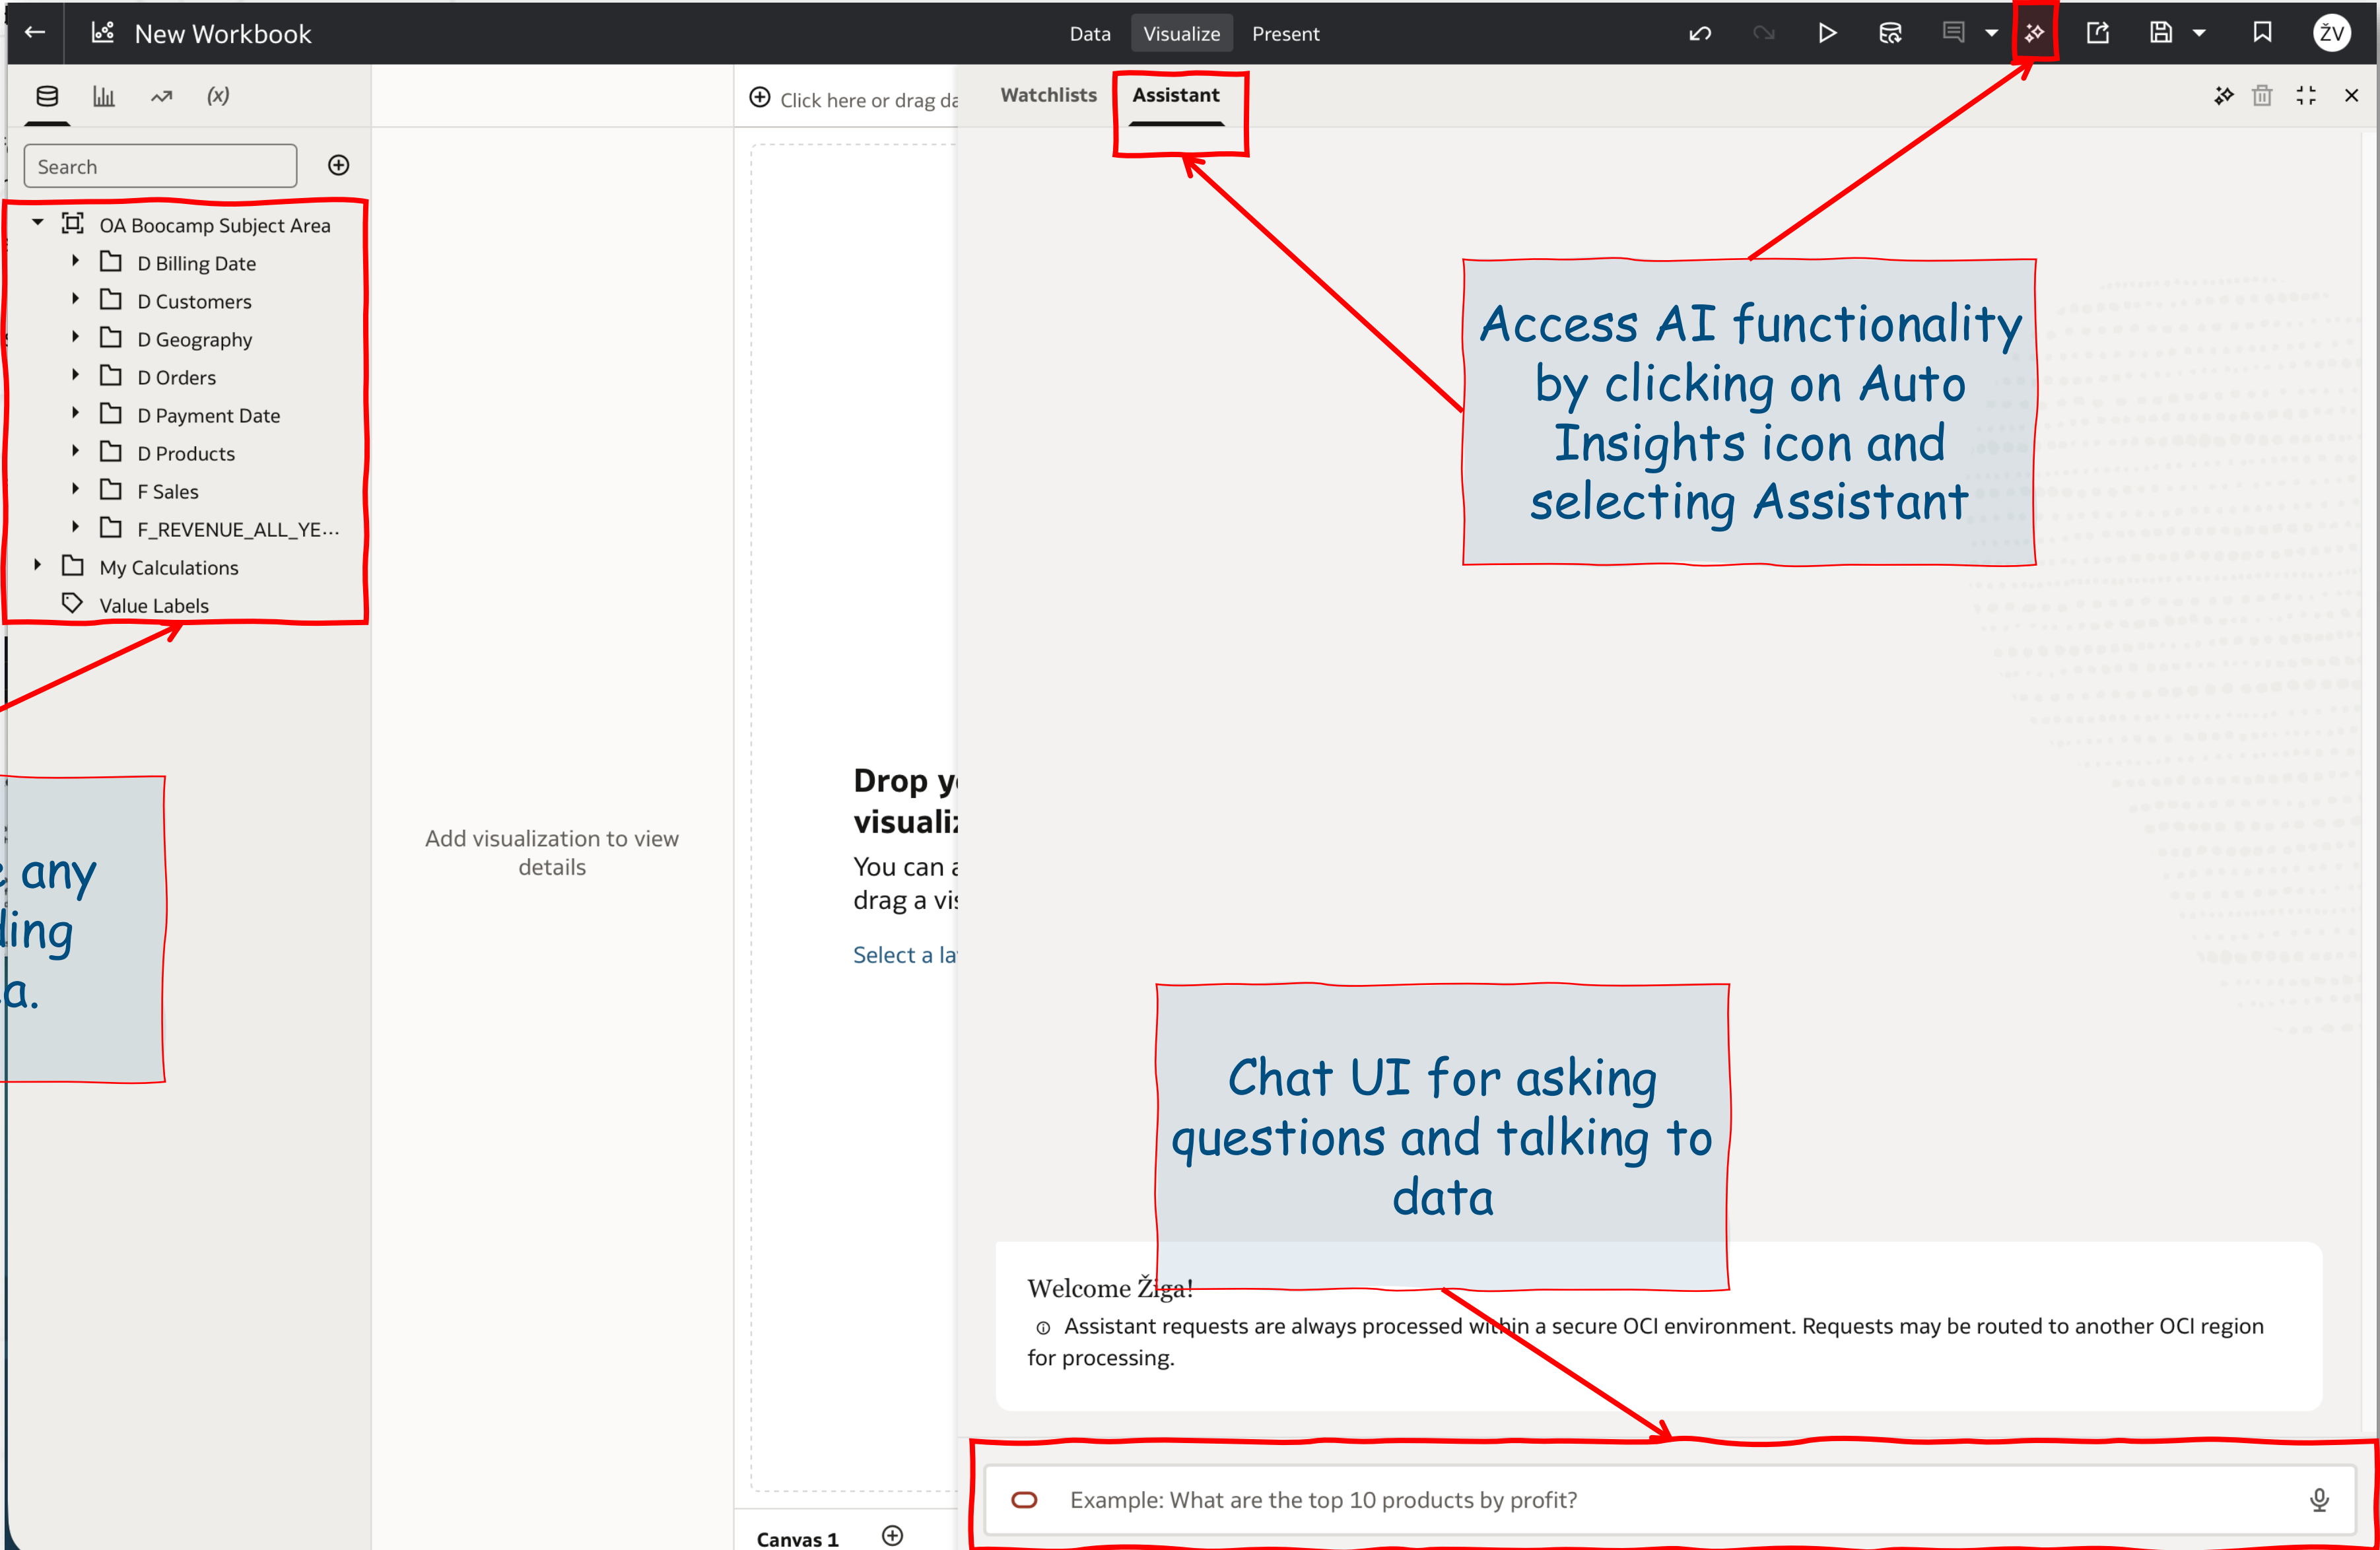

Dataset can be any dataset including Subject Area.

Access AI functionality by clicking on Auto Insights icon and selecting Assistant

Chat UI for asking questions and talking to data

Configuration?

Console

Administration

Q Search in Console, for example type: manage

Management and Administration

Content Management

List content and change ownership.

Issue SQL

Run test queries to debug SQL statements.

Monitor Deliveries

See when reports were sent, which items are pending, and manage yo...

Roles and Permissions

Configure what users see and do through application roles.

Sessions and Query Logs

Analyze SQL queries and logs. Filter SQL queries and logs by user.

Snapshots

Back up, restore, and migrate your system using a snapshot.

Extensions and Enrichments

Data Enrichments

Manage business-specific reference knowledge used to classify datase...

Extensions

Add custom visualization types, or data actions.

Generative AI

Manage large language models (LLMs) to power Oracle Analytics.

Configuration and Settings

Advanced System Settings

Customize system-level options and override defaults. Change the...

Content-Sharing Platforms

Configure the platforms where users are allowed to share content.

Database Connections

Create and manage database connections for semantic models...

Mail Settings

Connect to your email server.

Remote Data Connectivity

Register one or more Data Gateway agents to connect to remote on-...

Safe Domains

Authorize and manage access to domains that are safe to use with...

Currently, only internal Oracle Analytics GenAI service is available.
Expection is that other LLMs would be enabled .

← Console

Generative AI

Manage large language models (LLMs) to power Oracle Analytics.

Registered Gen AI Services

Name	Gen AI Service	Model	Status	Feature Usage
Oracle Analytics	OCI Gen AI	Default	Active	Workbook Assistant, Catalog Descriptions, Dataset Assistant, Language Narratives


Oracle Analytics AI Assistant Features

Feature	Description	Gen AI Service	Status	Monthly Requests
Workbook Assistant	Use generative AI assistant with workbooks to create insights and visualizations	Oracle Analytics	Active	55
Catalog Descriptions	Generate meaningful descriptions for catalog datasets	Oracle Analytics	Active	0
Dataset Assistant	Utilize Gen AI to assist dataset related functions	Oracle Analytics	Active	0
Language Narratives	Generate canvas summaries and descriptions of canvas visualizations	Oracle Analytics	Active	0




Using AI Assistant

Vizualize (Edit) Mode

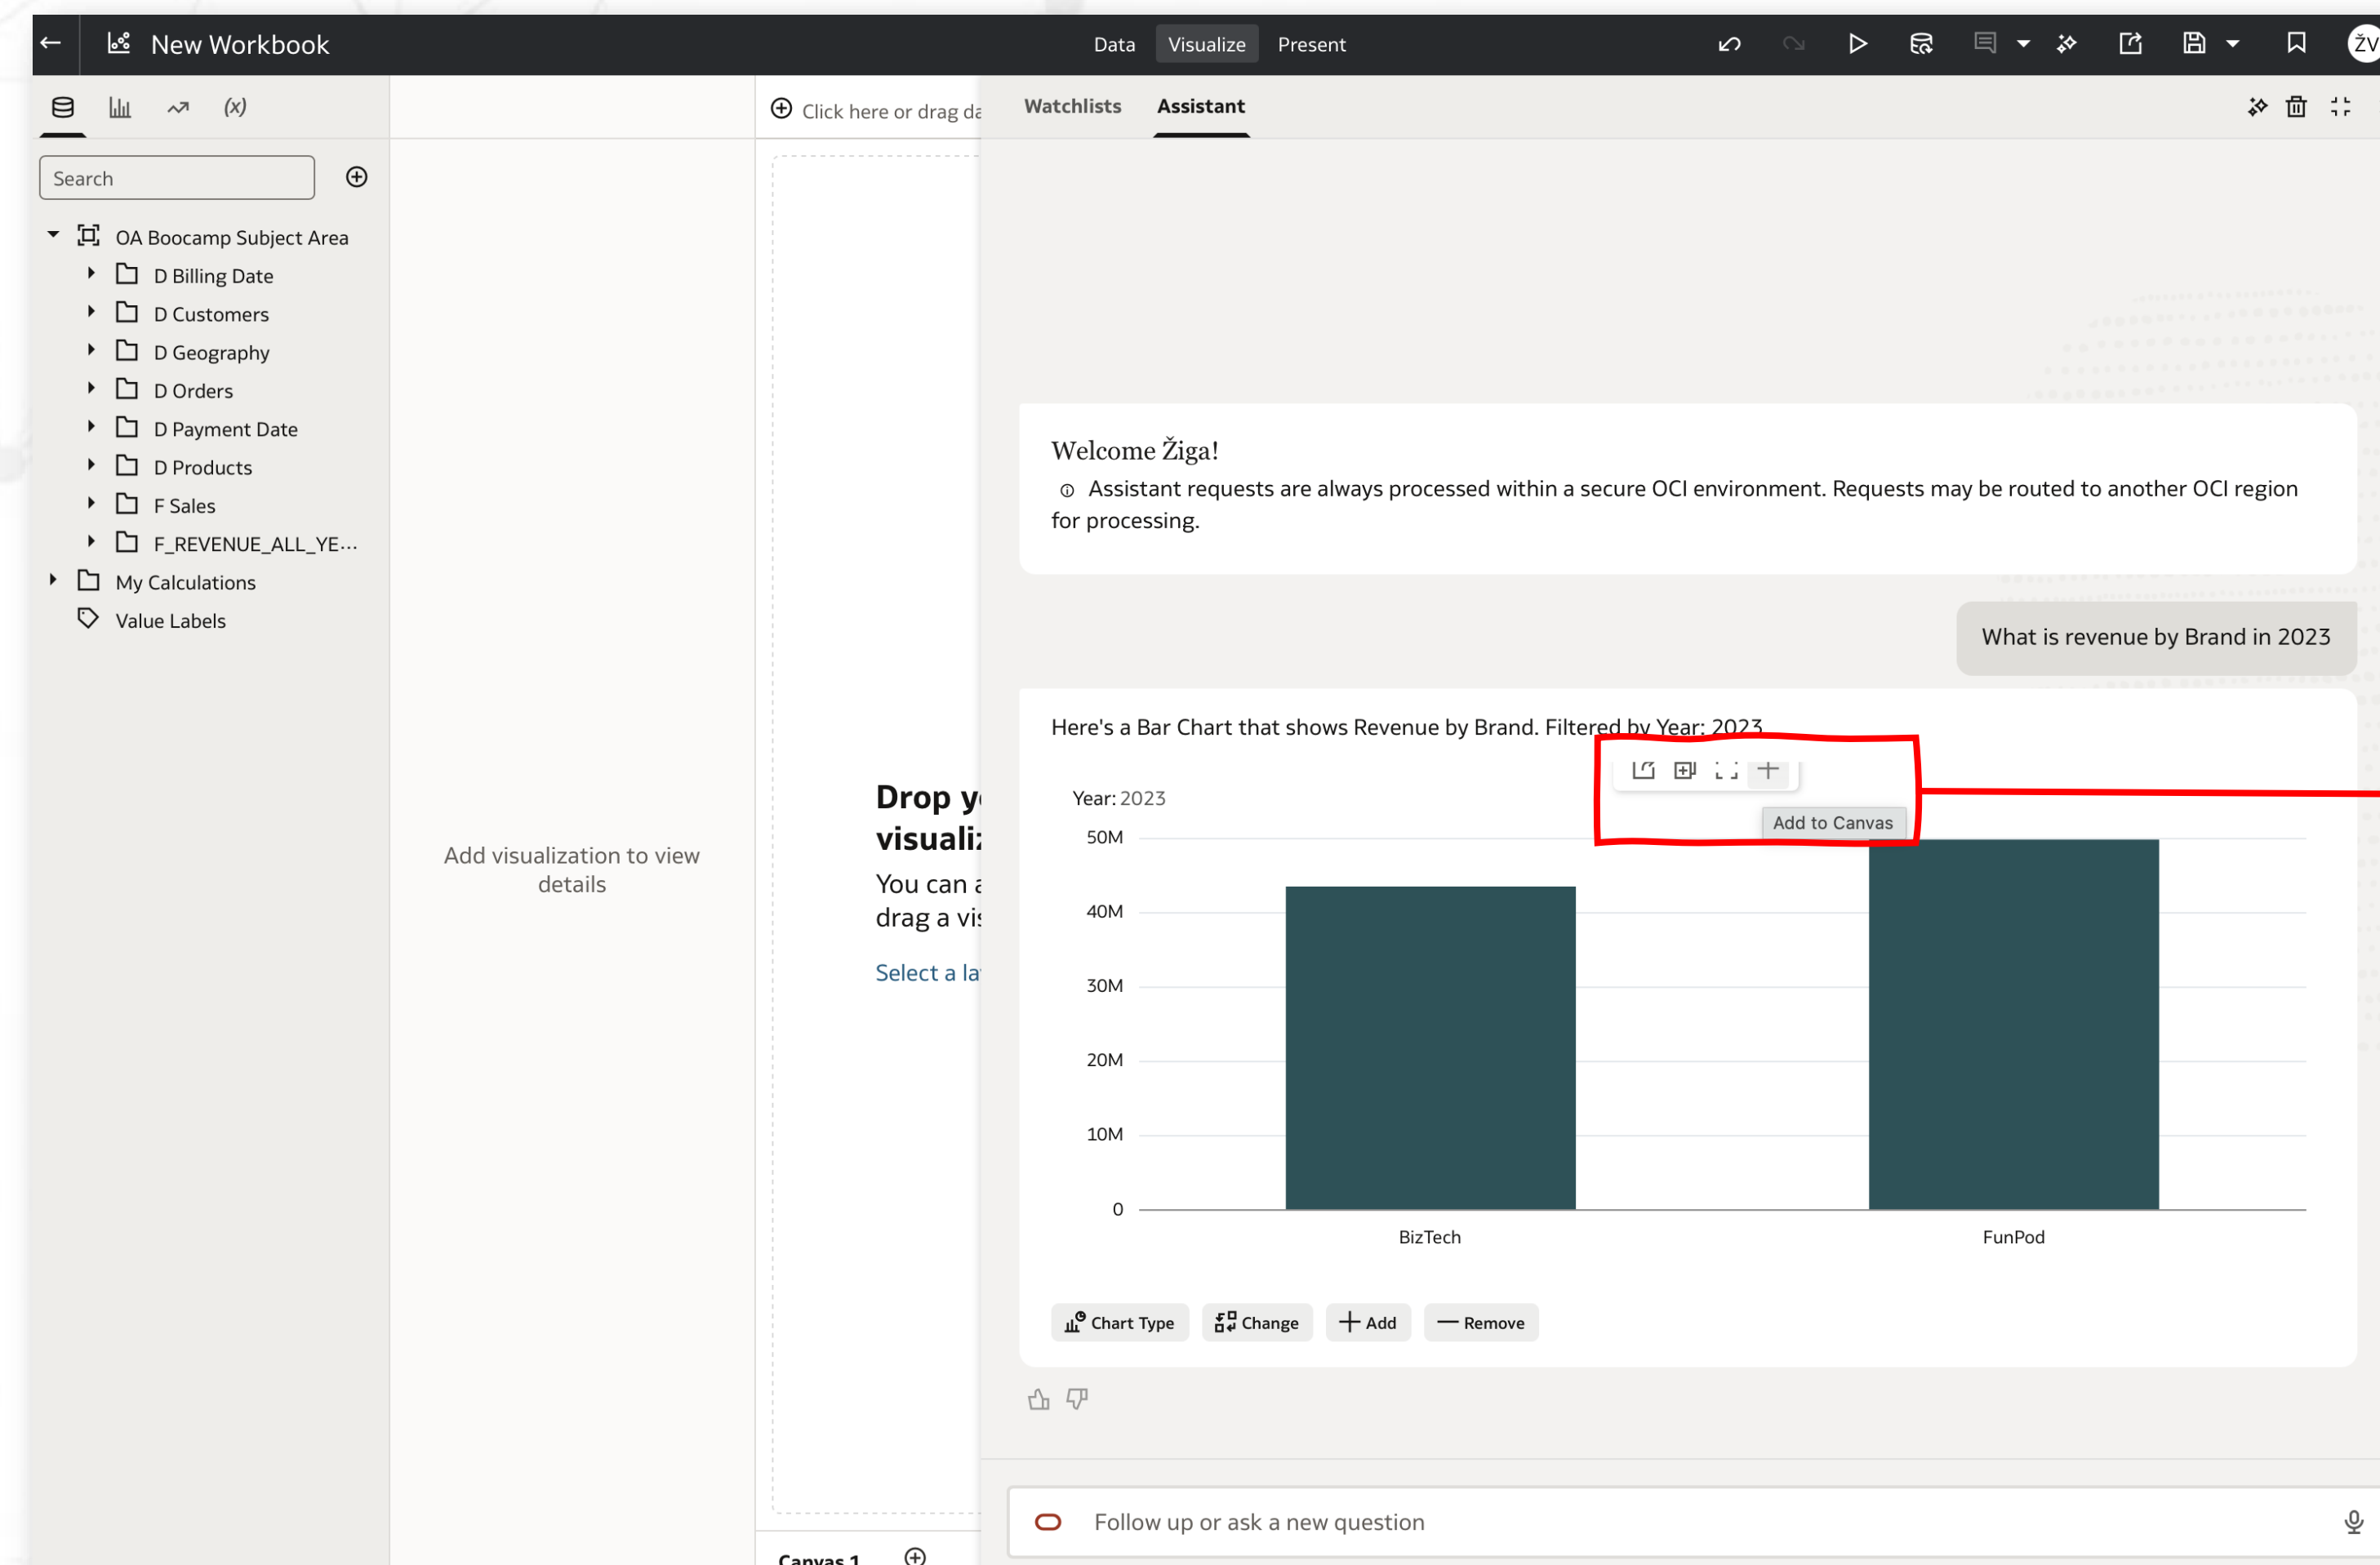


Any visualization from AI Assistant can be inserted to any canvas in a workbook

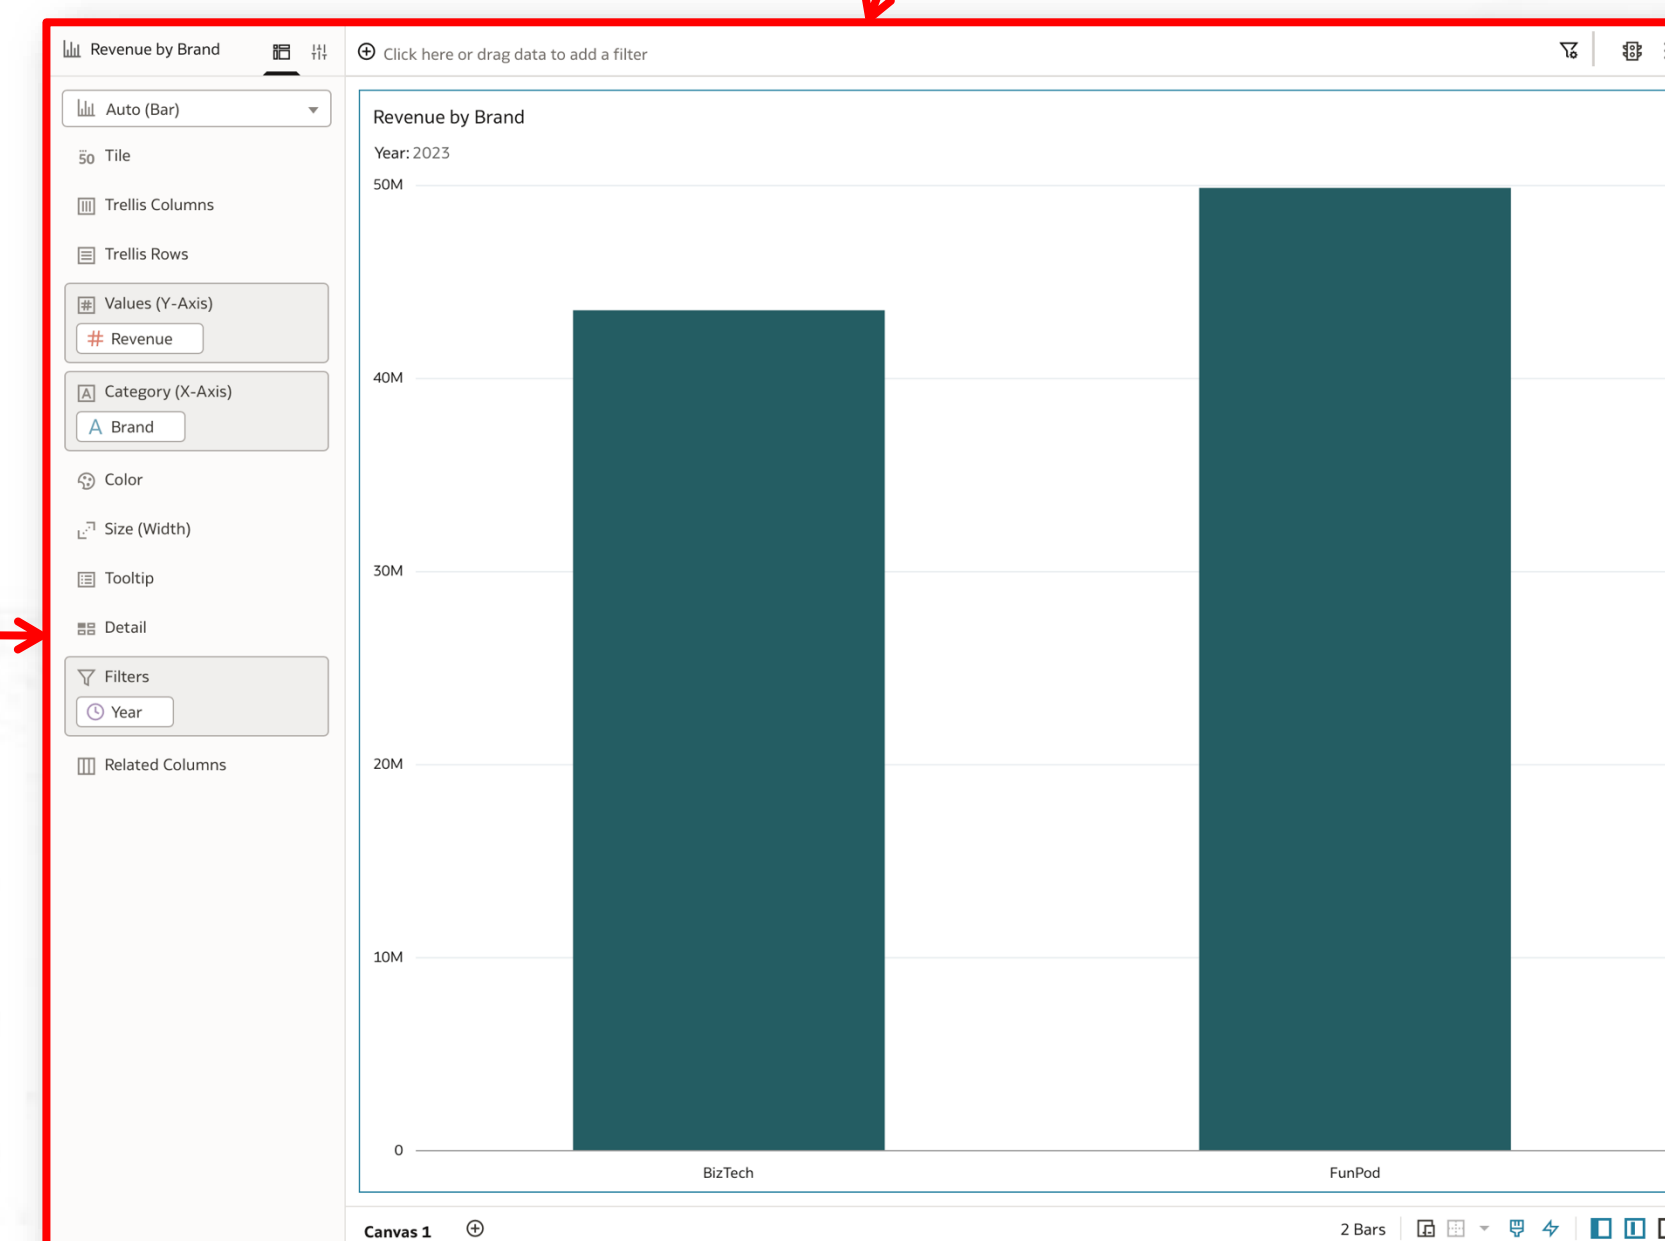


Using AI Assistant

Vizualize (Edit) Mode

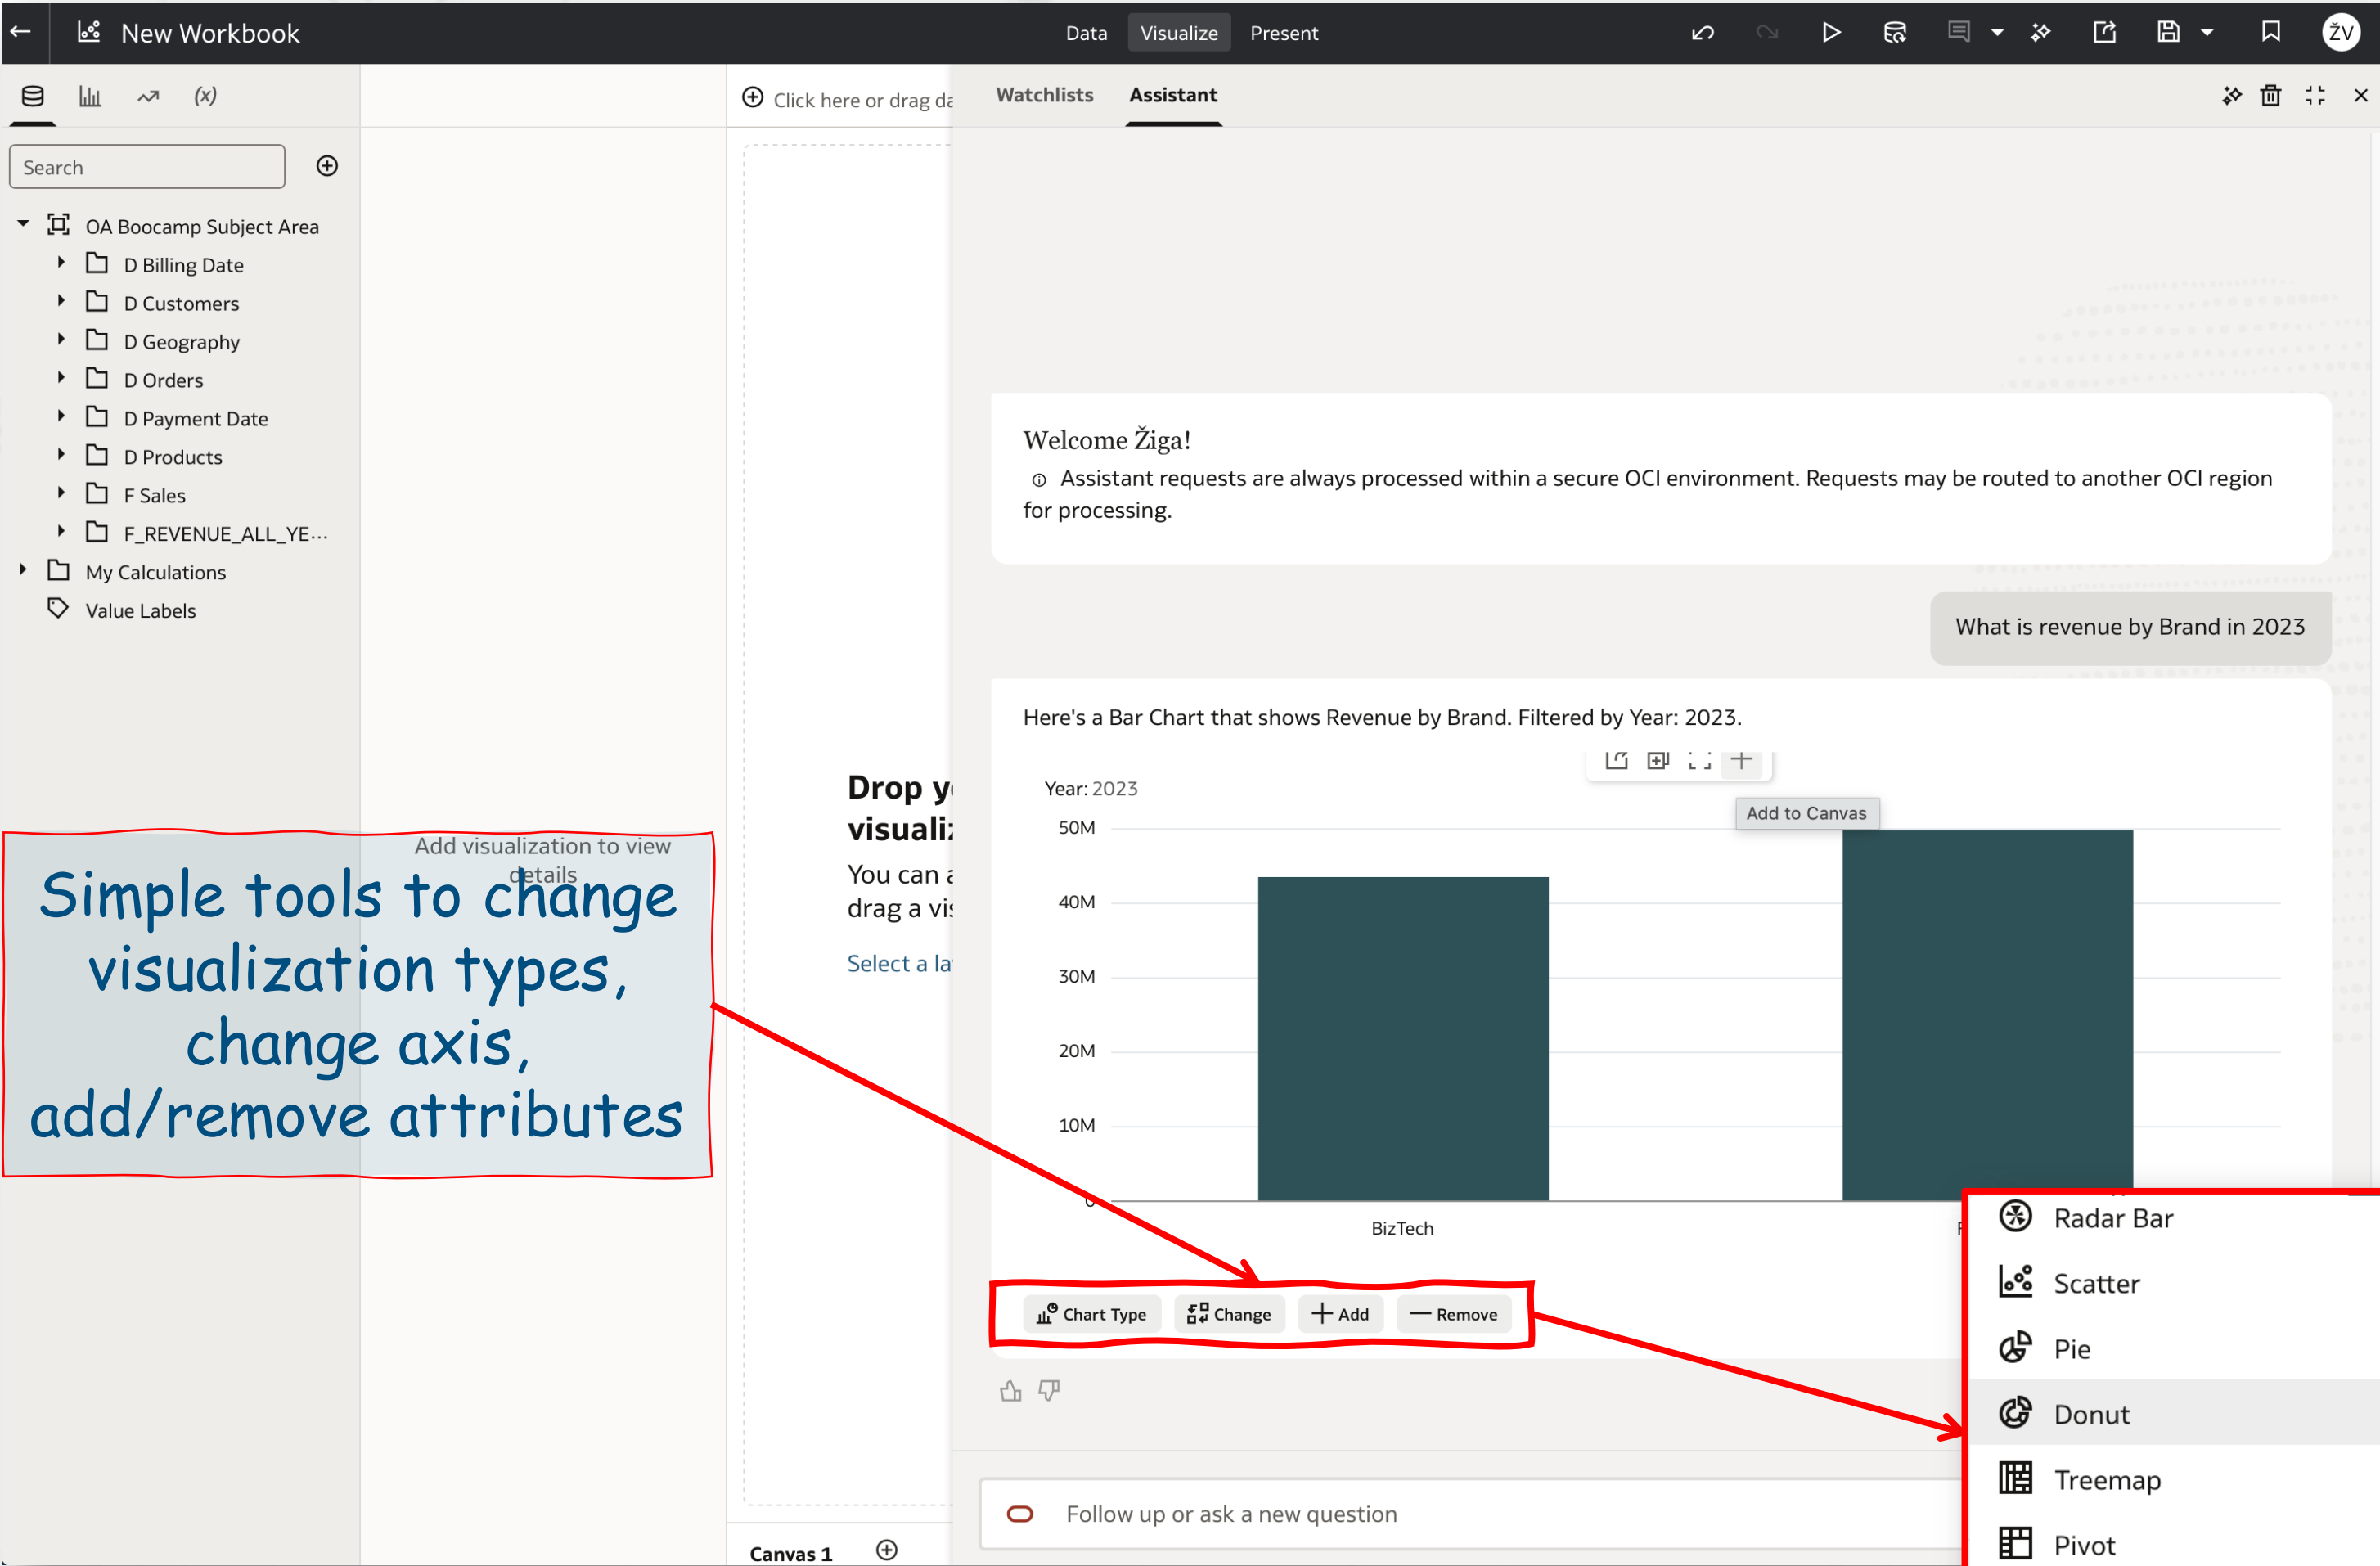





Simple tools to change visualization types, change axis, add/remove attributes

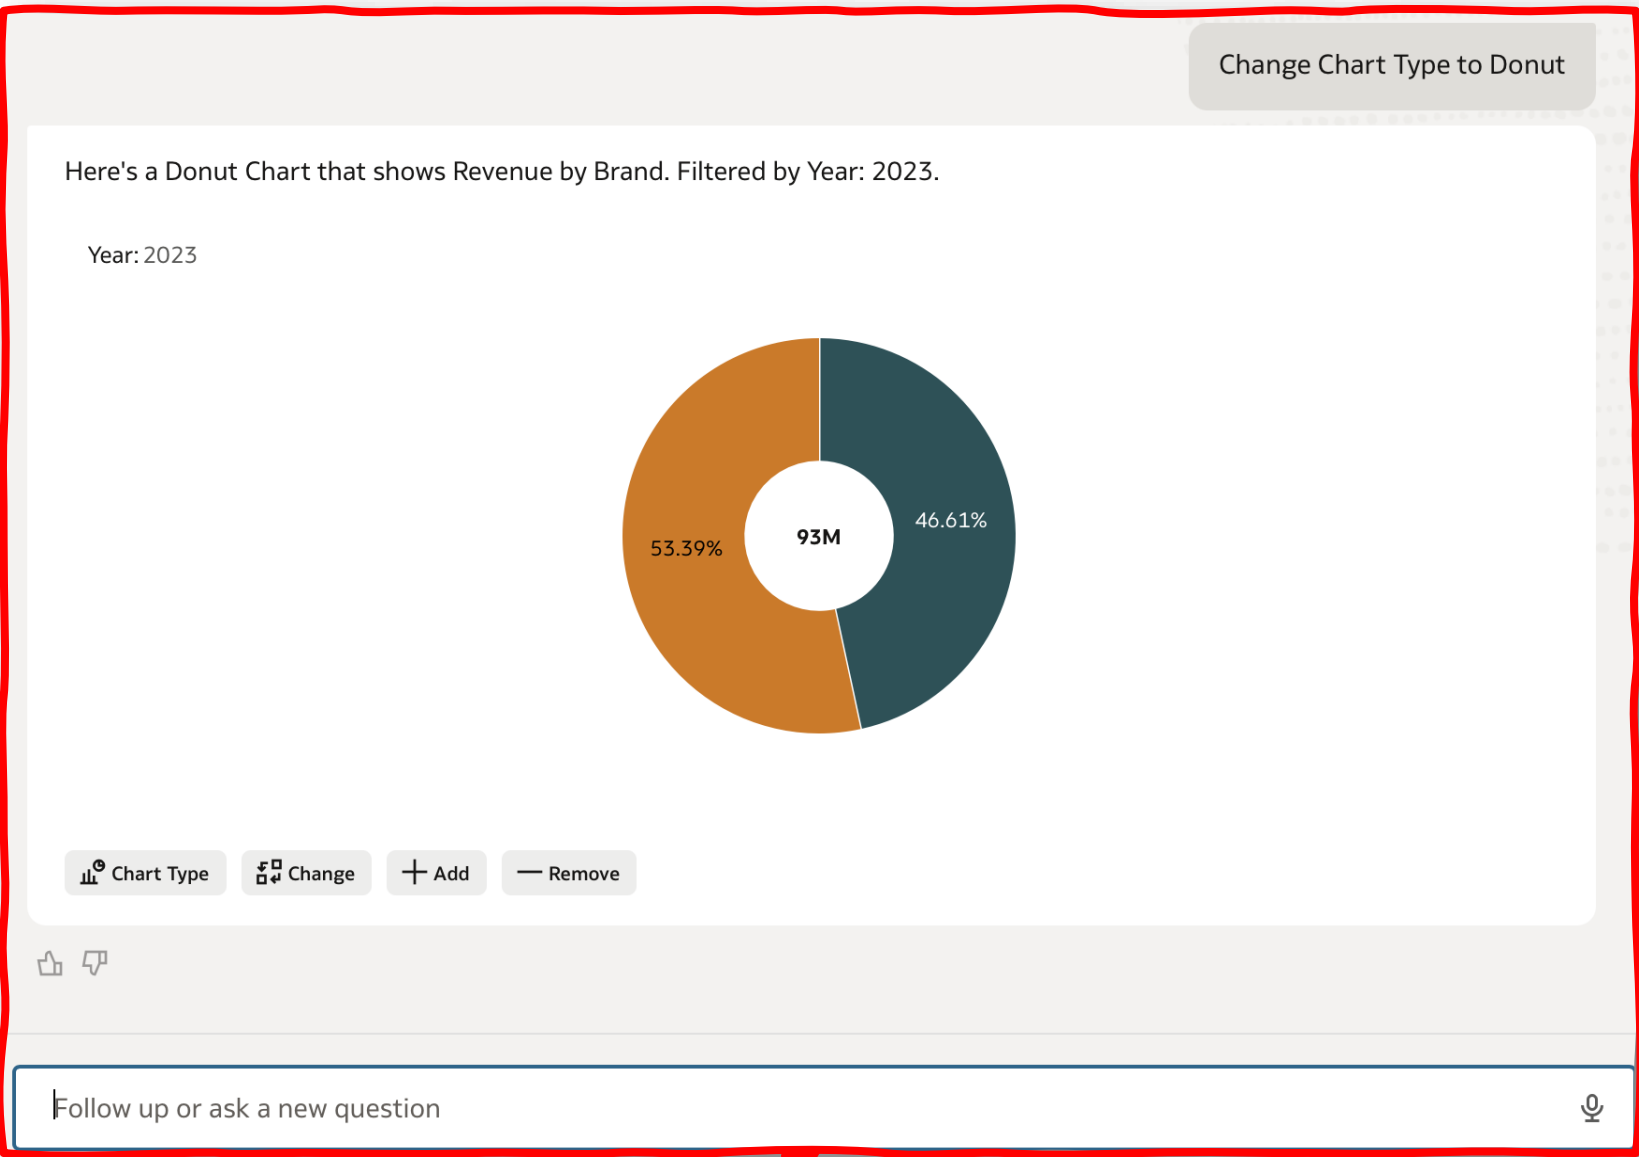

- Radar Bar
 - Scatter
 - Pie
 - Donut
 - Treemap
 - Pivot
- Change Chart Type to <chart>




Using AI Assistant Vizualize (Edit) Mode

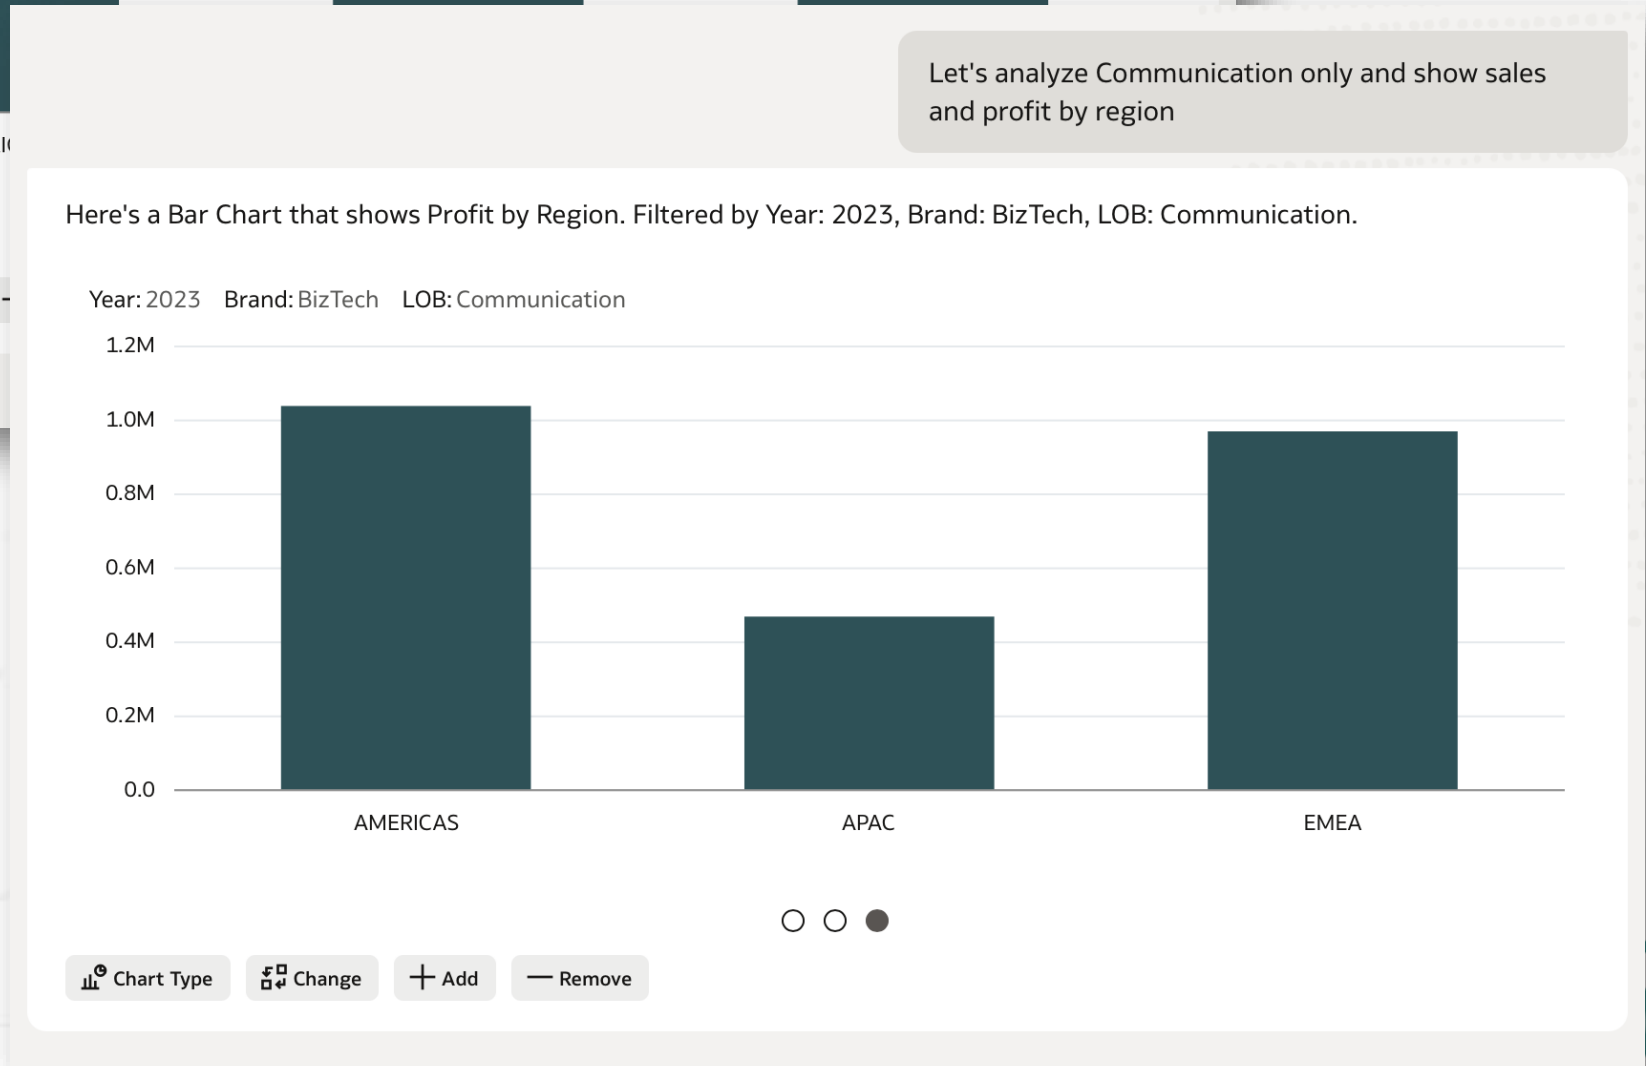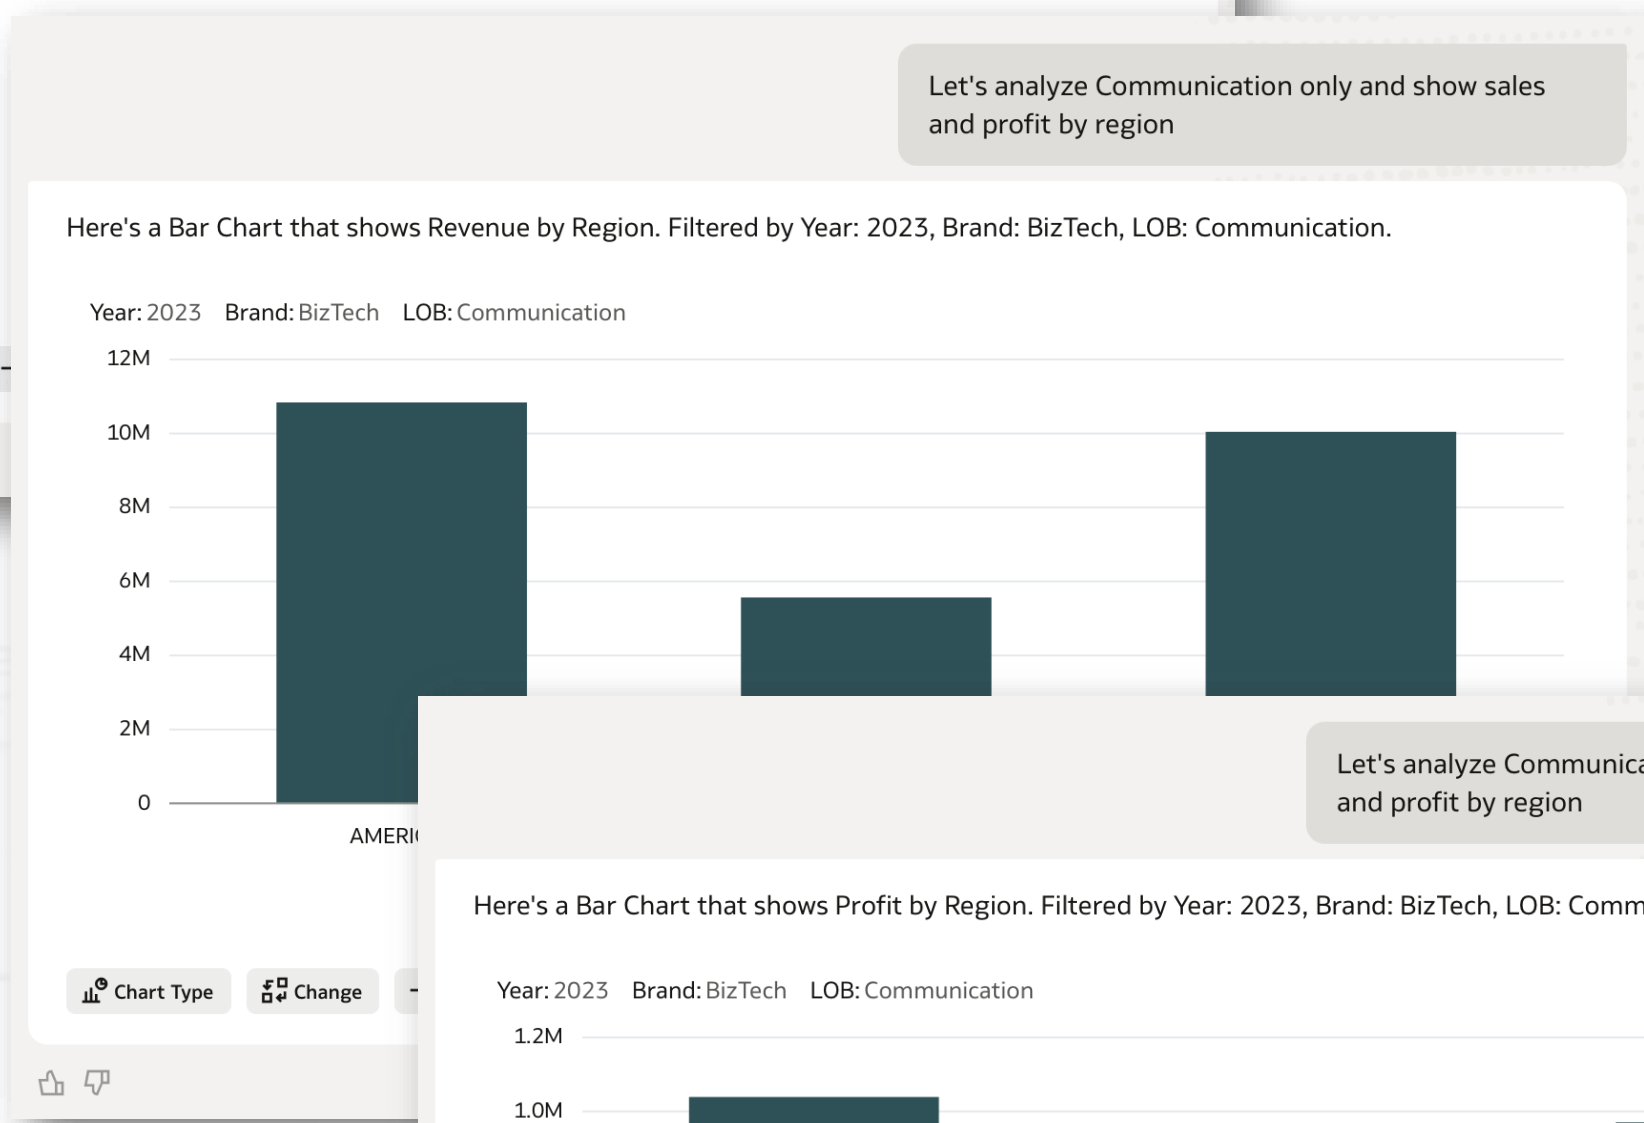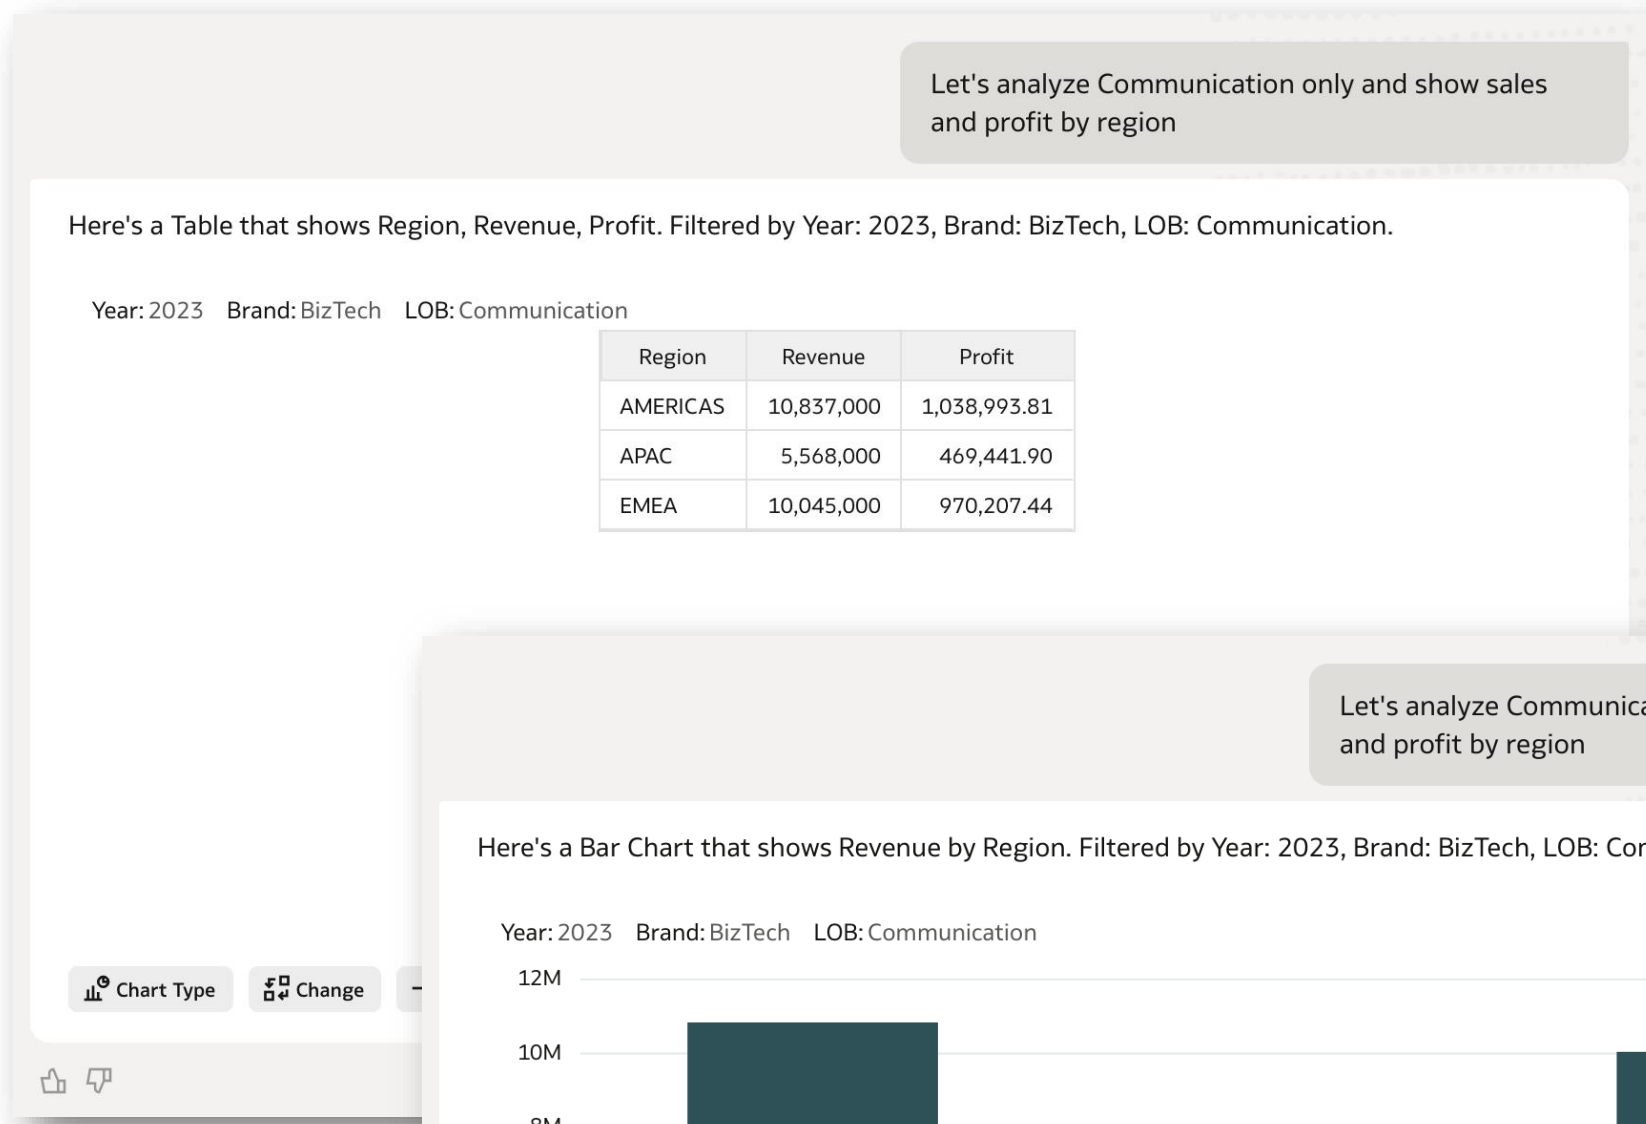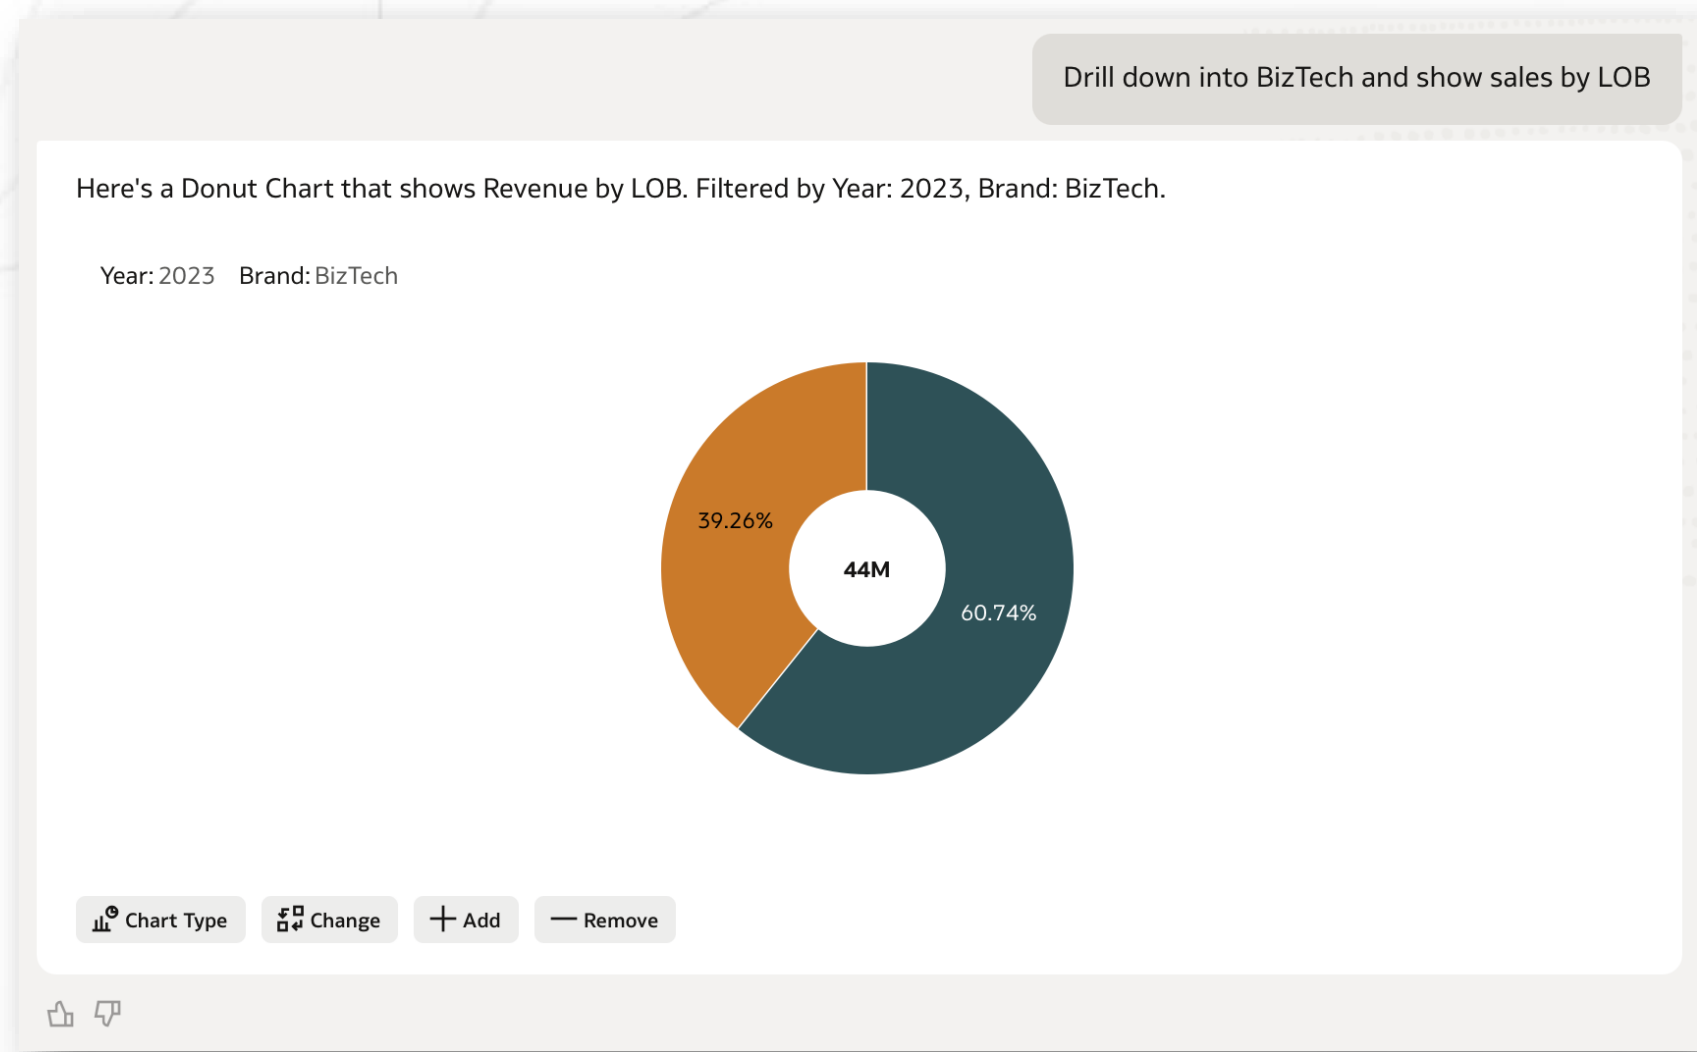

Using AI Assistant

Present Mode

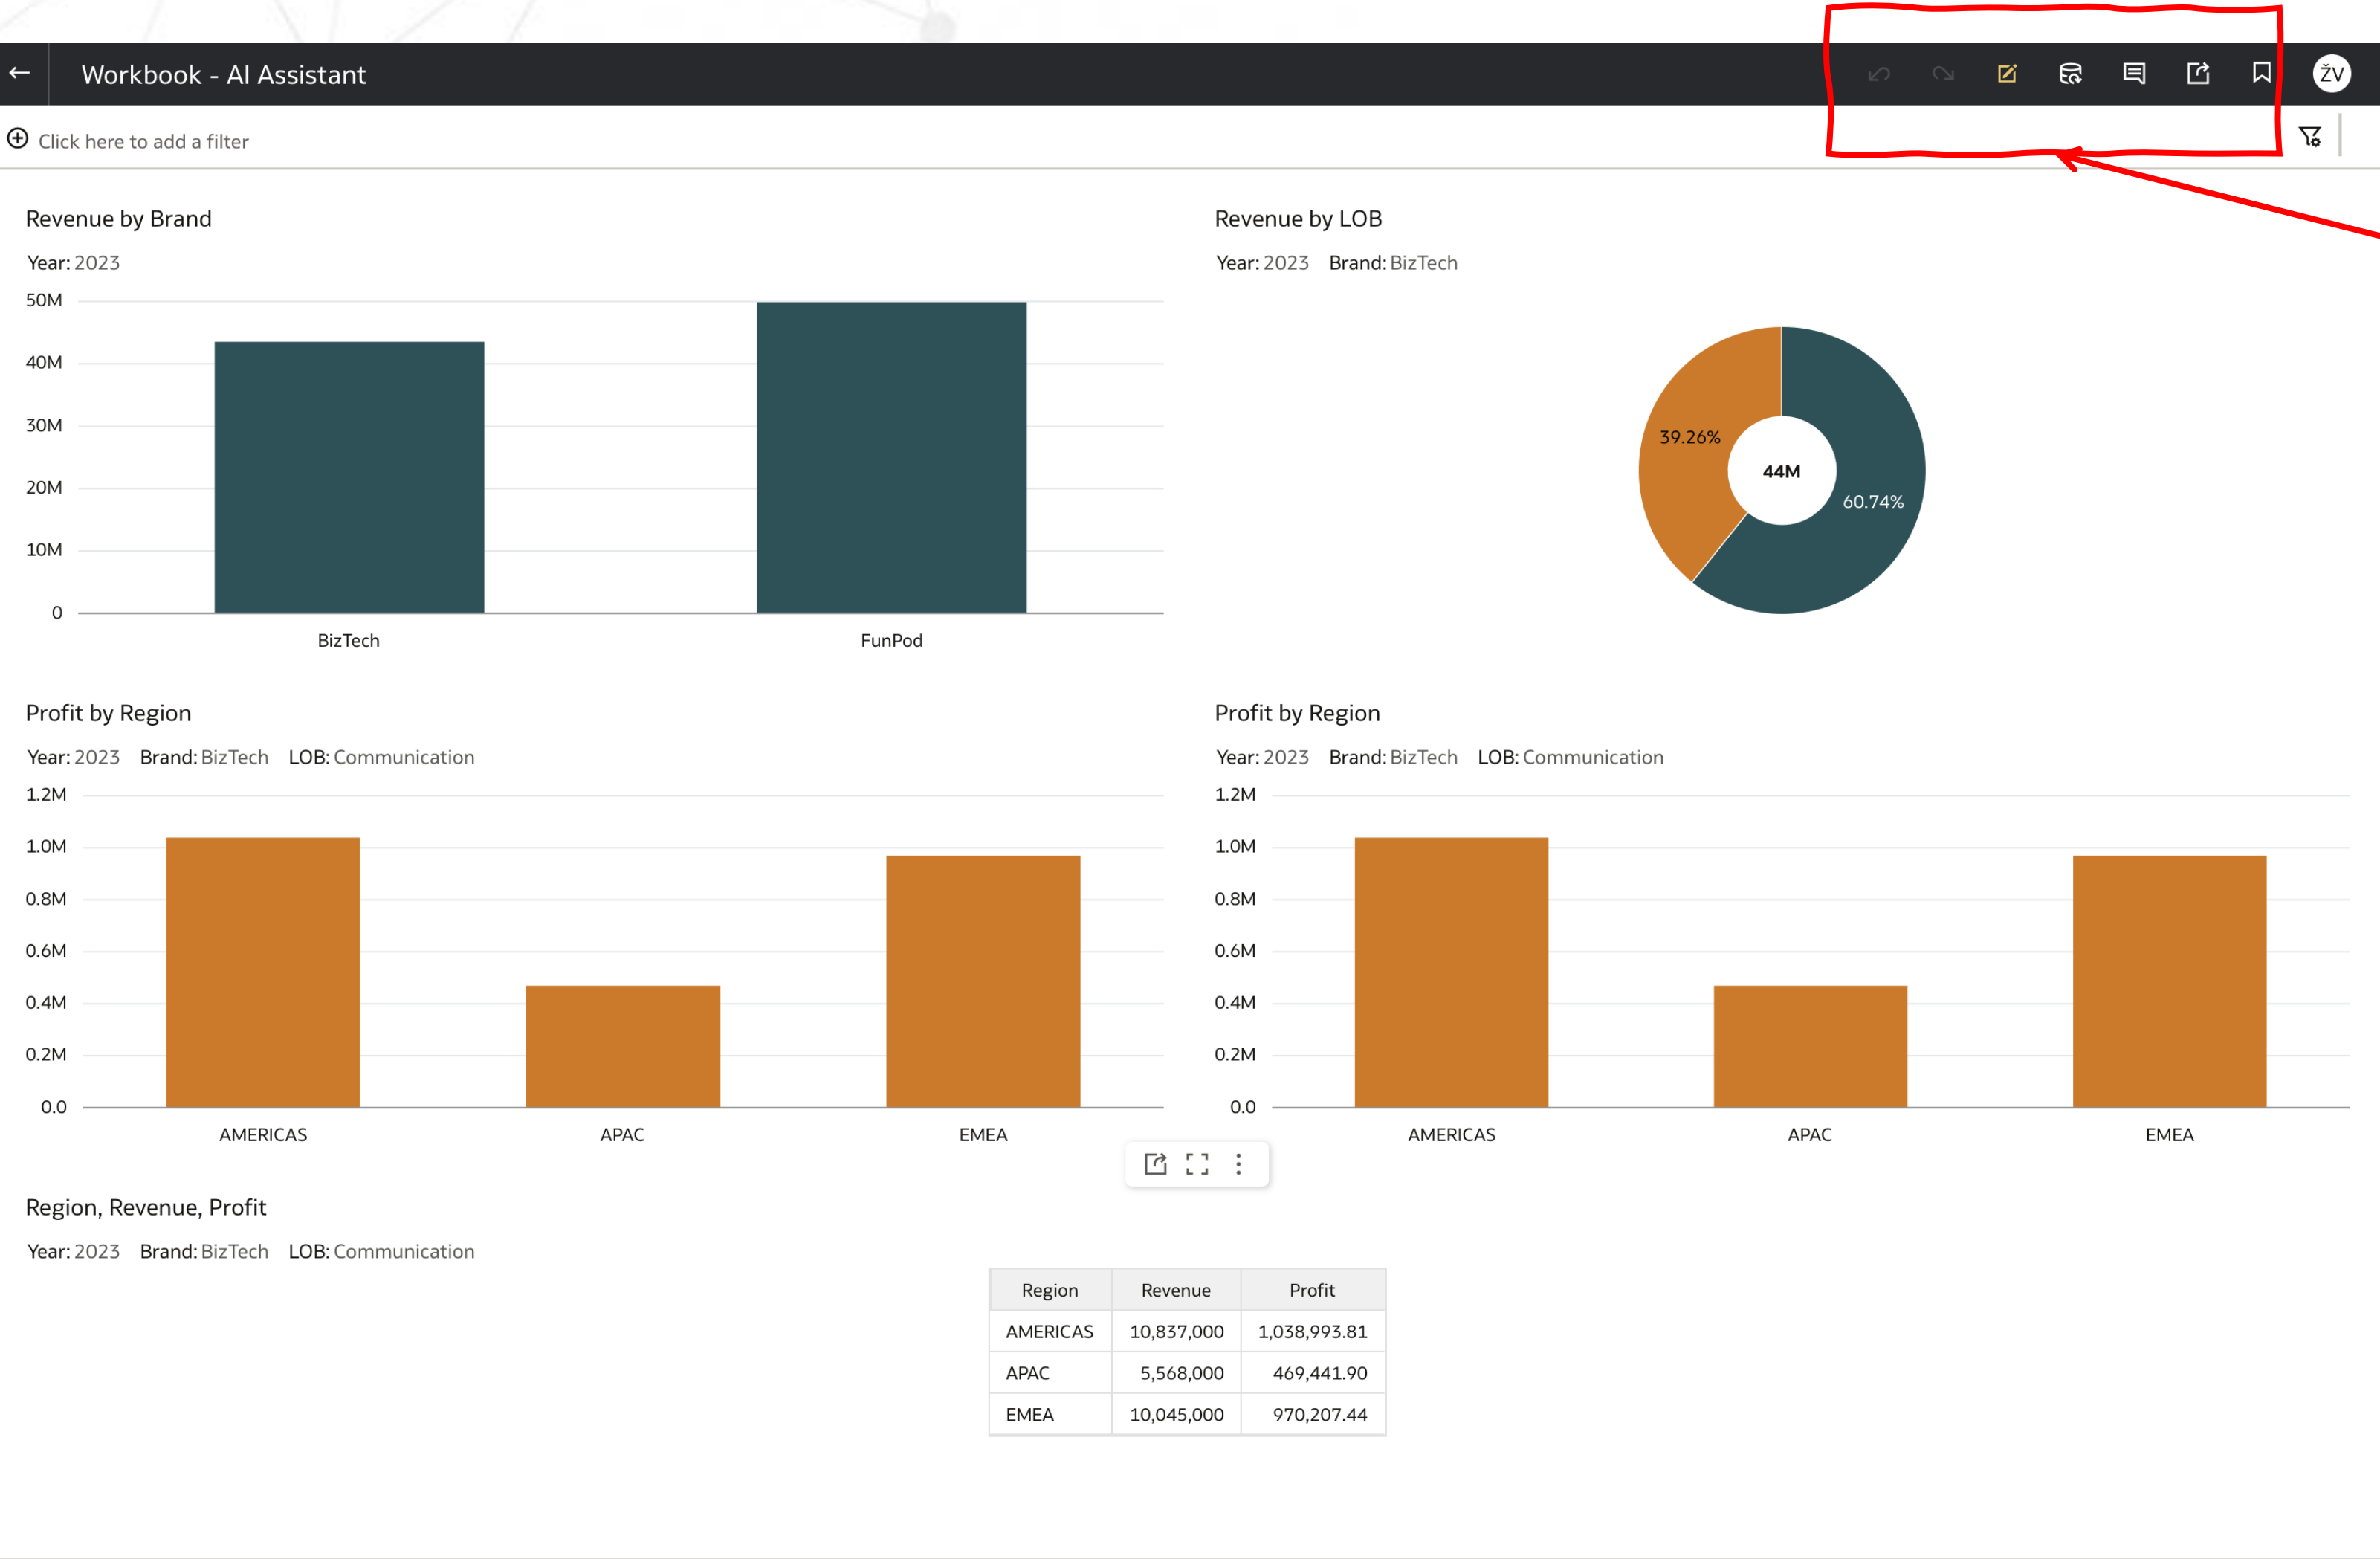

AI Assistant is not enabled by default in Present Mode!



Using AI Assistant

Present Mode

Switch to Present first.

Workbook - AI Assistant

DataVisualizePresent

WorkbookActive Canvas

Filter Actions

☒ Filter Selections

☒ Add Filters

☒ Remove Filters

☒ Disable Filters

☒ Filter Menu

Visualization Actions

Visualization Toolbar

☐ Sort

☐ Show Assignments

☐ Change Visualization Type

☒ Maximize

☒ Map Actions

☐ Add to Watchlist

☒ Toolbar Menu

☒ Export

Visualization Menu

☒ Keep/Remove Selections

☒ Sort by

☒ Drill

☒ Zoom Chart

☒ Data Action

☒ Copy Data

☒ Export

☒ Explain Visualization

Data Actions

☐ Show Accessible Only

Insights Panel

Watchlists

Workbook Assistant

Revenue by Brand

Year: 2023

50M

40M

30M

20M

10M

0

BizTech

FunPod

Revenue by LOB

Year: 2023Brand: BizTech

39.26%

44M

60.74%

Profit by Region

Year: 2023Brand: BizTechLOB: Communication

1.2M

1.0M

0.8M

0.6M

0.4M

0.2M

0.0

AMERICAS

APAC

EMEA

Profit by Region

Year: 2023Brand: BizTechLOB: Communication

1.2M

1.0M

0.8M

0.6M

0.4M

0.2M

0.0

AMERICAS

APAC

EMEA

Region, Revenue, Profit

Year: 2023Brand: BizTechLOB: Communication

Region	Revenue	Profit
AMERICAS	10,837,000	1,038,993.81
APAC	5,568,000	469,441.90
EMEA	10,045,000	970,207.44


Canvas 1

Canvas 1

Canvases are locked for rename, reorder and hide; visualizations are locked for resizing, dragging and dropping in Auto mode

Switch Insights Panel ON

Using AI Assistant Present Mode

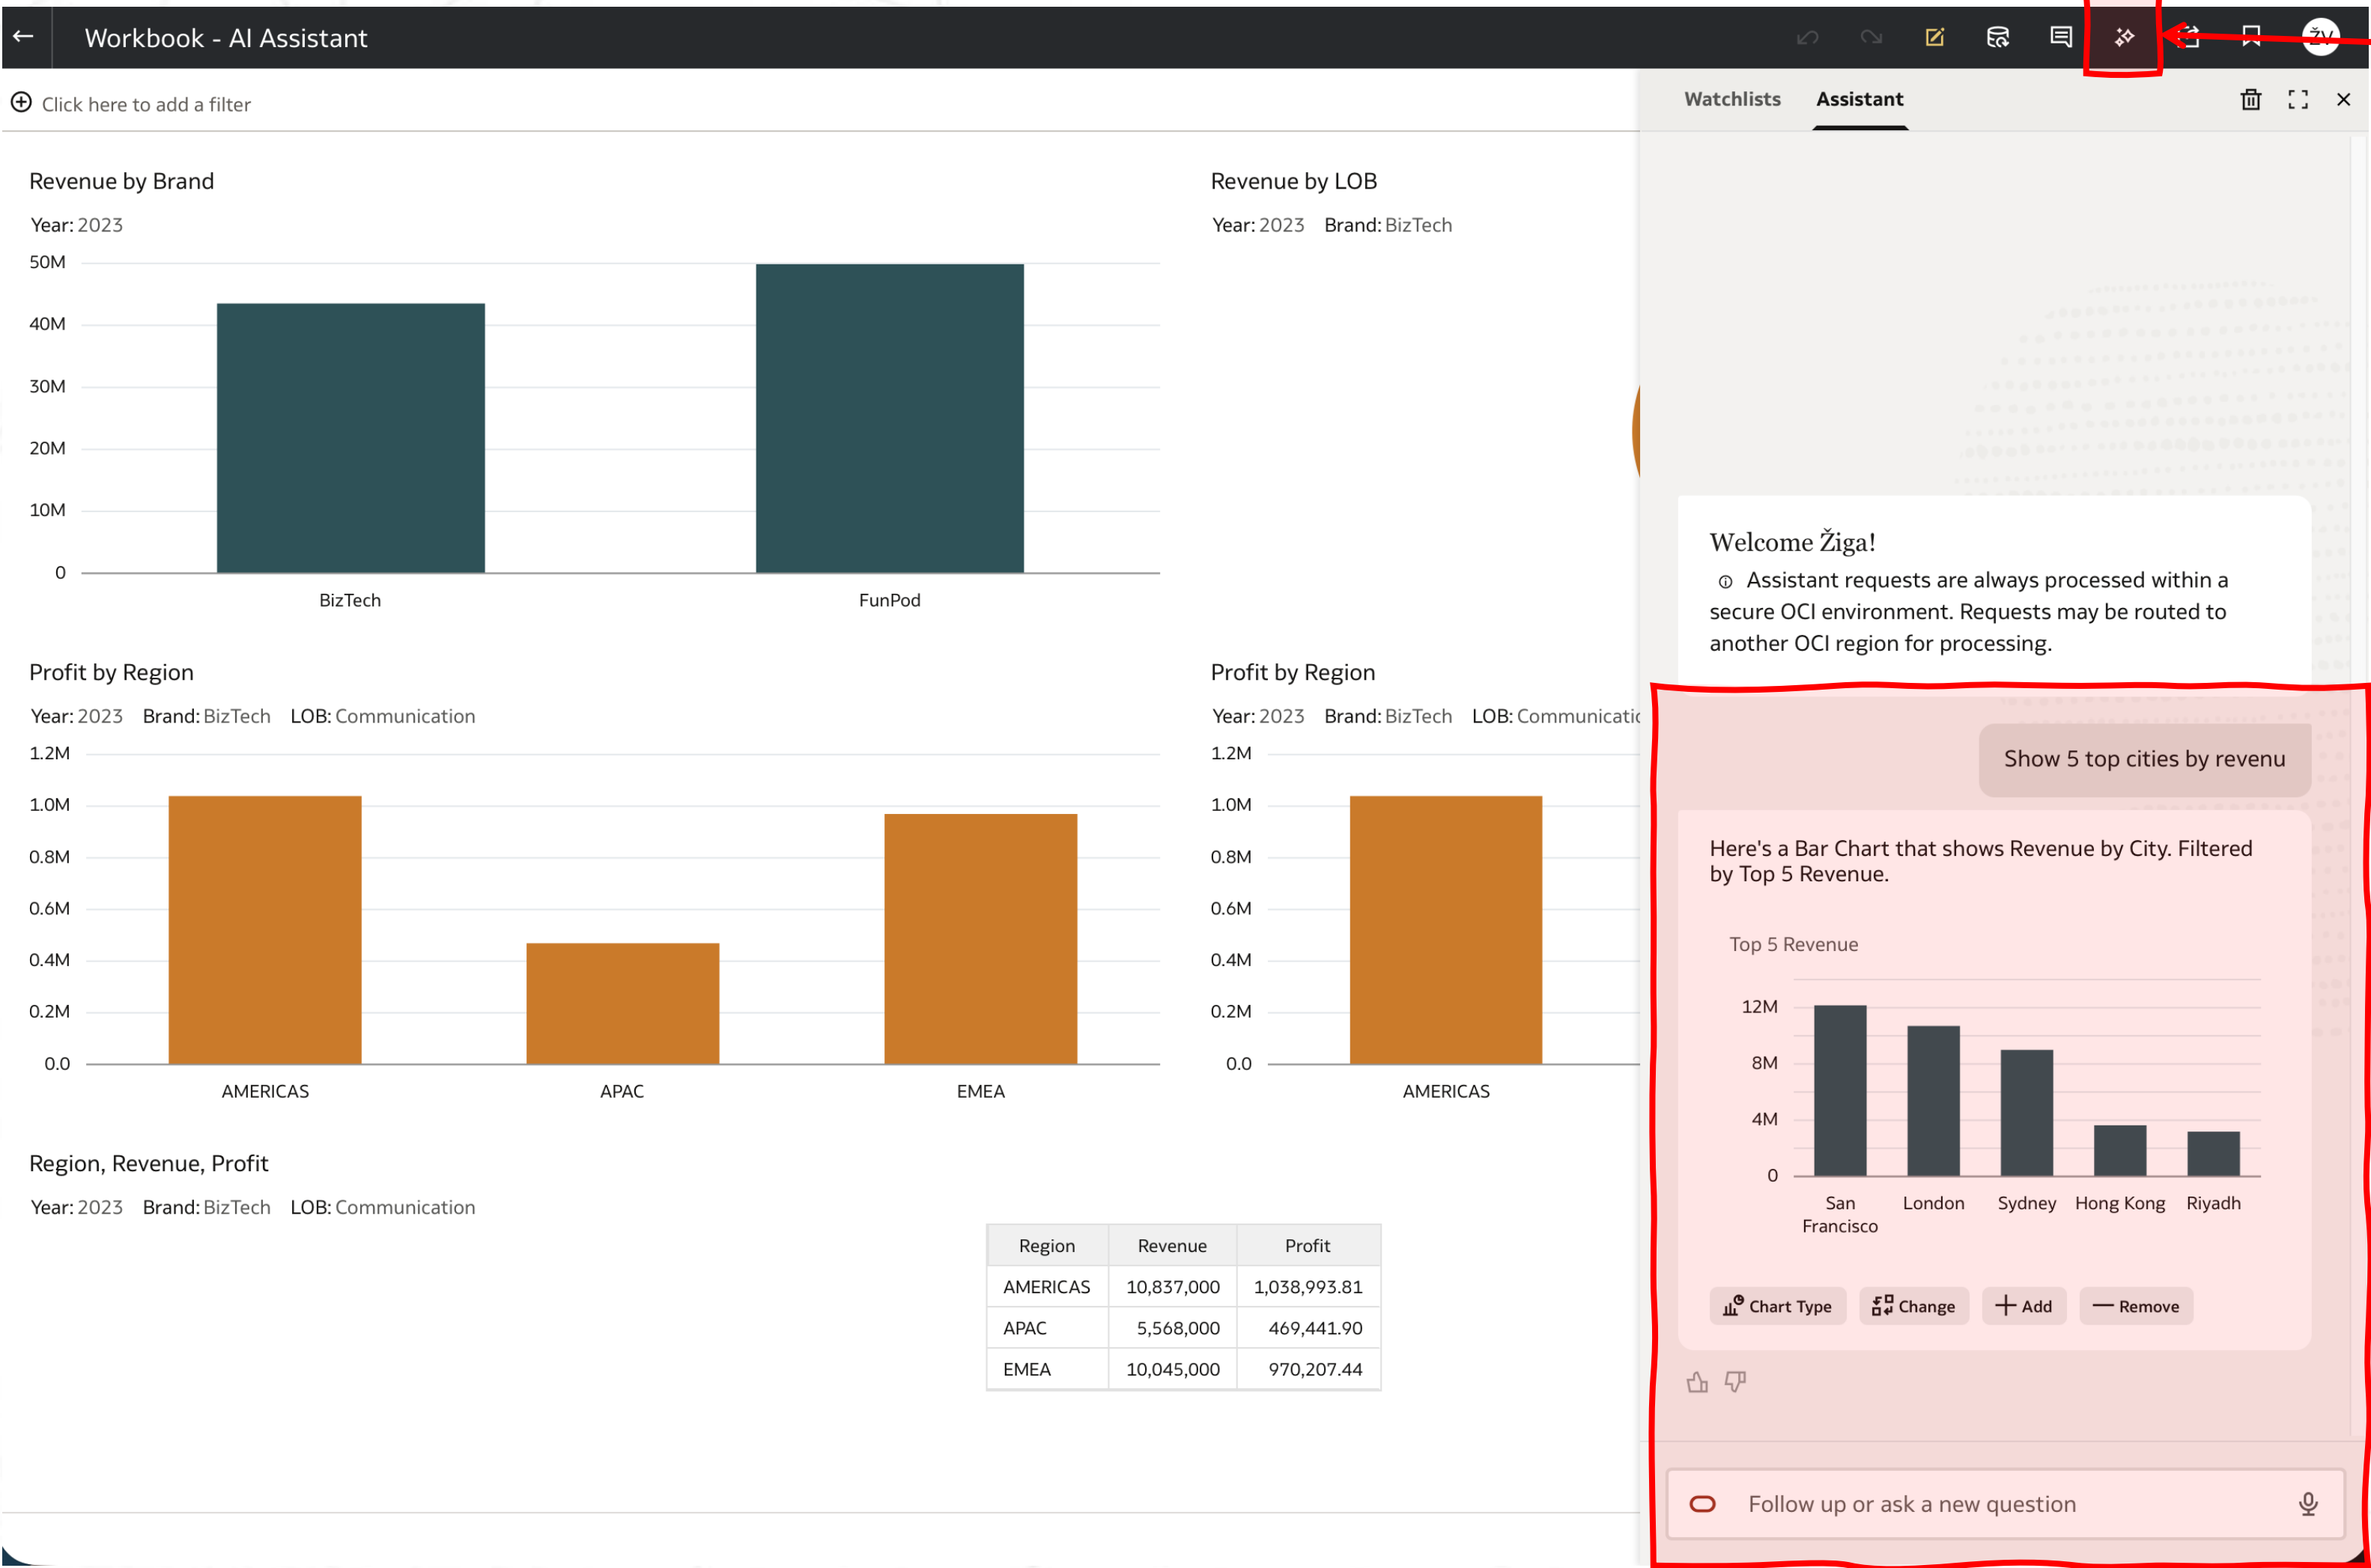


Auto Insights icon is enabled now.

AI Assistant is active now, allowing all users to access it, even without Edit privileges.






AI Agents

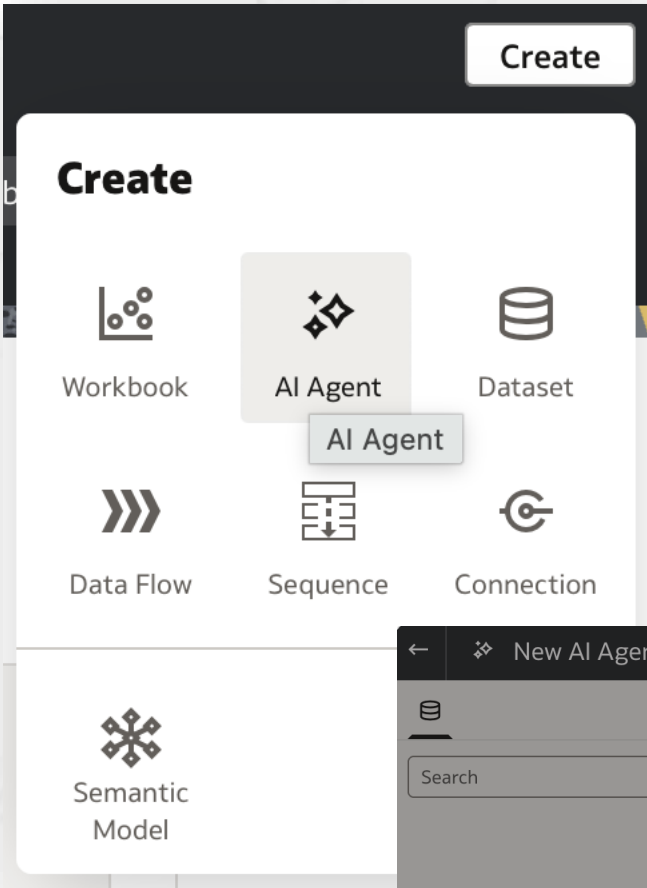

AI Agents are similar to AI Assistants in terms of functionality, but unlike AI Assistants, they exist as standalone objects rather than being embedded within Workbooks.

A key differentiator between AI Agents and AI Assistants is that users can provide instructions and additional documents to supply the agent with extra context.

First we Add Data to AI Agent.
It can be any dataset, even though Oracle recommends to use Local Subject Areas instead of Subject Areas.

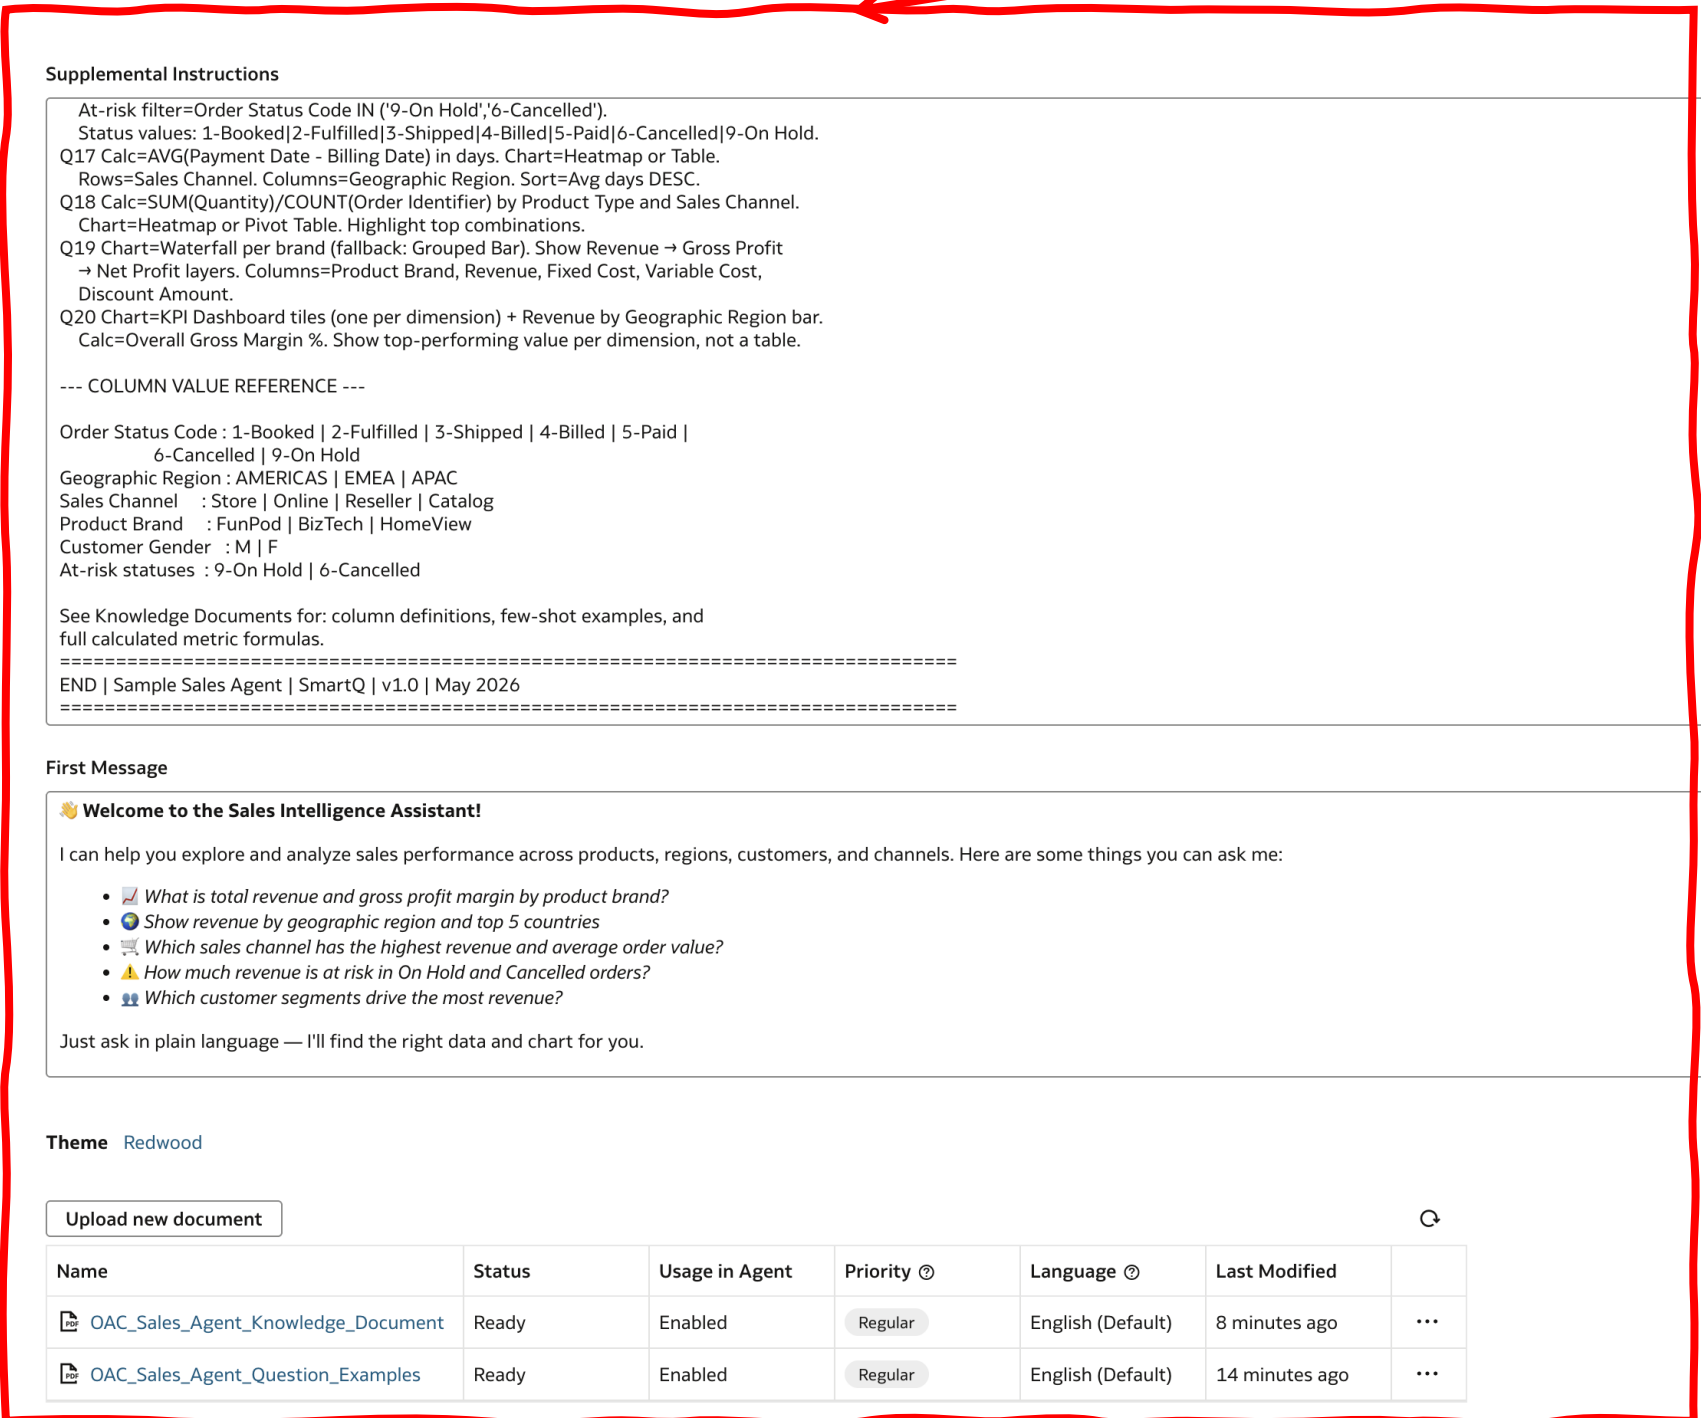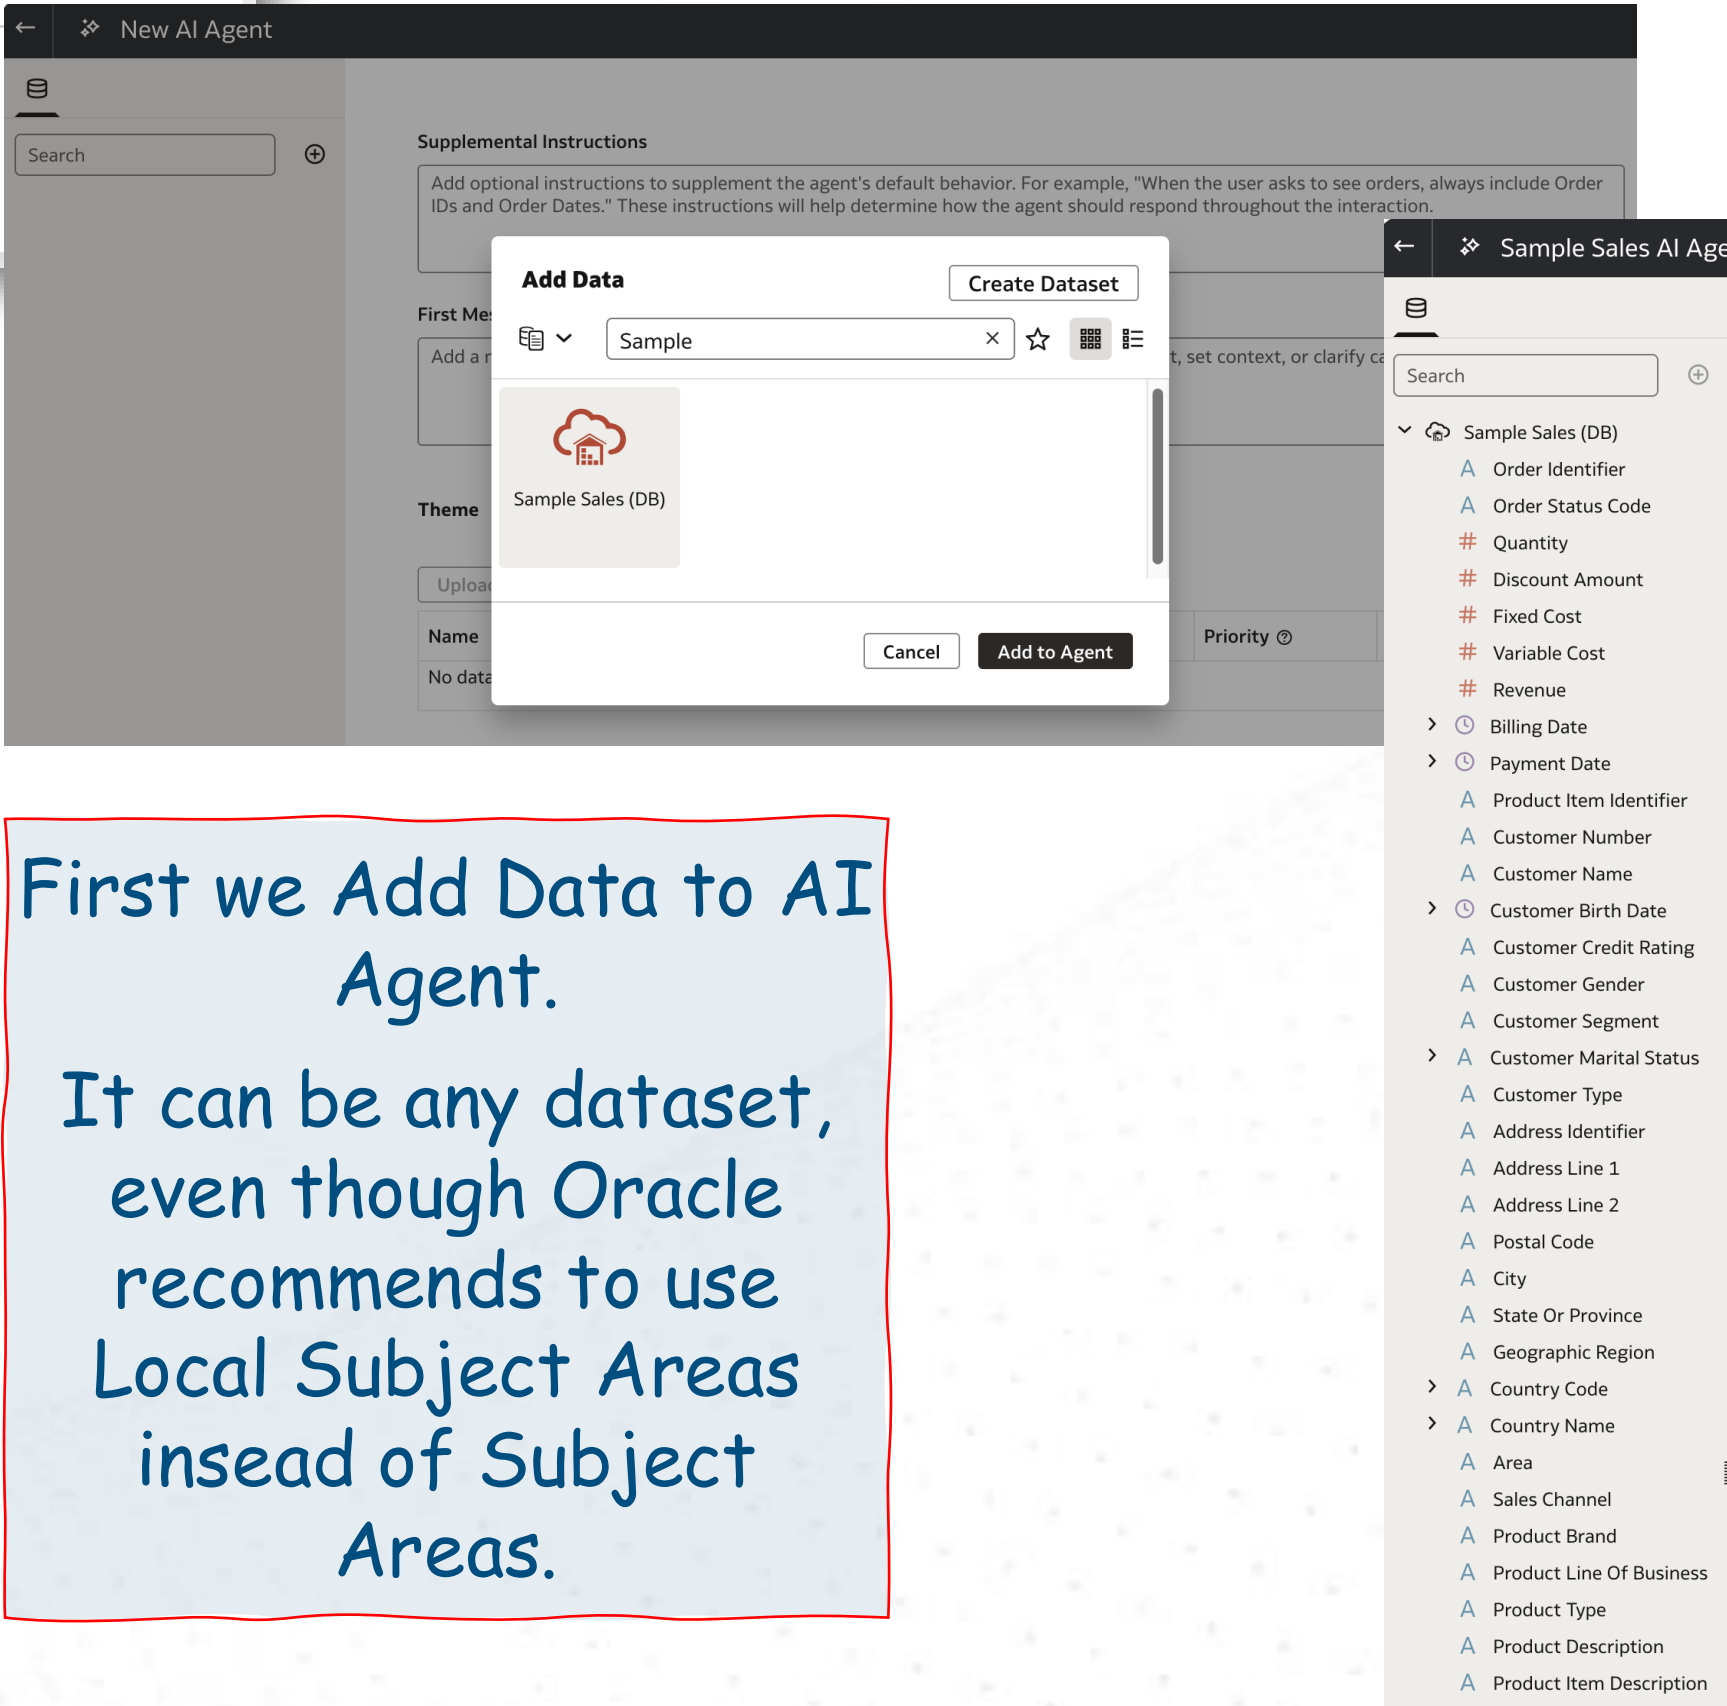

Supplemental Instructions

At-risk filter=Order Status Code IN ('9-On Hold','6-Cancelled').
Status values: 1-Booked|2-Fulfilled|3-Shipped|4-Billed|5-Paid|6-Cancelled|9-On Hold.
Q17 Calc=AVG(Payment Date - Billing Date) in days. Chart=Heatmap or Table.
Rows=Sales Channel. Columns=Geographic Region. Sort=Avg days DESC.
Q18 Calc=SUM(Quantity)/COUNT(Order Identifier) by Product Type and Sales Channel.
Chart=Heatmap or Pivot Table. Highlight top combinations.
Q19 Chart=Waterfall per brand (fallback: Grouped Bar). Show Revenue → Gross Profit
→ Net Profit layers. Columns=Product Brand, Revenue, Fixed Cost, Variable Cost, Discount Amount.
Q20 Chart=KPI Dashboard tiles (one per dimension) + Revenue by Geographic Region bar.
Calc=Overall Gross Margin %. Show top-performing value per dimension, not a table.

--- COLUMN VALUE REFERENCE ---

Order Status Code : 1-Booked | 2-Fulfilled | 3-Shipped | 4-Billed | 5-Paid | 6-Cancelled | 9-On Hold
Geographic Region : AMERICAS | EMEA | APAC
Sales Channel : Store | Online | Reseller | Catalog
Product Brand : FunPod | BizTech | HomeView
Customer Gender : M | F
At-risk statuses : 9-On Hold | 6-Cancelled

See Knowledge Documents for: column definitions, few-shot examples, and full calculated metric formulas.

=====

END | Sample Sales Agent | SmartQ | v1.0 | May 2026

=====

First Message

👋 **Welcome to the Sales Intelligence Assistant!**

I can help you explore and analyze sales performance across products, regions, customers, and channels. Here are some things you can ask me:

- 📊 What is total revenue and gross profit margin by product brand?
- 🌐 Show revenue by geographic region and top 5 countries
- 📈 Which sales channel has the highest revenue and average order value?
- ⚠️ How much revenue is at risk in On Hold and Cancelled orders?
- 👤 Which customer segments drive the most revenue?

Just ask in plain language — I'll find the right data and chart for you.

Theme Redwood

Upload new document

Name	Status	Usage in Agent	Priority	Language	Last Modified	
OAC_Sales_Agent_Knowledge_Document	Ready	Enabled	Regular	English (Default)	8 minutes ago	...
OAC_Sales_Agent_Question_Examples	Ready	Enabled	Regular	English (Default)	14 minutes ago	...

Creating an AI Agent

Supplemental Instructions

Supplemental Instructions

Add optional instructions to supplement the agent's default behavior. For example, "When the user asks to see orders, always include Order IDs and Order Dates." These instructions will help determine how the agent should respond throughout the interaction.

First Message

Add a message for users to see when agent starts. This message will introduce the agent, set context, and provide initial instructions.

Theme Redwood

Upload new document

Document upload is available after you save this agent.

Name	Status	Usage in Agent	Prior
No data to display.			

```
OAC AI AGENT – SUPPLEMENTAL INSTRUCTIONS
Sample Sales Agent | SmartQ | v1.0 | May 2026
Dataset: SAMPLEAPP.SAMPLE_DATA_DENORM (sample_sales)

--- GLOBAL DEFAULTS ---

CHART: Default bar chart unless user requests otherwise or a question rule overrides.
TOP N: "highest/top/leading/most" → return top 10 by default unless user specifies.
SORT: Sort time dimensions (Billing Date, Payment Date) chronologically ASC.
CURRENCY: All Revenue, Fixed Cost, Variable Cost, Discount Amount values are numeric
         with no currency symbol in the dataset. Label axes and KPI tiles with USD or $.
NULLS: Exclude blank/null Customer Name, Product Description from aggregations
       unless explicitly requested.
COLUMN NAMES: Always use OAC display names. Never use DB column names
              (e.g. use "Revenue" not "REVENUE", "Fixed Cost" not "COST_FIXED").

--- CALCULATED METRICS ---

Always derive these from base columns. Never guess or approximate.

Gross Profit      : Revenue – Fixed Cost – Variable Cost
Net Profit        : Revenue – Fixed Cost – Variable Cost – Discount Amount
Gross Margin %    : (Revenue – Fixed Cost – Variable Cost) / Revenue * 100
Net Margin %      : (Revenue – Fixed Cost – Variable Cost – Discount Amount) / Revenue * 100
Variable Cost %   : Variable Cost / Revenue * 100
Avg Order Value   : SUM(Revenue) / COUNT(Order Identifier)
Revenue per Unit  : SUM(Revenue) / SUM(Quantity)
Days to Payment   : Payment Date – Billing Date (in days)
Discount Rate %   : SUM(Discount Amount) / SUM(Revenue) * 100

--- QUESTION RULES ---

Q1 Chart=Grouped Bar (Revenue + Gross Profit per brand) + KPI tiles for Gross Margin %.
   Columns=Product Brand, Revenue, Fixed Cost, Variable Cost.
Q2 Group Billing Date by month. Chart=Line or Area. Sort=Billing Date ASC.
   Surface top 3 and bottom 3 months in summary alongside chart.
Q3 Chart=Horizontal Bar (Gross Profit). Columns=Product Line Of Business, Revenue,
   Fixed Cost, Variable Cost. Sort=Gross Profit DESC.
```



Creating an AI Agent

First Message

Supplemental Instructions

Add optional instructions to supplement the agent's default behavior. For example, "When the user asks to see orders, always include Order IDs and Order Dates." These instructions will help determine how the agent should respond throughout the interaction.

First Message

Add a message for users to see when agent starts. This message will introduce the agent, set context, or clarify capabilities.

Theme Redwood

Upload new document

Document upload is available after you save this agent.

Name	Status	Usage in Agent
No data to display.		

 **Welcome to the Sales Intelligence Assistant!**

I can help you explore and analyze sales performance across products, regions, customers, and channels. Here are some things you can ask me:

- 📈 *What is total revenue and gross profit margin by product brand?*
- 🌐 *Show revenue by geographic region and top 5 countries*
- 🛒 *Which sales channel has the highest revenue and average order value?*
- ⚠️ *How much revenue is at risk in On Hold and Cancelled orders?*
- 👥 *Which customer segments drive the most revenue?*

Just ask in plain language — I'll find the right data and chart for you.



Creating an AI Agent

Knowledge Documents

Supplemental

Add optional IDs and Order

First Message

Add a message

Revenue & Profitability

Q1	What is total Revenue and gross profit margin by Product Brand?	Revenue & Profitability
Full prompt	What is the total Revenue, total cost (Fixed Cost + Variable Cost), and gross profit margin by Product Brand (FunPod, BizTech, HomeView)?	
Chart	Grouped Bar — Revenue and Gross Profit side by side per brand. Add KPI tiles for overall gross margin %.	
Key columns	Product Brand, Revenue, Fixed Cost, Variable Cost	
Custom calc	Gross Profit = Revenue - Fixed Cost - Variable Cost Gross Margin % = Gross Profit / Revenue * 100	
Sort	Revenue DESC	
Example prompts	Brand profitability / How profitable is each brand? / Revenue and margin by brand	

Theme Redwood

Upload new document

Document upload is available after you save this agent.

Name	Status	Usage in Agent	Priority ?
No data to display.			

3. KPI Glossary & Calculated Metrics

All calculated metrics must be derived from base columns using the formulas below. Define these as dataset-level metrics in OAC where possible. Never use approximations or pre-aggregated shortcuts.

PRIMARY MEASURE — Revenue

- Use Revenue for ALL 'how much was sold / earned' questions.
- Always aggregate with SUM. Never use a pre-averaged value.
- Revenue is gross — it does not account for costs or discounts.

CAUTION — Discount Amount

- Discount Amount reduces realised revenue. It is NOT subtracted from Revenue in the raw data.
- To get Net Revenue: Revenue - Discount Amount.
- To get Net Profit: Revenue - Fixed Cost - Variable Cost - Discount Amount.

KPI Name	Formula (OAC display names)	Use Case
Gross Profit	Revenue - Fixed Cost - Variable Cost	Core profitability measure by brand, LOB, region
Net Profit	Revenue - Fixed Cost - Variable Cost - Discount Amount	True bottom-line after discounts
Gross Margin %	(Revenue - Fixed Cost - Variable Cost) / Revenue × 100	Margin comparison across brands, regions, channels
Net Margin %	(Revenue - Fixed Cost - Variable Cost - Discount Amount) / Revenue × 100	Profitability after discounting



AI Agent in Action

Welcome Žiga!

Welcome to the Sales Intelligence Assistant!

I can help you explore and analyze sales performance across products, regions, customers, and channels. Here are some things you can ask me:

- What is total revenue and gross profit margin by product?
- Show revenue by geographic region and top 5 countries?
- Which sales channel has the highest revenue and average profit margin?
- How much revenue is at risk in On Hold and Cancelled orders?
- Which customer segments drive the most revenue?

Just ask in plain language — I'll find the right data and chart for you.

Assistant might use different services to generate answers

Here's a Table that shows Product Brand, Revenue, Total Cost, and Gross Profit Margin.

Product Brand	Revenue	Total Cost	Gross Profit Margin
BizTech	2,032,292.78	2,094,048.66	10.92%
FunPod	2,047,226.99	2,001,804.00	2.22%
HomeView	1,013,841.40	1,005,750.00	0.80%

What is the total Revenue, total cost (Fixed Cost + Variable Cost), and Gross Profit Margin by Product Brand (FunPod, BizTech, HomeView)?


Generated from Document knowledge

Chart Type Change Add Remove



Follow up or ask a new question

Here's a Line Chart that shows Revenue by Billing Date (Month).

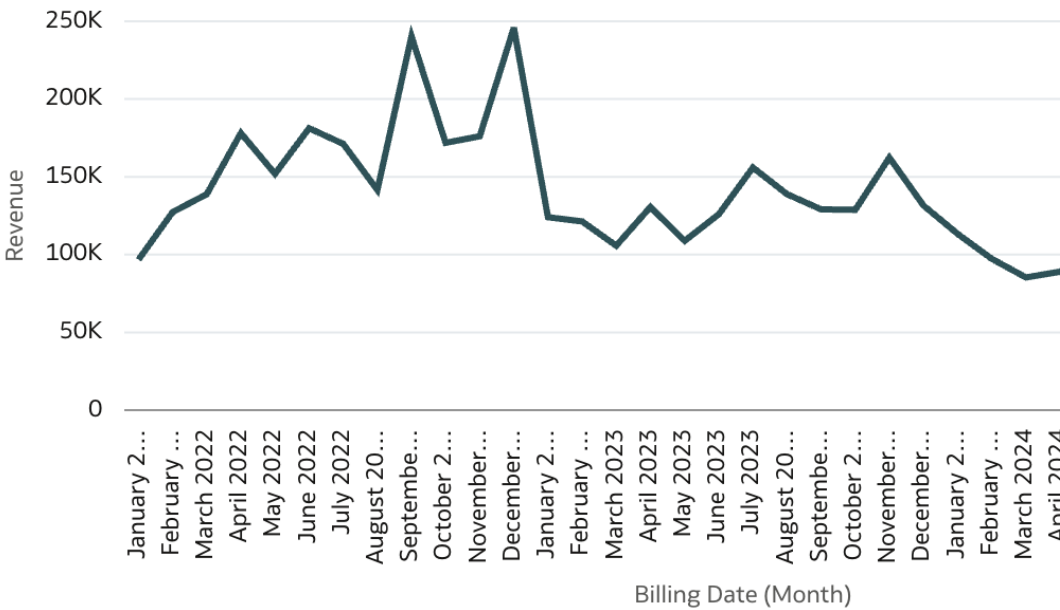

Additional Insights

The top 3 years(Billing Date) with highest monthly(Billing Date) Revenue are 2022[Dec 2022: 163862.81], 2023[Nov 2023: 162341.21]

Show monthly Revenue trend over time using the Billing Date. Identify the top and bottom performing months.

Generated from Document knowledge


Chart Type Change Add Remove



Follow up or ask a new question

Show me monthly Revenue trend over time using the Billing Date. Identify the top and bottom performing months.

Here's a Horizontal Bar Chart that shows Revenue, Total Cost, and Gross Profit Margin by Product Line Of Business.

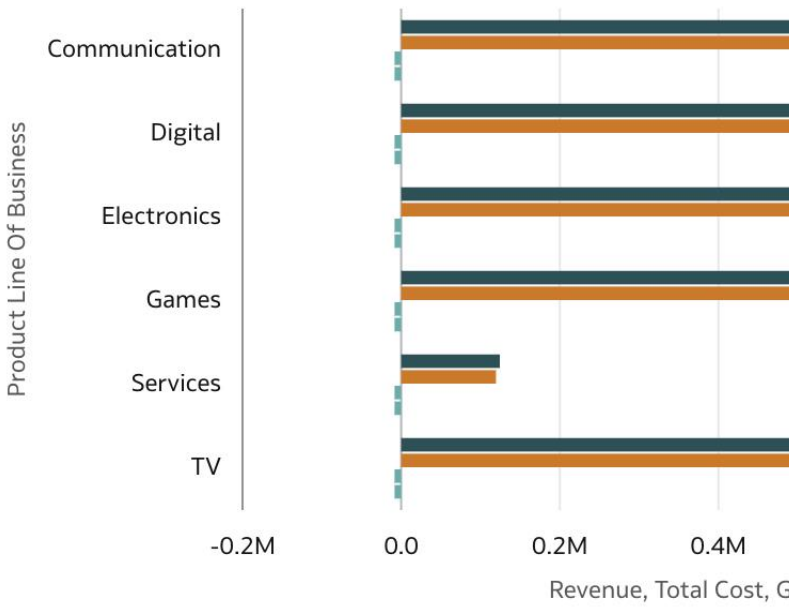

Compare Revenue vs total cost (Fixed Cost + Variable Cost) by Product Line Of Business. Which lines are most and least profitable?

Generated from Document knowledge

Chart Type Change Add Remove




Follow up or ask a new question

Compare Revenue vs total cost by Product Line Of Business. Which lines are most and least profitable?

What are the top 10 products by total Revenue? Show Product Description, Revenue, Quantity, and average Revenue per unit.

Here's a Horizontal Bar Chart that shows Revenue, Quantity, Revenue per Unit by Product Description. Filtered by Top 10 Revenue.

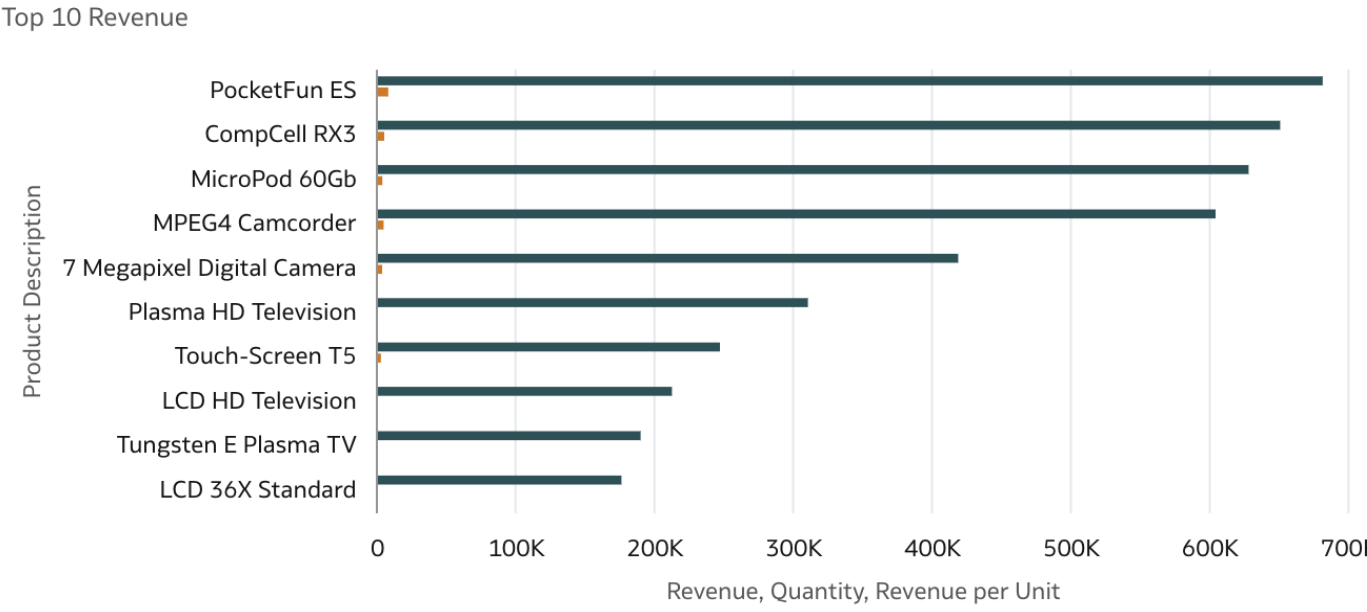

Show Product Description, Revenue, Quantity, and average Revenue per unit. Chart Horizontal Bar (Revenue). Accompany with a table showing all 4 metrics. Key columns Product Description, Revenue, Quantity. Custom calc Revenue per Unit = SUM(Revenue) / SUM(Quantity). Default limit Top 10 by Revenue DESC.

Generated from Document knowledge

Chart Type Change Add Remove




Follow up or ask a new question



Using AI Agents in Workbooks

Edit Mode

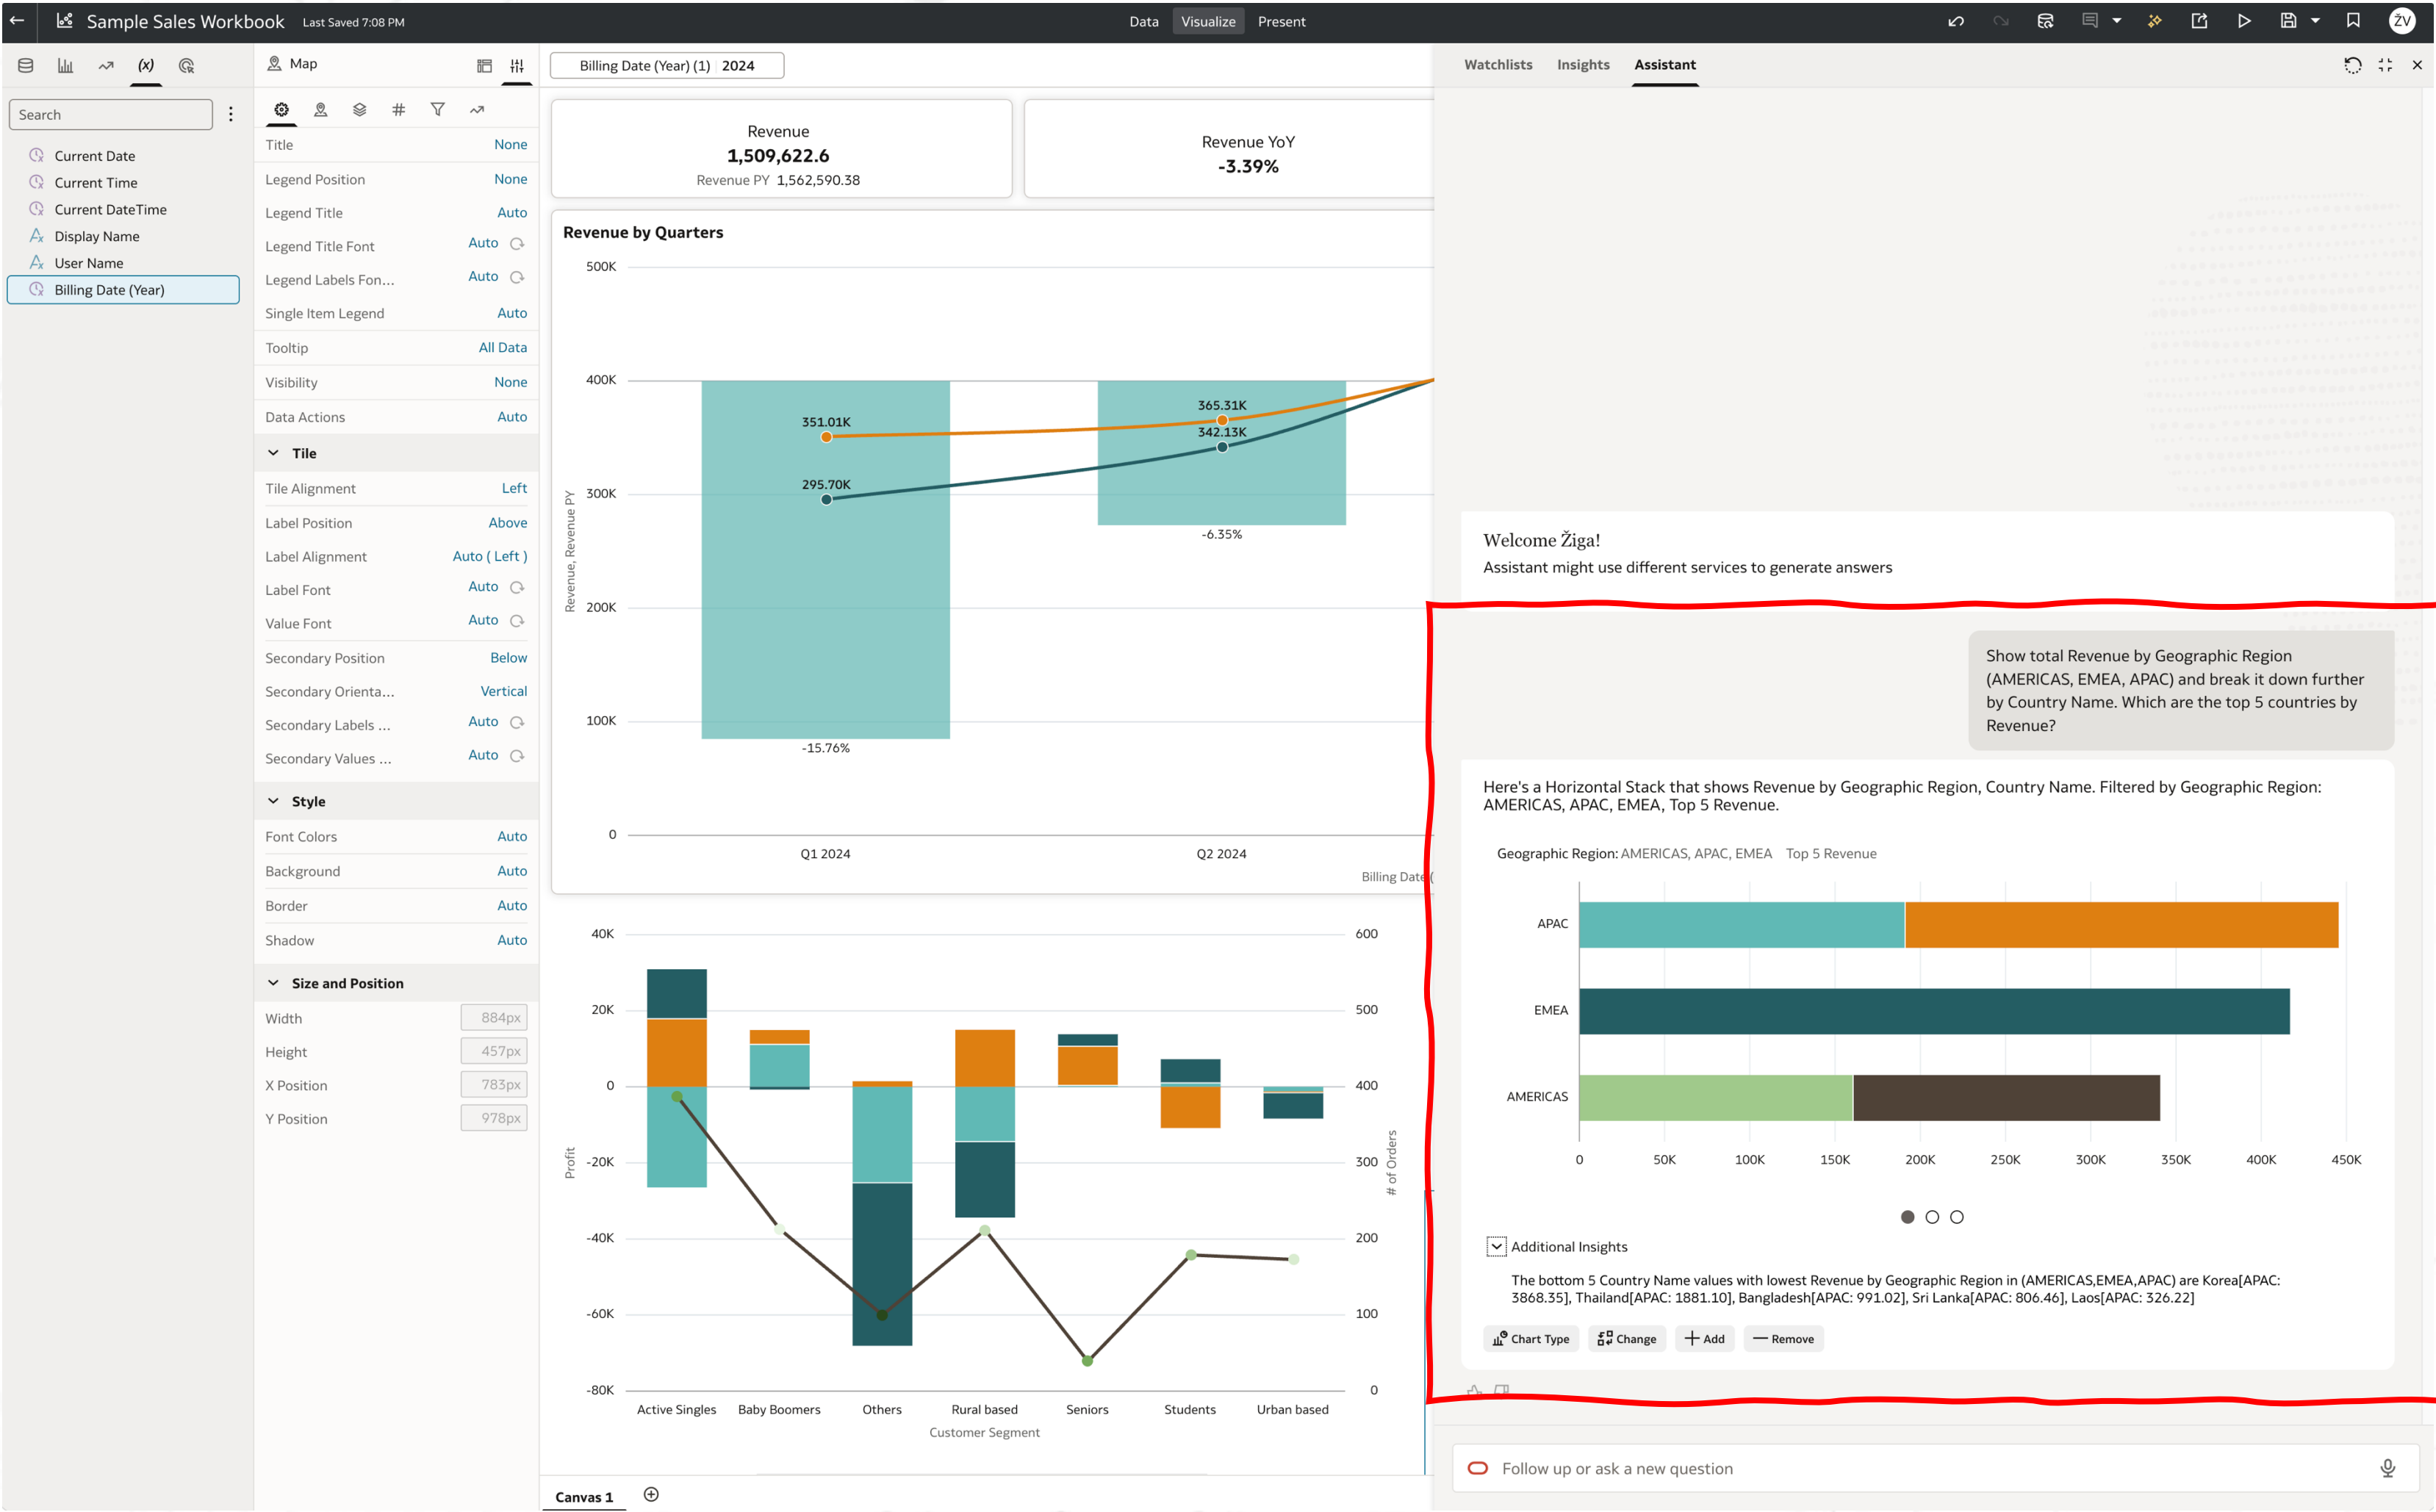

AI Assistant provides an answer, however it is not exactly accurate.




Using AI Agents in Workbooks

Presentation Mode


AI Assistant is NOT enabled by default.

Workbook Assistant in Presentation Mode can use indexed dataset or can use attached AI Agent.

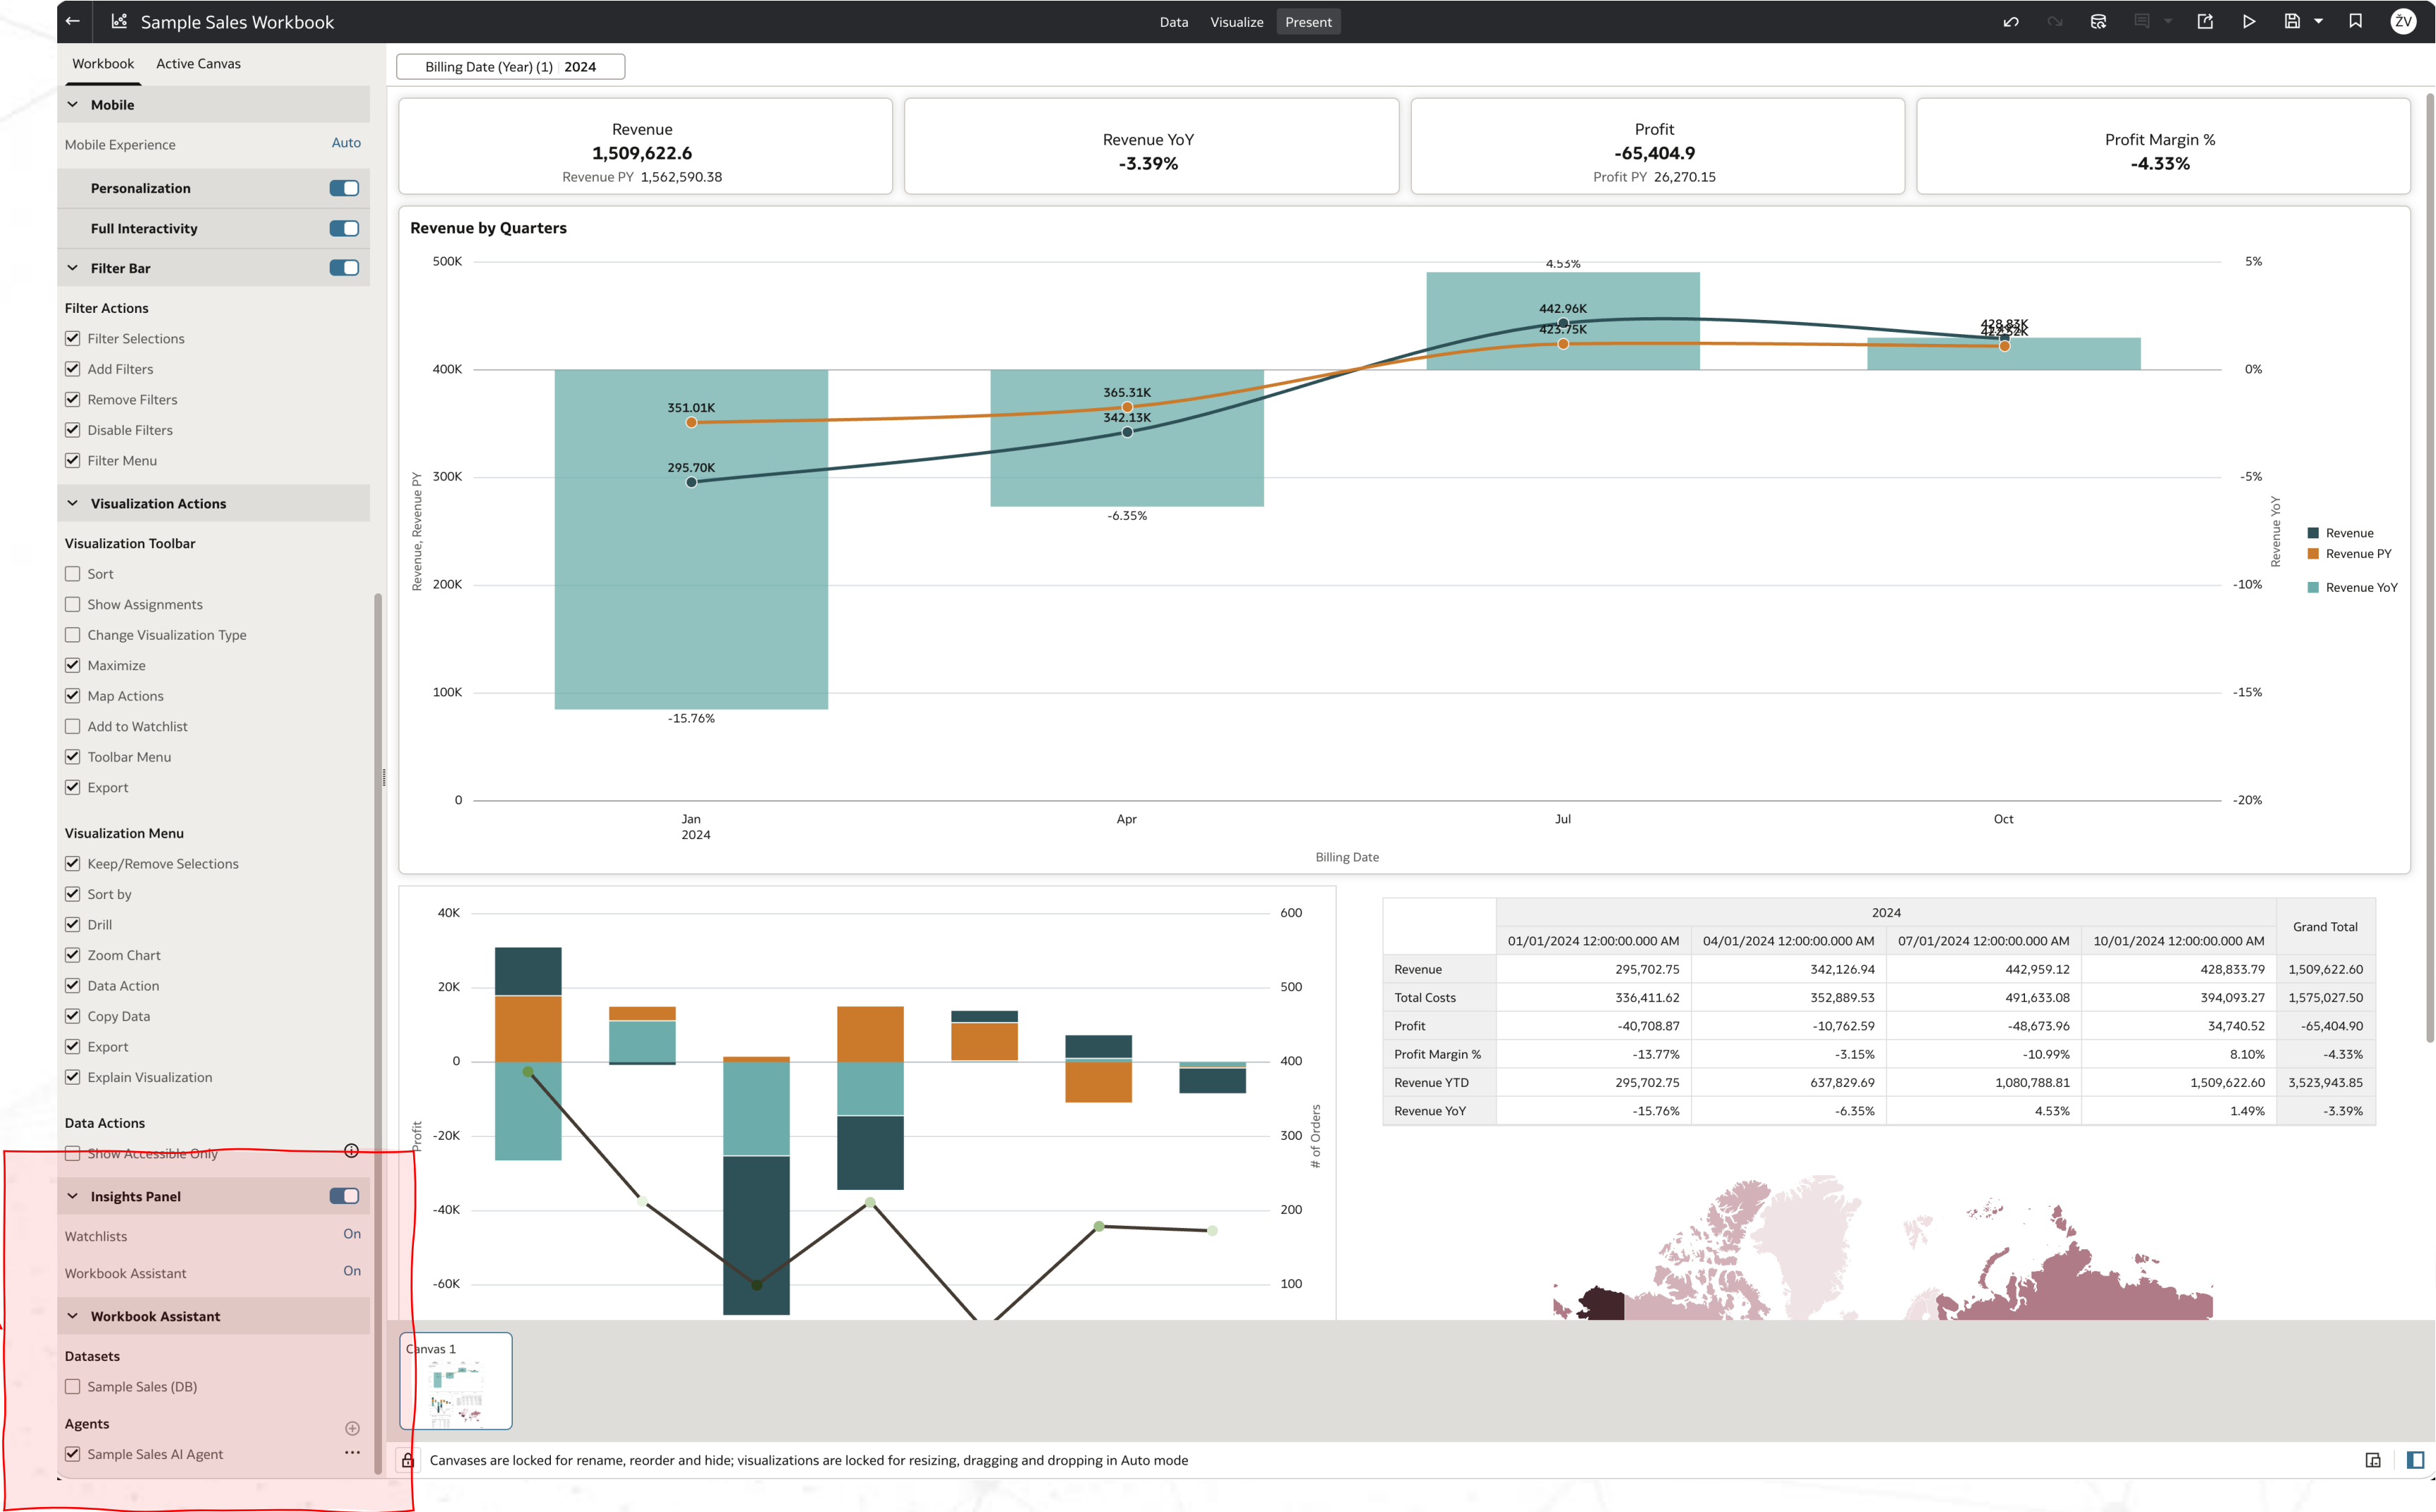

Using AI Agents in Workbooks

Presentation Mode

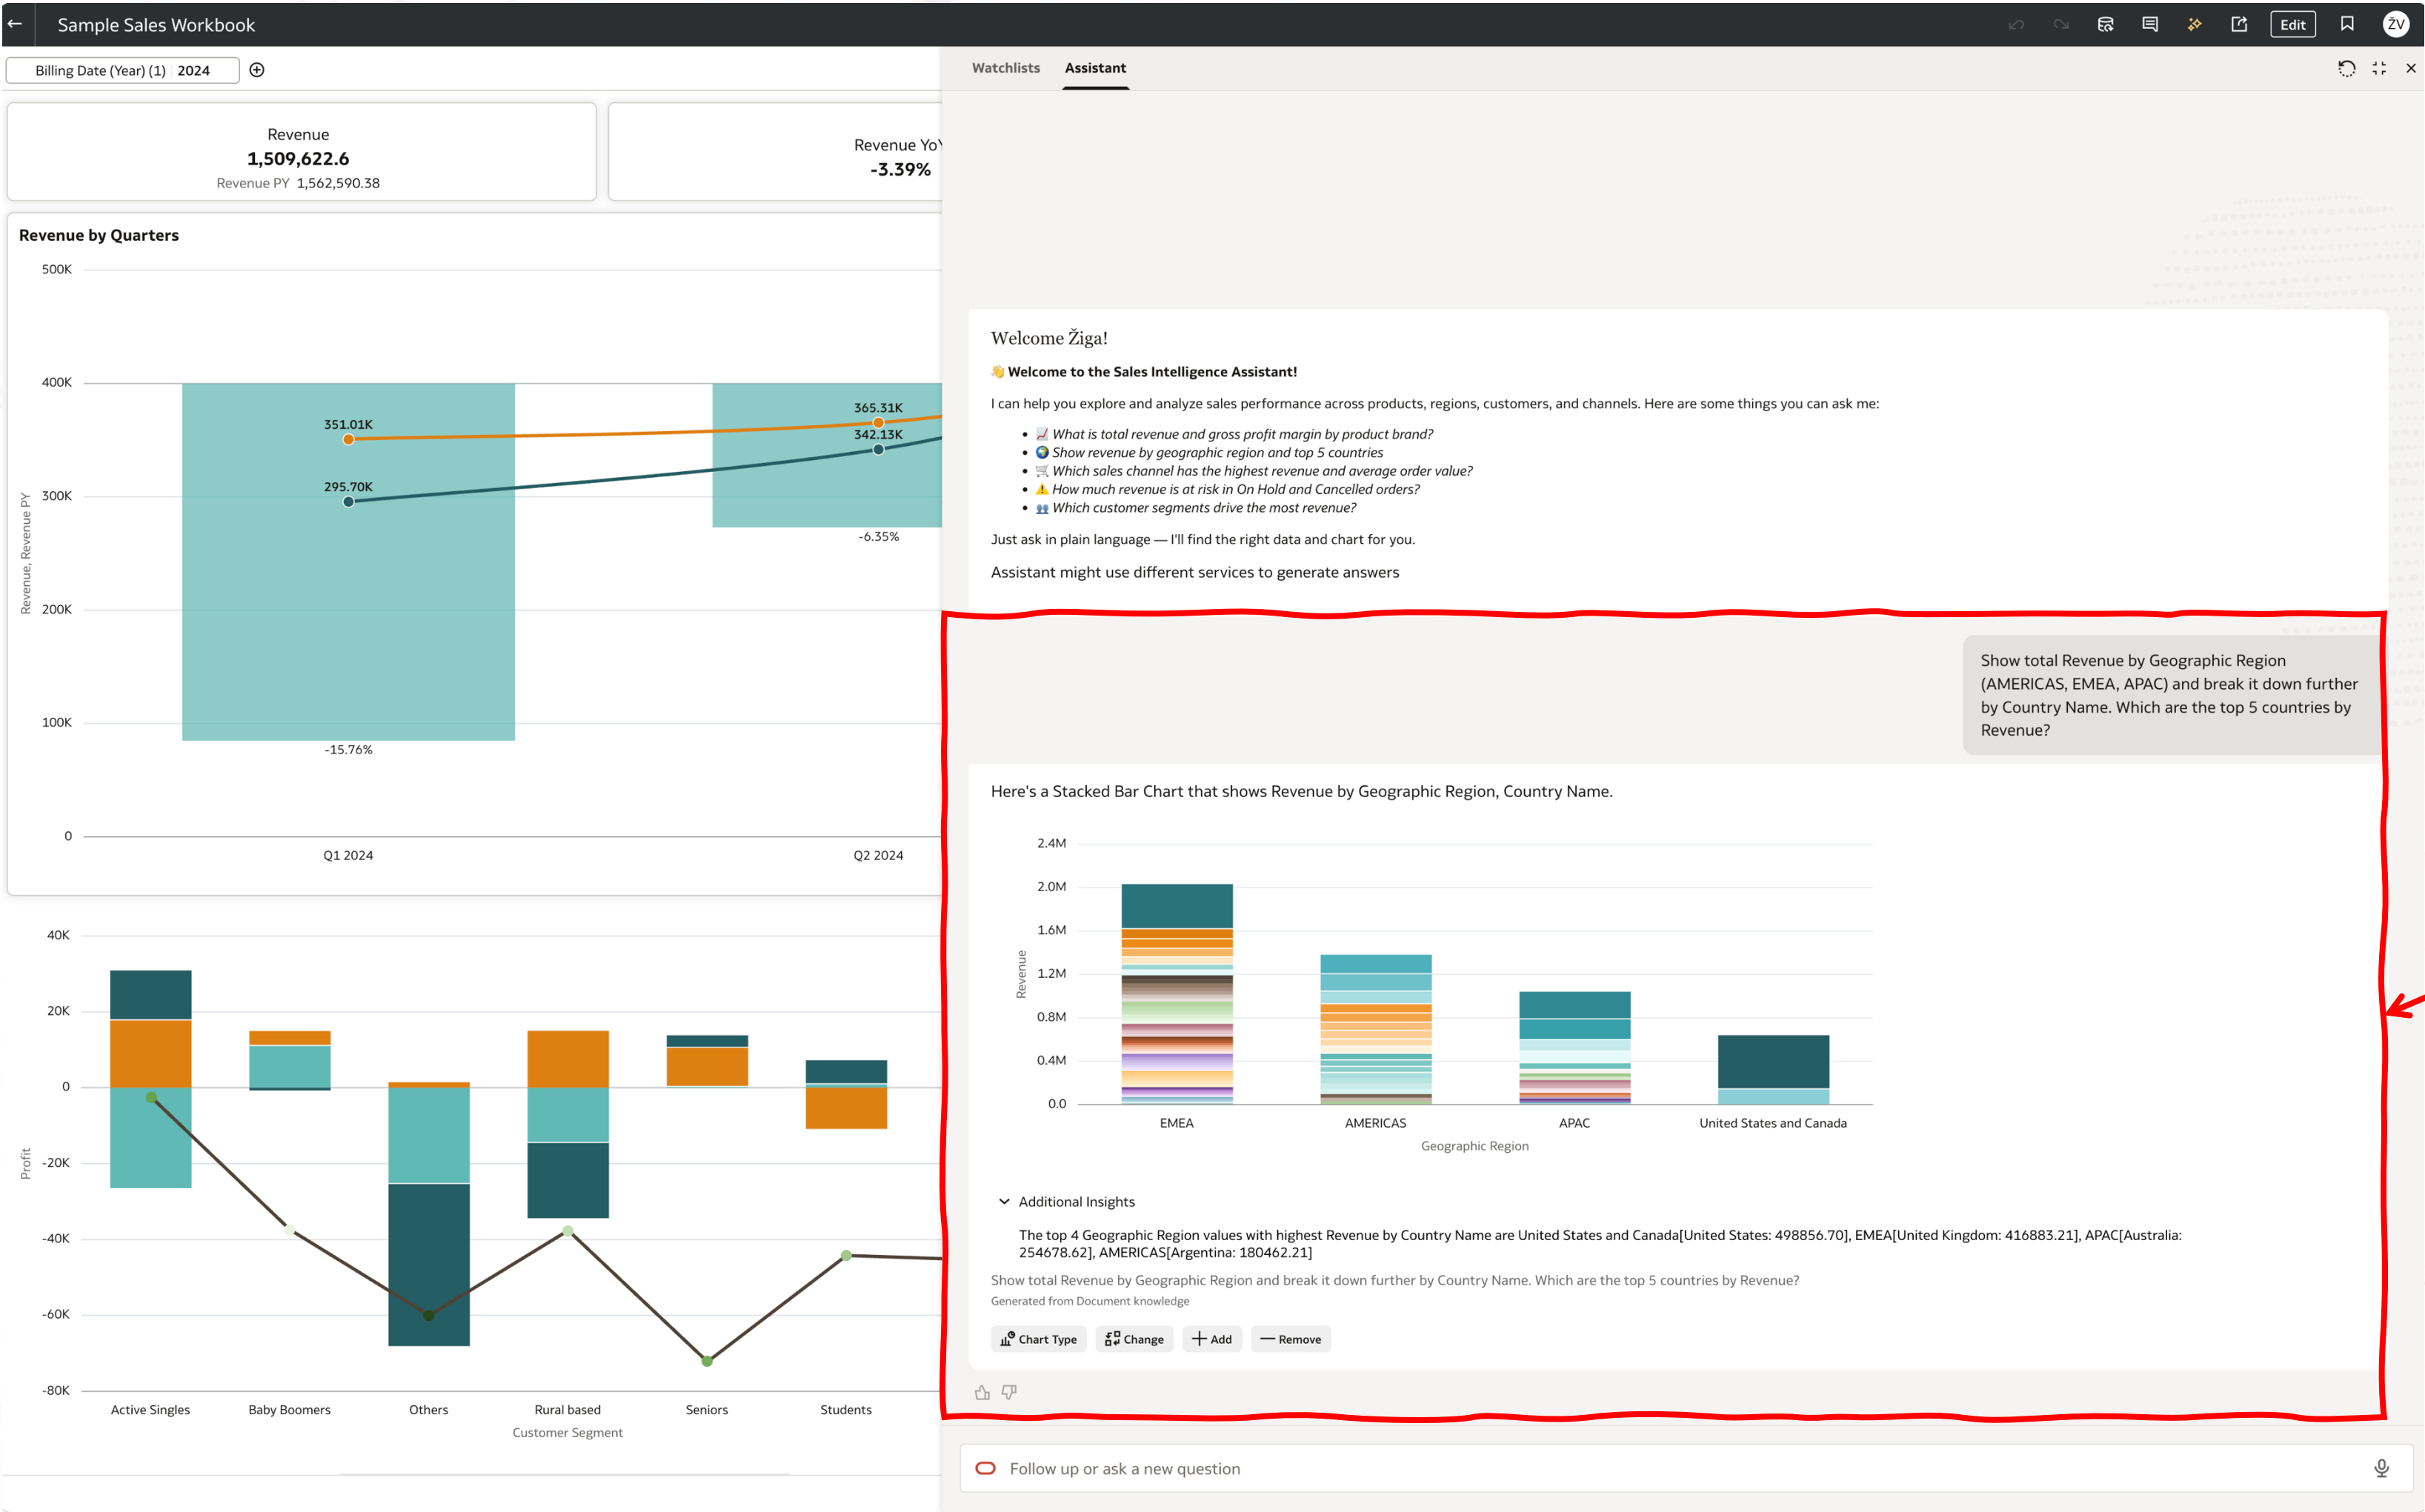

AI Agent has more knowledge and instructions, hence response is more correct than just AI Assistant.



DEMO


AI Assistant & AI Agents

OAC MCP Server

What is MCP?

Model Context Protocol

AI Assistant ↔ MCP Server ↔ Enterprise Systems / APIs / Databases

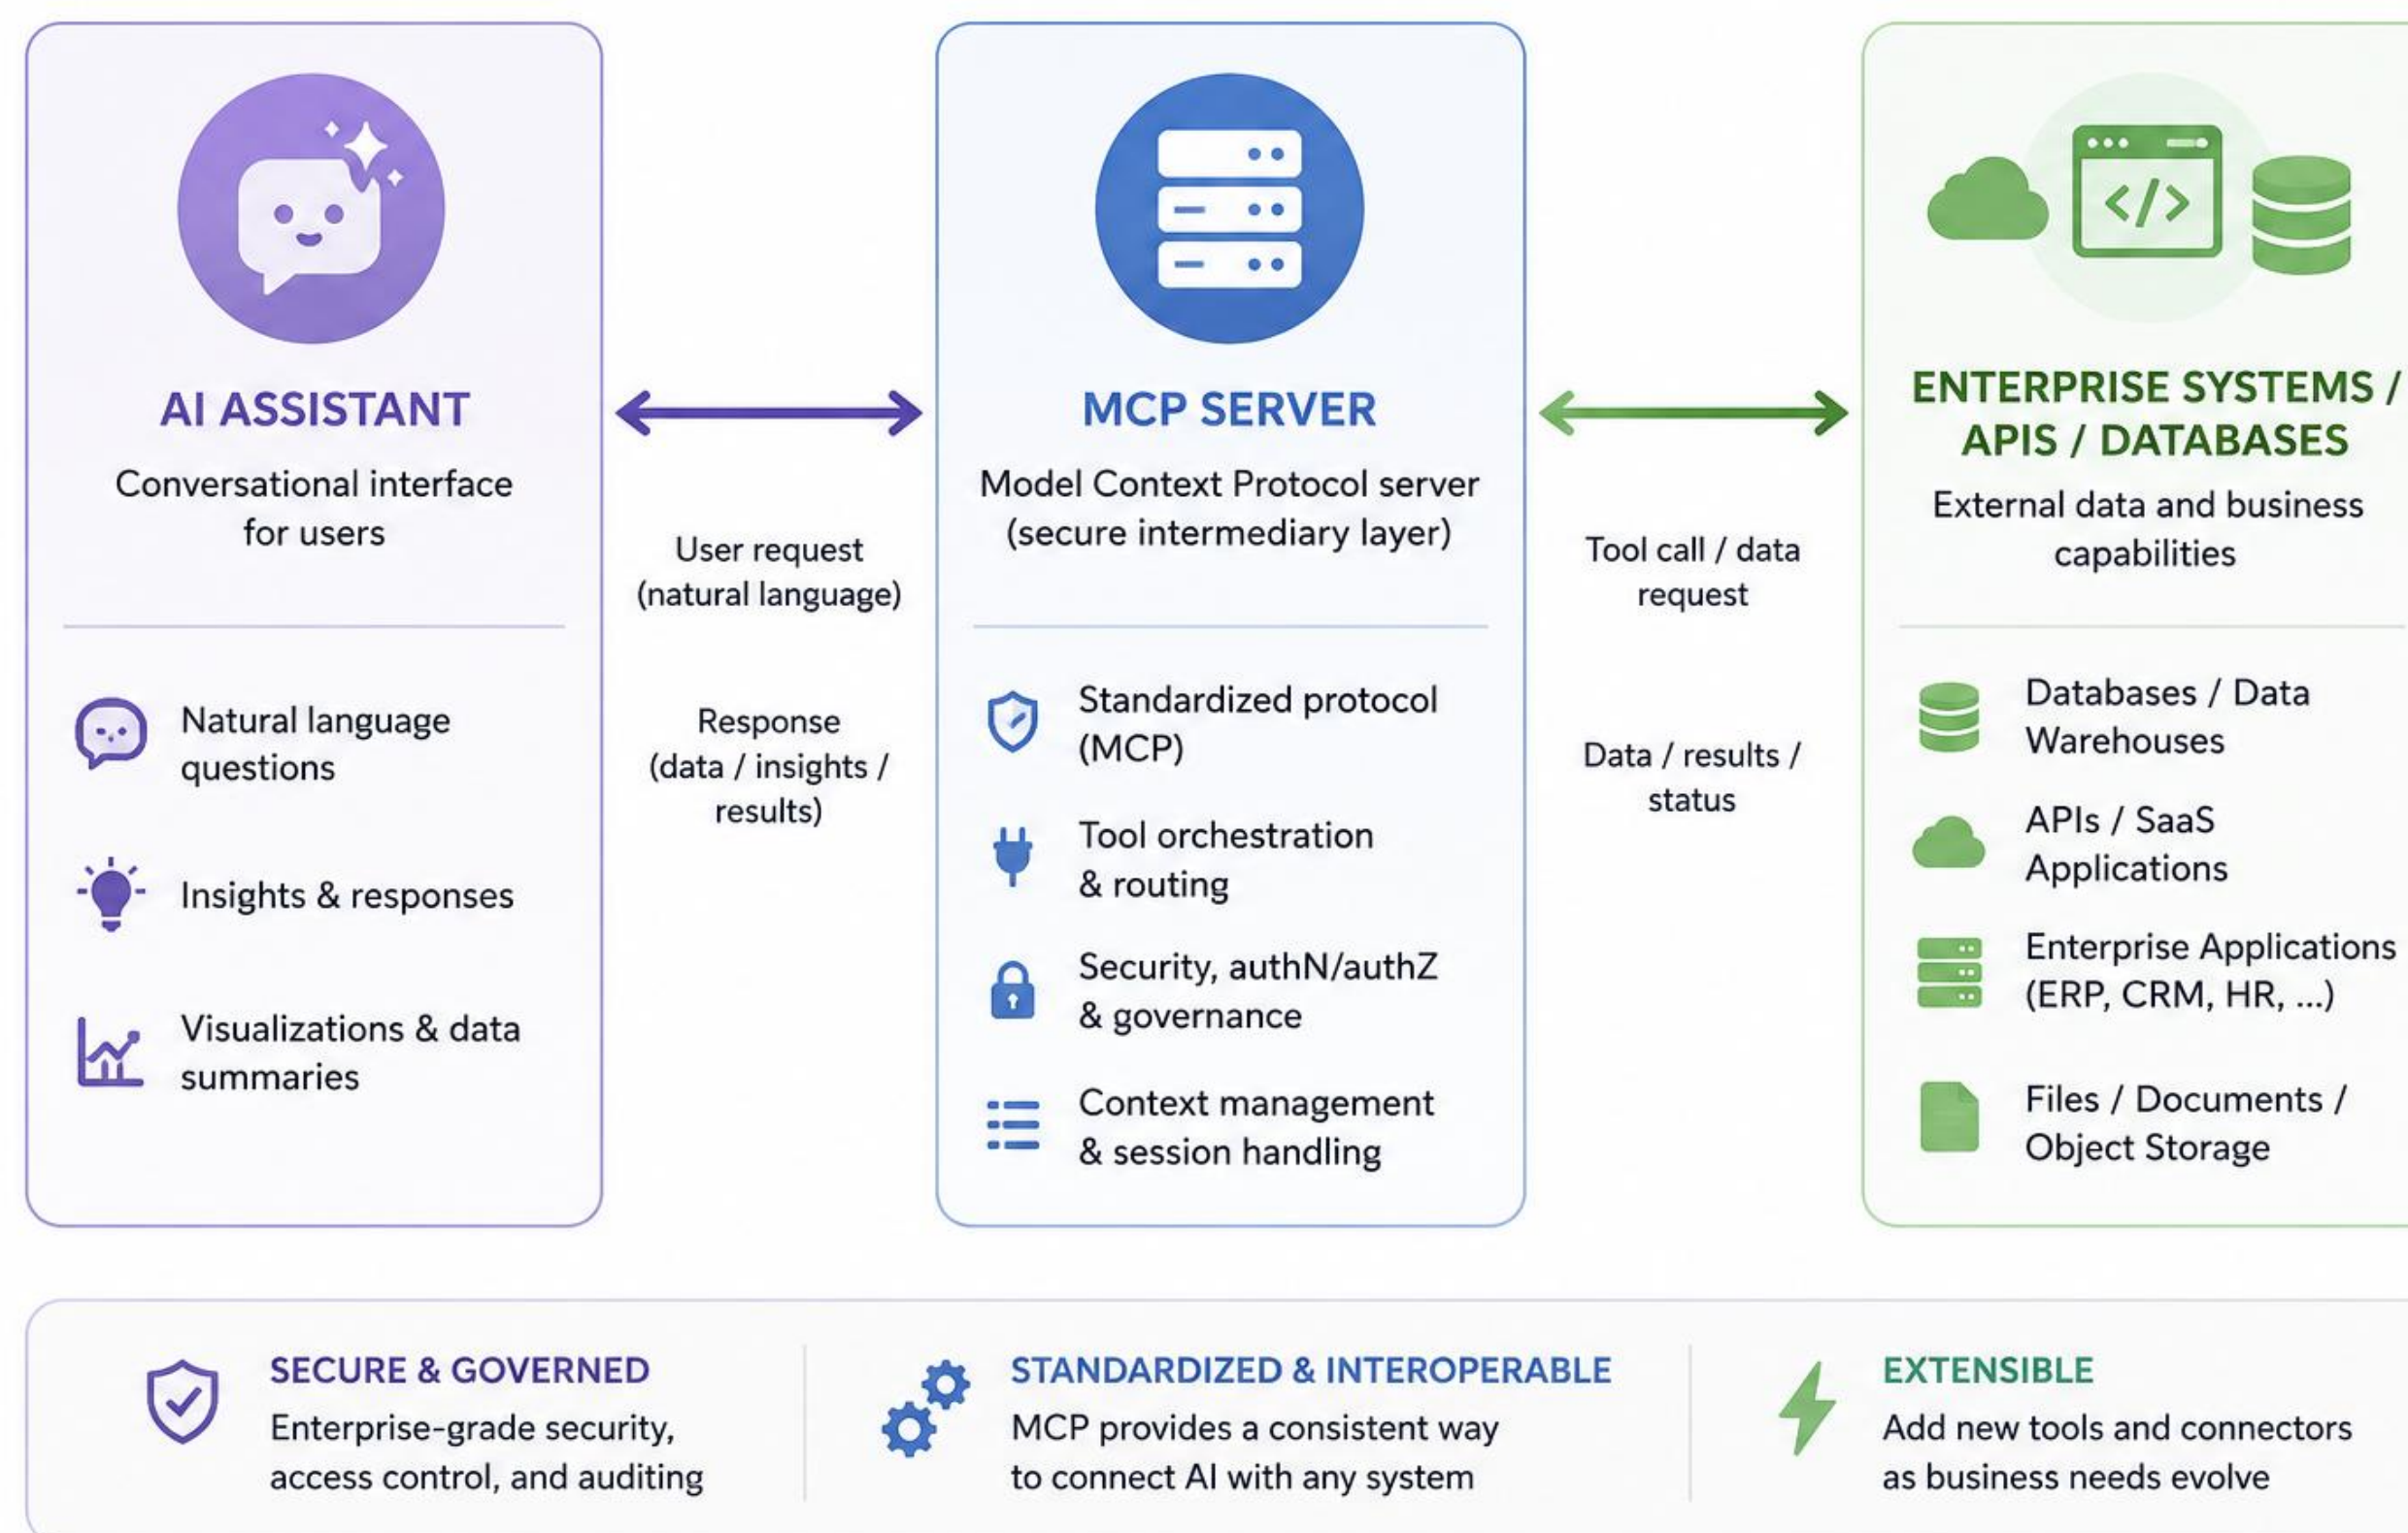

- MCP is an open standard that enables AI models to securely interact with external systems, applications, APIs, and data sources.
- It standardizes how AI assistants discover and use tools, data, and services.
- MCP acts as a bridge between:
 - AI models / assistants
 - Enterprise systems and applications
 - External tools and APIs



What is the OAC MCP Server?

Oracle Analytics Cloud MCP Server

- What?
 - The OAC MCP Server exposes Oracle Analytics Cloud capabilities as AI-consumable tools.
 - It enables AI Assistants and AI Agents to interact directly with OAC environments.
- Why?
 - Bring conversational AI capabilities to Oracle Analytics Cloud
 - Allow AI-driven access to analytics, metadata, datasets, and workbook interactions
 - Simplify analytical workflows through natural language

Use cases

- Discover available datasets and subject areas
- Explore semantic models and metadata
- Provide schema context to AI assistants
- Execute Logical SQL queries through natural language
- Generate insights from analytical query results
- Enable conversational access to enterprise analytics


Key Advantages

- Seamless AI integration with Oracle Analytics Cloud
- Standardized MCP-based tool access
- Faster access to analytics through natural language
- Improved self-service analytics experience
- Reusable and extensible integration architecture



OAC MCP Server Tools

End-to-end flow in the client

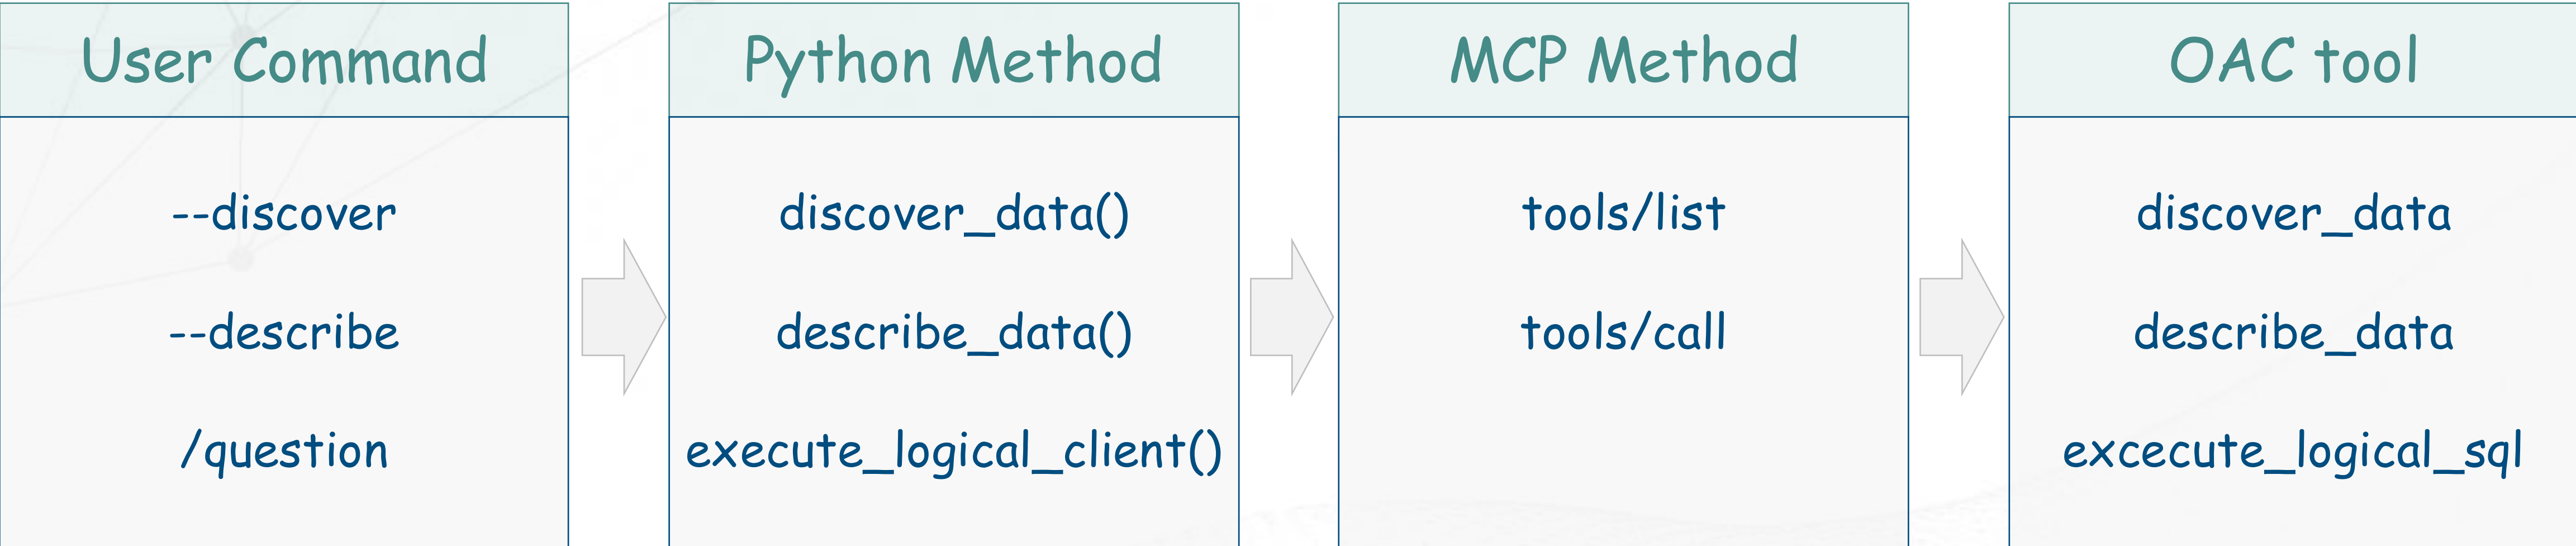

Discover: Metadata discovery	List available datasets, Discover subject areas, Explore analytics metadata, Identify available analytical content
Describe: Semantic model exploration	Describe semantic models, Retrieve dataset structure, Provide schema context to AI models, Expose metadata for query generation
Execute: Query execution through Logical SQL	Execute Logical SQL, Run analytical queries, Return query results, Support AI-generated analytics requests



Now, we can start creating an OAC MCP client

- Python client interacts with Oracle Analytics APIs through:
 - JSON-RPC helper: `_jsonrpc()`
 - List tools MCP method:
`tools/list`
 - Call tools MCP method:
`tools/call`

```
def _jsonrpc(method, params):  
    payload = {  
        "jsonrpc": "2.0",  
        "id": str(uuid.uuid4()),  
        "method": method,  
        "params": params,  
    }  
  
    request = Request(  
        MCP_URL,  
        data=json.dumps(payload).encode("utf-8"),  
        headers=AUTH_HEADERS,  
        method="POST",  
    )  
  
    with urlopen(request) as resp:  
        return json.loads(resp.read().decode("utf-8"))  
  
# List available MCP tools  
_jsonrpc("tools/list", {})  
  
# Call a specific OAC MCP tool  
_jsonrpc("tools/call", {  
    "name": "oracle_analytics-execute_logical_sql",  
    "arguments": {  
        "query": logical_sql,  
        "maxRows": 1000,  
    },  
})
```

1. Builds a JSON-RPC payload
2. Adds bearer token and JSON headers
3. POSTs to `CONFIG['mcp_host'] + CONFIG['mcp_path']`
4. Parses the JSON response
5. Raises HTTP or connection errors

OAC MCP Client in action: discover

oac> /discover

-- MCP REQUEST JSON -----

```
{
  "jsonrpc": "2.0",
  "id": "291c12da-44fb-4e1d-810c-f9caf861c2af",
  "method": "tools/call",
  "params": {
    "name": "oracle_analytics-discover_data",
    "arguments": {
      "fetchType": "all"
    }
  }
}
```

-- MCP RESULT JSON -----

```
{
  "jsonrpc": "2.0",
  "result": {
    "content": [
      {
        "type": "text",
        "text": "{\n  \"Datasets\": [\n    {\n      \"displayName\": \"ASOSamp.Basic\",
      \"name\": \"sandiholub@smartq.si'.ASOSamp\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Attrition Similarity Analysis Re\",
      \"name\": \"ziga.vaupot@gmail.com'.ATTRITI\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Census - Candidates\",
      \"name\": \"ziga.vaupot@gmail.com'.Census - Prediction\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Census - Train\",
      \"name\": \"ziga.vaupot@gmail.com'.Donatio\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"DB Dataset\",
      \"name\": \"mojca.gros@smartq.si'.DB Datas\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Fermentation Results\",
      \"name\": \"146fc880-4e7c-4005-9b35-4adfe8391da8'.Fermentation Results\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Inventory Data MONTH\",
      \"name\": \"ziga.vaupot@gmail.com'.JADED\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"marketing_list\",
      \"name\": \"ziga.vaupot@gmail.com'.Invento\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"pivotViz-test2\",
      \"name\": \"5f81819b-b506-44f7-ab94-fe0d445'.Sales DS\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"SALES\",
      \"name\": \"ziga.vaupot@gmail.com'.Makeit\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Sales dataset - one xlsx\",
      \"name\": \"ziga.vaupot@gmail.com'.Sales d\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Sales Returns\",
      \"name\": \"mojca.gros@smartq.si'.Sales Re\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"SAMPLE_SALES\",
      \"name\": \"ziga.vaupot@gmail.com'.SAMPLE_\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"SAMPLE_SALES_AFTER_CUT\",
      \"name\": \"ziga.vaupot@gmail.com'.SAMPLE_\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"SAMPLE_SALES_BEFORE_CUT\",
      \"name\": \"ziga.vaupot@gmail.com'.SAMPLE_\",
      \"description\": \"\",
      \"model\": \"custom\",
      \"type\": \"datasets\",
      \"display_name\": \"Turisti\",
      \"name\": \"mojca.gros@smartq.si'.Turisti\",
      \"description\": \"\",
      \"model\": \"\",
      \"type\": \"SubjectArea\",
      \"display_name\": \"OA Boocamp Subject Area\",
      \"name\": \"OA Boocamp Subject Area\",
      \"description\": \"\",
      \"model\": \"\",
      \"type\": \"SubjectArea\"
    ]
  },
  \"isError\": false
}
```

display_name	name	type
Essbase Subject Area	Essbase Subject Area	SubjectArea
OA Boocamp Subject Area	OA Boocamp Subject Area	SubjectArea
ASOSamp.Basic	'sandiholub@smartq.si'.ASOSamp	datasets
ATTRITION	'ziga.vaupot@gmail.com'.ATTRITI	datasets
ATTRITION ADW	'ziga.vaupot@gmail.com'.HR ATTR	datasets
Attrition Similarity Analysis Re	'ziga.vaupot@gmail.com'.Attriti	datasets
Census - Candidates	'ziga.vaupot@gmail.com'.Census	datasets
Census - Prediction	'ziga.vaupot@gmail.com'.Census	datasets
Census - Train	'ziga.vaupot@gmail.com'.Donatio	datasets
Combined XLSX data	'ziga.vaupot@gmail.com'.Combine	datasets
DB Dataset	'mojca.gros@smartq.si'.DB Datas	datasets
Fermentation Results	'146fc880-4e7c-4005-9b35-4adfe83	datasets
Fermentation Results	'df16ed15-fefe-4ca2-b3f6-6a36026	datasets
FERMENTERS_V110-V160	'17b1394a-c2a2-4f9f-9179-0a208cd	datasets
Inventory Data	'ziga.vaupot@gmail.com'.Invento	datasets
Inventory Data MONTH	'ziga.vaupot@gmail.com'.Invento	datasets
JADED	'gassper.vaupot@gmail.com'.JADE	datasets
JADED 2	'gassper.vaupot@gmail.com'.JADE	datasets
marketing_list	'28c7f342-4a2b-4d54-a653-0ac96b9	datasets
pivotViz-test2	'5f81819b-b506-44f7-ab94-fe0d445	datasets
SALES	'ziga.vaupot@gmail.com'.Makeit	datasets
Sales dataset - one xlsx	'ziga.vaupot@gmail.com'.Sales d	datasets
Sales DS	'mojca.gros@smartq.si'.Sales DS	datasets
Sales Returns	'mojca.gros@smartq.si'.Sales Re	datasets
SAMPLE_SALES	'ziga.vaupot@gmail.com'.SAMPLE_	datasets
SAMPLE_SALES_AFTER_CUT	'ziga.vaupot@gmail.com'.SAMPLE_	datasets
SAMPLE_SALES_BEFORE_CUT	'ziga.vaupot@gmail.com'.SAMPLE_	datasets
Turisti	'mojca.gros@smartq.si'.Turisti	datasets



OAC MCP Client in action: describe

```
oac> /use "OA Bootcamp Subject Area"
```

```
-- MCP REQUEST JSON -----  
{  
  "jsonrpc": "2.0",  
  "id": "09fb7966-3992-48a3-b181-7d1c8709dc7a",  
  "method": "tools/call",  
  "params": {  
    "name": "oracle_analytics-discover_data",  
    "arguments": {  
      "fetchType": "all"  
    }  
  }  
}  
-----  
2026-05-15 15:30:36 [INFO] Describing data model via OAC MCP: OA Boocamp Subject Area  
  
-- MCP RESULT JS -- MCP REQUEST JSON -----  
{  
  "jsonrpc": "2.0",  
  "result": {  
    "content": |  
      {  
        "type":  
          "text":  
            ":\"ATTRITION\",  
            \",\"description\  
            \":\"\", \"model\  
            {\\"displayName\  
            a.vaupot@gmail.c  
            on\":\"\", \"mode  
            :\"Fermentation  
            :\"'df16ed15-fe1  
            d9d786'. 'FERMEN  
            \":\"custom\", \\  
            me\": \"JADED\", \  
            tion\": \"\", \\  
            \"model\": \"custo  
            \"custom\", \\  
            \"type  
            \": \"custom\", \\  
            type  
            rmed business de  
            displayName\": \"S  
            . 'SAMPLE_SALES'  
            el\": \"custom\",  
            isplayName\": \"\n  
            el\": \"Essbase E            }  
            },  
            \"isError\": f  
            },  
            \"id\": \"09fb796  
            }  
            -----  
            Data source: OA Boocamp Subject Area  
            Data model: OA Boocamp Subject Area  
            Columns discovered from OAC MCP: 68  
            Attributes: Day, Day (Time Stamp), Week, Day of Week, Month, Quarter, Year, Customer Nr., Customer, Gender, Marital Status, Customer Segment ...  
            Measures: Revenue, Units, Discount Value, Revenue Year Ago, Revenue YoY, Revenue YoY %, Revenue YTD, Total Anual Revenue, Total Anual Revenue by  
            Customer Segment, Profit, Profit Margin %, Fixed Costs ...  
            -----  
            \"\", \\  
            \"scale\": \"0\", \\  
            aggregation\": \"istimedimension\", \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Billing Date\\\".\\\"Day (Time Stamp)\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Week\", \\  
            dataType\": \"VARCHAR\", \\  
            precision\": \"50\", \\  
            name\": \"Week\", \\  
            length\": \"50\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": \"istimedimension\", \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Billing Date\\\".\\\"Day of Week\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Day of Week\", \\  
            dataType\": \"NUMERIC\", \\  
            precision\": \"28\", \\  
            name\": \"Day of Week\", \\  
            lengt  
            h\": \"28\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": \"istimedimension\", \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Billing Date\\\".\\\"Day of Week\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Month\", \\  
            dataType\": \"VARCHAR\", \\  
            precision\": \"50\", \\  
            name\": \"Month\", \\  
            length\": \"50\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": \"istimedimension\", \\  
            fullyQualifi  
            edName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Billing Date\\\".\\\"Month\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Quarter\", \\  
            dataType\": \"VARCHAR\", \\  
            precision\": \"50\", \\  
            name\": \"Quarter\", \\  
            length\": \"50\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": \"istimedimension\", \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Billing Date\\\".\\\"Quarter\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Year\", \\  
            dataType\": \"VARCHAR\", \\  
            precision\": \"50\", \\  
            name\": \"Year\", \\  
            length\": \"50\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": \"istimedimension\", \\  
            fullyQualifie  
            dName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Billing Date\\\".\\\"Year\\\"\", \\  
            tableName\": \"D Billing Date\", \\  
            fullQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Customers\\\"\", \\  
            column  
            s\": [{\"columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Customer Nr.\", \\  
            dataType\": \"NUMERIC\", \\  
            precision\": \"28\", \\  
            name\": \"Customer Nr.\", \\  
            length\": \"28\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregatio  
            n\": null, \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Customers\\\".\\\"Customer Nr.\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Customer\", \\  
            dataType\": \"VAR  
            CHAR\", \\  
            precision\": \"64\", \\  
            name\": \"Customer\", \\  
            length\": \"64\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": null, \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Customers\\\".\\\"Customer\  
            \\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Gender\", \\  
            dataType\": \"VARCHAR\", \\  
            precision\": \"64\", \\  
            name\": \"Gender\", \\  
            length\": \"64\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregatio  
            n\": null, \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subject Area\\\".\\\"D Customers\\\".\\\"Gender\\\"\", \\  
            columnType\": \"attribute\", \\  
            nullable\": \"1\", \\  
            displayName\": \"Marital Status\", \\  
            dataType\": \"VARCHAR\", \\  
            p  
            recision\": \"64\", \\  
            name\": \"Marital Status\", \\  
            length\": \"64\", \\  
            description\": \"\", \\  
            scale\": \"0\", \\  
            aggregation\": null, \\  
            fullyQualifiedName\": \"\\\"OA Boocamp Subiect Area\\\".\\\"D Customers\\\".\\\"Marital Statu
```

OAC MCP Client in action: execute sql

```
oac> sum revenue month where for year = 2023
2026-05-15 15:26:41 [INFO] Executing Logical SQL via OAC MCP...

-- MCP REQUEST JSON -----
{
  "jsonrpc": "2.0",
  "id": "8fb41b49-e7a6-441e-bcbb-20a4b7d5d277",
  "method": "tools/call",
  "params": {
    "name": "oracle_analytics-execute_logical_sql",
    "arguments": {
      "query": "SELECT\n  \\"OA Boocamp Subject Area\\".\\"D Billing Date\\".\\"Month\\" AS llm_0,\n  \\"OA Boocamp Subject Area\\".\\"D Billing Date\\".\\"Year\\" AS llm_1,\n  SUM(OVERRIDEAGGR(\\"OA Boocamp Subject Area\\".\\"Revenue Metrics\\".\\"Revenue\\")) AS llm_2\nFROM \\"OA Boocamp Subject Area\\" \nWHERE \\"OA Boocamp Subject Area\\".\\"D Billing Date\\".\\"Year\\" = '2023'\nORDER BY 3 DESC\nFETCH FIRST 1000 ROWS ONLY",
      "maxRows": 1000
    }
  }
}

-- MCP RESULT JSON -----
{
  "jsonrpc": "2.0",
  "result": {
    "content": [
      {
        "type": "text",
        "text": "{\\\"metadata\\\":{\\\"requestId\\\":\\\"31b8c96d-d4c9-4876-a46d-ad40678ab14b\\\",\\\"batchSize\\\":1000,\\\"startTime\\\":1778851601801,\\\"batches\\\":[{\\\"complete\\\":true,\\\"cursorId\\\":\\\"c0ff7791-b1c6-4d42-a39c-f00c07c4484\\\",\\\"batchNumber\\\":1,\\\"data\\\":[{\\\"llm_2\\\":9234021.14,\\\"llm_0\\\":\\\"2023 / 12\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":8805336.27,\\\"llm_0\\\":\\\"2023 / 11\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":8582524.51,\\\"llm_0\\\":\\\"2023 / 07\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":8551516.35,\\\"llm_0\\\":\\\"2023 / 08\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":8517513.79,\\\"llm_0\\\":\\\"2023 / 09\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":8262733.96,\\\"llm_0\\\":\\\"2023 / 06\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":8075354.96,\\\"llm_0\\\":\\\"2023 / 10\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":7694167.69,\\\"llm_0\\\":\\\"2023 / 05\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":7232719.75,\\\"llm_0\\\":\\\"2023 / 04\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":6248179.6,\\\"llm_0\\\":\\\"2023 / 03\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":6130898.75,\\\"llm_0\\\":\\\"2023 / 01\\\",\\\"llm_1\\\":\\\"2023\\\"},{\\\"llm_2\\\":6085033.23,\\\"llm_0\\\":\\\"2023 / 02\\\",\\\"llm_1\\\":\\\"2023\\\"}],\\\"hasMore\\\":false,\\\"totalRecordsStreamed\\\":12,\\\"isComplete\\\":true,\\\"recordsInBatch\\\":12,\\\"timestamp\\\":1778851601803}],\\\"status\\\":{\\\"result\\\":\\\"success\\\",\\\"error\\\":false,\\\"message\\\":\\\"Streaming completed successfully\\\"},\\\"summary\\\":{\\\"completed\\\":true,\\\"totalBatches\\\":1,\\\"totalRecords\\\":12,\\\"endTime\\\":1778851601804,\\\"durationMs\\\":3}}}"
      }
    ],
    "isError": false
  },
  "id": "8fb41b49-e7a6-441e-bcbb-20a4b7d5d277"
}

sum_revenue | month | year
-----+-----+-----
9234021.1400 | 2023 / 12 | 2023
8805336.2700 | 2023 / 11 | 2023
8582524.5100 | 2023 / 07 | 2023
8551516.3500 | 2023 / 08 | 2023
8517513.7900 | 2023 / 09 | 2023
8262733.9600 | 2023 / 06 | 2023
8075354.9600 | 2023 / 10 | 2023
7694167.6900 | 2023 / 05 | 2023
7232719.7500 | 2023 / 04 | 2023
6248179.6000 | 2023 / 03 | 2023
6130898.7500 | 2023 / 01 | 2023
6085033.2300 | 2023 / 02 | 2023
```



DEMO

OAC MCP Server using REST

Instead of coding an agent, we can use something that is (almost) ready to go instead – i.e. Claude

ŽV

Žiga Vaupot

Save

Close

My Profile

Privacy

Shared Links

Advanced

App Keys

Mobile Access

Access Tokens

MCP Connect

Download this tool and register it with your MCP Host application to manage your connection from it to the Oracle Analytics MCP server. A browser will launch to prompt you to login with your Oracle Analytics credentials when you start the MCP Host application.

Installation

1. If Node.js 18 or later is not installed, download Node.js from <https://nodejs.org> and install it.

2. Unpack the zip file

3. Copy the MCP server configuration below to your MCP Host application's MCP configuration:

Download

Copy JSON

```

{
  "mcpServers": {
    "oac-mcp-connect": {
      "command": "node",
      "args": [
        "/path/to/oac-mcp-connect.js",
        "https://analyticsent-XXXXXXXXXXr.analytics.ocp.oraclecloud.com"
      ]
    }
  }
}

```

1st download MCP connect tool and unpack it to your laptop.

```
(base) zigavaupot@Mac oac-mcp-connect % pwd
/Users/zigavaupot/Documents/oac-mcp-connect
(base) zigavaupot@Mac oac-mcp-connect % ls -lahR
total 6776
drwxr-xr-x@ 7 zigavaupot  staff   224B  14 maj  11:23 .
drwx-----+ 25 zigavaupot  staff   800B  13 maj  14:43 ..
-rw-r--r--@ 1 zigavaupot  staff    6,0K  14 maj  11:23 .DS_Store
drwxr-xr-x@ 7 zigavaupot  staff   224B  28 okt.  2025 lib
-rwxr-xr-x@ 1 zigavaupot  staff   912B  28 okt.  2025 oac_mcp_connect_config-template.json
-rwxr-xr-x@ 1 zigavaupot  staff   3,3M  28 okt.  2025 oac-mcp-connect.js
-rwxr-xr-x@ 1 zigavaupot  staff    12K  28 okt.  2025 README.md

./lib:
total 568
drwxr-xr-x@ 7 zigavaupot  staff   224B  28 okt.  2025 .
drwxr-xr-x@ 7 zigavaupot  staff   224B  14 maj  11:23 ..
-rw-r--r--@ 1 zigavaupot  staff   285B  28 okt.  2025 288.oac-mcp-connect.js
-rw-r--r--@ 1 zigavaupot  staff    46K  28 okt.  2025 661.oac-mcp-connect.js
-rw-r--r--@ 1 zigavaupot  staff   106K  28 okt.  2025 772.oac-mcp-connect.js
-rw-r--r--@ 1 zigavaupot  staff    48K  28 okt.  2025 832.oac-mcp-connect.js
-rw-r--r--@ 1 zigavaupot  staff    71K  28 okt.  2025 868.oac-mcp-connect.js
(base) zigavaupot@Mac oac-mcp-connect %
```

Then Copy JSON and proceed ...

Setting up

Settings > Developer

The screenshot illustrates the steps to configure local MCP servers in the Claude AI settings. On the left, the 'Settings' menu is open, with 'Settings' and 'Developer' highlighted. A red arrow points from 'Settings' to the 'Settings' window. In the 'Settings' window, the 'Developer' section is selected in the sidebar, and the 'Edit Config' button is highlighted. A red arrow points from 'Edit Config' to a file search window. In the search window, 'Searching "Claude"' is shown, and the search results list 'claude_desktop_config.json' as a JSON File. A red arrow points from this file to a code block containing the configuration for browser authentication.

Settings Menu:

- Settings
- Language
- Get help
- Upgrade plan
- Get apps and extensions
- Gift Claude
- Learn more
- Log out

Settings Window:

- General
- Account
- Privacy
- Billing
- Usage
- Capabilities
- Connectors
- Claude Code
- Cowork
- Claude in Chrome
- Desktop app
- General
- Extensions
- Developer**

Local MCP servers
Add and manage MCP servers that you're working on.

Edit Config

Searching "Claude"

Search: This Mac "Claude"

Save +

Name	Kind	Date Last Opened
claude_desktop_config.json	JSON File	27. februar 2026 ob 13:31

For Browser Authentication (Interactive):

```
{
  "mcpServers": {
    "oac-mcp-connect": {
      "command": "node",
      "args": [
        "/Users/zigavaupot/Documents/oac-mcp-connect/oac-mcp-connect.js",
        "https://analyticsent-.analytics.ocp.oraclecloud.com"
      ]
    }
  }
}
```



Other authentication options

- For Bearer Token Authentication
- with Custom Header

```
{
  "mcpServers": {
    "oac-mcp-connect": {
      "command": "node",
      "args": [
        "/path/to/oac-mcp-connect/oac-mcp-connect.js",
        "https://your-oac-instance.com",
        "/path/to/token.json"
      ]
    }
  }
}
```

```
{
  "mcpServers": {
    "oac-mcp-connect": {
      "command": "node",
      "args": [
        "/path/to/oac-mcp-connect/oac-mcp-connect.js",
        "https://your-oac-instance.com",
        "-H", "X-Custom: value",
        "--service-instance-key", "mykey",
        "./token.json"
      ]
    }
  }
}
```



Using OAC MCP Server

Restart Claude Desktop and Log-in

ORACLE Cloud

Vpis v račun Oracle Cloud

Domena identitete ⓘ
Default

Uporabniško ime
ziga.vaupot@gmail.com

Geslo
.....

[Ali ste pozabili geslo?](#)

Vpis

[Ali potrebujete pomoč pri vpisu?](#)

Chat Cowork Code

+ New chat

Projects

Artifacts

Customize

Recents

Good afternoon, Žiga

How can I help you today?

+ Sonnet 4.6

Code Learn Write Life stuff Claude's choice

Žiga · Pro



Discover Data

oracle_analytics-discover_data

s katerimi podatki razpolagamo?

Loaded tools >

Poglejmo, kateri podatki so na voljo v Oracle Analytics!

oracle_analytics-discover_data >

V Oracle Analytics so na voljo naslednji podatki:

Vaši nabori podatkov (ziga.vaupot@gmail.com):

- **ATTRITION / ATTRITION ADW** — podatki o odlivu zaposlenih (HR)
- **Attrition Similarity Analysis Results** — rezultati analize podobnosti za attrition
- **Census - Candidates / Prediction / Train** — podatki o popisu / napovednem modelu
- **Combined XLSX data** — združeni Excel podatki
- **Inventory Data / Inventory Data MONTH** — podatki o zalogah
- **SALES** — prodajni podatki (Makeit)
- **Sales dataset - one xlsx** — prodajni nabor podatkov
- **SAMPLE_SALES, SAMPLE_SALES_AFTER_CUT, SAMPLE_SALES_BEFORE_CUT** — vzorčni prodajni podatki

Subject Area-ji (preddefinirani poslovni modeli):

- **Essbase Subject Area**
- **OA Boocamp Subject Area**

Podatki drugih uporabnikov (dostopni v skupni rabi):

- Fermentation Results, FERMENTERS_V110-V160, marketing_list, Turisti, Sales DS, Sales Returns, DB Dataset, JADED/JADED 2, ASOSamp.Basic ...

Kateri nabor podatkov vas zanima? Lahko podrobneje raziščem strukturo katerega koli od njih ali kar začnemo z analizo.

Loading tools

Request

```
{
  "query": "select:mcp__oac-mcp-connect__oracle_analytics-discover_data,mcp__oac-mcp-connect__oracle_analytics-describe_data",
  "max_results": 2
}
```

oracle_analytics-discover_data

o oracle_analytics-discover_data

Response

```
{
  "Datasets": [
    {
      "displayName": "ASOSamp.Basic",
      "name": "'sandi.holub@smartq.si'. 'ASOSamp.Basic'",
      "description": "Dataset",
      "model": "custom",
      "type": "datasets"
    },
    {
      "displayName": "ATTRITION",
      "name": "'ziga.vaupot@gmail.com'. 'ATTRITION'",
      "description": "",
      "model": "custom",
      "type": "datasets"
    },
    {
      "displayName": "ATTRITION ADW",
      "name": "'ziga.vaupot@gmail.com'. 'HR ATTRITION'",
      "description": "",
      "model": "custom",
      "type": "datasets"
    }
  ]
}
```

Done



Describe Data

oracle_analytics-describe_data

želim analizirati podatke o odlivu zaposlenih

Thought process ▾

🕒 The user wants to analyze employee attrition data. Let me first explore the structure of the ATTRITION dataset to understand what columns are available.

👌 Done

Najprej si oglejmo strukturo teh podatkov!

Used oac-mcp-connect integration ▾

o oracle_analytics-describe_data

Result

o oracle_analytics-describe_data

Result

🕒 Both datasets have the same columns. Let me now ask the user what kind of analysis they want to do. The datasets contain rich HR data about employee attrition. Let me ask clarifying questions about what they want to analyze specifically.

🕒 The user wants a general overview of attrition — how many employees left, by department, role, gender, etc. Let me run several queries to gather this data, then present a nice visualization.

Let me run multiple queries in parallel:

1. Overall attrition count (Yes vs No)

2. Attrition by department

3. Attrition by job role

4. Attrition by gender

Show more

👌 Done

Odlično! Oba nabora podatkov (ATTRITION in ATTRITION ADW) imata enako strukturo z bogatimi HR podatki. Na voljo so naslednje kategorije podatkov:

O zaposlenem:

starost, spol, zakonski stan, izobrazba, področje izobrazbe

O delu:

oddelek, delovna vloga, nivo delovnega mesta, nadure, poslovna potovanja

Zadovoljstvo in angažiranost:

zadovoljstvo z delom, zadovoljstvo z okoljem, ravnovesje med delom in življenjem, vključenost v delo, zadovoljstvo z odnosi

Plača in napredovanje:

mesečni dohodek, dnevna/urna stopnja, % povišice plače, nivo delniških opcij

Karierna pot:

leta v podjetju, leta v trenutni vlogi, leta od zadnje promocije, leta s trenutnim vodjem, skupna delovna leta, število preteklih podjetij

Ciljna spremenljivka:

ATTRITION (Yes/No — ali je zaposleni zapustil podjetje)

o oracle_analytics-describe_data

Request

```
{
  "datamodelName": "XSA('ziga.vaupot@gmail.com'. 'ATTRITION')"
```


o oracle_analytics-describe_data

Response

```
{"tables":
[{"fullQualifiedName": "XSA('ziga.vaupot@gmail.com'. 'ATTRITION').\"attrition\"", "columns":
[{"columnType": "measure", "nullable": "1", "displayName": "AGE", "dataType": "NUMERIC", "precision": 10, "scale": 0},
{"columnType": "attribute", "nullable": "1", "displayName": "ATTRITION", "dataType": "VARCHAR", "precision": 10, "scale": 0},
{"columnType": "attribute", "nullable": "1", "displayName": "BUSINESSTRAVEL", "dataType": "VARCHAR", "precision": 10, "scale": 0},
{"columnType": "measure", "nullable": "1", "displayName": "DAILYRATE", "dataType": "NUMERIC", "precision": 10, "scale": 0},
{"columnType": "attribute", "nullable": "1", "displayName": "DEPARTMENT", "dataType": "VARCHAR", "precision": 10, "scale": 0}
]
}
```

Execute Logical SQL

oracle_analytics-execute_logical_sql

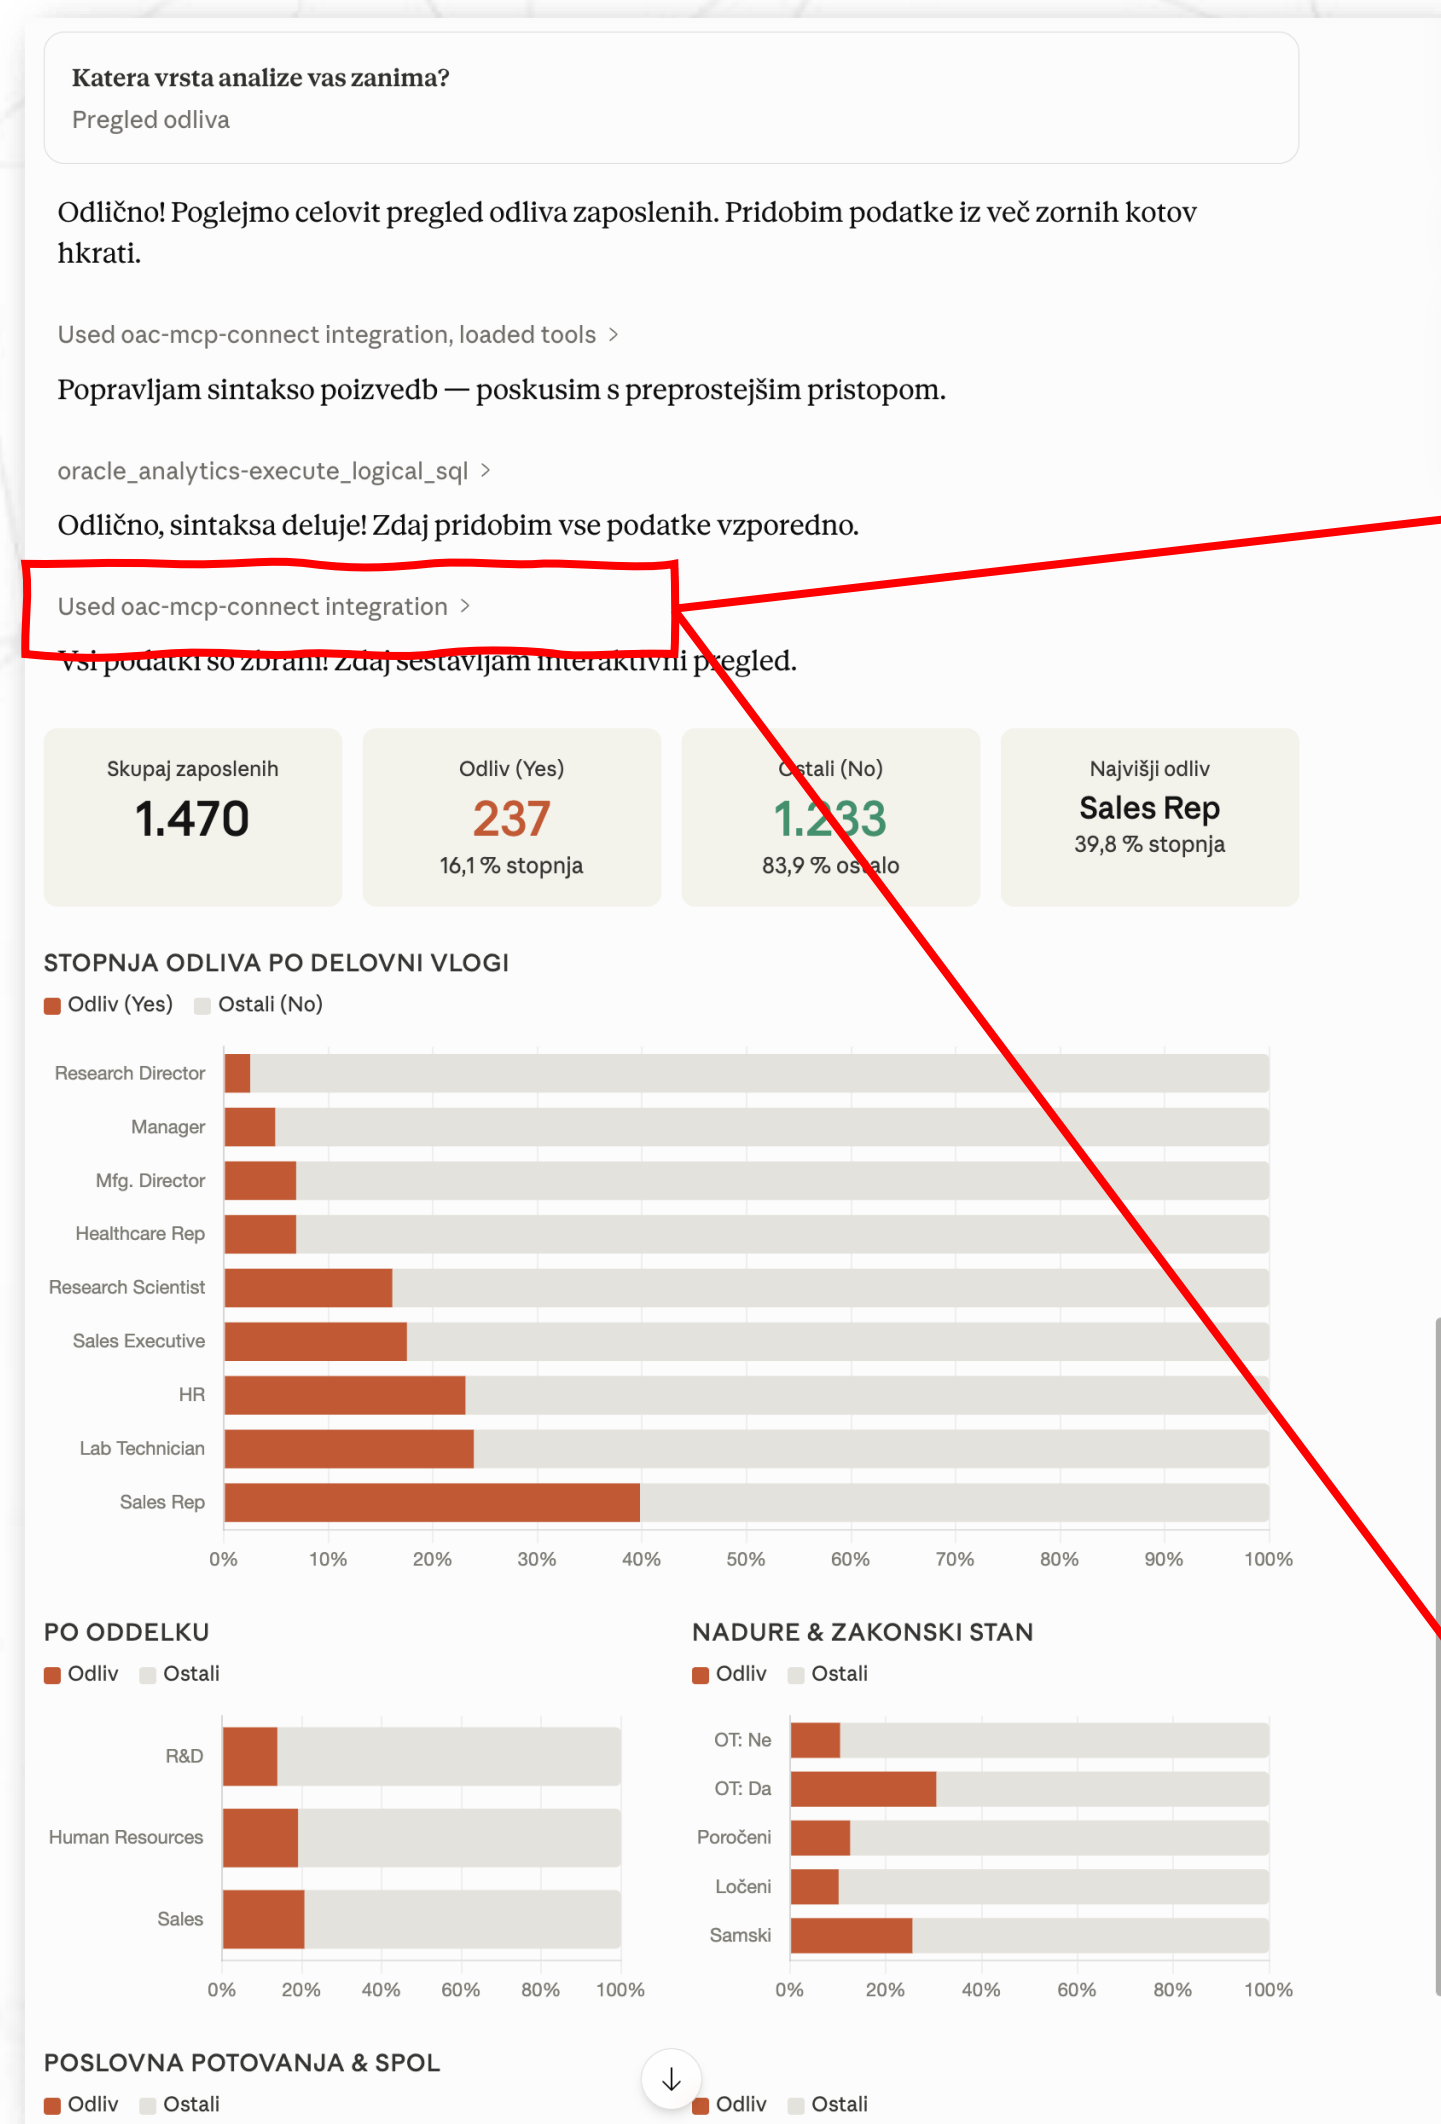

```
o oracle_analytics-execute_logical_sql

Request

{
  "query": "SELECT XSA('ziga.vaupot@gmail.com'. 'ATTRITION').\"attrition\".\"ATTRITION\",
SUM(XSA('ziga.vaupot@gmail.com'. 'ATTRITION').\"attrition\".\"EMPLOYEECOUNT\") FROM
XSA('ziga.vaupot@gmail.com'. 'ATTRITION') GROUP BY
XSA('ziga.vaupot@gmail.com'. 'ATTRITION').\"attrition\".\"ATTRITION\""
}
```

```
o oracle_analytics-execute_logical_sql

Response

{"metadata":{"requestId":"9916baa8-727a-4d00-a3cc-108b2d2963fb","batchSize":1000,"startTime":1778759416472},"batches":
[{"complete":true,"cursorId":"e53850b6-8109-4349-b30f-7c8217103fdd","batchNumber":1,"data":
[{"XSA('ziga.vaupot@gmail.com'. 'ATTRITION').\"folder::attrition\".\"DEPARTMENT\" : \"Human
Resources\", \"
```

HR Attrition Dashboard

Ustvari interaktivni dashboard za odliv zaposlenih

Loaded tools >

Sestavim dashboard z živimi podatki. Najprej napišem HTML datoteko, nato pa ustvarim artifact.


Created a file >

Created artifact: hr-attrition-dashboard

Dashboard je ustvarjen in shranjen! Vsebuje:

- **6 KPI kartic** — skupaj zaposlenih, število in stopnja odliva, povprečni dohodek in starost odšlih vs. ostalih, vloga z najvišjim tveganjem
- **Grafikon delovnih vlog** — horizontalni stolpčni grafikon z barvnim kodiranjem tveganja (rdeča / oranžna / rumena / zelena) in rang listo tveganja ob strani
- **3 grafikoni po dimenzijah** — oddelek, nadure & zakonski stan, poslovna potovanja & spol
- **Primerjalna tabela** — ključni kazalniki z odstotno razliko med skupinama

Dashboard se **samodejno osveži** iz Oracle Analytics vsakič ko ga odprete, in ima gumb za ročno osvežitev. Dostopen je kadarkoli v stranskem panelu Cowork.

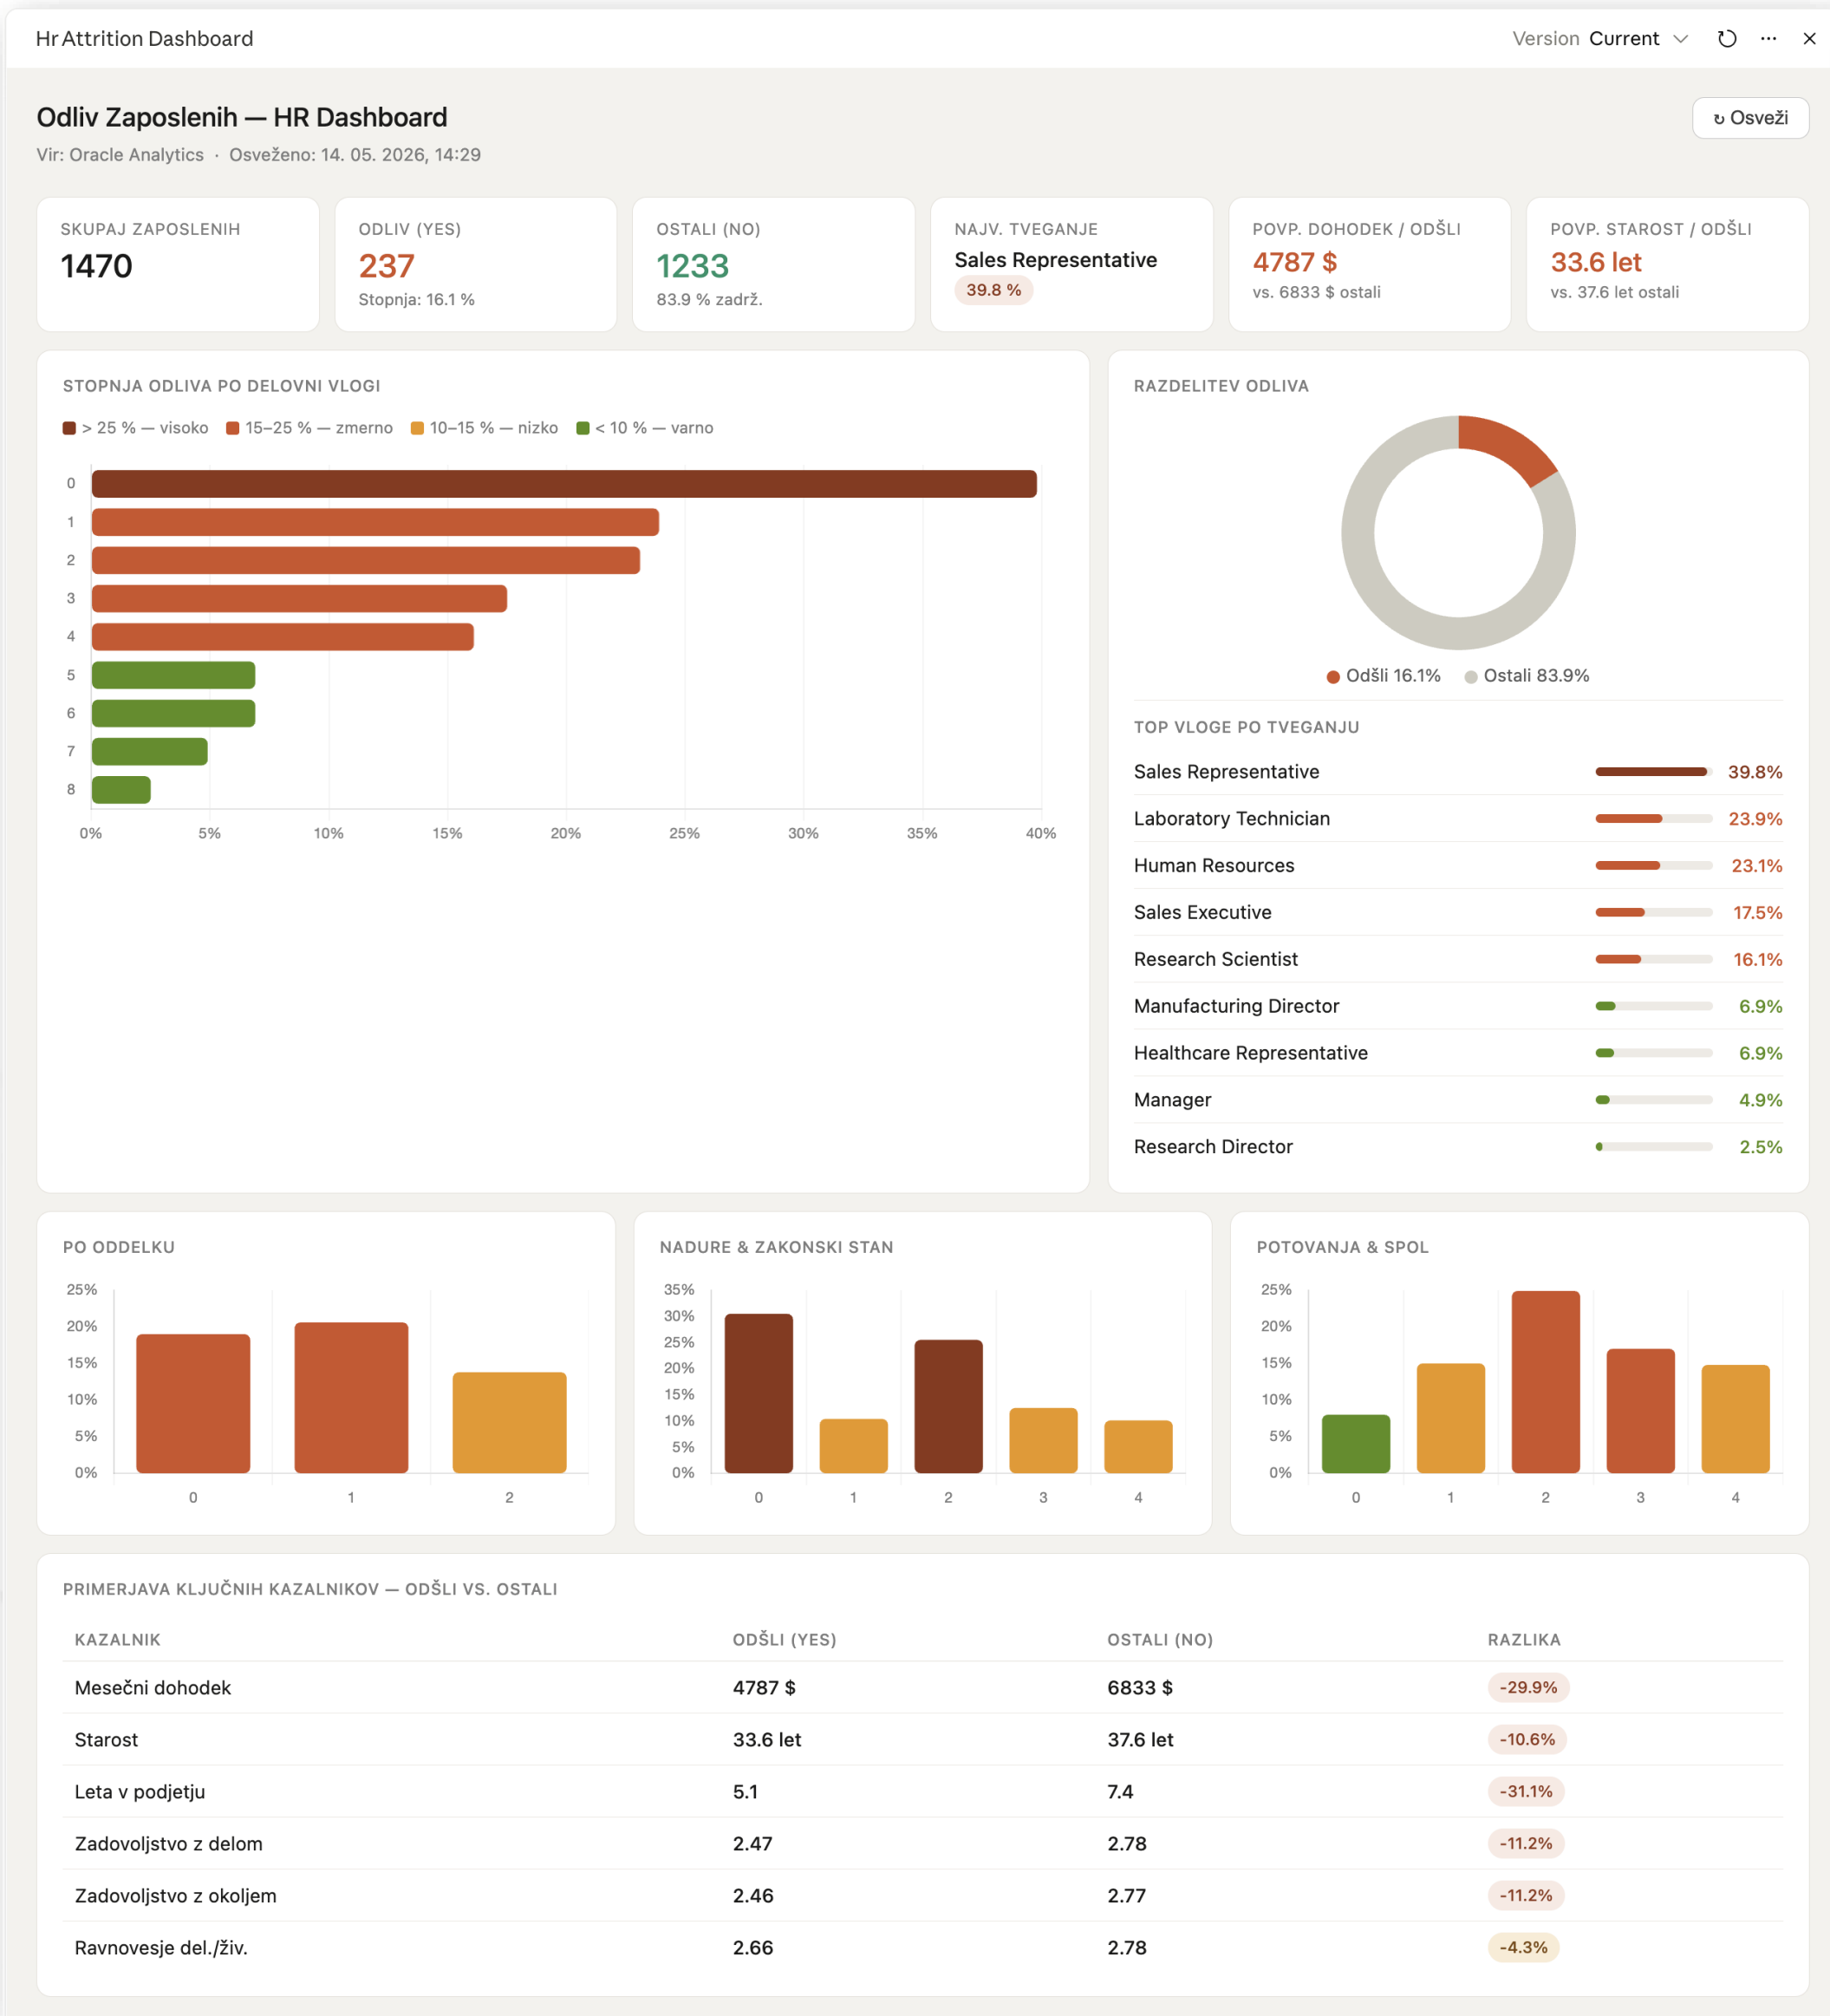

DEMO

OAC MCP Server with Claude



AI meets Oracle Analytics

Q&A



AI Meets Oracle Analytics

28. 5. 2026

Žiga Vaupot  Oracle ACE
Pro

