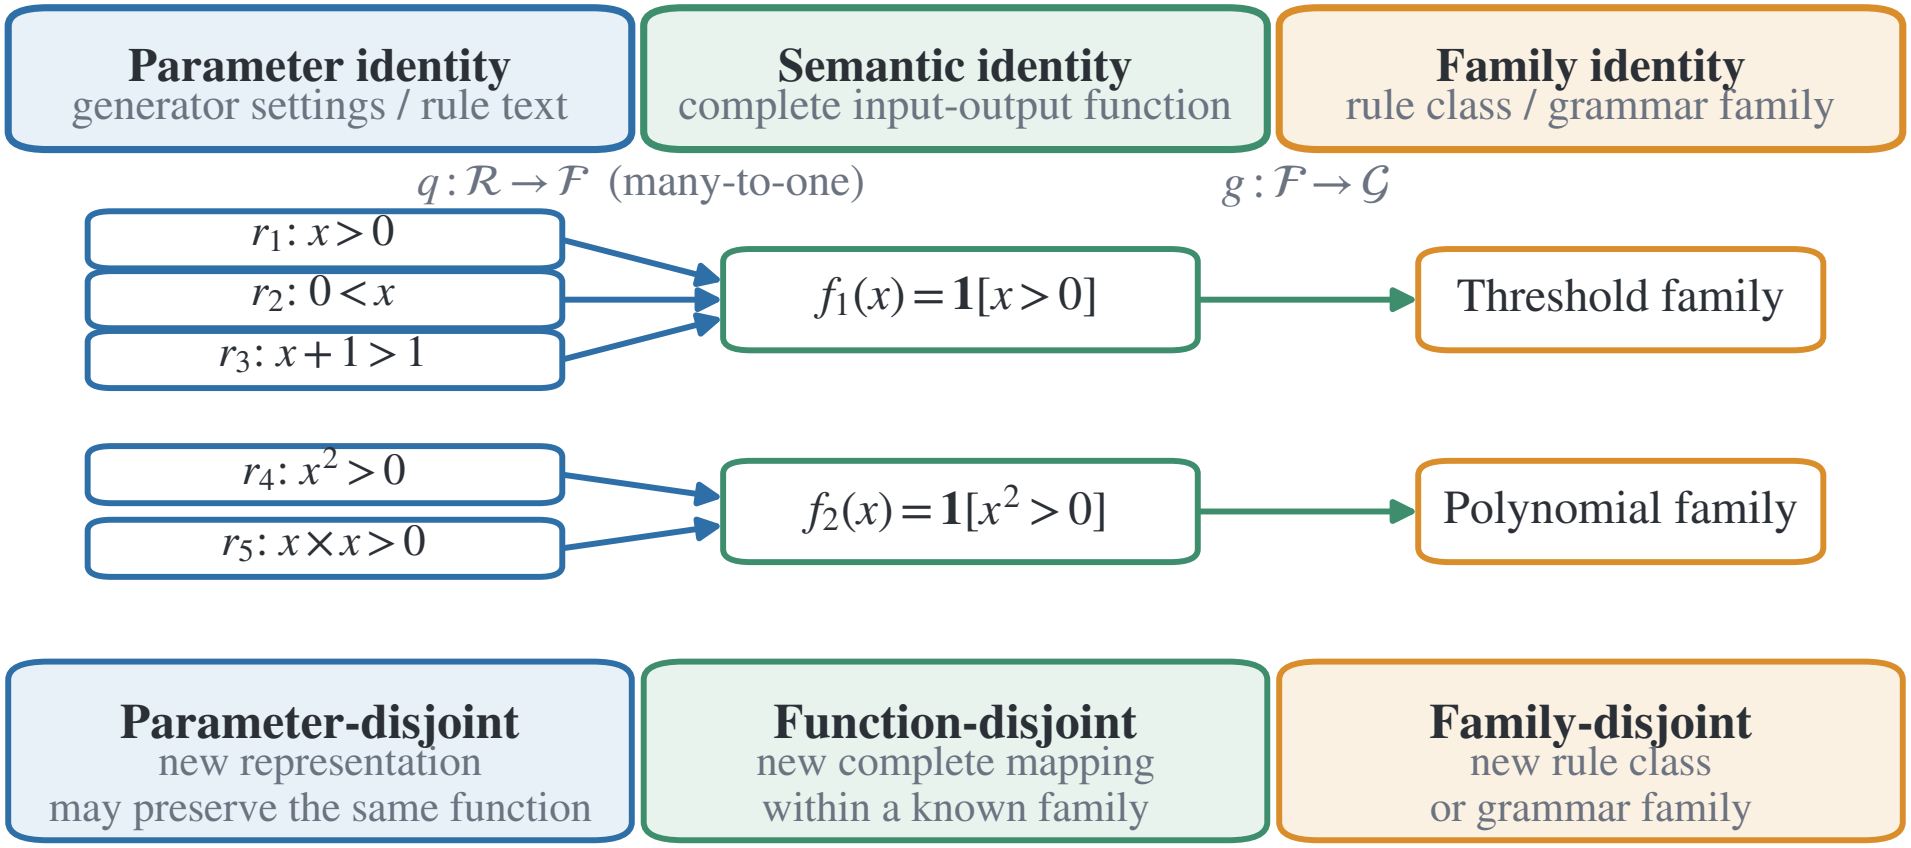
Parameter identity
generator settings / rule text
Semantic identity
complete input-output function
Family identity
rule class / grammar family
$q : \mathcal{R} \to \mathcal{F}$ (many-to-one)
$g : \mathcal{F} \to \mathcal{G}$
r_1: $x > 0$
r_2: $0 < x$
r_3: $x + 1 > 1$
$f_1(x) = \mathbf{1}[x > 0]$
Threshold family
r_4: $x^2 > 0$
r_5: $x \times x > 0$
$f_2(x) = \mathbf{1}[x^2 > 0]$
Polynomial family
Parameter-disjoint
new representation
may preserve the same function
Function-disjoint
new complete mapping
within a known family
Family-disjoint
new rule class
or grammar family