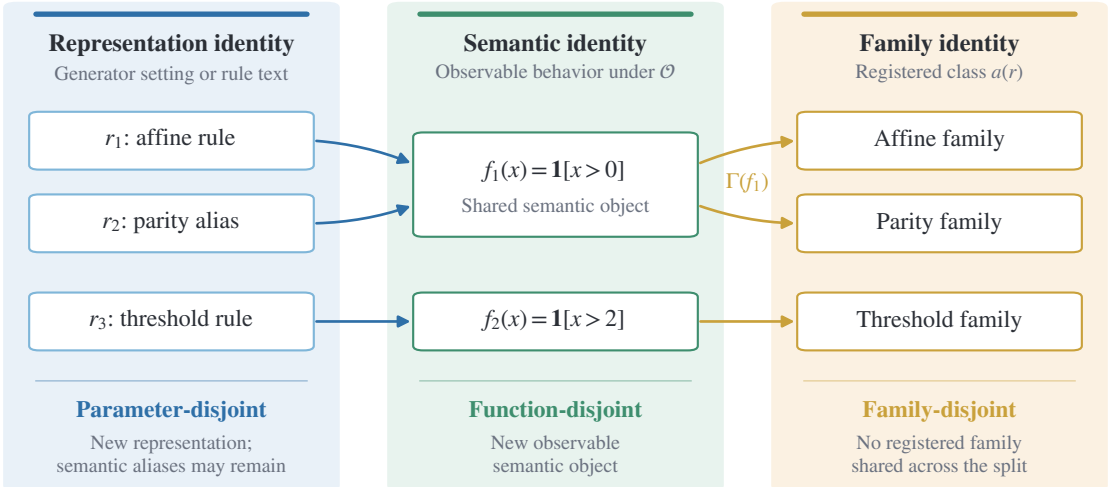
Representation identity
Generator setting or rule text
r_1: affine rule
r_2: parity alias
r_3: threshold rule
Parameter-disjoint
New representation;
semantic aliases may remain
Semantic identity
Observable behavior under $\mathcal{O}$
$f_1(x) = \mathbf{1}[x > 0]$
Shared semantic object
$f_2(x) = \mathbf{1}[x > 2]$
Function-disjoint
New observable
semantic object
$\Gamma(f_1)$
Family identity
Registered class $a(r)$
Affine family
Parity family
Threshold family
Family-disjoint
No registered family
shared across the split