


Weight-7 schedule comparison: same-shot joint X/Z failure

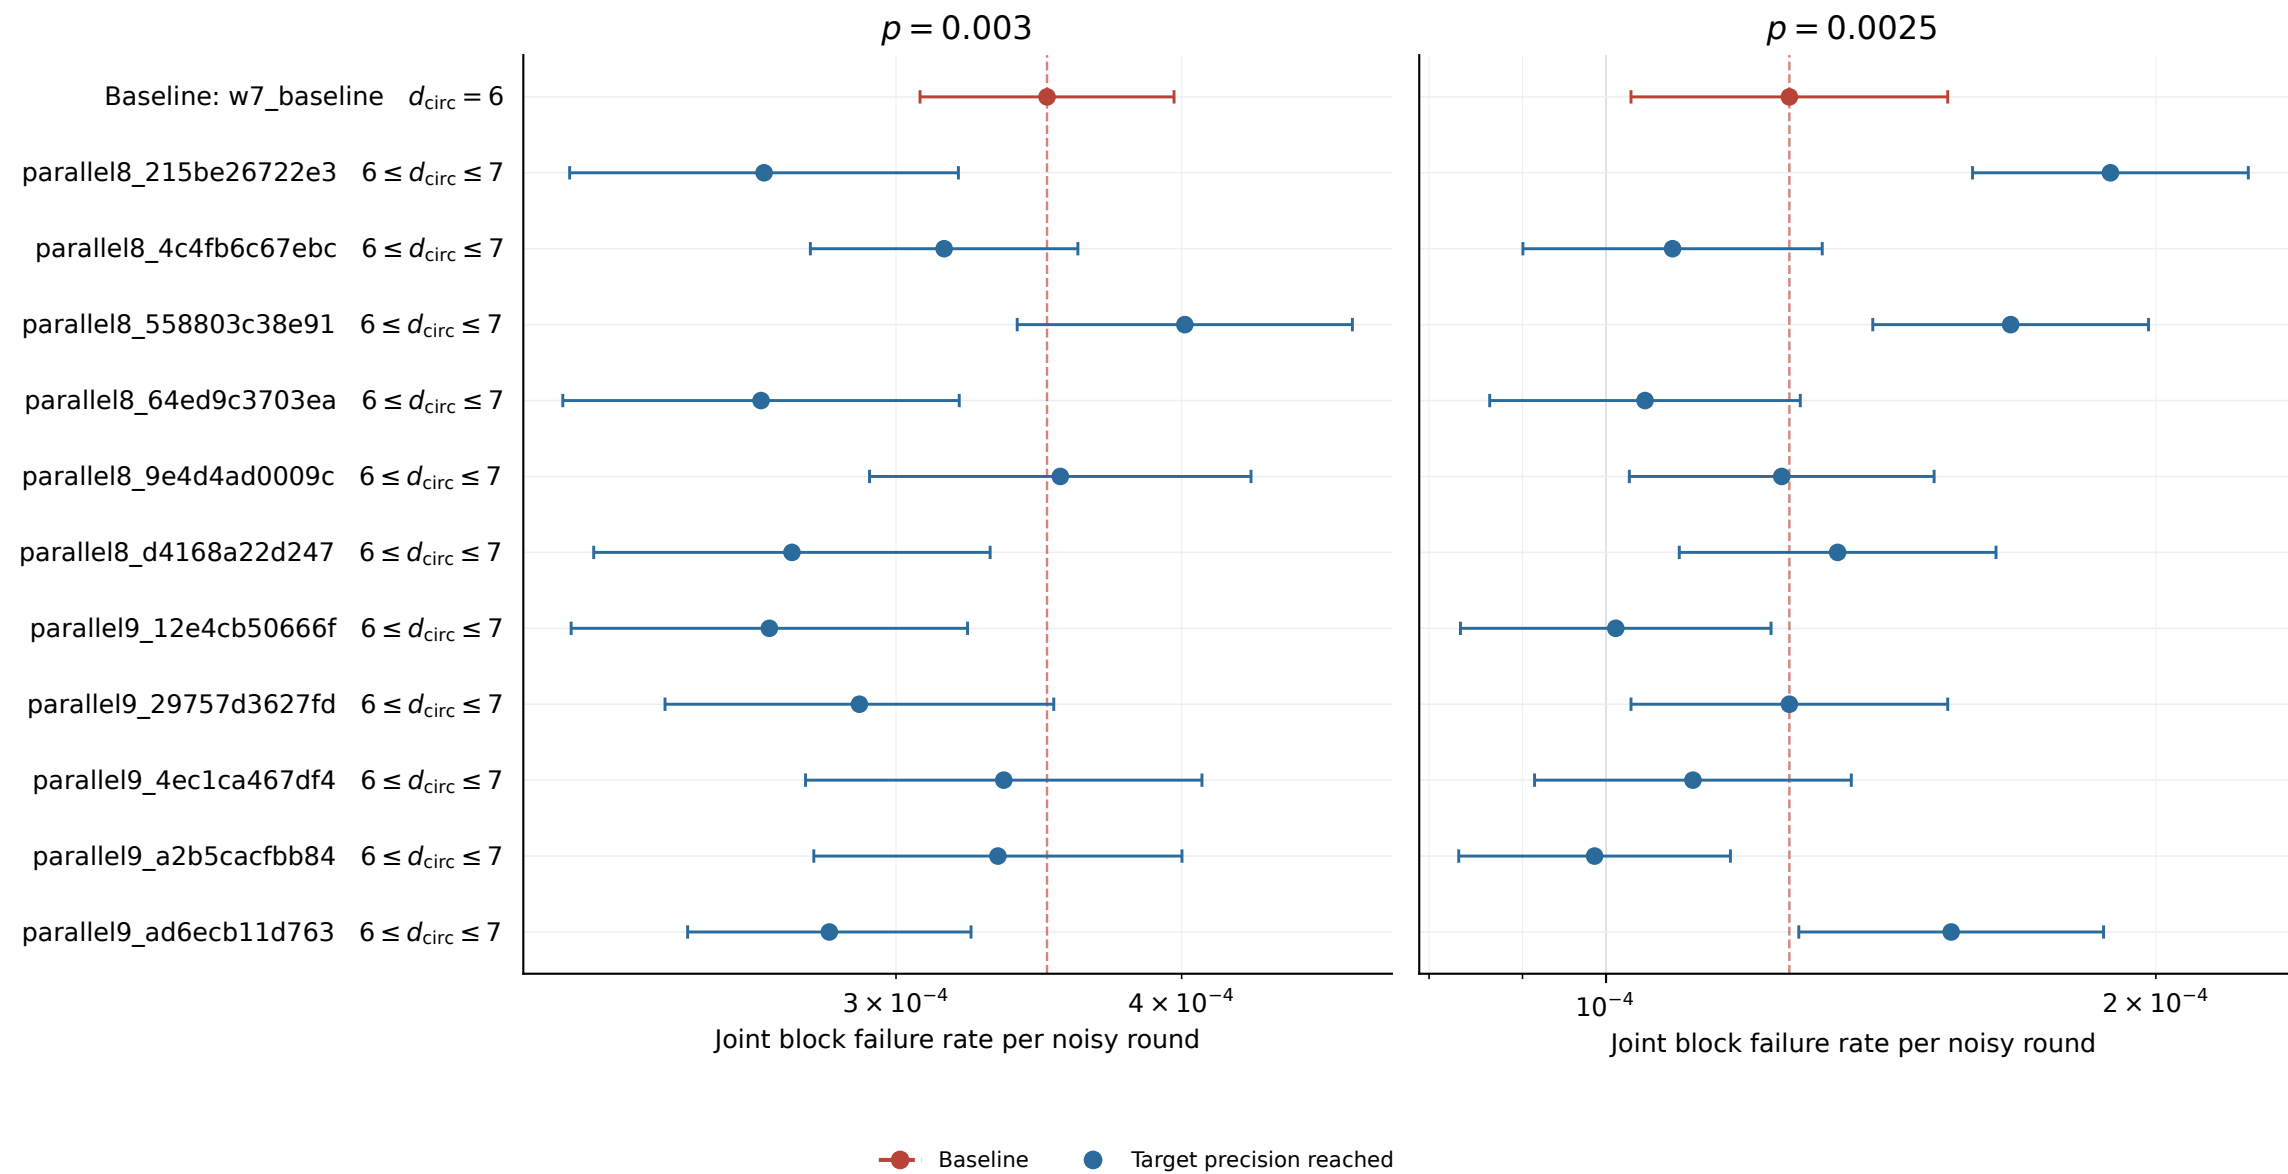

All candidates: $[[56, 12, 7]]$, $k=12$, $R=7$. Rate = $1 - (1 - F_{\text{joint}}/N)^{1/7}$, per block (not per logical qubit). Nominal 1-sigma Wilson intervals; arrows denote upper limits. Candidate order is fixed; ratios and descriptive ranks are in CSV. Multiple-candidate selection requires independent validation; this scan does not prove a best schedule.