


# R0334-3007

## Labwork 1 – Learning Reflection

<u>Aa</u> Course	 Property
<u>Name</u>	Richard Zilahi
<u>CourseID</u>	R0334-3007
<u>Course Name</u>	Introduction to Mobile App Design and Development
<u>Module</u>	Module 1 – Labwork-1: Setting up Ionic Framework and Developing First App
<u>Date</u>	28.08.2022 – 23:33

### Introduction

After doing the React Native course in one of the previous semsters, I knew this course again will be very well designed and planned, with clear schedules, assignments, and all the study materials nicely curated. And I can already say during the hands-on on the first module, that I was right.

I have been into mobile development for a whole couple of years by now, and mostly used React Native, lately with Expo, just as it was the topic of the React Native course. This, however, is something new, as it's focuses on ionic. I have been aware of the existence of Ionic, I've read some comparison blogposts, and maybe even seen some live coding challenges on youtube, but this is the first time I am taking a closer look actually, so I was very existed at first when I was diving into it.

### The assignment

In the first assignment of **Module 1** the task was to setup a development environment of **Ionic**. After swiping through the provided material of the course, i've hitted up youtube myself, to try to figure out what was the video I have been watching of Ionic a while back. And while I didn't find the exact video I was trying to, I've came across a nice comparison video. As a React Native developer, this was actually the most

interesting part for me, to get some insights, what's the decision-chain fellow developers are going through when deciding on this specific framework.

<https://youtu.be/kYZENMe6-N0>

The video also mentions `Flutter`, which I personally dislike, as when I was giving it a shot, years ago, it gave me the impressions that it just tries to cut corners, instead of properly doing something, most if the things in `Flutter` was giving the the feeling like it's *almost* there. `Ionic` also gave this vibe at first, but after peeking into some open source `Ionic` projects on `Github` it was a little bit better, but also as the guy states in the video, there is no *the best framework* per se, every framework can be the *best* for a specific project, a task, or a problem one needs to solve.

In general, this is going to be my first `Ionic` application, (or the first dev-env I am putting together for an `Ionic` app), so I was excited to gather some insights, and being able to create a very low level comparison using my own experiences instead of others.

## My first `Ionic` application

With every new framework, the first thing I do, is to go to the official documentation. For `Ionic` tis can be found at:

<https://ionicframework.com/docs>


The documentation suggests to install their official `CLI` package globally. I tend to avoid globally installed package, so instead I am using the `CLI` or other development related packages *locally*.

So let's get it started:

## Create a working directory, and it's git repository

```
cd zilahir/laurea
```

```
mkdir R0334-3007
```

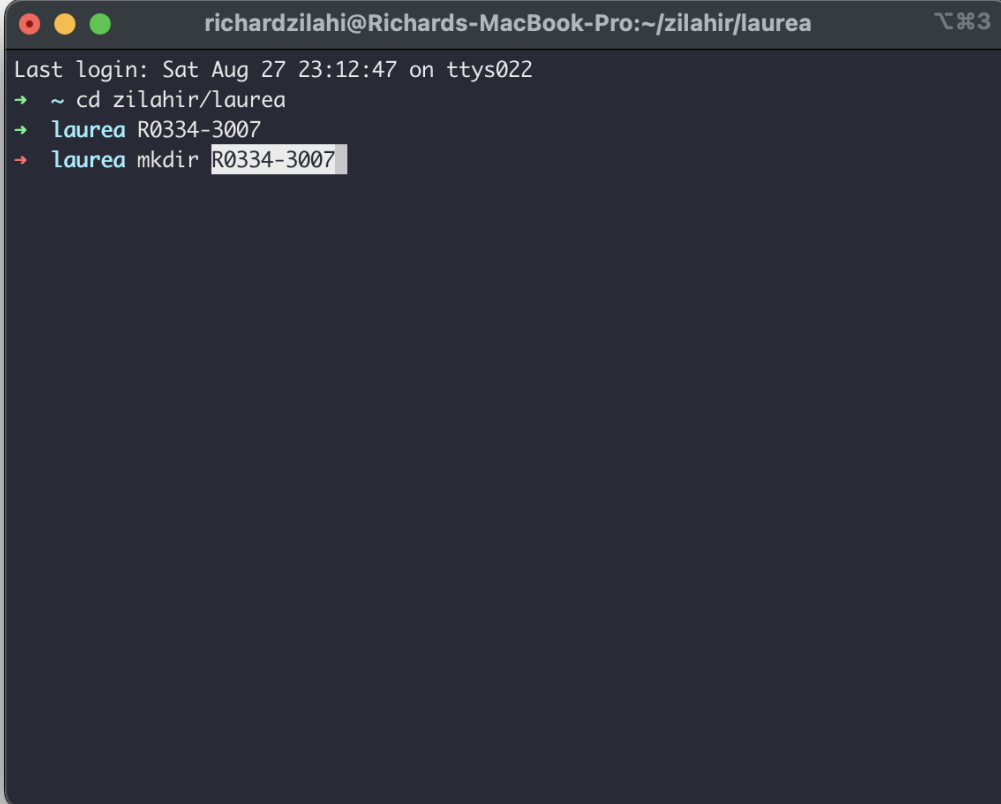A terminal window titled 'richardzilahi@Richards-MacBook-Pro:~/zilahir/laurea' with a dark background. It shows the following commands and output: 'Last login: Sat Aug 27 23:12:47 on ttys022', '~ cd zilahir/laurea', 'laurea R0334-3007', and 'laurea mkdir R0334-3007'. The last command's output is highlighted with a light gray background.

```
richardzilahi@Richards-MacBook-Pro:~/zilahir/laurea
Last login: Sat Aug 27 23:12:47 on ttys022
→ ~ cd zilahir/laurea
→ laurea R0334-3007
→ laurea mkdir R0334-3007
```

Once the folder is created, a couple of things needs to be setup. Let's initialise an empty `npm project`.

To do this, we can use the npm's initialisation script.

```
npm init
```

```
richardzilahi@Richards-MacBook-Pro:~/zilahir/laurea/dummy/R0334-3007
→ R0334-3007 npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.

See `npm help init` for definitive documentation on these fields
and exactly what they do.

Use `npm install <pkg>` afterwards to install a package and
save it as a dependency in the package.json file.

Press ^C at any time to quit.
package name: (r0334-3007)
version: (1.0.0)
description:
entry point: (index.js)
test command:
git repository:
keywords:
author:
license: (ISC)
About to write to /Users/richardzilahi/zilahir/laurea/dummy/R0334-3007/package.json:
{
  "name": "r0334-3007",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "author": "",
  "license": "ISC"
}

Is this OK? (yes) yes
→ R0334-3007
```

We can initialise a git repository on this current working directory right away.

```
git init
```

```
richardzilahi@Richards-MacBook-Pro:~/zilahir/laurea/dummy/R0334-3007
→ R0334-3007 npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.


See `npm help init` for definitive documentation on these fields
and exactly what they do.

Use `npm install <pkg>` afterwards to install a package and
save it as a dependency in the package.json file.

Press ^C at any time to quit.
package name: (r0334-3007)
version: (1.0.0)
description:
entry point: (index.js)
test command:
git repository:
keywords:
author:
license: (ISC)
About to write to /Users/richardzilahi/zilahir/laurea/dummy/R0334-3007/package.json:
{
  "name": "r0334-3007",
  "version": "1.0.0",
  "description": "",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "author": "",
  "license": "ISC"
}

Is this OK? (yes) yes
→ R0334-3007
```


Once we have the git initialized, we can set up it's remote, by grabbing the repo's URL from [Github](#)

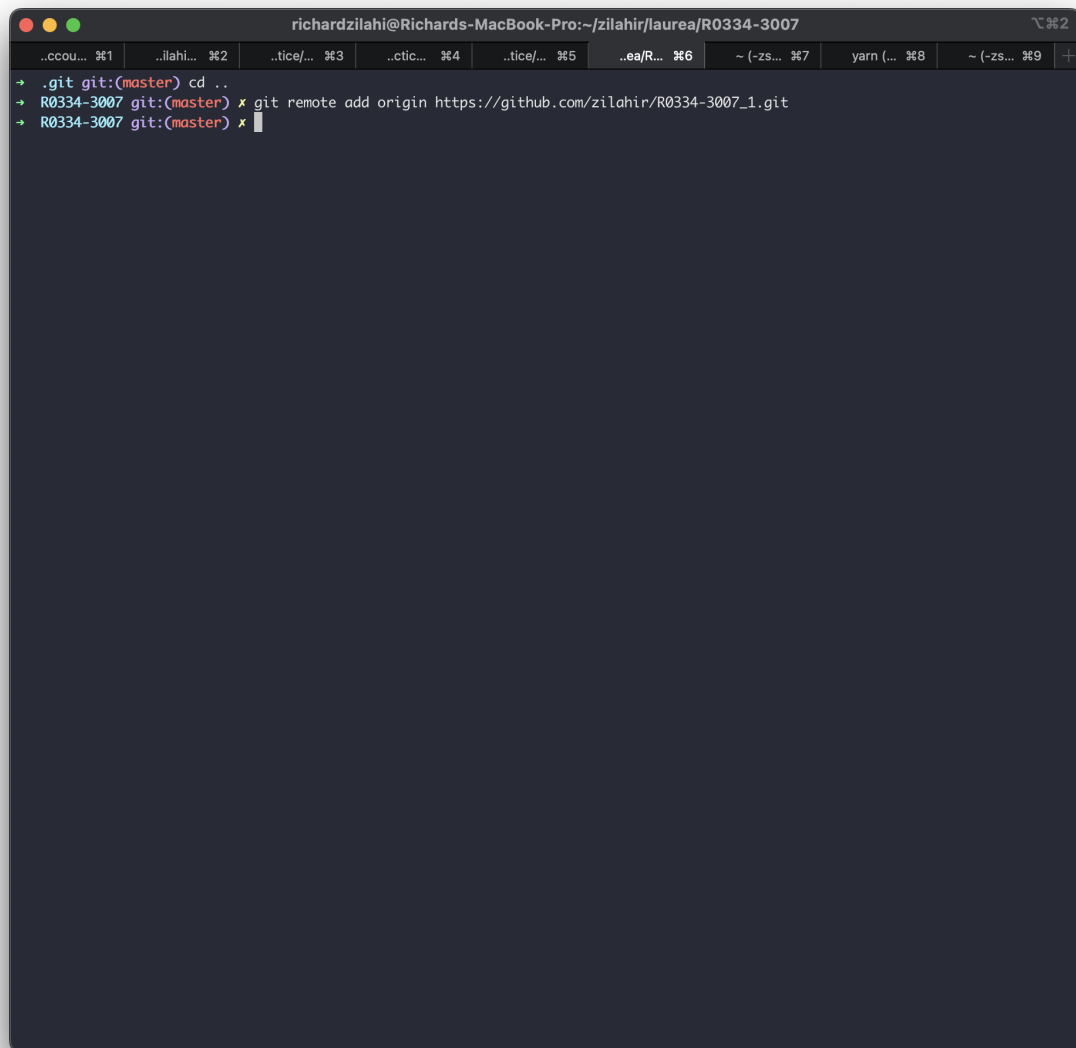A terminal window on a MacBook Pro. The title bar shows the user 'richardzilahi' and the path '~/zilahir/laurea/R0334-3007'. The terminal has a dark background with light green text. It shows a sequence of commands: first, a prompt for a shell, then a prompt for a git repository, then a 'cd ..' command, and finally a 'git remote add origin https://github.com/zilahir/R0334-3007\_1.git' command. The prompt changes from '\$' to 'git:(master) \$' after the first two steps, and back to '\$' after the third. The terminal also shows a tab bar at the top with several tabs labeled with file names and symbols like '%1', '%2', etc.

```
richardzilahi@Richards-MacBook-Pro:~/zilahir/laurea/R0334-3007
→ .git git:(master) cd ..
→ R0334-3007 git:(master) $ git remote add origin https://github.com/zilahir/R0334-3007_1.git
→ R0334-3007 git:(master) $
```

Before installing any `npm` packages, let's make sure I am using the correct version of `npm`. As I am working on several project's simultaneously, I have utilised a tiny helper programme, that let's me switch between `node` versions. This is called `n`, and it can be found behind the following link: <https://github.com/tj/n>

n

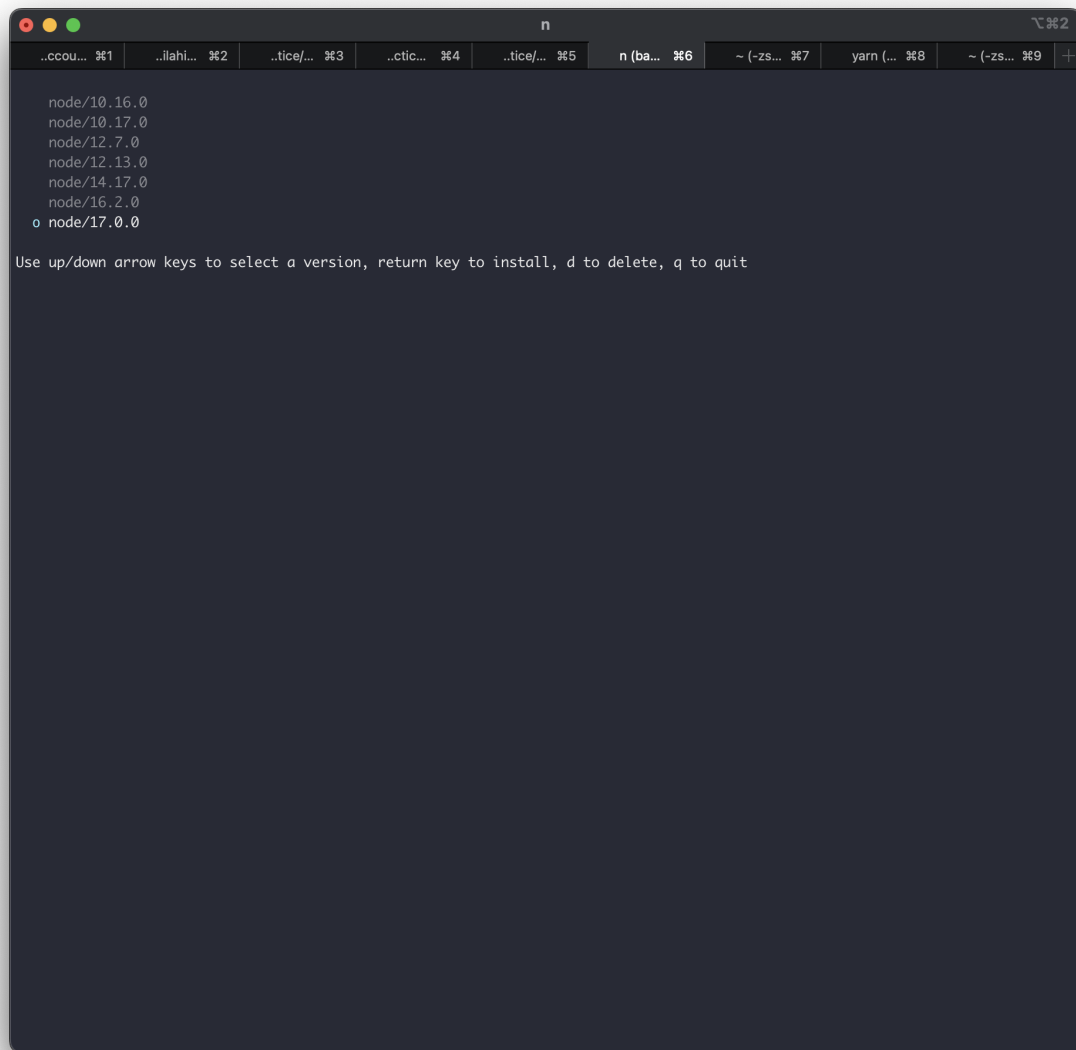

To create this **Ionic** application, I am using **node 17**

As mentioned before, let's get the **CLI** of **Ionic** to the freshly created **npm** project.

```
npm i --save @ionic/cli
```

Now i have access to the binaries of this **CLI** , so I can continue setting up an **Ionic** project.

## Creating the application

The documentation states the `CLI` command, which prompts a wizard and can walk me through of creating a new `Ionic` application:

```
ionic start R0334-3007 tabs --capacitor
```

I've chosen the `React` framework, and `capacitor`. The other options was `cordova` which I have quite bad memories of, so I was happy that there's an alternative offered here.



```
richardzilahi@Richards-MacBook-Pro:~/zilahir/laurea/R0334-3007
found 0 vulnerabilities
+ laurea ionic start R0334-3007 tabs --capacitor

Pick a framework! 🤖

Please select the JavaScript framework to use for your new app. To bypass this prompt next time, supply a value for the
--type option.

? Framework: React
? ./R0334-3007 exists. Overwrite? Yes
✓ Preparing directory ./R0334-3007 in 10.46s
✓ Downloading and extracting tabs starter in 441.11ms
> ionic integrations enable capacitor --quiet -- R0334-3007 io.ionic.starter
> npm i --save -E @capacitor/core@latest
npm WARN deprecated stable@0.1.8: Modern JS already guarantees Array#sort() is a stable sort, so this library is deprecated. See
the compatibility table on MDN: https://developer.mozilla.org/en-US/docs/Web/JavaScript/Reference/Global_Objects/Array/sort#brows
er_compatibility
npm WARN deprecated svgo@1.3.2: This SVGO version is no longer supported. Upgrade to v2.x.x.

added 1337 packages, and audited 1338 packages in 30s

207 packages are looking for funding
  run `npm fund` for details

6 high severity vulnerabilities

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
> npm i -D -E @capacitor/cli@latest

added 41 packages, and audited 1379 packages in 3s

209 packages are looking for funding
  run `npm fund` for details

6 high severity vulnerabilities

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.
> npm i --save -E @capacitor/haptics @capacitor/app @capacitor/keyboard @capacitor/status-bar

added 4 packages, and audited 1383 packages in 3s

209 packages are looking for funding
  run `npm fund` for details
```

## Launching the **Ionic** application

Once the setup wizard of the **Ionic** application has been completed, let's fire up the application.

To do this I've created a new **npm** command in my **package.json** file:


```
"dev": "next dev -p 3003",
```

Let's start the application using this modified command:

```
"start:ionic-dev": "ionic serve",
```

Now I can start the application using this command:

```
npm run start:ionic-dev
```

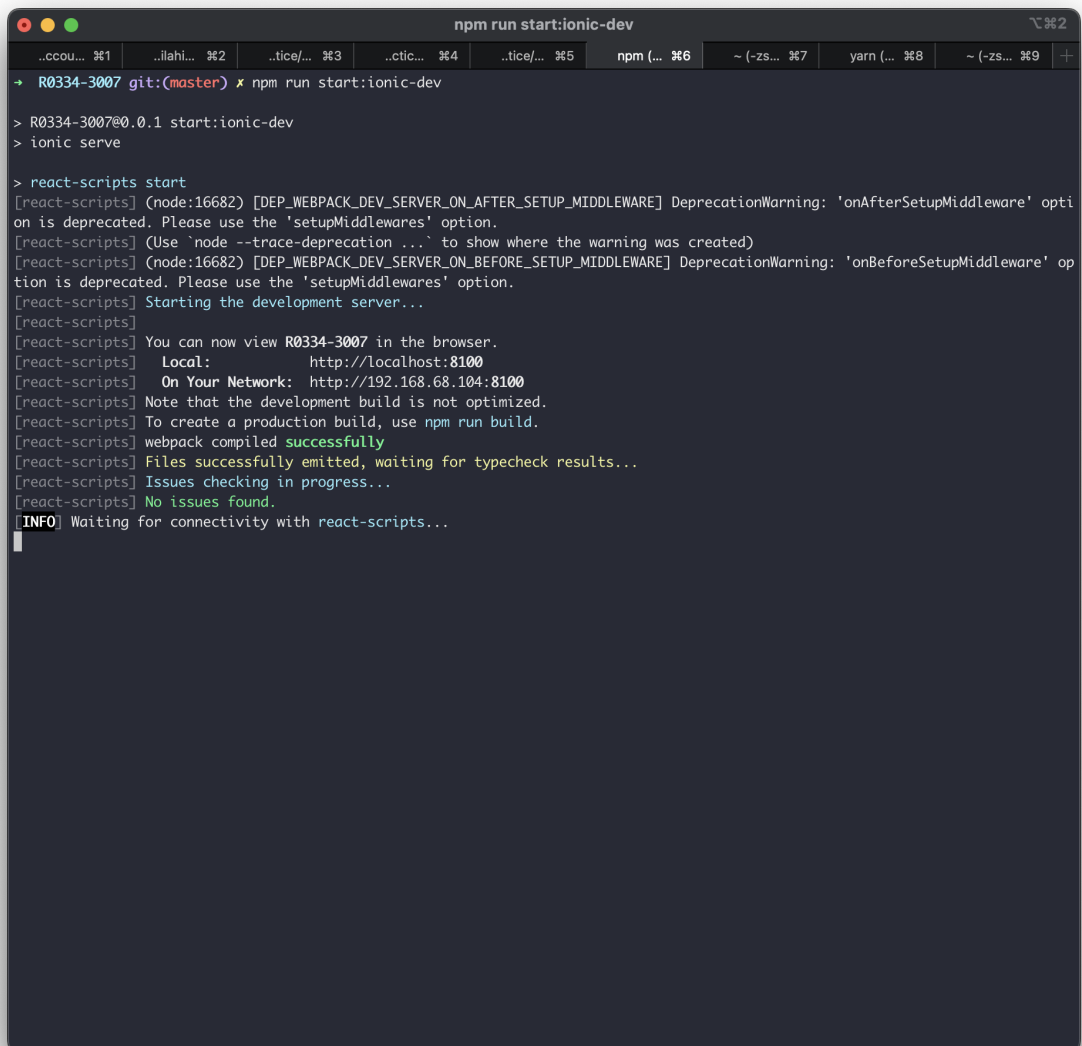

```
npm run start:ionic-dev
R0334-3007 git:(master) x npm run start:ionic-dev
> R0334-3007@0.0.1 start:ionic-dev
> ionic serve

> react-scripts start
[react-scripts] (node:16682) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
[react-scripts] (node:16682) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
[react-scripts] Starting the development server...
[react-scripts] You can now view R0334-3007 in the browser.
[react-scripts]   Local:             http://localhost:8100
[react-scripts]   On Your Network: http://192.168.68.104:8100
[react-scripts] Note that the development build is not optimized.
[react-scripts] To create a production build, use npm run build.
[react-scripts] webpack compiled successfully
[react-scripts] Files successfully emitted, waiting for typecheck results...
[react-scripts] Issues checking in progress...
[react-scripts] No issues found.
[INFO] Waiting for connectivity with react-scripts...
```

Once the application is running locally, we can visit it on it's assigned port, which is in my case is `8100`.

```
http://localhost:8100/
```

Tab 1

**Tab 1 page**  
Explore UI Components

Hello from course Introduction to Mobile App Design and Development R0334-3007

**Tab 1 page**  
Explore UI Components

As the screenshot shows, the `Ionic` application bootstrapped with `Create React App` running.

## Summary

Of course setting up a fresh application of any framework doesn't give much of insights of it, but this was definitely positive. The documentation is clean, easy to read, and also important to mention, that it was easy to find things in them, which was a huge refreshment. I am excited to look forward to the other assignment of this course.

The fact, that `Ionic` framework offer's not just angular, but `React` was also something that didn't lower down my expectations. This would be very much different if `Angular` was the only available framework within the `Ionic` ecosystem.