**HTML**

**Example of HTML Tags:**

```
<!DOCTYPE html>
<html>
   <head>
      <title>Title of the
document</title>
   </head>
  <body>
    <h1>This is heading 1</h1>
    <h2>This is heading 2</h2>
    <p>Here is the paragraph.</p>
  </body>
</html>
```

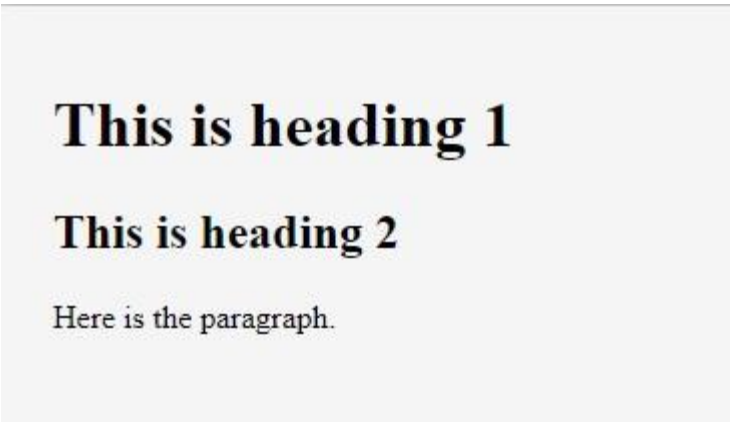


**HTML Paragraphs**

```
!DOCTYPE html>
<html>
  <head>
    <title>Title of the document</title>
  </head>
  <body>
    <h2>Elements example</h2>
    <p>This is some paragraph.</p>
<p>This is another paragraph <br/> with
line break.</p>   </body>
</html>
```

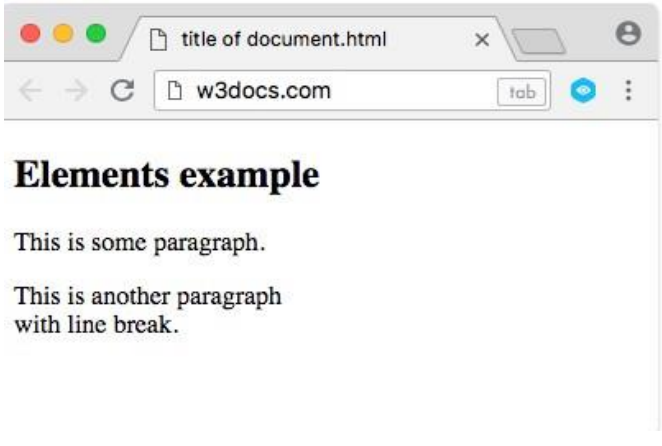

**HTML Image:**

```
<!DOCTYPE html>
<html>
  <head>
    <title>Title of the document</title>
  </head>
  <body>
    <h1>This is an image example</h1>
    <img
src="/uploads/media/default/0001/01/25acd
db3da54207bc6beb5838f65f022feaa81d7.jp eg"
alt="Aleq" width="200" height="185"/>
  </body>
</html>
```

**Example of the HTML <button> tag:**

```
<!DOCTYPE html>
<html>
  <head>
    <title>Title of the document</title>
  </head>
  <body>
    <h1>Example of the HTML button
tag:</h1>
    <p>You can specify the HTML buttons
with the button tag:</p>
    <button type="button">Button</button>
  </body>
</html>
```

**HTML Table Tags:** Some HTML tags are:

| Tag | Description |
|---|---|
| <table> | Defines a table |
| <th> | Defines a header cell in a table |
| <tr> | Defines a row in a table |
| <td> | Defines a cell in a table |
| <caption> | Defines a table caption |

Without those tags more attributes are available like cellpadding, cellspacing, colspan, rowspan, etc.

**1. Design this following table by using HTML table.**

| Name | Salary |
|---|---|
| Ramesh Raman | 5000 |
| Shabbir Hussein | 7000 |

**HTML code:**

```
<!DOCTYPE html>
<html>

   <head>
      <title>HTML Table Header</title>
   </head>
   <body>
      <table border = "1">
         <tr>
            <th>Name</th>
            <th>Salary</th>
         </tr>
         <tr>
            <td>Ramesh Raman</td>
            <td>5000</td>
         </tr>
         <tr>
            <td>Shabbir Hussein</td>
```

```
            <td>7000</td>
         </tr>
      </table>
   </body>
</html>
```

**2. Colspan and Rowspan Attributes:**

**Design this following table by using HTML table:**

| Column 1 | Column 2 | Column 3 |
|---|---|---|
| Row 1 Cell 1 | Row 1 Cell 2 | Row 1 Cell 3 |
| | Row 2 Cell 2 | Row 2 Cell 3 |
| Row 3 Cell 1 | | |

**HTML code:**

```
<!DOCTYPE html>
<html>

   <head>
      <title>HTML Table
Colspan/Rowspan</title>
   </head>

   <body>
      <table border = "1">
         <tr>
            <th>Column 1</th>
            <th>Column 2</th>
            <th>Column 3</th>
         </tr>
         <tr>
            <td rowspan = "2">Row 1 Cell
1</td>
            <td>Row 1 Cell 2</td>
            <td>Row 1 Cell 3</td>
         </tr>
         <tr>
            <td>Row 2 Cell 2</td>
            <td>Row 2 Cell 3</td>
         </tr>
         <tr>
```

```
            <td colspan = "3">Row 3 Cell
1</td>
         </tr>
      </table>
   </body>

</html>
```

**3. Design this following table by using HTML table**

| Firm | Org | Lob | Sub Lob | Business Plans | Business Components |
|---|---|---|---|---|---|
| XYZ | CST | CT | ADS | 1 | 10 |
| | | | BTO | 2 | 15 |
| | | | CSI | 3 | 6 |
| | | VCT | ADS | 4 | 10 |
| | | | BTO | 5 | 15 |
| | Sub Total | | | 6 | 15 |
| | CST | CT | ADS | 7 | 10 |
| | | | BTO | 8 | 15 |
| | | | CSI | 9 | 6 |
| | | VCT | ADS | 10 | 10 |
| | Sub Total | | | 11 | 15 |

**<u>HTML Code:</u>**

```
<html>
<body>
<table border="1" cellpadding="1" cellspacing="1">
  <thead>
    <tr>
      <th>Firm</th>
      <th>Org</th>
      <th>Lob</th>
      <th>Sub Lob</th>
      <th>Business Plans</th>
      <th>Business Components</th>
    </tr>
  </thead>

  <tbody>
    <tr>
```

```
    <td rowspan="11">XYZ</td>
    <td rowspan="5">CST</td>
    <td rowspan="3">CT</th>
    <td>ADS</td>
    <td>1</td>
    <td>10</td>
  </tr>
  <tr>
    <td>BTO</th>
    <td>2</td>
    <td>15</td>
  </tr>
  <tr>
    <td>CSI</th>
    <td>3</td>
    <td>6</td>
  </tr>
 <tr>
    <td rowspan="2">VCT</th>
    <td>ADS</td>
    <td>4</td>
    <td>10</td>
  </tr>
  <tr>
    <td>BTO</th>
    <td>5</td>
    <td>15</td>
  </tr>
  <tr>
    <td colspan="3"> Sub Total</td>
    <td>6</td>
    <td>15</td>
  </tr>
<tr>
    <td rowspan="4">CST</td>
    <td rowspan="3">CT</th>
    <td>ADS</td>
    <td>7</td>
    <td>10</td>
  </tr>
  <tr>
    <td>BTO</th>
    <td>8</td>
```

```
    <td>15</td>
  </tr>
  <tr>
    <td>CSI</th>
    <td>9</td>
    <td>6</td>
  </tr>
 <tr>
    <td rowspan="1">VCT</th>
    <td>ADS</td>
    <td>10</td>
    <td>10</td>
  </tr>
  <tr>
    <td colspan="3">Sub Total</td>
    <td>11</td>
    <td>15</td>
  </tr>
 </tbody>
</table>
</body>
</html>
```

# Homework

| Days | Time | | | | | |
|---|---|---|---|---|---|---|
| | 8:00 | 9:00 | 10:00 | 11:00 | 11:30 | 12:30 |
| Mon | Course 1 | Course 2 | Course 3 | BREAK | Course 5 | |
| Tue | | | Course 2 | | Course 4 | Course 1 |
| Wed | Course 3 | | | | Course 2 | |
| Thr | Course 4 | Course 2 | Course 3 | | Thesis | |
| Fri | | | Course 1 | | | |

## Draw This table by HTML

## HTML Forms:

An HTML form is used to collect user input. The user input is most often sent to a server for processing.

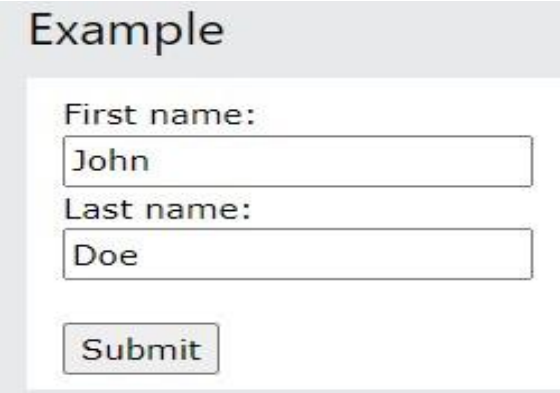


### The <form> Element

The HTML <form> element is used to create an HTML form for user input:

```
<form>
.
form elements
.
</form>
```

### The HTML <form> Elements

The HTML <form> element can contain one or more of the following form elements:

- <input>
- <label>
- <select>
- <textarea>
- <button>
- <fieldset>
- <legend>
- <datalist>
- <output>
- <option>
- <optgroup>

**The <input> Element**

The HTML <input> element is the most used form element.
An <input> element can be displayed in many ways, depending on the type attribute.
Here are some examples:

| Type | Description |
|---|---|
| <input type="text"> | Displays a single-line text input field |
| <input type="radio"> | Displays a radio button (for selecting one of many choices) |
| <input type="checkbox"> | Displays a checkbox (for selecting zero or more of many choices) |
| <input type="submit"> | Displays a submit button (for submitting the form) |
| <input type="button"> | Displays a clickable button |

**The <label> Element:**

Notice the use of the <label> element in the example above. The <label> tag defines a label for many form elements.
The <label> element is useful for screen-reader users, because the screen-reader will read out loud the label when the user focus on the input element.
The <label> element also help users who have difficulty clicking on very small regions (such as radio buttons or checkboxes) - because when the user clicks the text within the <label> element, it toggles the radio button/checkbox.
The for attribute of the <label> tag should be equal to the id attribute of the <input> element to bind them together.

**Radio Buttons**

The <input type="radio"> defines a radio button.
Radio buttons let a user select ONE of a limited number of choices.

**Checkboxes**

The <input type="checkbox"> defines a **checkbox**.

Checkboxes let a user select ZERO or MORE

options of a limited number of choices. **The**

**Submit Button**

The <input type="submit"> defines a button for
submitting the form data to a form-handler.
The form-handler is typically a file on the server with a
script for processing input data.
The form-handler is specified in the form's action
attribute.
**Example:**

```
<html>
<body>
<h1 align="center">Input Form</h1>

            <form align="center">
              First Name: <input type="text" name="firstname">
              Last Name : <input type="text"
name="lastname"><br><br>
              User Name : <input type="text" name="user">
              Password :  <input type="text"
name="password"><br><br>

              <b>Gender</b>
            <input type="radio" name="s" value="male">Male
            <input type="radio" name="s"
value="female">Female<br><br>

            <b>Religion</b>
            <input type="checkbox" name="religion"
value="muslim">Muslim
           <input type="checkbox" name="religion"
value="others">Others<br><br>

         <b>IT Expert</b>
        <input type="checkbox" name="expert"
value="hardware">Hardware Expert
        <input type="checkbox" name="expert"
value="software">Software Expert
```

```
        <input type="checkbox" name="expert"
value="graphic">Graphic Designer
     <input type="checkbox" name="expert"
value="Network">Network Expert<br><br>          <b>Select
DepartMent</b>
          <select name="department">
          <option>CIS</option>
          <option>SWE</option>
           <option>EEE</option>
           <option>CSE</option>

           <input type ="submit" value= "Submit">



</form>

</body>
</html>
```

**Output:**

# Input Form

First Name: Last Name :

User Name : Password :

**Gender** Male Female

**Religion** Muslim Others

**IT Expert** Hardware Expert Software Expert Graphic Designer Network Expert

**Select DepartMent** CIS Submit

**The Action Attribute:**

The action attribute defines the action to be performed when the form is submitted.

Usually, the form data is sent to a file on the server when the user clicks on the submit button.

In the example below, the form data is sent to a file called "action_page.php". This file contains a server-side script that handles the form data:

```
<!DOCTYPE html>
<html>
<body>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname"
value="John"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname"
value="Doe"><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

**Output:**

**After Submitting:**

# Submitted Form Data

## Your input was received as:

fname=John&lname=Doe

The server has processed your input and returned this answer.

**HW:** Design by HTML

Name :

Password :

Gender : ○ Male ○ Female

Email :

Phone no : +88015

Submit