Praln FinTech Co., Ltd. (HQ)
SJ Infinite I Business Complex,
21st Floor Vibhavadi Rangsit Road,
Chompol, Chatuchak, Bangkok, Thailand. 10900
Tax ID: 0105535090912

V.1.0.3

API RECURRING

SERVICE DOCUMENT [ENGLISH]

+66.2.107.7788	@chillpay	chillpay payment gateway
CS.CHILLPAY	@ChillPay_VI	help@chillpay.co

Table of Contents

System Flow : Generate Schedule System 3
System Flow : Payment Schedule System 5
Generate Recurring Schedule 6
Get Recurring Schedule 9
Search Recurring Schedule 12
Cancel Recurring Schedule 16
Callback Recurring Schedule 18
Get Recurring Transactions 21
Search Recurring Transactions 24
Information and Testing Procedure for Sandbox test 28
    Credit card number information for Sandbox test 28
Appendix 29
    Appendix A: Recurring Schedule Status 29
    Appendix B: Recurring Transactions Status 29
    Appendix C: Payment Transactions Status 29
    Appendix D: Response Code for Status 1 30
    Appendix E: Response Code for Status 2 30
    Appendix F: Currency Code 31

System Flow : Generate Schedule System

The system flow demonstrates the process of data transmission and reception between ChillPay and the Merchant's server.

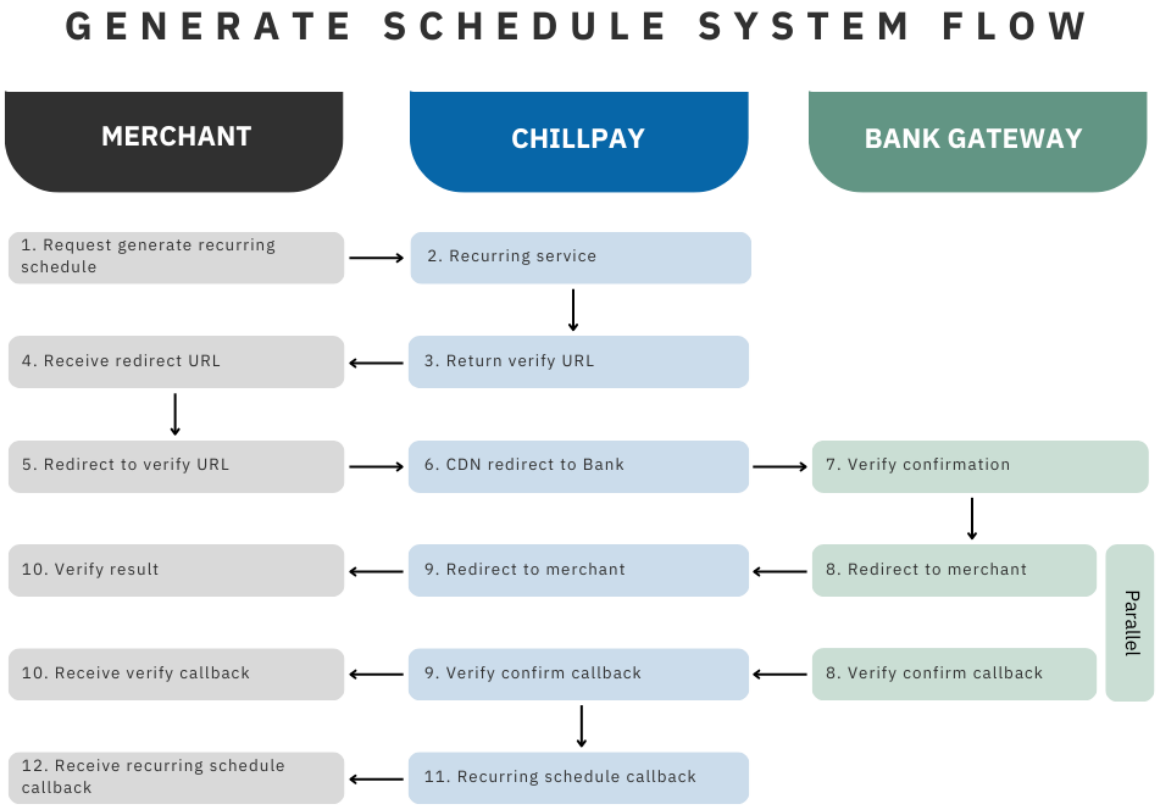

1. Request to Generate a Recurring Schedule : The merchant submits a request to the ChillPay system to create a recurring payment schedule for a customer.

2. Recurring Service : The ChillPay system processes the request received from the merchant and creates the recurring payment schedule.

3. Return Verification URL : The ChillPay system generates a verification URL and sends it to the merchant.

4. Receive Redirect URL : The merchant receives the verification URL sent by ChillPay.

5. Redirect to Verification URL : The merchant redirects the customer to the verification URL provided by ChillPay.

6. CDN Redirect to Bank : The ChillPay system forwards the verification request to the bank's payment gateway via a Content Delivery Network (CDN) for payment information verification.

7. Verification Confirmation : The bank gateway validates and confirms the payment information.

8.1 Redirect to Merchant : The bank gateway redirects the payment confirmation result back to the merchant.

9.1 Redirect to Merchant : ChillPay redirects the payment verification result back to the merchant.

10.1 Verify Result : The merchant validates the payment verification result and displays the outcome to the customer.

8.2 Verify Confirmation Callback : The bank gateway sends the payment confirmation result to ChillPay via a callback.

9.2 Verify Confirmation Callback : ChillPay sends a callback to the merchant, providing the payment verification status received from the bank.

10.2 Redirect Verification Callback : The merchant receives the callback from ChillPay with the payment verification status and processes it accordingly.

11. Recurring Schedule Callback : ChillPay sends a callback to the merchant to notify the status of the recurring schedule creation.

12. Receive Recurring Schedule Callback : The merchant receives the callback from ChillPay regarding the recurring schedule status and updates its internal system as needed.

System Flow : Payment Schedule System

The system flow demonstrates the process of data transmission and reception between ChillPay and the Merchant's server.

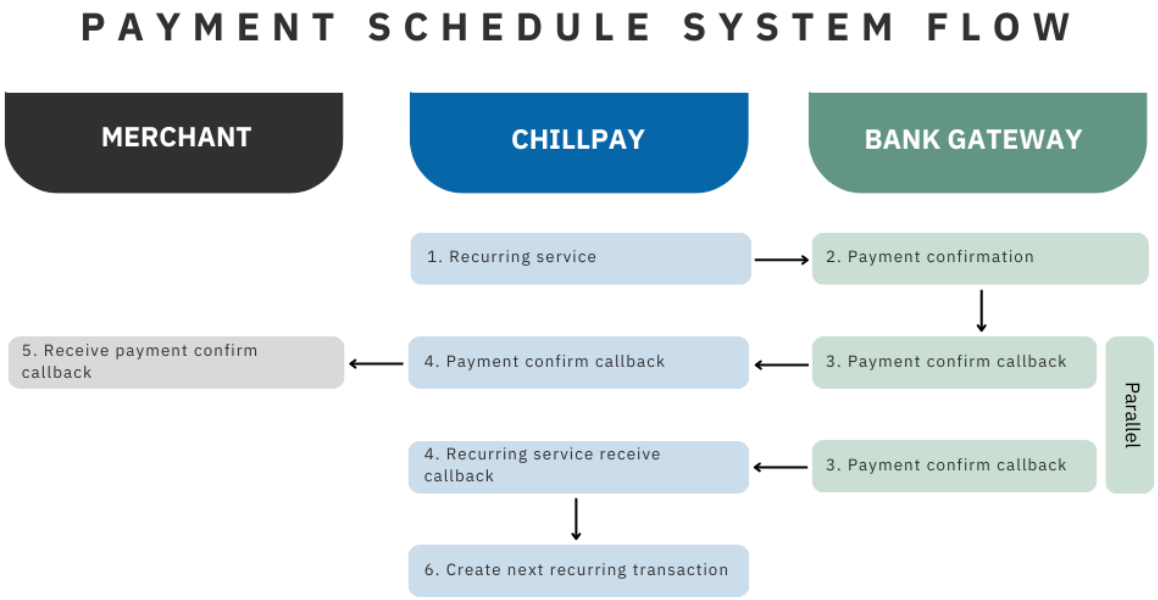

1. Recurring Service : ChillPay initiates the recurring service by creating a new payment transaction and preparing to transmit the information to the Bank Gateway for credit card authorization.

2. Payment Confirmation : The Bank Gateway validates and confirms the payment information provided by ChillPay.

3. Payment Confirmation Callback : The Bank Gateway sends the payment confirmation result to ChillPay via a payment confirmation callback.

4.1 Payment Confirmation Callback to Merchant : ChillPay receives the callback from the Bank Gateway with the payment status and forwards this information to the merchant.

5. Merchant Receives Payment Confirmation Callback : The merchant receives the payment confirmation callback from ChillPay and updates the payment status in their system.

4.2 Recurring System Receives Callback : The recurring system within ChillPay processes the payment result information received from the Bank Gateway.

6. Creation of Next Recurring Transaction : ChillPay processes and schedules the next recurring transaction in the recurring payment cycle.

Generate Recurring Schedule

Service Name: Generate Recurring Schedule

URL: **[SANDBOX]** https://sandbox-api-recurring.chillpay.co/api/v1/recurringschedule

[PROD] https://api-recurring.chillpay.co/api/v1/recurringschedule

Method: POST

Description: A service used for creating a new recurring schedule for a customer.

Table 1.1 Request Header Parameters

No.	Parameter Name	Type	Description
1	Content-Type	string	**(required)** application/json
2	CHILLPAY-MerchantCode	string	**(required)** Merchant Code issued by ChillPay
3	CHILLPAY-Apikey	string	**(required)** Reference code issued by ChillPay for connecting to the system

Table 1.2 Request Body Parameters

No.	Parameter Name	Type	Description
1	customer_id	string (100)	**(required)** Customer reference identifier.
2	customer_email	string (100)	Customer's email address.
3	order_no	string (20)	**(required)** Order number or reference identifier.
4	currency	integer	**(required)** Currency code for the transaction. **Appendix F.**, e.g. 764
5	description	string (100)	Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
6	billing_due_date	string	**(required)** The due date for the first billing. [YYYY-MM-DD]
7	billing_cycle	string	**(required)** Frequency of billing. [day, monthly, yearly]
8	billing_round	integer	**(required)** Billing cycle interval. [1, 7, 15, 30, etc.]
9	total_billing	integer	Total number of billing cycles. *If not specified, the system will continue to bill indefinitely until a cancellation order is received.
10	amount_per_round	number	**(required)** Amount to be charged in each billing cycle.
11	check_sum	string (32)	**(required)** The result of MD5 encryption of all values is used to verify the integrity of the transaction.

Example Generate Recurring Schedule (Code in C# .NET)

```
var client = new RestClient("https://api-recurring.chillpay.co/api/v1/recurringschedule");
client.Timeout = -1;
var request = new RestRequest(Method.POST);
request.AddHeader("CHILLPAY-MerchantCode", "xxx");
request.AddHeader("CHILLPAY-ApiKey", "yyy");
request.AddHeader("Content-Type", "application/json");
var body = @"{""customer_id"": ""CU00001"", ""customer_email"": ""Test@gmail.com"", ""order_no"":
""Order00001"", ""currency"": ""764"", ""description"": ""Test"", ""billing_due_date"": ""2024-11-14"",
""billing_cycle"": ""month"", ""billing_round"": 1, ""total_billing"": 10, ""amount_per_round"": 1550,
""check_sum"": ""xxx""}";
request.AddParameter("application/json", body, ParameterType.RequestBody);
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

Remarks

- Checksum value is a concatenation of all values from the parameters in Table 1.2 (No. 1-10) and attach with MD5 Secret Key (received from ChillPay), as follows:

  customer_id + customer_email + order_no + currency + description + billing_due_date + billing_cycle + billing_round + total_billing + amount_per_round + merchant_code + api_key + MD5 Secret Key

  Later, encode all this sequenced data with function MD5 Hashing to get Checksum value

  Example Data concatenation for function MD5
  CU00001Test@gmail.comOrder00001764Test2024-11-14month1101550xxxyyyAAABBBCCCDDD

Table 1.3 Response Message Parameters

No.	Parameter Name	Type	Description
1	status	integer	Transaction status code. **Appendix D.**
2	errorCode	integer	Error code indicating the transaction result. **Appendix E.**
3	message	string	Provides additional information about the response.
4	totalRecord	integer	Total number of records.
5	data	object	Contains the requested data.
6	data.recurring_schedule_id	string	Unique identifier for the recurring schedule.
7	data.billing_due_date	string	The due date for the first billing. [YYYY-MM-DD]
8	data.recurring_schedule_status	string	Status of the recurring schedule. **Appendix A.**
9	data.verify_payment_url	string	URL for redirecting to the page for entering credit card details. [First verify credit card]
10	data.added_date	string	Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]

Example Response Message Data (JSON)


```
{
   "status": 200,
   "errorCode": 0,
   "message": "Success",
   "data": {
      "recurring_schedule_id": "RS20241114000001",
      "billing_due_date": "2024-11-14",
      "recurring_schedule_status": "initial",
      "verify_payment_url": "https://dev-creditcdn.chillpay.co/Payment/xxxxxxxxxxxx",
      "added_date": "2024-11-14 14:55:01"
   },
   "totalRecord": 1
}
```

Get Recurring Schedule

Service Name: Get Recurring Schedule

URL: **[SANDBOX]** https://sandbox-api-recurring.chillpay.co/api/v1/recurringschedule/get/{recurring_schedule_id}

[PROD] https://api-recurring.chillpay.co/api/v1/recurringschedule/get/{recurring_schedule_id}

Method: GET

Description: A service used for get recurring schedule data by recurring schedule id

Table 2.1 Request Header Parameters

No.	Parameter Name	Type	Description
1	Content-Type	string	**(required)** application/json
2	CHILLPAY-MerchantCode	string	**(required)** Merchant Code issued by ChillPay
3	CHILLPAY-Apikey	string	**(required)** Reference code issued by ChillPay for connecting to the system

Table 2.2 Request Attribute

No.	Parameter Name	Type	Description
1	schedule_id	string	**(required)** Unique identifier for the recurring schedule

Example Get Recurring Schedule (Code in C# .NET)

```
var client = new RestClient("https://api-recurring.chillpay.co/api/v1/recurringschedule/get/RS20241114000001");
client.Timeout = -1;
var request = new RestRequest(Method.GET);
request.AddHeader("Content-Type", "application/json");
request.AddHeader("CHILLPAY-MerchantCode", "xxx");
request.AddHeader("CHILLPAY-Apikey", "yyy");
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

Table 2.3 Response Message Parameters

No.	Parameter Name	Type	Description
1	status	integer	Transaction status code. **Appendix D.**
2	errorCode	integer	Error code indicating the transaction result. **Appendix E.**
3	message	string	Provides additional information about the response.
4	totalRecord	integer	Total number of records.
5	data	object	Contains the requested data.
6	data.recurring_schedule_id	string	Unique identifier for the recurring schedule.
7	data.customer_id	string	Customer reference identifier.
8	data.customer_email	string	Customer's email address.
9	data.order_no	string	Order number or reference identifier.
10	data.currency	string	Currency code for the transaction. **Appendix F.** , e.g. 764
11	data.description	string	Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
12	data.billing_due_date	string	The due date for the first billing. [YYYY-MM-DD]
13	data.billing_cycle	string	Frequency of billing. [day, monthly, yearly]
14	data.billing_round	integer	Billing cycle interval. [1, 7, 15, 30, etc.]
15	data.total_billing	string	Total number of billing cycles.
16	data.current_billing_no	integer	Current billing number in the sequence of recurring payments.
17	data.amount_per_round	number	Amount charged in each billing cycle.
18	data.status	string	Status of the recurring schedule **Appendix A.**
19	data.cancellation_date	string	Cancellation date of the recurring schedule. The cancellation will take effect in the next automated billing cycle. [YYYY-MM-DD HH:mm:ss]
20	data.cancellation_reason	string	Reason for canceling the recurring schedule.
21	data.added_date	string	Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]

Example Response Message Data (JSON)


```
{
   "status": 200,
   "errorCode": 0,
   "message": "Success",
   "data": {
      "recurring_schedule_id": "RS20241114000001",
      "customer_id": "CU0001",
      "customer_email": "test@gmail.com",
      "order_no": "order123456",
      "currency": "764",
      "description": "Subscribe to a 10 month",
      "billing_due_date": "2024-11-14",
      "billing_cycle": "month",
      "billing_round": 1,
      "total_billing": "10",
      "current_billing_no": 0,
      "amount_per_round": 1550.00,
      "status": "Active",
      "cancellation_date": null,
      "cancellation_reason": null,
      "added_date": "2024-11-14 10:29:22"
      "merchant_code": "M000001"
   },
   "totalRecord": 1
}
```

Search Recurring Schedule

Service Name: Search Recurring Schedule

URL: **[SANDBOX]** https://sandbox-api-recurring.chillpay.co/api/v1/recurringschedule/search

[PROD] https://api-recurring.chillpay.co/api/v1/recurringschedule/search

Method: POST

Description: A service used for search recurring schedule

Table 3.1 Request Header Parameters

No.	Parameter Name	Type	Description
1	Content-Type	string	**(required)** application/json
2	CHILLPAY-MerchantCode	string	**(required)** Merchant Code issued by ChillPay
3	CHILLPAY-Apikey	string	**(required)** Reference code issued by ChillPay for connecting to the system

Table 3.2 Request Body Parameters

No.	Parameter Name	Type	Description
1	start_date	datetime	**(required)** Start date used for searching recurring schedule records. The system will retrieve records with Added dates on or after this date. Must be provided in UTC format.
2	end_date	datetime	**(required)** End date used for searching recurring schedule records. The system will retrieve records with Added dates on or after this date. Must be provided in UTC format.
3	status	integer	Status of the recurring schedule **Appendix A.**
4	merchant_code	array	Merchant Code issued by ChillPay
5	billing_cycle	string	Frequency of billing.
6	start	integer	**(required)** Starting index for pagination of search results.
7	page_size	integer	**(required)** Number of records to display per page.
8	order_by	string	**(required)** Field name used for sorting the data.
9	order_dir	string	**(required)** Sorting direction ASC (smaller to larger), DESC (larger to smaller)
10	check_sum	string	**(required)** The result of MD5 encryption of all values is used to verify the integrity of the transaction.

Example Search Recurring Schedule (Code in C# .NET)

```
var client = new RestClient("https://api-recurring.chillpay.co/api/v1/recurringschedule/search");
client.Timeout = -1;
var request = new RestRequest(Method.POST);
request.AddHeader("Content-Type", "application/json");
request.AddHeader("CHILLPAY-MerchantCode", "xxx");
request.AddHeader("CHILLPAY-Apikey", "yyy");
var body = @"{""start_date"": ""2024-11-11T00:04:50.844Z"", ""end_date"": ""2024-11-
15T00:04:50.844Z"", ""status"": null, ""merchant_code"": [xxx], ""billing_cycle"": "" "", ""start"": null,
""page_size"": 100, ""order_by"": ""RecurringScheduleID"", ""order_dir"": ""DESC"", ""keyword"": "" "",
""check_sum"": ""xxx""
}";
request.AddParameter("application/json", body, ParameterType.RequestBody);
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

Remark

- Checksum value is a concatenation of all values from the parameters in Table 3.2 (No. 3-9) and attach with MD5 Secret Key (received from ChillPay), as follows:

  status + merchant_code + billing_cycle + start + page_size + order_by + order_dir + merchant_code + api_key + MD5 Secret Key

  Later, encode all this sequenced data with function MD5 Hashing to get Checksum value.

  Example Data concatenation for function MD5
  *** If you want to search for data from Sub merchants, arrange the merchant_code as follows. For example, to retrieve data for M000001 and M000001-00001.
  99M000001M000001-00001990100iddescM000001xxxyyyAAABBBCCCDD

Table 3.3 Response Message Parameters

No.	Parameter Name	Type	Description
1	status	integer	Transaction status code. **Appendix D.**
2	errorCode	integer	Error code indicating the transaction result. **Appendix E.**
3	message	string	Provides additional information about the response.
4	totalRecord	integer	Total number of records.
5	data	object	Contains the requested data.
6	data.recurring_schedule_id	string	Unique identifier for the recurring schedule.
7	data.customer_id	string	Customer reference identifier.
8	data.customer_email	string	Customer's email address.
9	data.order_no	string	Order number or reference identifier.
10	data.currency	string	Currency code for the transaction. **Appendix F.** , e.g. 764

11	data.description	string	Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
12	data.billing_due_date	string	The due date for the first billing. [YYYY-MM-DD]
13	data.billing_cycle	string	Frequency of billing. [day, monthly, yearly]
14	data.billing_round	integer	Billing cycle interval. [1, 7, 15, 30, etc.]
15	data.total_billing	string	Total number of billing cycles.
16	data.current_billing_no	integer	Current billing number in the sequence of recurring payments.
17	data.amount_per_round	number	Amount charged in each billing cycle.
18	data.status	string	Status of the recurring schedule **Appendix A.**
19	data.cancellation_date	string	Cancellation date of the recurring schedule. The cancellation will take effect in the next automated billing cycle. [YYYY-MM-DD HH:mm:ss]
20	data.cancellation_reason	string	Reason for canceling the recurring schedule.
21	data.added_date	string	Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]

Example Response Message Data (JSON)


```
{
   "status": 200,
   "errorCode": 0,
   "message": "Success",
   "data": {
      "list": [
         {
            "recurring_schedule_id": "RS20241114000001",
            "customer_id": " CU00001",
            "customer_email": "test@gmail.com",
            "order_no": "order123456",
            "currency": "764",
            "description": "Subscribe to a 10 month",
            "billing_due_date": "2024-11-14",
            "billing_cycle": "month",
            "billing_round": 1,
            "total_billing": "10",
            "current_billing_no": 0,
            "amount_per_round": 1550.00,
            "status": "Active",
            "cancellation_date": null,
            "cancellation_reason": null,
            "added_date": "2024-11-14 10:29:22"
            "merchant_code": "M000001"

         }
}
```

Cancel Recurring Schedule

Service Name: Cancel Recurring Schedule

URL: **[SANDBOX]** https://sandbox-api-recurring.chillpay.co/api/v1/recurringschedule/cancel

[PROD] https://api-recurring.chillpay.co/api/v1/recurringschedule/cancel

Method: POST

Description: A service used for cancel recurring schedule

Table 4.1 Request Header Parameters

No.	Parameter Name	Type	Description
1	Content-Type	string	**(required)** application/json
2	CHILLPAY-MerchantCode	string	**(required)** Merchant Code issued by ChillPay
3	CHILLPAY-Apikey	string	**(required)** Reference code issued by ChillPay for connecting to the system

Table 4.2 Request Body Parameters

No.	Parameter Name	Type	Description
1	recurring_schedule_id	string	**(required)** Unique identifier for the recurring schedule.
2	cancellation_reason	string	**(required)** Reason for canceling the recurring schedule.
3	check_sum	string (32)	**(required)** The result of MD5 encryption of all values is used to verify the integrity of the transaction.

Example Cancel Recurring Schedule (Code in C# .NET)

```
var client = new RestClient("https://api-recurring.chillpay.co/api/v1/recurringschedule/cancel");
client.Timeout = -1; var request = new RestRequest(Method.POST);
request.AddHeader("Content-Type", "application/json");
request.AddHeader("CHILLPAY-MerchantCode", "xxx");
request.AddHeader("CHILLPAY-Apikey", "yyy");
var body = @"{ ""recurring_schedule_id"": ""RS20241114000001"", ""cancellation_reason"": ""TestCancel"",
""check_sum"": ""xxx"" }";
request.AddParameter("application/json", body, ParameterType.RequestBody);
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

Remark

- Checksum value is a concatenation of all values from the parameters in Table 4.2 (No. 1-2) and attach with MD5 Secret Key (received from ChillPay), as follows:

  recurring_schedule_id + cancellation_reason + merchant_code + api_key + MD5 Secret Key

  Later, encode all this sequenced data with function MD5 Hashing to get Checksum value.

  Example Data concatenation for function MD5
  RS20241114000001TestCancelxxxyyyAAABBBCCCDDD

Table 4.3 Response Message Parameters

No.	Parameter Name	Type	Description
1	status	integer	Transaction status code. **Appendix D.**
2	errorCode	integer	Error code indicating the transaction result. **Appendix E.**
3	message	string	Provides additional information about the response.
4	totalRecord	integer	Total number of records.
5	data	object	Contains the requested data.
6	data.recurring_schedule_id	string	Unique identifier for the recurring schedule.
7	data.customer_id	string	Customer reference identifier.
8	data.customer_email	string	Customer's email address.
9	data.order_no	string	Order number or reference identifier.
10	data.currency	string	Currency code for the transaction. **Appendix F.** , e.g. 764
11	data.description	string	Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
12	data.billing_due_date	string	The due date for the first billing. [YYYY-MM-DD]
13	data.billing_cycle	string	Frequency of billing. [day, monthly, yearly]

14	data.billing_round	integer	Billing cycle interval. [1, 7, 15, 30, etc.]
15	data.total_billing	string	Total number of billing cycles.
16	data.current_billing_no	integer	Current billing number in the sequence of recurring payments.
17	data.amount_per_round	number	Amount charged in each billing cycle.
18	data.status	string	Status of the recurring schedule **Appendix A.**
19	data.cancellation_date	string	Cancellation date of the recurring schedule. The cancellation will take effect in the next automated billing cycle. [YYYY-MM-DD HH:mm:ss]
20	data.cancellation_reason	string	Reason for canceling the recurring schedule.
21	data.added_date	string	Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]

Example Response Message Data (JSON)


```
{
   "status": 200,
   "errorCode": 0,
   "message": "Success",
   "data": {
      "recurring_schedule_id": "RS20241114000001",
      "customer_id": "CUS00001",
      "customer_email": "test@gmail.com",
      "order_no": "order123456",
      "currency": "764",
      "description": "Subscribe to a 10 month",
      "billing_due_date": "2024-11-14",
      "billing_cycle": "month",
      "billing_round": 1,
      "total_billing": "10",
      "current_billing_no": 0,
      "amount_per_round": 1550.00,
      "status": "Cancel",
      "cancellation_date": "2024-11-14 18:31:40",
      "cancellation_reason": "Cancellation requested by customer",
      "added_date": "2024-11-14 10:29:22"
      "merchant_code": "M000001"

   },
}
```


Callback Recurring Schedule

Service Name: Callback Recurring Schedule

URL: **[SANDBOX]** Merchant URL

[PROD] Merchant URL

Method: POST

Description: A service used for send a callback to the merchant.

Table 5.1 Request Body Parameters

No.	Parameter Name	Type	Description
1	recurring_schedule_id	string	**(required)** Unique identifier for the recurring schedule.
2	customer_id	string	**(required)** Customer reference identifier.
3	customer_email	string	Customer's email address.
4	order_no	string	**(required)** Order number or reference identifier.
5	currency	string	**(required)** Currency code for the transaction**. Appendix F.** , e.g. 764
6	description	string	**(required)** Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
7	billing_due_date	string	**(required)** The due date for the first billing. [YYYY-MM-DD]
8	billing_cycle	string	**(required)** Frequency of billing. [day, month, year]
9	billing_round	integer	**(required)** Billing cycle interval. [1, 7, 15, 30, etc.]
10	total_billing	string	Total number of billing cycles.
11	current_billing_no	integer	Current billing number in the sequence of recurring payments.
12	amount_per_round	number	**(required)** Amount charged in each billing cycle.
13	status	string	**(required)** Status of the recurring schedule. **Appendix A.**
14	cancellation_date	string	Cancellation date of the recurring schedule. The cancellation will take effect in the next automated billing cycle. [YYYY-MM-DD HH:mm:ss]
15	cancellation_reason	string	Reason for canceling the recurring schedule.
16	added_date	string	**(required)** Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]
17	check_sum	string	**(required)** The result of MD5 encryption of all values is used to verify the integrity of the transaction.

Remark

- Checksum value is a concatenation of all values from the parameters in Table 5.1 (No. 1-16) and attach with MD5 Secret Key (received from ChillPay), as follows:

  recurring_schedule_id + customer_id + customer_email + order_no + currency + description + billing_due_date + billing_cycle + billing_round + total_billing + current_billing_no + amount_per_round + status + cancellation_date + cancellation_reason + added_date + merchant_code + api_key + MD5 Secret Key

  Later, encode all this sequenced data with function MD5 Hashing to get Checksum value

  Example Data concatenation for function MD5
  RS20241114000001CU00001Test@gmail.comOrder00001764Test2024-11-14month11001550Active2024-11-14 10:29:22xxxyyyAAABBBCCCDDD

Get Recurring Transactions

Service Name: Get Recurring Transactions

URL: **[SANDBOX]** https://sandbox-api-recurring.chillpay.co/api/v1/recurringtransactions/get/{recurring_transaction_id}

[PROD] https://api-recurring.chillpay.co/api/v1/recurringtransactions/get/{recurring_transaction_id}

Method: GET

Description: A service used for get recurring transaction data by recurring transaction id

Table 6.1 Request Header Parameters

No.	Parameter Name	Type	Description
1	Content-Type	string	**(required)** application/json
2	CHILLPAY-MerchantCode	string	**(required)** Merchant Code issued by ChillPay
3	CHILLPAY-Apikey	string	**(required)** Reference code issued by ChillPay for connecting to the system

Table 6.2 Request Attribute

No.	Parameter Name	Type	Description
1	recurring_transaction_id	string	**(required)** Unique identifier for the recurring transaction

Example Get Recurring Transactions (Code in C# .NET)

```
var client = new RestClient("https://api-recurring.chillpay.co/api/v1/recurringtransactions/get/1");
client.Timeout = -1;
var request = new RestRequest(Method.GET);
request.AddHeader("Content-Type", "application/json");
request.AddHeader("CHILLPAY-MerchantCode", "xxx");
request.AddHeader("CHILLPAY-Apikey", "yyy");
request.AddParameter("application/json", body,  ParameterType.RequestBody);
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

Table 6.3 Response Message Parameters

No.	Parameter Name	Type	Description
1	status	integer	Transaction status code. **Appendix D.**
2	errorCode	integer	Error code indicating the transaction result. **Appendix E.**
3	message	string	Provides additional information about the response.
4	totalRecord	integer	Total number of records.
5	data	object	Contains the requested data.
6	data.recurring_schedule_id	string	Unique identifier for the recurring schedule.
7	data.customer_id	string	Customer reference identifier.
8	data.customer_email	string	Customer's email address.
9	data.order_no	string	Order number or reference identifier.
10	data.currency	string	Currency code for the transaction. **Appendix F.**, e.g. 764
11	data.description	string	Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
12	data.amount	number	Amount charged in each billing cycle.
13	data.status	string	Status of the recurring transaction **Appendix B**
14	data.payment_transaction_id	string	Reference identifier of the payment transaction
15	data.payment_transaction_status	string	Status of the payment transaction. **Appendix C**
16	data.payment_transaction_date	string	Date and time of the payment transaction [YYYY-MM-DD HH:mm:ss]
17	data.remark	string	Additional notes or remarks
18	data.current_billing_no	integer	Current billing number in the sequence of recurring payments.
19	data.total_billing	string	Total number of billing cycles.
20	data.billing_cycle	string	Frequency of billing. [day, month, year]
21	data.retry_period_times	integer	Time period (in minutes) between retry attempts, e.g., retry every 30 minutes
22	data.retry_count	integer	Current number of recurring attempts made
23	data.retry_max_count	integer	Maximum number of retry attempts allowed for the recurring billing period. - The system will not exceed the maximum retry attempts defined in the merchant's settings.

			- If a retry overlaps with the next scheduled billing cycle, the system will automatically cancel the Recurring Schedule.
24	data.next_payment_date	string	Date and time for the next automatic billing attempt [YYYY-MM-DD HH:mm:ss]
25	data.added_date	string	Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]
26	data.modified_date	string	Date and time of the last data modification [YYYY-MM-DD HH:mm:ss]

Example Response Message Data (JSON)


```
{
   "status": 200,
   "errorCode": 0,
   "message": "Success",
   "data": {
      "id": 1,
      "recurring_schedule_id": "RS20241114000001",
      "customer_id": "CUS00001",
      "customer_email": "test@gmail.co ",
      "order_no": "order123456",
      "currency": "764",
      "description": "Subscribe to a 10 month",
      "amount": 1,550,
      "status": "Success",
      "payment_transaction_id": "500001",
      "payment_transaction_status": "Paid",
      "payment_transaction_date": "2024-11-15 06:30:31",
      "remark": null,
      "current_billing_no": 0,
      "total_billing": "10",
      "billing_cycle": "day",
      "retry_period_times": 60,
      "retry_count": 0,
      "retry_max_count": 3,
      "next_payment_date": "2024-11-15 06:30:27",
      "added_date": "2024-11-14 10:29:22",
      "modified_date": "2024-11-15 06:31:29"
      "merchant_code": "M000001"

   }
```

Search Recurring Transactions

Service Name: Search Recurring Transactions

URL: **[SANDBOX]** https://sandbox-api-recurring.chillpay.co/api/v1/recurringtransactions/search

[PROD] https://api-recurring.chillpay.co/api/v1/recurringtransactions/search

Method: POST

Description: A service used for search recurring transactions

Table 7.1 Request Header Parameters

No.	Parameter Name	Type	Description
1	Content-Type	string	**(required)** application/json
2	CHILLPAY-MerchantCode	string	**(required)** Merchant Code issued by ChillPay
3	CHILLPAY-Apikey	string	**(required)** Reference code issued by ChillPay for connecting to the system

Table 7.2 Request Body Parameters

No.	Parameter Name	Type	Description
1	start_date	datetime	**(required)** Start date used for searching recurring schedule records. The system will retrieve records with Added dates on or after this date. Must be provided in UTC format.
2	end_date	datetime	**(required)** End date used for searching recurring schedule records. The system will retrieve records with Added dates on or after this date. Must be provided in UTC format.
3	status	integer	Status of the recurring transaction. **Appendix B.**
4	merchant_code	array	Merchant Code issued by ChillPay
5	billing_cycle	string	Frequency of billing.
6	start	integer	**(required)** Starting index for pagination of search results.
7	page_size	integer	**(required)** Number of records to display per page.
8	order_by	string	**(required)** Field name used for sorting the data.
9	order_dir	string	**(required)** Sorting direction ASC (smaller to larger), DESC (larger to smaller)
10	check_sum	string	**(required)** The result of MD5 encryption of all values is used to verify the integrity of the transaction.

Example Search Recurring Transactions (Code in C# .NET)

```
var client = new RestClient("https://api-recurring.chillpay.co/api/v1/recurringtransactions/search");
client.Timeout = -1;
var request = new RestRequest(Method.POST);
request.AddHeader("Content-Type", "application/json");
request.AddHeader("CHILLPAY-MerchantCode", "xxx");
request.AddHeader("CHILLPAY-Apikey", "yyy");
var body = @"{ ""start_date"": ""2024-11-11T00:04:50.844Z"", ""end_date"": ""2024-11-
15T00:04:50.844Z"", ""status"": null, ""merchant_code"": [xxx], ""billing_cycle"": "" "", ""start"": null,
""page_size"": 100, ""order_by"": ""RecurringTransactionsID"", ""order_dir"": ""DESC"", ""keyword"": "" "",
""check_sum"": ""xxx"" }";
request.AddParameter("application/json", body, ParameterType.RequestBody);
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

Remark

- Checksum value is a concatenation of all values from the parameters in Table 7.2 (No. 3-9) and attach with MD5 Secret Key (received from ChillPay), as follows:

  status + merchant_code + billing_cycle + start + page_size + order_by + order_dir + merchant_code + api_key + MD5 Secret Key

  Later, encode all this sequenced data with function MD5 Hashing to get Checksum value.

  Example Data concatenation for function MD5
  *** If you want to search for data from Sub merchants, arrange the merchant_code as follows. For example, to retrieve data for M000001 and M000001-00001.
  99M000001M000001-00001990100iddescM000001xxxyyyAAABBBCCCDD

Table 7.3 Response Message Parameters

No.	Parameter Name	Type	Description
1	status	integer	Transaction status code. **Appendix D.**
2	errorCode	integer	Error code indicating the transaction result. **Appendix E.**
3	message	string	Provides additional information about the response.
4	totalRecord	integer	Total number of records.
5	data	object	Contains the requested data.
6	data.recurring_schedule_id	string	Unique identifier for the recurring schedule.
7	data.customer_id	string	Customer reference identifier.
8	data.customer_email	string	Customer's email address.
9	data.order_no	string	Order number or reference identifier.

10	data.currency	string	Currency code for the transaction. **Appendix F.**, e.g. 764
11	data.description	string	Additional details about the recurring schedule, e.g. "Prime Golf Membership (Monthly)"
12	data.amount	number	Amount charged in each billing cycle.
13	data.status	string	Status of the recurring transaction **Appendix B**
14	data.payment_transaction_id	string	Reference identifier of the payment transaction
15	data.payment_transaction_status	string	Status of the payment transaction. **Appendix C**
16	data.payment_transaction_date	string	Date and time of the payment transaction [YYYY-MM-DD HH:mm:ss]
17	data.remark	string	Additional notes or remarks
18	data.current_billing_no	integer	Current billing number in the sequence of recurring payments.
19	data.total_billing	string	Total number of billing cycles.
20	data.billing_cycle	string	Frequency of billing. [day, month, year]
21	data.retry_period_times	integer	Time period (in minutes) between retry attempts, e.g., retry every 30 minutes
22	data.retry_count	integer	Current number of recurring attempts made
23	data.retry_max_count	integer	Maximum number of retry attempts allowed for the recurring billing period. - The system will not exceed the maximum retry attempts defined in the merchant's settings. - If a retry overlaps with the next scheduled billing cycle, the system will automatically cancel the Recurring Schedule.
24	data.next_payment_date	string	Date and time for the next automatic billing attempt [YYYY-MM-DD HH:mm:ss]
25	data.added_date	string	Date and time when the recurring schedule was created. [YYYY-MM-DD HH:mm:ss]
26	data.modified_date	string	Date and time of the last data modification [YYYY-MM-DD HH:mm:ss]

Example Response Message Data (JSON)


```
{
  "status": 200,
  "errorCode": 0,
  "message": "Success",
  "data": {
    "list": [
```

```
        {
            "id": 1,
            "recurring_schedule_id": "RS20241114000001",
            "customer_id": "CUS00001",
            "customer_email": "test@gmail.com",
            "order_no": "order123456",
            "currency": "764",
            "description": "test",
            "amount": 1550,
            "status": "Waiting",
            "payment_transaction_id": "0",
            "payment_transaction_status": "Request",
            "payment_transaction_date": null,
            "remark": null,
            "current_billing_no": 1,
            "total_billing": "10",
            "billing_cycle": "month",
            "retry_period_times": 60,
            "retry_count": 1,
            "retry_max_count": 3,
            "next_payment_date": "2024-11-15 09:53:53",
            "added_date": "2024-11-14 09:38:53",
            "modified_date": "2024-11-15 09:38:53"
            "merchant_code": "M000001"

        },
        ....
    ],
  },
}
```

Information and Testing Procedure for Sandbox test

Credit card number information for Sandbox test

Card Number	Card Scheme	Expiry (MM/YY)	CVV	OTP Pass	Remark
4141 0000 0000 1414	VISA	Any	Any	123456	Card that successfully processes all transactions.
5353 0000 0000 3535	MASTER Card	Any	Any	123456	
3535 0000 0000 5353	JCB	Any	Any	123456	
6262 0000 0000 2626	UnionPay	Any	Any	123456	
4040 3333 3333 3333	VISA	Any	Any	123456	Card that only successfully processes the first transaction; subsequent transactions fail.

Appendix

Appendix A: Recurring Schedule Status

No.	Status Message	Description
1	Initial	Verifying the status of the credit card.
2	Active	The credit card is in a ready-to-use status.
3	Complete	The system has successfully completed all billing cycles as specified (Billing Period).
4	Cancel	The recurring schedule (Recurring Schedule ID) has been canceled by the system.

Appendix B: Recurring Transactions Status

No.	Status Message	Description
1	Waiting	Waiting for the system to process the request.
2	Processing	The system is processing the payment.
3	Success	The payment was successfully completed.
4	Fail	The payment attempt failed.

Appendix C: Payment Transactions Status

No.	Status Message	Description
1	Request	The system is waiting to process the request.
2	Paid	The transaction was successfully completed.
3	Unpaid	The transaction was unsuccessful.
4	Voided	Successful voided transaction
5	Refunded	Successful refunded transaction

Appendix D: Response Code for Status 1

Status Code	Status Message	Description
200	Success	Successful transaction
400	Bad Request	Request was invalid or malformed.
401	Unauthorized	Access is denied due to invalid credentials.
403	Forbidden	Access to resources is denied.
404	Not Found	Requested resource could not be found.
500	Server Error	An error occurred on the server.
504	Server Timeout	The server didn't respond in time.

Appendix E: Response Code for Status 2

Error Code	Status Message	Description
1001	Invalid Parameter	Invalid parameter
1002	Invalid Merchant Code	Invalid Merchant code
1003	Invalid Api Key	Invalid Merchant reference number
1011	Invalid Checksum	Invalid Checksum code
2007	Request Transaction Error	An error occurred while processing the transaction.
2041	Recurring Schedule Not Found	Recurring schedule could not be found.
2042	Request Recurring Schedule Error	An error occurred while requesting the recurring schedule.
2043	Request Cancel Recurring Schedule Error	An error occurred while canceling the recurring schedule.
2044	Recurring Transaction Not Found	Recurring transaction could not be found.
2045	Retry Period Mismatch	The retry period does not match the defined schedule.
2046	Time Restriction Error	An error occurred due to a time restriction.

Appendix F: Currency Code

No.	Code (ISO Code)	Status Message	Description
1	764	THB	Thai Baht (฿)
2	840	USD	United States (US) Dollar ($)
3	978	EUR	Euro (€)
4	392	JPY	Japanese Yen (¥)
5	826	GBP	Pound Sterling (£)
6	036	AUD	Australian Dollar ($)
7	554	NZD	New Zealand Dollar ($)
8	344	HKD	Hong Kong Dollar ($)
9	702	SGD	Singapore Dollar ($)
10	756	CHF	Swiss Franc (CHF)
11	458	MYR	Malaysian Ringgit (RM)
12	156	CNY	Chinese Yuan (¥)
13	124	CAD	Canadian dollar ($)