
The drift generator pixel_B_sota: one forward pass, from inputs to a 256×256 image (no iterative denoising)

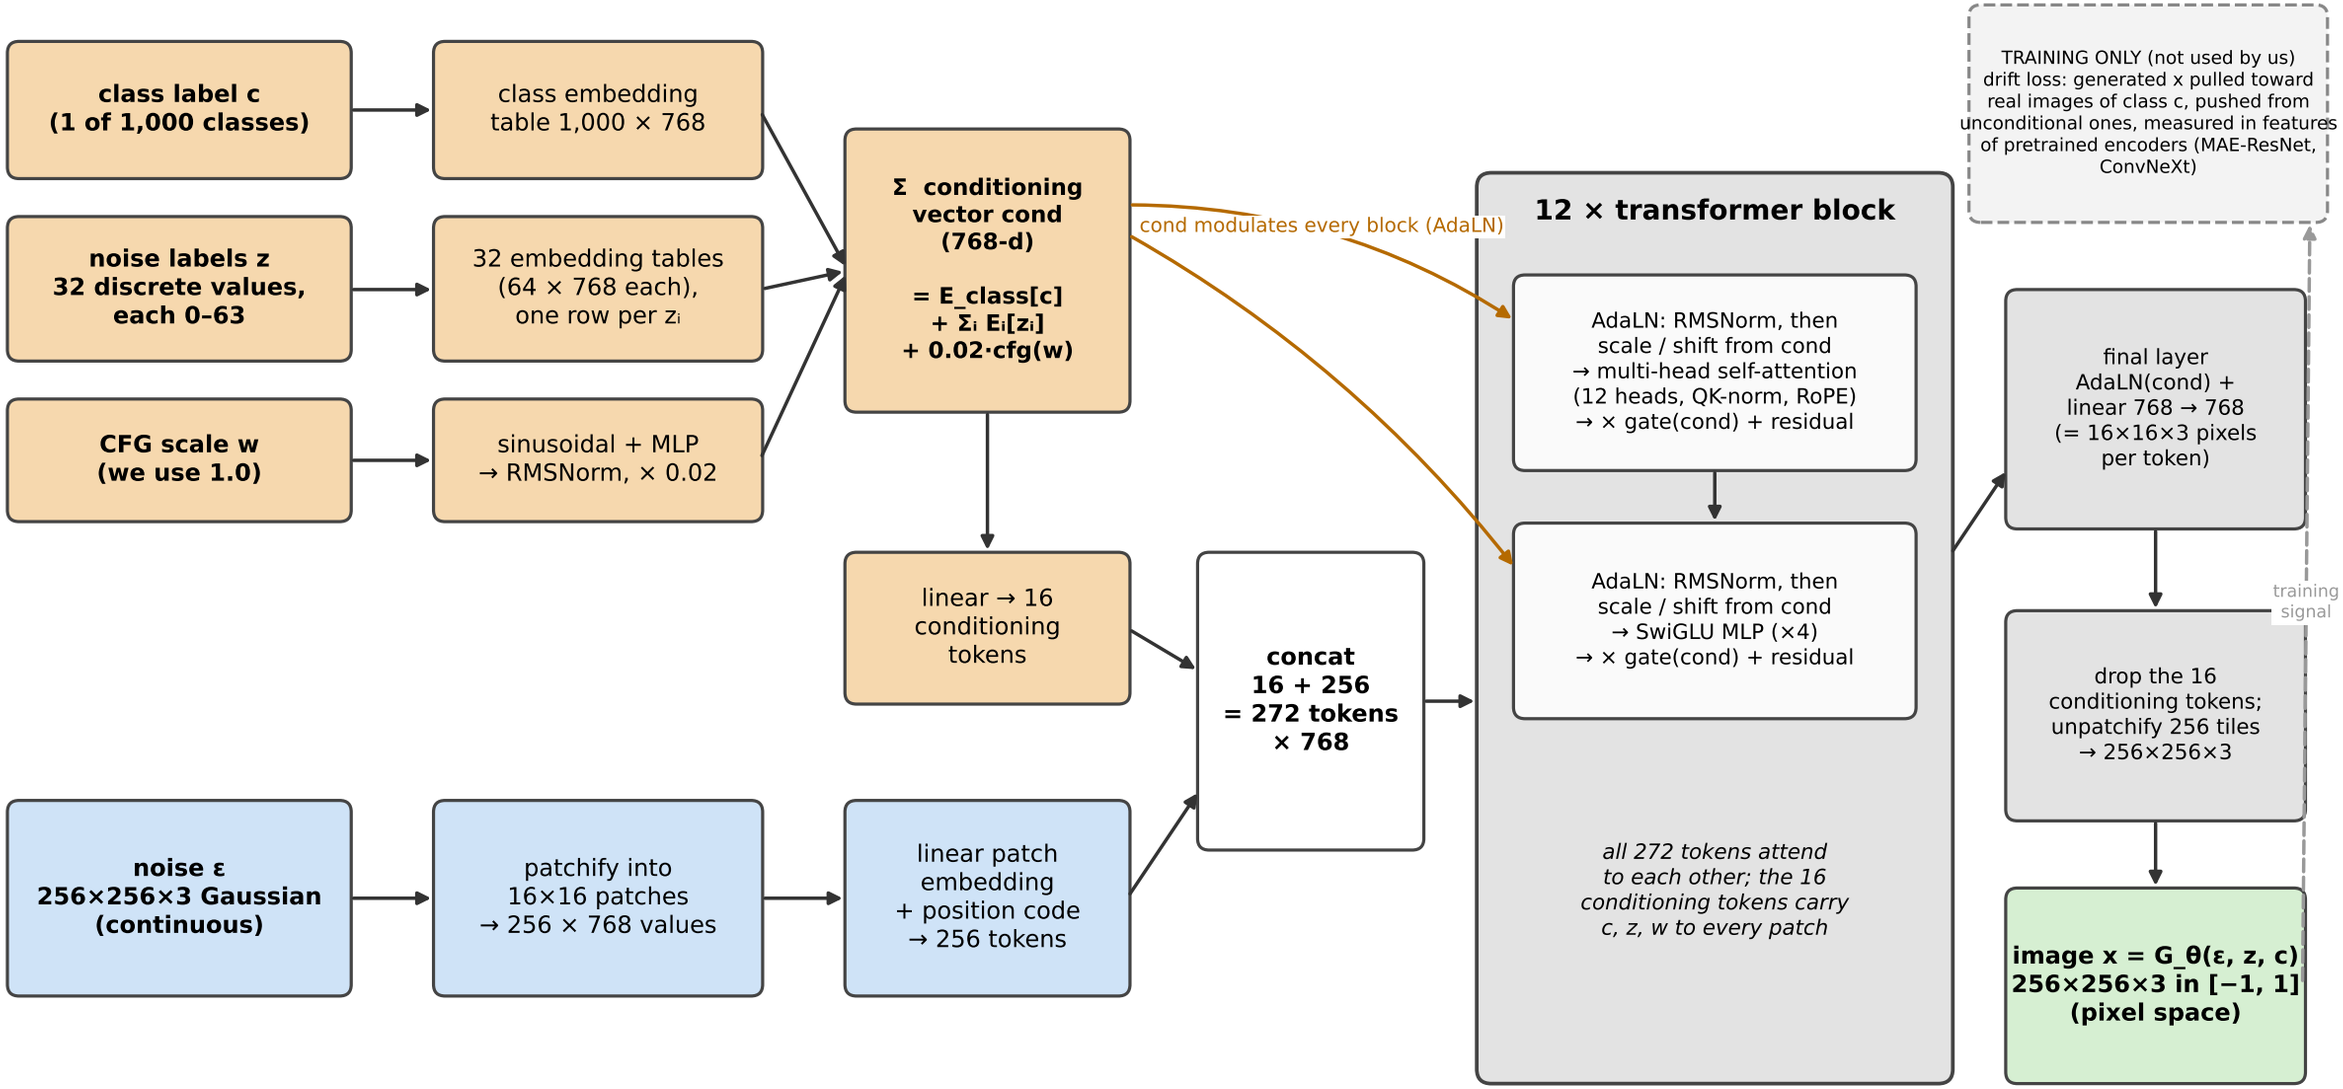

How the inputs act

- ε is LOCAL: each 16×16 patch of ε becomes one token, and each output tile is painted from one token (neighbouring tiles must agree through attention; when they don't → visible 16-pixel seams).
- c, z, w are GLOBAL: summed into one 768-d vector that modulates every token in every block. In our experiments z decides the scene (layout, palette, texture); ε adjusts local detail (notebook 2, §4).

θ = all 134M weights (241 tensors), bf16 compute. Sizes from the model config:
patch 16, hidden 768, depth 12, 12 heads, 16 conditioning tokens, 32 noise-label coordinates × 64 values.