Online-Mind2Web · BrowserCode and native CUAWright

Performance vs. API cost

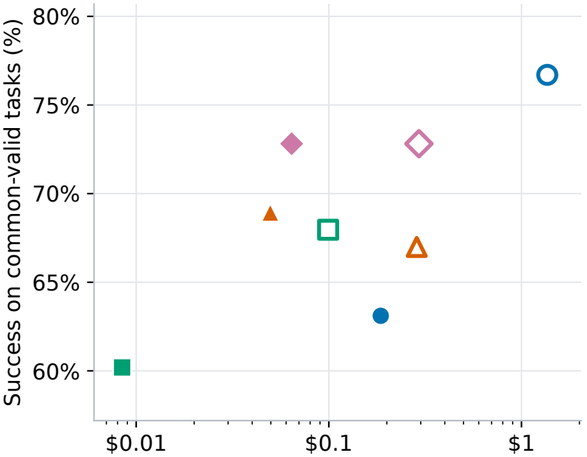

Performance vs. latency

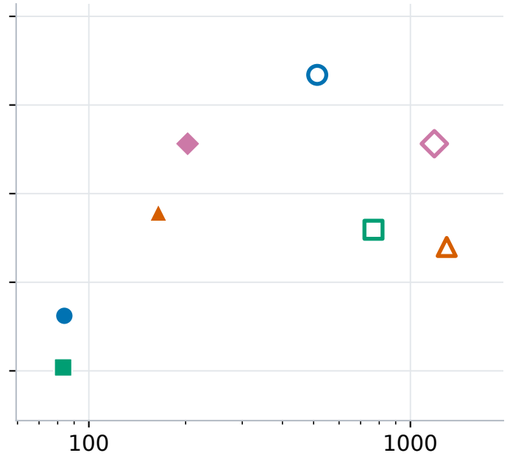

Performance vs. browser batches

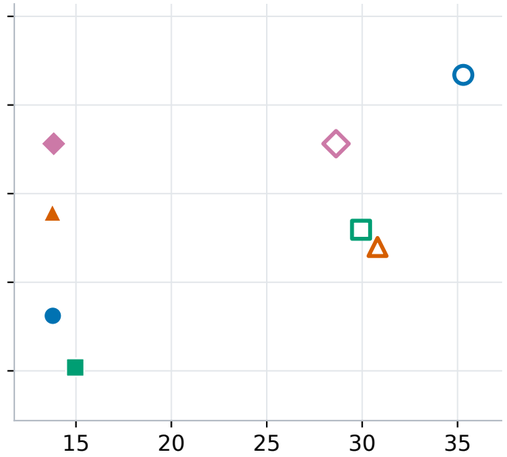

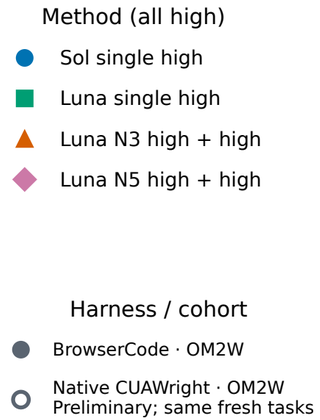

OM2W overall outcomes · invalids count as failures (separate from matched scatter cohort)

Method	BrowserCode tasks	BrowserCode successes	BrowserCode overall	CUAWright tasks	CUAWright successes	CUAWright overall
Sol single	300	171	57.0%	300	222	74.0%
Luna single	300	168	56.0%	300	189	63.0%
Luna N3	300	180	60.0%	300	192	64.0%
Luna N5	300	188	62.7%	277	183	66.1%

Online-Mind2Web only: same 103 fresh tasks valid in all eight method–harness cells; valid failures included. Not a three-benchmark average.

Native 20,000 tokens / 100 decisions; BrowserCode 12,288 tokens / 30 decisions. Different collection windows and task-time boundaries; descriptive comparison, not a harness-only causal effect.

Native snapshot: 2026-10-27T22:08:52.364258+00:00; N5 incomplete. External judging excluded. Native model costs include helpers/full unknown reserves; BrowserCode uses original proposal/selector receipt costs. Overall table includes historical100 for three methods; invalids remain failures.