
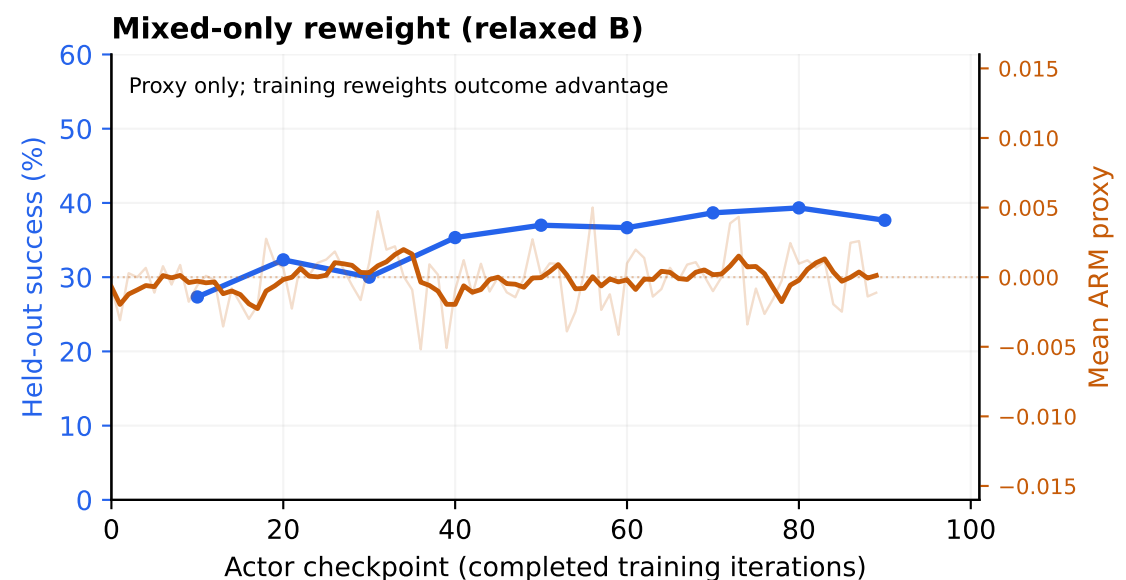
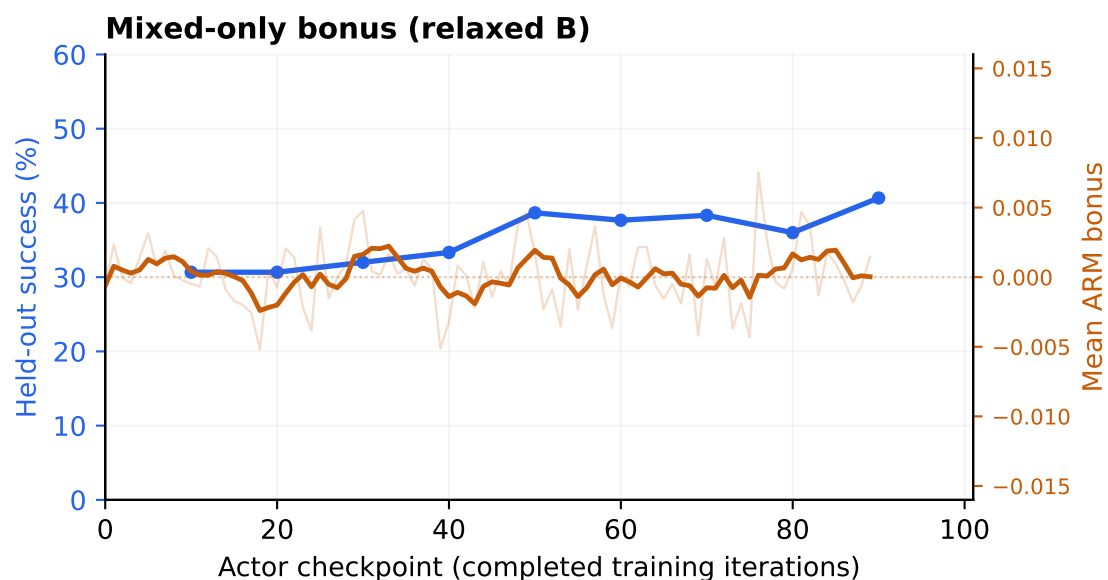
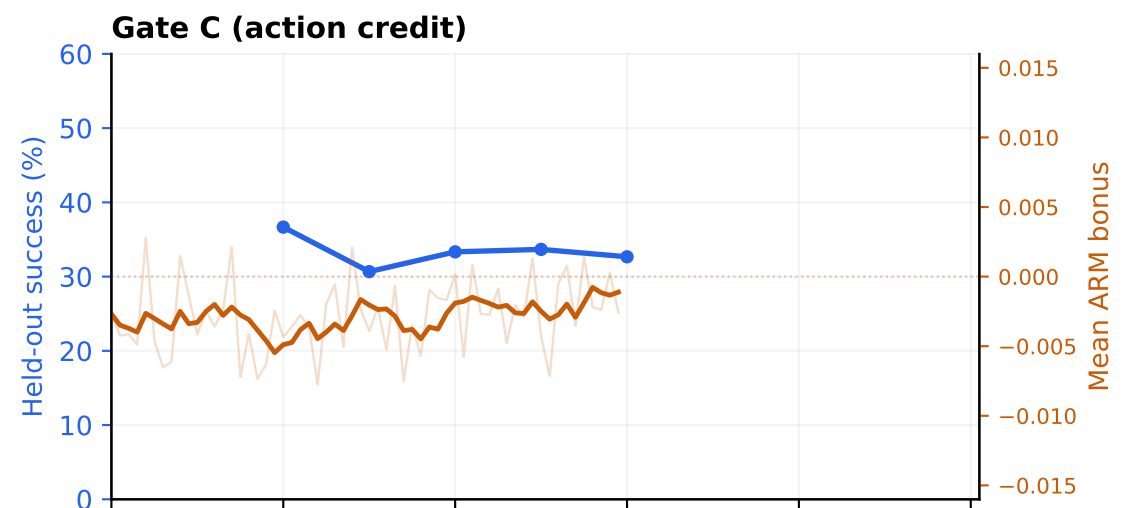
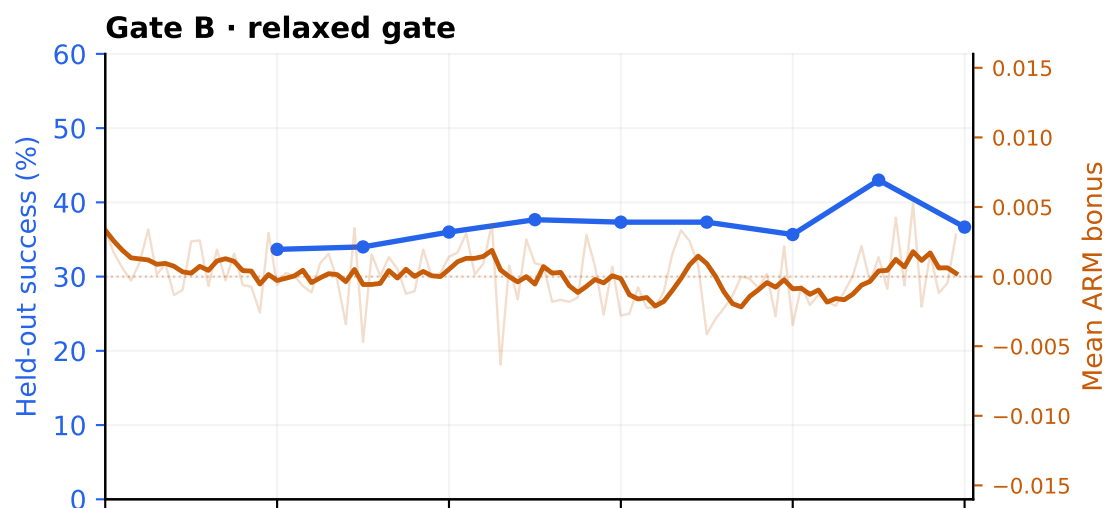
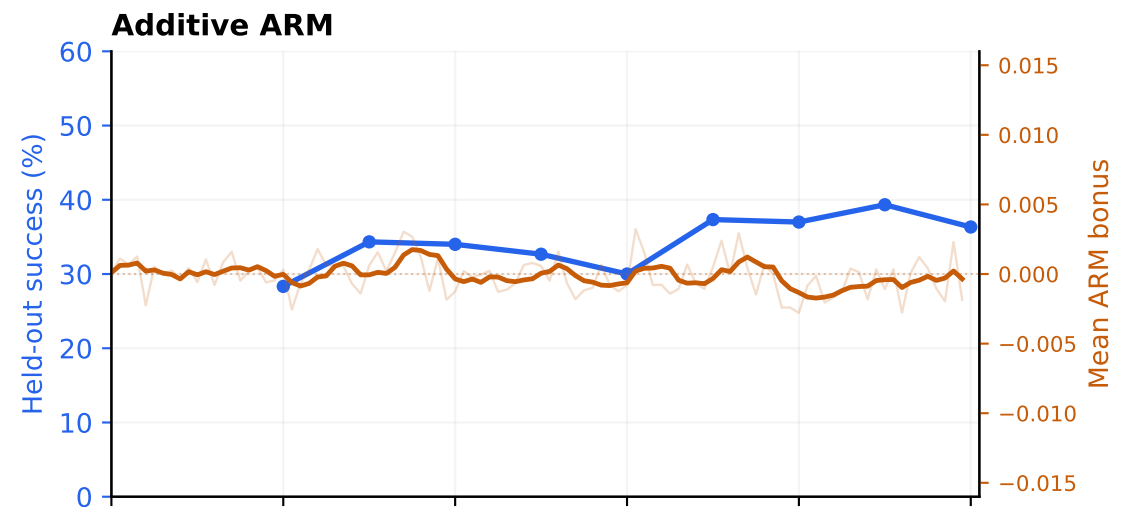


Does increasing ARM reward track task success?

● Held-out full-300 success (independent judge) — Mean ARM signal (trailing 5 iterations; faint = raw)

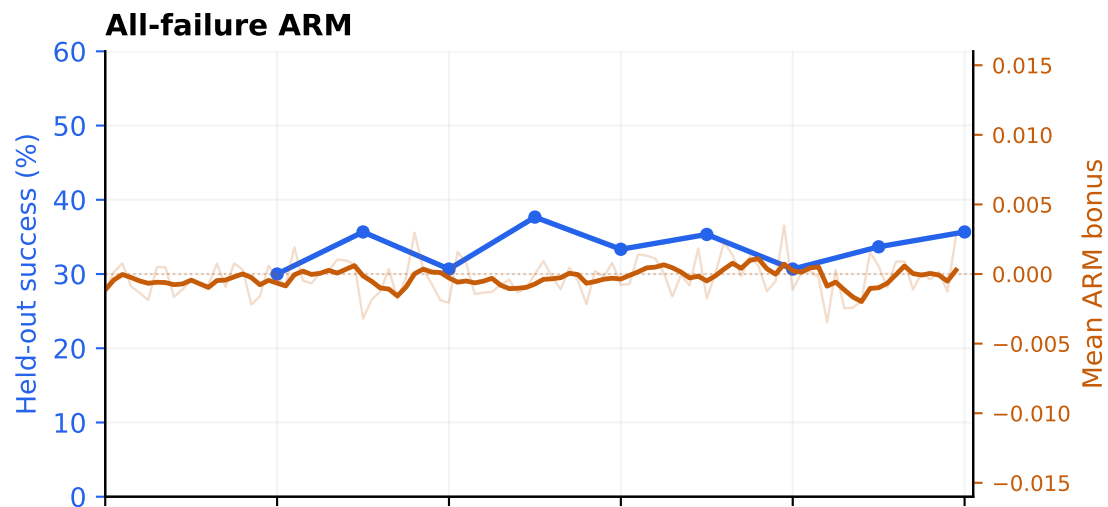

Success: local browser, GPT-4.1/action_history, actor T=0. ARM: retained main-batch turns; unlabeled turns contribute zero.
 ARM is aligned to the actor BEFORE its next update. Extra failure buffers and label coverage are available in the interactive view.
 Separate axes; all panels share their scales. Changing training states and live-web conditions prevent a causal reward-hacking claim.