Online-Mind2Web · GPT-5.6 Terra terminal judge

a) BrowserCode

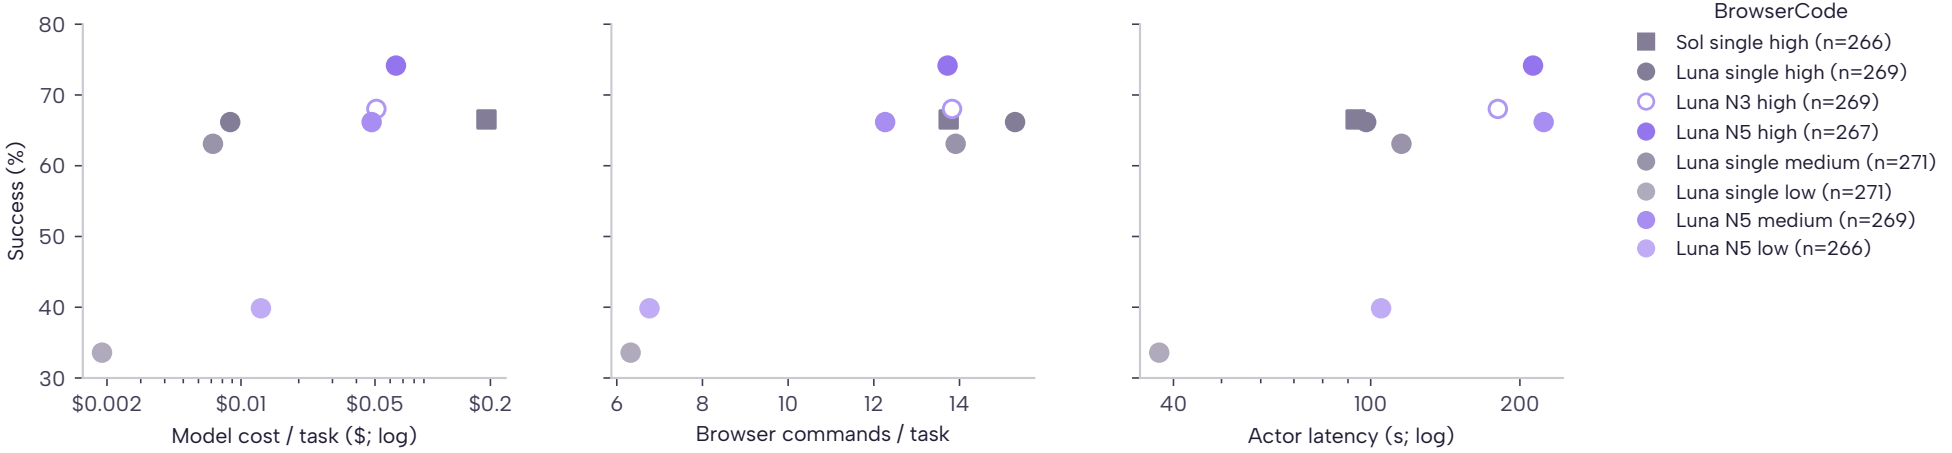

b) Native CUAWright

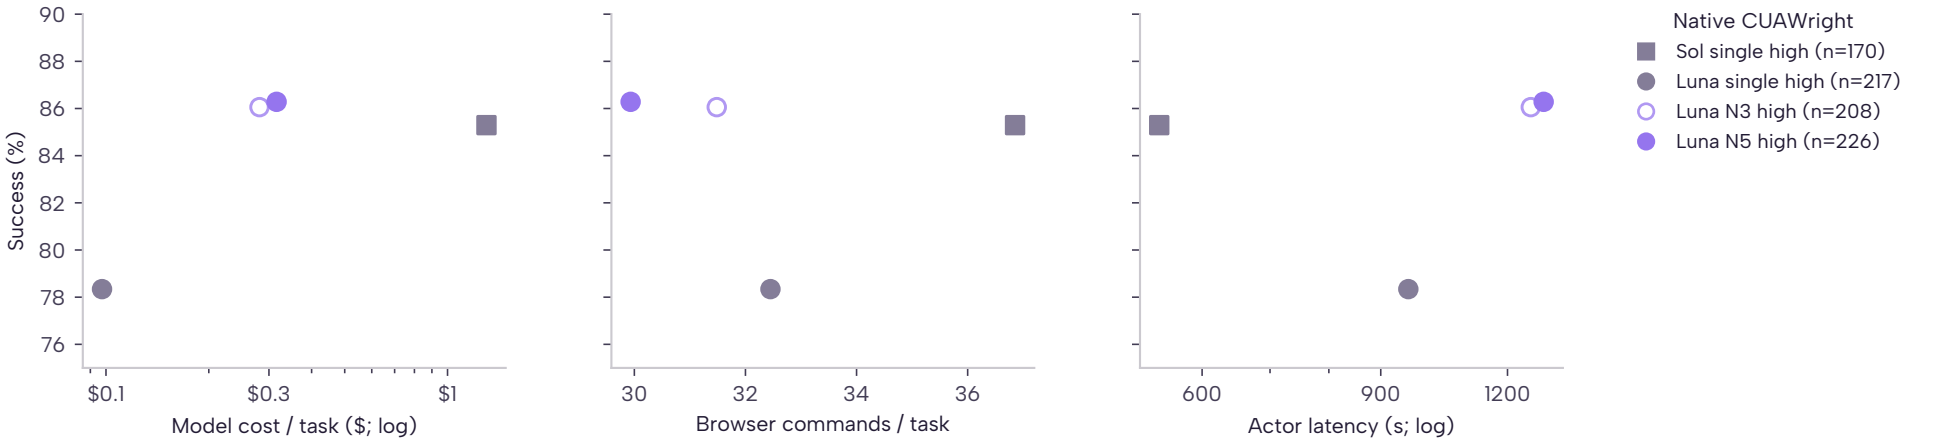

n = valid Terra judgments; valid subsets differ. Native uses a selected endpoint-evidence subset: 276 original-valid runs ungraded.
Model cost excludes judging. Actor limits, measurement scopes and live windows differ; descriptive comparison.
Medium/low provisional; one prescribed retry per original invalid; cumulative costs and observed task times.