## a Leaving a scroll loop




Task: “Retrieve an example of a pre-trained model on Hugging Face that is optimized for question answering tasks and …”


WebVoyager, step 12; huggingface.co, a quantized Qwen3-8B model card; last 4 steps: scroll down, scroll up, scroll down, scroll up

*Five actor proposals, grouped*

| | | |
|---|---|---|
| **scroll down** | 4 of 5 | Pre-exec (GPT-5.5) Pre-exec (Luna) |
| **go back** | 1 of 5 | H = 4 (GPT-5.5) H = 4 (Luna) |

*Over 93 replayed states after 2+ scrolls with “go back” offered: go back 18% / 17% (pre: Luna / GPT-5.5) vs 55% / 55% (H = 4)*

## b Answering before the inputs match the task

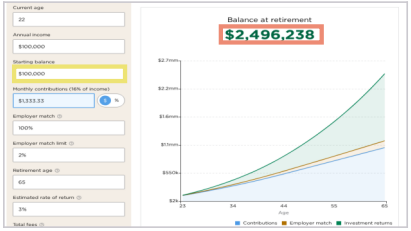


Task: “Using a calculator to determine how much I can have in my 401(k) account at retirement, if I work from age 22 to …”

Online-Mind2Web, step 12; nerdwallet.com 401(k) calculator; the page still shows defaults (starting balance $100,000; contributions 16% of income)

*Five actor proposals, grouped*

| | | |
|---|---|---|
| **set starting balance to $0** | 2 of 5 | Pre-exec (GPT-5.5) Pre-exec (Luna) |
| **answer “$2,496,238”** | 3 of 5 | H = 4 (GPT-5.5) H = 4 (Luna) |

*When only 1–2 of the 5 proposals stop, the student stops: Luna 6% to 9%, GPT-5.5 10% to 20% (pre to H = 4)*