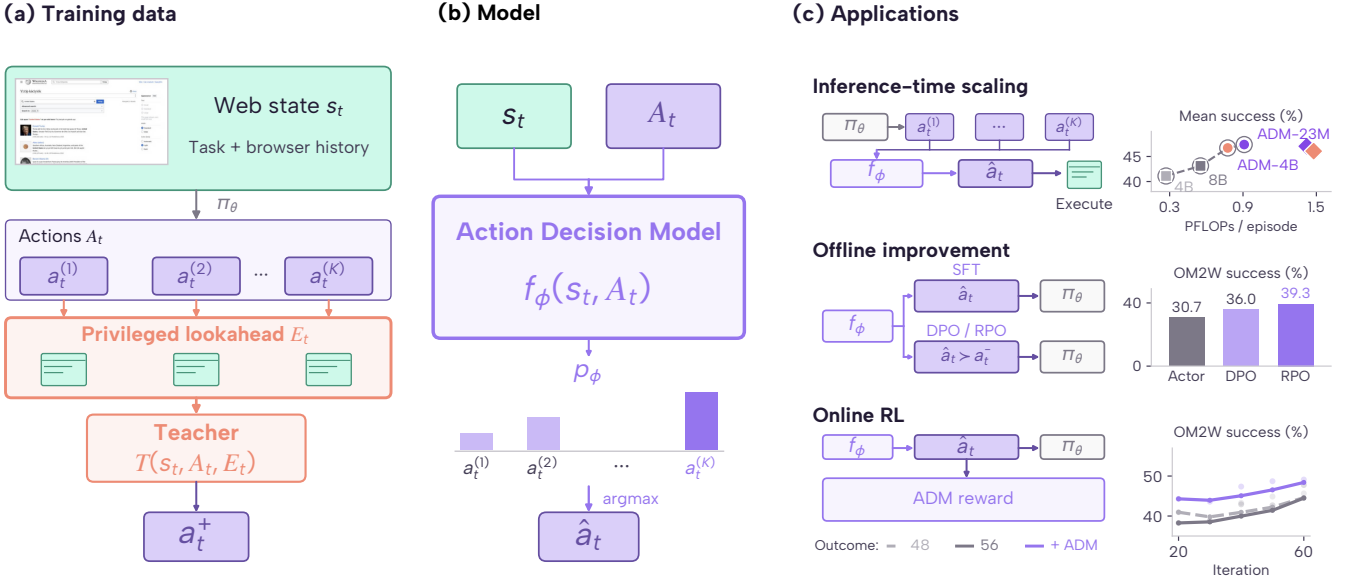
(a) Training data
Web state s_t
Task + browser history
π_θ
Actions A_t
$a_t^{(1)}$
$a_t^{(2)}$
...
$a_t^{(K)}$
Privileged lookahead E_t
Teacher
$T(s_t, A_t, E_t)$
a_t^+
(b) Model
s_t
A_t
Action Decision Model
$f_\phi(s_t, A_t)$
p_ϕ
$a_t^{(1)}$
$a_t^{(2)}$
...
$a_t^{(K)}$
argmax
$\hat{a}_t$
(c) Applications
Inference-time scaling
π_θ
$a_t^{(1)}$
...
$a_t^{(K)}$
f_ϕ
$\hat{a}_t$
Execute
Mean success (%)
ADM-23M
ADM-4B
45
40
4B
8B
0.3
0.9
1.5
PFLOPs / episode
Offline improvement
SFT
$\hat{a}_t$
π_θ
f_ϕ
DPO / RPO
$\hat{a}_t \succ a_t^-$
π_θ
OM2W success (%)
40
0
30.7
36.0
39.3
Actor
DPO
RPO
Online RL
f_ϕ
$\hat{a}_t$
π_θ
ADM reward
Outcome:
48
56
+ ADM
OM2W success (%)
50
40
20
60
Iteration