a Leaving a scroll loop



Task: “Retrieve an example of a pre-trained model on Hugging Face that is optimized for question answering tasks and …”


WebVoyager, step 12; huggingface.co, a quantized Qwen3-8B model card; last 4 steps: scroll down, scroll up, scroll down, scroll up

Five actor proposals, grouped

scroll down	4 of 5	Pre-exec (GPT-5.5)	Pre-exec (Luna)
go back	1 of 5	Lookahead (GPT-5.5)	Lookahead (Luna)

Over 93 replayed states after 2+ scrolls with “go back” offered: go back 18% / 17% (pre: Luna / GPT-5.5) vs 55% / 55% (lookahead)

b Answering before the inputs match the task

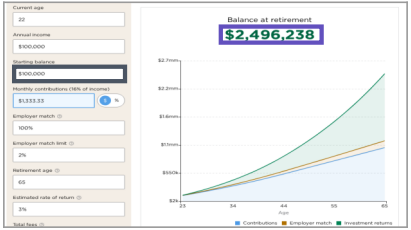

Task: “Using a calculator to determine how much I can have in my 401(k) account at retirement, if I work from age 22 to …”

Online-Mind2Web, step 12; nerdwallet.com 401(k) calculator; the page still shows defaults (starting balance $100,000; contributions 16% of income)

Five actor proposals, grouped

set starting balance to $0	2 of 5	Pre-exec (GPT-5.5)	Pre-exec (Luna)
answer “$2,496,238”	3 of 5	Lookahead (GPT-5.5)	Lookahead (Luna)

When only 1–2 of the 5 proposals stop, the student stops: Luna 6% to 9%, GPT-5.5 10% to 20% (pre to lookahead)